AsciidoctorJ PDF

A Showcase

Guillaume Grossetie

Version 0.1, 2026-10-17

Table of Contents

1. Text 1
2. Admonitions 1
3. Blocks 2
4. Code 2
5. Lists 3
6. Tables 3
7. Images 4
8. Raw Typst 4
Appendix A: The default template 4

This document shows how the AsciiDoc elements look with the default template of AsciidoctorJ PDF. It was converted with `asciidoctorj -b pdf -a reproducible example.adoc`: AsciidoctorJ produced Typst, and Typst, running on the JVM as WebAssembly, produced this PDF.

---

1. Text

A paragraph can contain **strong**, *emphasized*, `monospaced`, ^{superscript} and $_{subscript}$ text, highlighted text, and text with a role such as red, underlined or ~~struck through~~. The typographic replacements apply: “double quotes”, ‘single quotes’, an em dash—like this, an ellipsis… and ©, ™, →.

The characters that have a meaning in Typst are escaped: 2 * 3 = 6, $9.99, #hashtag, @mention, <tag>, [brackets], snake_case, ~/path and // not a comment.

Links can be external, like Asciidoctor or https://typst.app, internal, like Lists or the section about code, or point to an inline anchor: [anchor]. Footnotes are placed at the bottom of the page.[1]

Use `Ctrl` + `Shift` + `P` to open the palette, click [**OK**], or select **File** › **Export** › **PDF**.

Line breaks are preserved
when a line ends with a plus.

2. Admonitions

NOTE | A note gives additional information.

[1] Typst lays out the footnotes.

TIP | A tip suggests a better way.

IMPORTANT | Something important to remember.

WARNING | A warning about a possible problem.

CAUTION | *Admonition with a title*
An admonition block can have a title and contain several blocks.

- Including lists.

3. Blocks

Example 1. An example block

An example block encloses an example, with a numbered caption.

A sidebar

A sidebar contains content that complements the main text.

> Simplicity is prerequisite for reliability.
> — Edsger W. Dijkstra, *The Humble Programmer*

> To see a World in a Grain of Sand
> And a Heaven in a Wild Flower
> — William Blake, *Auguries of Innocence*

4. Code

Source code with callouts

```
public class Greeter {

    private final String name; ①

    public String greet() {
        return "Hello, " + name + "!"; ②
    }
}
```

1. The name is immutable.
2. Typst highlights the syntax.

```
{ "backend": "pdf", "template": "theme/theme.typ", "reproducible": true }
```

```
A literal block keeps
    the spaces and line breaks.
```

5. Lists

- Unordered lists
  - can be nested
    - on several levels
- and contain blocks:

```
mvn verify
```

1. Ordered lists
2. are numbered
   a. with nested levels
   b. in another style

iv. Lists can start at any number
 v. and use another numbering style

- ☑ A checklist
- ☑ with checked items
- □ and unchecked items

Typst A markup-based typesetting system.
Chicory A WebAssembly runtime for the JVM.
AsciidoctorJ Asciidoctor for the JVM, now in pure Java.

Horizontal A description list
Lists on two columns

1. *Does it need Ruby?*
   No, everything runs on the JVM.
2. *Does it need a native library?*
   No, Typst runs as JVM bytecode.

6. Tables

Table 1. Supported formats

Format	Extension	Supported	Notes
Scalable Vector Graphics	`.svg`	✓	Rendered as vectors
Portable Network Graphics	`.png`	✓	
JPEG	`.jpg`	✓	
PDF	`.pdf`	✓	Embedded as vectors
Remote image	URL	✘	Not yet
Formats			5

A table	with stripes
and only	horizontal lines
in the	frame

An AsciiDoc cell can contain: • lists, • and other blocks.	A plain cell.
A cell spanning two columns.	

7. Images

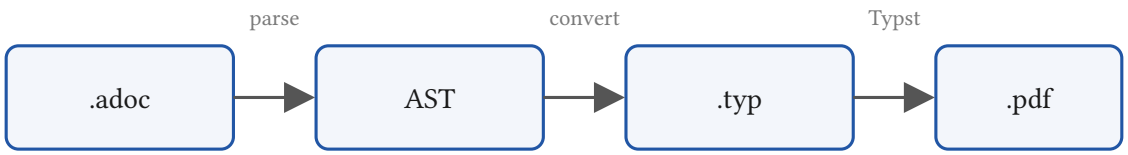



Figure 1. The conversion pipeline

An inline image  sits on the text line.

This paragraph has an anchor, the target of a link in the first section.

8. Raw Typst

A passthrough block contains Typst code, for what AsciiDoc can't express:

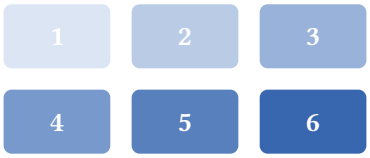

Appendix A: The default template

The default rendering is defined by `asciidoctor.typ`. A template given with the `pdf-template` attribute can redefine any of its functions, or style the native Typst elements with show rules.