

Refining character relationships using embeddings of textual units : a case study on Les Misérables

Guillaume Guex¹

¹Departement of Language and Information Sciences, University of Lausanne, Switzerland

Abstract

A clear and well-documented \LaTeX document is presented as an article formatted for publication by CEUR-WS in a conference proceedings. Based on the “ceurart” document class, this article presents and explains many of the common variations, as well as many of the formatting elements an author may use in the preparation of the documentation of their work.

Keywords

LaTeX class, paper template, paper formatting, CEUR-WS

1. Introduction

Distant reading tools allow researchers, from various fields, to quickly gain knowledge on textual corpora without actually reading them. Purposes of these methods are various, but can be mainly categorized into two groups: in the first case, these methods are used in order to tag, classify, or summary large quantities of texts, in order to quickly structure information or to deliver a speech over the whole studied corpus. Methods in this case rely heavily on Big Data and make an extensive use of Machine Learning algorithms. In the second case, researchers use these methods to underline hidden structures in a particular text, helping them to refine their understanding of it and reinforce stated hypotheses. Methods in this setting can also rely on Machine Learning, but must typically be build with more caution and attention to details: corpus are smaller, analyses are closer to the work, and methods must be more transparent in order to appropriately interpret results.

Automatic extraction and analysis of *character networks* from literacy works typically belong in the latter group. These methods aim at representing various interactions occurring between fictional characters found in a textual narrative with a graph, thus showing explicitly the hidden structure of character relationships constructed by the author. This structure might allow to find hidden patterns within a book, which can highlight a particular genre or style.

2. Methodology

When building character networks from a textual narrative, the most widespread method consists in dividing the studied work into n textual units u_1, \dots, u_n , which can be, e.g., sentences, paragraphs, or chapters, and then counting characters co-occurrences in these units. Usually, the text constituting these units is discarded and the resulting network displays edges which roughly represent an aggregated number of interactions between characters. However, by doing so, the aggregation occurs on various type of interactions and will give little information about the type of relationship which exist between characters. In this paper, we propose a data organization leading to various methods which takes into consideration the text contained in the unit, helping to refine understanding of characters and their relationships.

2.1. Data organization

In this article, the data representation for a textual narrative, divided in n textual units u_1, \dots, u_n , is made through two tables. The first one is well known in the field of textual analysis, and consists in the $(n \times v)$ contingency table \mathbf{N} , as represented by Table 2.1, where v is the vocabulary size. In this table, each row represents an unit, each column a word, and cells n_{ij} counts the number of times the word i appears in the unit. Using this table typically denotes a *Bag-of-Words* approach in our analyses.

The second table, denoted by \mathbf{O} , has a size of $(n \times p)$ where p is the number of *character-based objects* found in the narrative and cells o_{ij} counts occurrences of object j in unit i . A character-based object can be loosely defined in order to be flexible for various types of narrative or analyses, but can roughly be seen as a countable recurring narrative entity, containing one or more characters. For example, it can be a character occurrence, a character co-occurrence, an oriented character interaction (e.g.

COMHUM 2022: Workshop on Computational Methods in the Humanities, June 9–10, 2022, Lausanne, Switzerland

✉ guillaume.guex@unil.ch (G. Guex)

ORCID 0000-0003-1001-9525 (G. Guex)

© 2022 Copyright for this paper by its authors. Use permitted under Creative Commons License Attribution 4.0 International (CC BY 4.0).



CEUR Workshop Proceedings (CEUR-WS.org)

	aller	allumer	apercevoir	bas	bon	...
u_{101}	23	2	6	11	6	...
u_{102}	12	1	0	3	9	...
u_{103}	10	0	5	1	5	...
u_{104}	0	0	1	0	0	...

Table 1

A snippet of the contingency table **N** extracted from *les Misérables*. Rows are chapters, columns are words in the vocabulary, and cell n_{ij} counts the number of time word j appear in chapter i .

a dialog), or even a particular recurring event containing multiple characters (e.g. a meeting). In this article, we mostly consider character occurrences and pair of characters co-occurrences, as shown in Table 2.1.

	Cosette	Thénardier	Valjean	...
u_{101}	66	78	0	...
u_{102}	21	26	0	...
u_{103}	12	25	0	...
u_{104}	12	0	5	...

	...	Cosette-Thénardier	Cosette-Valjean	...
u_{101}	...	66	0	...
u_{102}	...	21	0	...
u_{103}	...	12	0	...
u_{104}	...	0	5	...

Table 2

A snippet of the character-based objects table **O** extracted from *les Misérables*. Rows are chapters, columns are character occurrences (top) and character co-occurrences (bottom), and cell o_{ij} counts the number of times object j appear in chapter i . Character co-occurrences are computed here as $o_{ij} = \min(o_{ik}, o_{il})$, where $\{k, l\}$ are characters constituting j .

This data organization already gives an orientation to the subsequent analyses and should be kept in mind of the practitioner. Textual unit are now considered as *individuals* (in the statistical terminology), defined by their *variables* contained in the different columns of both tables. Moreover, subsequent analyses are oriented in searching how the object table **O** has an influence over the contingency table **N**, i.e. searching which words are over-represented or under-represented knowing the character-based objects in the unit. While authors use characters in order to build the narrative, we, to a certain extent, work backward: we are searching how character appearances and interactions in the textual unit act on her/his choice of words. If the extraction method permits it, a practitioner should include all character-based objects which she/he desire to study. Here, for example, the choice to include character co-occurrences along with occurrences is motivated by the fact that we are interested in studying character relationships. A character co-occurrence can roughly be seen as an interaction between two characters, and an interaction between two characters (or more, but higher order interactions are

outside the scope of this article) should be considered as an object of its own: this interaction is not necessarily the sum of its parts and can give a particular flavor to the unit.

This data organization also highlight the importance of choosing a proper size for the units. These units should be large enough to contain enough words in order the properly capture the textual specificity of each unit, but not too large, as each unit should ideally captures particularities about one of the character-based objects. Unfortunately, it is impossible to define an ideal size for all types of analysis and this size should be balanced regarding the level of analysis, the text size, the selected character-based objects, and previous knowledge of the studied work.

The use of a contingency table **N** to represent the textual resource present in the units denotes a *Bag-of-Words* approach. Using this approach loses the information relative to the order of words in the units, but permits to transform a chain of characters, improper to statistical analyses, into a contingency table, a well studied mathematical object which allows the use of various kind of statistical methods. The next section shows two methods of analysis based on this table.

2.2. Embedding of textual units

Various methods can be performed on the contingency table **N** in order to extract information from it, such as Sentiment Analysis (REF), Textometry (REF), or even Deep Learning methods (REF?). Here, we make to choice to extract a lower dimensional, numeric representation of each units, in other words, an *embedding of textual units*.

In section (REF), these vectors of textual units are used as anchor points in order to also embed character-based objects into the same space. Therefore, it is crucial that an interpretation about the directions, or the regions, of this embedding is possible in order to properly extract information about the localization of character-based objects vectors (the relative position of these vectors is insufficient). For that reason, we focus on embeddings of textual units which also contain *vectors of words*: by examining the positions of character-based objects relatively to word vectors, these objects can be characterized.

We propose here two embeddings verifying this condition: Section 2.2.1 describes *Correspondence Analysis* (CA) and section 2.2.2 focuses on *Pre-trained Word Vectors* (WV).

2.2.1. Correspondence Analysis (CA)

Using Correspondence Analysis in order to analyze textual resources has a long tradition in literature (REF). It has the advantage to naturally provide an embedding

space, the factorial map, where units are placed alongside word vectors, allowing to analyze or represent the different units in terms of word frequency profiles. Moreover, units and words placement in the embedding space have a direct interpretation in terms of chi2 distance between profiles, which is desirable when interpreting results.

By performing a Correspondence Analysis on table \mathbf{N} , we directly get n vectors $\mathbf{x}_1, \dots, \mathbf{x}_n$ corresponding to units (rows) and v vectors $\mathbf{w}_1, \dots, \mathbf{w}_v$ corresponding to words (columns). Each of these vectors has a size of $\min(n, v) - 1$, which will generally be $n - 1$. For a detailed computation of quantities in CA, see Appendix A.1.

The relationship between a particular unit i and a word j is expressed through the scalar product between their vectors $s_{ij} := \mathbf{x}_i^\top \mathbf{w}_j$. A positive (resp. negative) similarity denotes a over-representation (resp. under-representation) of the word j in i , which permit to find lists of words characterizing the different units. Observe that in this article, this similarity is rather computed between word and character-based object vectors, as defined in section (REF), as they lie in the same space as unit vectors.

Using CA to embedded units however comes with some limitations. First, note that vectors $\mathbf{x}_1, \dots, \mathbf{x}_n$ obtained from CA reflect textual unit profile (in terms of words) regarding the mean profile. This analysis is thus *contrastive*: it highlights unit variations among the studied text. This could becomes problematic in order to study a dataset containing multiple texts: units belonging to the same text will have a greater chance to be close from each other, and the displayed variance might be largely composed by differences of style between text. Another limitation with this approach is that the words helping the interpretation of units (and character-based objects) are contained in the studied text. Approaches requiring to study the position of units and objects relatively to a predefined list of words (e.g., friends, enemies, family) might therefore be impossible.

2.2.2. Pre-trained Word Vectors (WV)

Pre-trained word vectors, based on Word2Vec (REF), Glove (REF), or fastText (REF), have recently received great attention from various fields (REFS). They are generally obtained through a training on a very large corpora, such as Wikipedia (REF) or Common Crawl (REF), and the resulting embedding contains a large quantity of word vectors. As shown by multiple studies (REF), these vectors are placed in order to reflect semantic and syntactic similarities between words, and are used in multiple applications (REF).

There exists various ways to use these pre-trained word vectors in order to find vectors for a *group of words*, such as sentences (REF), paragraphs (REF), or documents

(REF). These vectors are often used to apply a classification or clustering algorithm on the newly embedded objects (REF), or to query information (REF). These methods often use the frequencies of words found in the objects, i.e. a table similar to \mathbf{N} , but apply various weighting scheme and normalization in order to reduce the effects of frequent words and to align vectors. In the present article, we use a recent methodology proposed in (REF) as it is compatible with multiple unit size and gives state-of-the-art results in multiple tasks.

More precisely, we use a pre-trained word vectors $\mathbf{w}_1, \dots, \mathbf{w}_m$ trained on Common Crawl and Wikipedia using fastText.¹ For French, the number of word-vectors m is 2 millions and the dimension of vectors are 300. Textual units vectors $\mathbf{x}_1, \dots, \mathbf{x}_n$ are obtained through the table \mathbf{N} and with the method detailed in Appendix A.2. The main way to interpret units with this method is to use the cosine similarity between its corresponding vector \mathbf{x}_i and every word-vectors \mathbf{w}_j , as defined by $s_{ij} := \frac{\mathbf{x}_i^\top \mathbf{w}_j}{\sqrt{\mathbf{x}_i^\top \mathbf{x}_i \mathbf{w}_j^\top \mathbf{w}_j}}$. The cosine similarity also permits to compare units between themselves.

With the pre-trained word vector method, the unit vectors $\mathbf{x}_1, \dots, \mathbf{x}_n$ (and character-based objects vectors in section REF) lie in an *absolute space* defined by the used word vectors. Comparison between different texts are therefore more pertinent in this space and comparison with words absent from the corpus can be made. However, it is possible that all units from a given text, if the author style is particularly marked, are located in the same region of the space. In this case, the list of most associated word-vectors might be similar for every unit, and the analysis might not give usable results. This effect is fortunately limited by the centration of unit-vectors which occurs in the method describe in Appendix A.2.

2.3. Character-based object embeddings

The main goal of this article is not to analyze units, but rather the character-based objects, i.e. the p columns of table \mathbf{O} . While we used the table \mathbf{N} to build our embeddings of units, we now use the table \mathbf{O} in order to build the character-based vectors $\mathbf{y}_1, \dots, \mathbf{y}_p$ which lie in the same space as units.

Two propositions of method are made: the *centroids* method (CENT) is describe in section 2.3.1 and the *regressions* method (REG) is explained in section 2.3.2. Both methods work with the proposed embeddings of units.

2.3.1. Centroids (CENT)

This method is the most trivial and is based on the following intuition: a character-based object is characterized

¹<https://fasttext.cc/docs/en/crawl-vectors.html>, accessed September 2022.

by all units in which it appears. In other words, we can define the vector \mathbf{y}_k for character-object object k as

$$\mathbf{y}_k = \sum_{i=1}^n \frac{o_{ik}}{o_{\bullet k}} \mathbf{x}_i \quad (1)$$

i.e. the center of mass, or *centroid*, of the units containing the character-based object, weighted by the relative weight of its occurrences $\frac{o_{ik}}{o_{\bullet k}}$. This way of building character-based vectors is closely related to the treatment of *supplementary variables* found in CA (REF): these variables do not act in the choice of factorial axis, but can still be represented afterward. However, by contrast, character-based vectors are not dilated after computing centroids, which means that they lie in the same space as units (row).

An important remark about the centroid method, is that character-objects vectors positions are *additive*, which means that we have

$$o_{ik} = \sum_{g \in \mathcal{G}} o_{ig}, \forall i \implies \mathbf{y}_k = \sum_{g \in \mathcal{G}} \frac{o_{\bullet g}}{o_{\bullet k}} \mathbf{y}_g, \quad (2)$$

where \mathcal{G} is a subset of character-based objects. This property can be interpreted as followed: if the occurrences of a character k can be divided among different situations g (the character alone, the character in interaction with another character, etc.), the character vector \mathbf{y}_k is in fact the centroid of all vectors \mathbf{y}_g of these situations. This is not necessary an undesirable property, but this implies that the specificities of the character might be hidden if he is often registered in an interaction. For example, if the character is frequently with a friend, the character vector will be close to the vector of the couple (if both the character and the couple are counted in the table \mathbf{O}). By contrast, if we consider that an interaction between two characters is an *emerging situation*, unrelated to prior behaviors of characters, the regressions method described in the next section seems more appropriate to capture every specificities.

2.3.2. Regressions (REG)

When building a regression model with multiple explanatory variables, it is possible to include every variables and their *interactions*. By doing so, we suppose that the effect of raising both variables is not the same as raising each variable independently. Regression models seem therefore appropriate to capture specificities of having a particular character-based object in a textual unit: the presence of a character a has a effect on the vocabulary of an unit, the presence of another character b has an other effect, and the presence of the pair $\{a, b\}$ yet a different effect. Now, the dependent variable still need to be defined. In fact, we are doing d regressions, with d the number of dimensions of the chosen unit embeddings,

and each regressions is constructed to predict the α -th coordinate of each units by using variables in the \mathbf{O} . In a matrix notation, all models can be written as

$$\mathbf{X} = \tilde{\mathbf{O}}\mathbf{B} + \mathbf{E}, \quad (3)$$

where $\mathbf{X} = (x_{i\alpha})$ is the $(n \times d)$ matrix containing unit-vectors (on rows), $\tilde{\mathbf{O}}$ the $(n \times (p+1))$ matrix representing \mathbf{O} with an additional column of 1 for the intercept, $\mathbf{B} = (\beta_{k\alpha})$ is the $((p+1) \times d)$ matrix containing intercepts and regression coefficients (each regression is contained on a column), and \mathbf{E} the $(n \times \alpha)$ error matrix.

Estimates $\hat{\mathbf{B}} = (\hat{\beta}_{k\alpha})$ for the intercept and coefficient regressions are in fact the researched embeddings for character-based objects as well as for the intercept representing the general tone of the studied text. We therefore denote these estimates with $\mathbf{Y} = (y_{k\alpha})$ in the following, with the convention $y_{0\alpha}$ for intercept coefficients.

As the number of character-objects might be very large, it is a good idea to add a L^2 regularization term in the objective function. Moreover, the quadratic error rate should also be weighted by the number of tokens in each unit. Including all this, we find the solution for our character-based vectors $\mathbf{y}_0, \mathbf{y}_1, \dots, \mathbf{y}_p$ contained in rows of \mathbf{Y} with

$$\mathbf{Y} = (\tilde{\mathbf{O}}^\top \mathbf{Diag}(\mathbf{f}) \tilde{\mathbf{O}} + \lambda \mathbf{I}_{(p+1)})^{-1} \tilde{\mathbf{O}}^\top \mathbf{Diag}(\mathbf{f}) \mathbf{X}, \quad (4)$$

where $\mathbf{Diag}(\mathbf{f})$ is the diagonal matrix containing weights of units $\mathbf{f} = \begin{pmatrix} n_{i\bullet} \\ n_{\bullet\bullet} \end{pmatrix}$, $\lambda > 1$ is the regularization coefficient, and $\mathbf{I}_{(p+1)}$ is the identity matrix of size $((p+1) \times (p+1))$.

An interesting effect of the regularization coefficient is that if λ is high, equation (4) becomes $\mathbf{Y} \approx \frac{1}{\lambda} \tilde{\mathbf{O}}^\top \mathbf{Diag}(\mathbf{f}) \mathbf{X}$, which is similar to equation (3) (with a contraction and a different weighting scheme). In fact, the regressions method with a regularized term interpolate between the hypothesis where we suppose that every character-object should be considered independently (with $\lambda \rightarrow 0$), to the hypothesis of additive mixture between character-objects (with $\lambda \rightarrow \infty$), as discussed in section 2.3.1. Choosing an appropriate λ according to the study (how is another, difficult question) might lead to a situation revealing pertinent information about all character-objects.

3. Case studie : *Les Misérables*

For the moment, it is not possible to evaluate the presented methods by the use of some measurements, which would allow to test its validity on various corpora. In order to see if the methods give coherent results, we have to carefully scrutinized and compared them with previous knowledge of the studied work. For this reason, and because of method variations and multiplicity of the

results (and lack of place), we chose to present here only one case studies: *Les Misérables* by Victor Hugo. The choice of this work is motivated by the fact that it is a large corpus, immensely studied, and containing various colorful characters and characters relationships. It is therefore a solid choice to clearly illustrate the potential of presented methods.

3.1. Preprocessing

The five volumes of *Les Misérables*, in French, were extracted from *Project Gutenberg*², while headers and footers of each files were manually removed. The whole text was lower cased, lemmatized, and stopwords³ and punctuation were removed. Volumes, books, and chapters breaking points were kept for later uses.

We chose to use chapter as textual units. The table **N** (Figure 2.1) was build by considering words appearing at least 20 times in the text and resulted in a table of size 365 chapters \times 1974 words.

Characters presences were detected using *Flair*⁴ (REF) NER tools. In order to unify character and to further refine the detected characters list, we used hand-made lists of character and aliases from NER results. It resulted in the detection of 54 characters. The character-based objects considered in table **O** (Figure 2.1) are single character occurrences (54 objects) and character pair co-occurrences (547 objects), resulting in a table of size 365 \times 601. The character co-occurrences count is computed as $o_{ij} = \min(o_{ik}, o_{il})$, where $\{k, l\}$ are characters constituting the pair j .

Note that, in section 3.3.3, we also tested experiments with objects consisting in character and character-pairs as found in each volumes (e.g. Cosette-Valjean in volume one and Cosette-Valjean in volume two are now two different objects) with the addition of volume constants ($V_i = 1$ in volume i , $V_i = 0$ in the other volumes) in order to isolate specific volume vocabulary. This new table **O_{vol}**, containing 1124 character-based objects, permits to see a diachronic evolution of words describing volumes, characters, and character relationships.

3.2. Methods

There are two types of methods for unit embeddings, **CA** (section 2.2.1) and **WV** (section 2.2.2), as well as two methods for character-based embedding, **CENT** (section 2.3.1) and **REG** (section 2.3.2), making a total of 4 possibles ways for obtaining final embeddings. The **CA** method is fully automated, and results in vectors in a 364-dimensional space, while the **WV** methods is based

on French *fastText*⁵ (REF) pre-trained embeddings, giving a 300-dimensional space. The **CENT** do not have any hyperparameter and we fixed the hyperparameter of the **REG** methods to $\lambda = 0.01$ for all experiments.

Note that, in addition to having two table 4 variations for the methods, 2 tables **O** and **O_{vol}**, and a considerable number of characters and character relationships, results can also be presented in various ways (similarities between character-based objects, between words, between objects and words, etc.). Thus, we chose to show here a selection of results for the each method: the 5 most associated words regarding character-based objects (section 3.3.1), the 5 most related character-based object regarding a subset of words (section 3.3.2)), and a diachronic study of top associated words for a subset of character-based objects (section 3.3.3). We invite curious readers to consult these results for all words and objects, which can be found in our GitHub repository.⁶

3.3. Results

3.3.1. The most associated words for a subset of characters-based objects

The first results in this section is to examine the most associated words with a subset of character-based objects, as measured by the similarities defined in section 2.2. Results can be found in Table 3 for all methods.

We can first observe that **CA** methods seems to summarize objects with a vocabulary closer to the work, while **WV** methods tend to use more general concepts, with notably more verbs. This behavior can be traced back to the nature of embeddings: in the **WV** embedding, word-vectors are fixed and do not consider the actual frequencies of words found in the studied corpora. A character could be highly similar to a word appearing only a few times in the corpus if this word is located near the vocabulary associated with this character. By contrast, **CA** will generally takes into account word frequencies, and balance them with specificities, in order to describe a character.

Another remark can be made about the difference between **CENT** methods and **REG** methods. As expected, we see that the **CENT** methods reveal their additive construction between characters and relationships: words used to describe a relationship rob off on their characters descriptions (see e.g. Cosette, Cosette-Marius, and Cosette-Valjean). By constrast, the **REG** methods display more "perpendicular" descriptions of objects, with less words repeating.

Note that we did not show here the least associated words with each object, as they are frequently the same for all methods and all related to the long description of

²<https://www.gutenberg.org/>

³from a list made by Jacques Savoy <http://members.unine.ch/jacques.savoy/clef/frenchST.txt>

⁴<https://github.com/flairNLP/flair>

⁵<https://fasttext.cc/docs/en/crawl-vectors.html>

⁶https://github.com/gguex/char2char_vectors/results

CA-CENT	Cosette	Cosette-Marius	Cosette-Valjean	Marius	Valjean
	poupée (0.7)	noce (1.72)	noce (1.0)	théodule (0.61)	mestienne (0.51)
	noce (0.68)	mariage (1.31)	mestienne (0.97)	jondrette (0.59)	fossoyeur (0.46)
	mestienne (0.58)	marié (1.21)	mariage (0.71)	ursule (0.56)	accusé (0.45)
	mariage (0.48)	marier (1.11)	marié (0.68)	vernon (0.53)	maire (0.39)
CA-REG	Marius-Valjean	Javert	Javert-Valjean	Myriel	Myriel-Valjean
	noce (1.2)	accusé (1.47)	accusé (1.85)	conventionnel (5.03)	chandelier (6.28)
	mariage (0.85)	arras (1.04)	avocat (1.12)	évêque (3.54)	gendarme (5.06)
	ursule (0.85)	mouchard (0.97)	preuve (1.1)	oratoire (3.39)	panier (4.72)
	marié (0.8)	avocat (0.96)	président (1.08)	hôpital (2.57)	couvert (4.64)
WV-CENT	tableau (0.74)	preuve (0.93)	forçat (1.01)	cathédrale (2.54)	deuil (4.52)
	seau (1.23)	amant (0.83)	blesure (0.78)	jondrette (1.76)	matelas (1.02)
	poupée (0.86)	mariage (0.73)	noce (0.76)	réchaud (1.26)	chandelier (0.87)
	ravissant (0.7)	entraîner (0.7)	file (0.6)	galetas (1.11)	toulon (0.82)
	source (0.65)	noce (0.67)	corbillard (0.58)	bouge (1.05)	fossoyeur (0.79)
WV-REG	rassurer (0.61)	volupté (0.63)	mestienne (0.58)	tableau (0.93)	pelle (0.76)
	Marius-Valjean	Javert	Javert-Valjean	Myriel	Myriel-Valjean
	égout (1.1)	arras (1.09)	accusé (1.04)	conventionnel (2.99)	deuil (1.14)
	vase (1.08)	roue (0.89)	nier (0.79)	évêque (1.76)	chandelier (1.07)
	issue (1.07)	bonjour (0.83)	quai (0.54)	cathédrale (1.14)	aveugle (1.01)
WV-CENT	sable (1.0)	malle (0.8)	avocat (0.53)	prêtre (1.11)	panier (0.94)
	couloir (0.98)	cabriolet (0.76)	fonction (0.5)	philosophie (1.06)	gendarme (0.89)
	jean (0.34)	aimer (0.38)	jean (0.6)	embrasser (0.36)	jean (0.56)
	dormir (0.28)	rêver (0.34)	jacques (0.3)	essayer (0.36)	habiller (0.27)
	regarder (0.26)	vouloir (0.32)	philippe (0.26)	avouer (0.36)	poser (0.26)
WV-REG	habiller (0.26)	douter (0.32)	habiller (0.26)	vouloir (0.35)	jacques (0.26)
	voir (0.25)	avouer (0.32)	pantalon (0.25)	voir (0.35)	pantalon (0.25)
	Marius-Valjean	Javert	Javert-Valjean	Myriel	Myriel-Valjean
	jean (0.35)	saisir (0.34)	jean (0.54)	évêque (0.59)	évêque (0.55)
	questionner (0.31)	jean (0.34)	denis (0.31)	archevêque (0.52)	archevêque (0.46)
WV-CENT	essayer (0.31)	placer (0.31)	jacques (0.3)	prêtre (0.45)	prêtre (0.42)
	oser (0.31)	retirer (0.29)	saisir (0.3)	abbé (0.39)	âme (0.42)
	poser (0.29)	dégager (0.29)	philippe (0.28)	souverain (0.38)	abbé (0.39)
	Cosette	Cosette-Marius	Cosette-Valjean	Marius	Valjean
	contempler (0.29)	éternel (0.35)	rue (0.44)	regarder (0.38)	jean (0.56)
WV-REG	emplir (0.29)	amour (0.35)	jean (0.41)	voir (0.36)	pantalon (0.28)
	doucement (0.27)	humanité (0.34)	faubourg (0.41)	refermer (0.34)	jacques (0.26)
	envelopper (0.26)	âme (0.32)	boulevard (0.41)	glisser (0.34)	philippe (0.23)
	illuminer (0.26)	vérité (0.32)	quartier (0.34)	poser (0.31)	glisser (0.23)
	Marius-Valjean	Javert	Javert-Valjean	Myriel	Myriel-Valjean
WV-CENT	rue (0.35)	serrer (0.34)	rue (0.35)	évêque (0.43)	ange (0.37)
	boulevard (0.35)	glisser (0.34)	boulevard (0.34)	divin (0.4)	évêque (0.31)
	souterrain (0.35)	forcer (0.34)	autorité (0.33)	humble (0.39)	âme (0.31)
	bastille (0.35)	bouger (0.33)	civil (0.33)	bonté (0.38)	amour (0.29)
	carrefour (0.34)	aller (0.32)	loi (0.33)	archevêque (0.37)	aurore (0.28)

Table 3

The 5 most associated words (similarity in parentheses) to a selected set of characters and character pairs, regarding **CA-CENT**, **CA-REG**, **WV-CENT**, and **WV-REG** methods. Words appearing at least two times within the same method are in bold.

the Battle of Waterloo in volume 2 ("infanterie", "welling-ton", "cuirassier", "bridage"), containing no protagonist of the story.

Overall, we find that the **CA-REG** method gives the

most satisfying results, with pertinent words associated with each character-based object, and an high variety in the choice of words.

	aimer	rue	justice	guerre
CA-CENT	Dahlia-Fameuil (1.12) Dahlia-Listolier (1.12) Fameuil-Zéphine (1.12) Listolier-Zéphine (1.12) Gillenormand-Toussaint (1.11)	Courfeyrac-Fauchelevet (0.79) Courfeyrac-Toussaint (0.79) Eponine-Fauchelevet (0.79) Eponine-Gavroche (0.79) Eponine-Pontmercy (0.79)	Azelma-Babet (1.09) Azelma-Brujon (1.09) Azelma-Claquesous (1.09) Azelma-Magnon (1.09) Azelma-Montparnasse (1.09)	Combeferre-Fauchelevet (1.35) Feuilly-Valjean (1.27) Feuilly-Marius (1.22) Lesgle-Valjean (1.15) Mabeuf-Valjean (1.15)
CA-REG	Cosette-Marius (0.35) Myriel (0.31) Basque-Fauchelevet (0.25) Myriel-Valjean (0.22) Fauchelevet-Gillenormand (0.21)	Courfeyrac (0.37) Grantaire-Prouvaire (0.29) Cosette-Javert (0.26) Marius-Prouvaire (0.22) Enjolras (0.22)	Javert-Valjean (0.37) Champmathieu-Valjean (0.37) Myriel (0.21) Grantaire (0.18) Grantaire-Javert (0.16)	Grantaire-Pontmercy (0.94) Grantaire (0.56) Marius-Pontmercy (0.55) Pontmercy (0.55) Enjolras (0.49)
WV-CENT	Cosette-Marius (0.38) Fantine-Marius (0.34) Fantine-Pontmercy (0.34) Basque-Fauchelevet (0.34) Prouvaire-Valjean (0.33)	Grantaire-Prouvaire (0.57) Marius-Prouvaire (0.54) Cosette-Javert (0.43) Magnon-Monsieur Thénardier (0.37) Gavroche (0.36)	Azelma-Babet (0.34) Azelma-Brujon (0.34) Azelma-Claquesous (0.34) Azelma-Magnon (0.34) Azelma-Montparnasse (0.34)	Grantaire (0.32) Combeferre-Lesgle (0.32) Feuilly-Lesgle (0.25) Combeferre-Marius (0.25) Combeferre-Grantaire (0.25)
WV-REG	Prouvaire-Valjean (0.34) Champmathieu-Chenildieu (0.31) Brevet-Chenildieu (0.31) Brevet-Cocheville (0.31) Champmathieu-Cocheville (0.31)	Grantaire-Prouvaire (0.8) Marius-Prouvaire (0.77) Courfeyrac (0.66) Cosette-Javert (0.64) Prouvaire (0.63)	Champmathieu-Valjean (0.38) Azelma-Brujon (0.35) Azelma-Claquesous (0.35) Azelma-Magnon (0.35) Azelma-Montparnasse (0.35)	Grantaire-Pontmercy (0.39) Enjolras-Marius (0.35) Grantaire (0.31) Combeferre-Lesgle (0.31) Cosette-Gavroche (0.27)

Table 4

The 5 most associated character-based objects (similarity in parentheses) to a selected set of words, regarding **CA-CENT**, **CA-REG**, **WV-CENT**, and **WV-REG** methods.

3.3.2. The most associated characters-based objects for a subset of words

These results are extracted from the transposed table from the last, and display the most associated character-based objects to a selected set of words. They can be found in Table 4. This type of results can be seen as "queries", made from a single word, which output the highest objects in the work related to that query. We chose here to show the most associated objects to words "aimer", "rue", "justice" and "guerre", as they represent some of the major topics of the book. In this task, the **CA-REG** again seems to display the most satisfying results: the main love relationship (Cosette-Marius) of the book is the most associated object for "aimer", several "amis de l'ABC" (a revolutionary group) are most associated with "rue", the cop-suspect relationship (Javert-Valjean) is the top object for "justice", and officers or aggressive characters appear massively associated with "guerre". While somewhat inferior with the select set of queries, **WV** methods have the advantage to be able to query words outside the scope of the book, as the pre-trained word embedding possess a very large vocabulary. It should also give interesting results when comparing different corpora, due to the fixed nature of word-vectors, but case studies concerning multiple corpora are outside the scope of this article.

Note that another way to represent these results is through weighted signed networks, as found in Figure 1 (for **CA-REG**). The network structure represent the number of time characters are detected together (which do not depend on the query), and the signed weights (edge color) display similarities between character relationship

(edges) and the queried word. This representation gives a quick visual support in order to explore the studied work and could be implemented as a standalone program.

3.3.3. A diachronic study of the most associated words for a subset of character-based objects

4. Conclusion

A. Appendix

A.1. Correspondence Analysis

Starting from the $(n \times v)$ contingency table $\mathbf{N} = (n_{ij})$, we define the vector of unit weights as $\mathbf{f} = (f_i) := (n_{i\bullet}/n_{\bullet\bullet})$ and the vector of word weights as $\mathbf{g} = (g_j) := (n_{\bullet j}/n_{\bullet\bullet})$, where \bullet denotes the summation on the replaced index. It is then possible to compute the *weighted scalar product matrix between units* $\mathbf{K} = (k_{ij})$ with

$$k_{ij} := \sqrt{f_i f_j} \sum_{k=1}^v g_k (q_{ik} - 1)(q_{jk} - 1), \quad (5)$$

where $q_{ik} = \frac{n_{ik} n_{\bullet\bullet}}{n_{i\bullet} n_{\bullet k}}$ is the *quotient of independence* of the cell i, k . The vector of textual unit i , $\mathbf{x}_i = (x_{i\alpha})$, is obtained by the eigendecomposition of the matrix $\mathbf{K} = \mathbf{U}\mathbf{\Lambda}\mathbf{U}^\top$ and with

$$x_{i\alpha} := \frac{\sqrt{\lambda_\alpha}}{\sqrt{f_i}} u_{i\alpha}, \quad (6)$$

where λ_α are the eigenvalues contained in the diagonal matrix $\mathbf{\Lambda}$ and $u_{i\alpha}$ the eigenvectors components found in

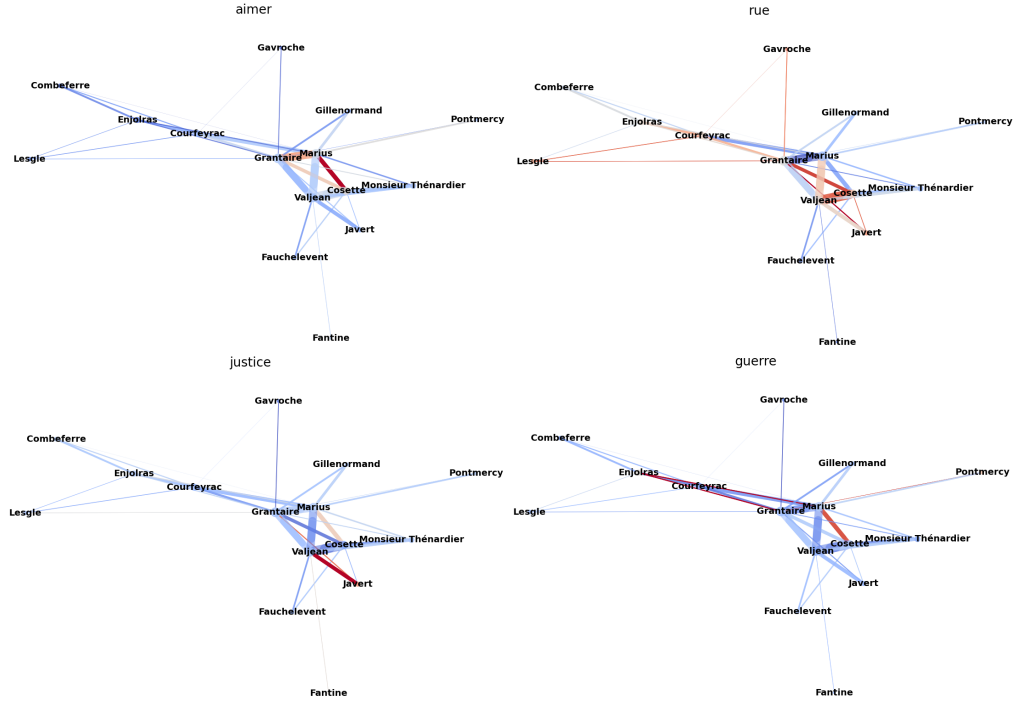


Figure 1: Resulting weighted and signed networks between main characters, with examples of word queries ("aimer", "rue", "justice", and "guerre"). These networks are computed with **CA-REG** method ($\lambda = 0.01$). Red indicate positive affinity, blue negative affinity, and edge width is proportional to the number of detected interactions between characters.

T1	T2	T3	T4	T5
huissier (1.4)	cuirassier (3.38)	gamin (1.92)	émeute (1.48)	sable (3.04)
hôte (1.11)	infanterie (2.9)	mine (1.38)	révolte (0.86)	berge (2.32)
arras (0.92)	sacrement (2.69)	farce (0.81)	bourgeoisie (0.84)	égout (2.16)
lampe (0.91)	brigade (2.41)	ignorance (0.74)	populaire (0.82)	voûte (1.9)
montreuil (0.81)	division (2.4)	jondrette (0.7)	insurrection (0.81)	vase (1.89)

Cosette-Valjean_1	Cosette-Valjean_2	Cosette-Valjean_3	Cosette-Valjean_4	Cosette-Valjean_5
maladie (0.49)	façade (0.68)	-	promenade (0.5)	noce (1.27)
médecin (0.48)	corbillard (0.66)	-	chaîne (0.47)	marié (0.93)
demain (0.33)	mestienne (0.6)	-	blessure (0.46)	mardi (0.89)
surprise (0.28)	bâtiment (0.56)	-	tuyau (0.45)	mariage (0.86)
auprès (0.28)	cul (0.55)	-	luxembourg (0.44)	file (0.65)

Table 5

The 5 most associated words (similarity in parentheses) vs volumes objects (top) and Cosette-Valjean relationship as found in each tome, regarding the **CA-REG** method ($\lambda = 0.01$). Note that no co-occurrence between Cosette and Valjean were automatically found in volume 3.

U. We find the vector of word j , $\mathbf{w}_j = (w_{j\alpha})$, with

$$w_{j\alpha} := \frac{1}{\sqrt{\lambda_\alpha}} \sum_{i=1}^v f_i q_{ij} x_{i\alpha}. \quad (7)$$

Note that various other quantities of interest can also be computed in CA, such as

$$p_\alpha := \frac{\lambda_\alpha}{\lambda_\bullet} : \text{the proportion of inertia expressed in } \alpha,$$

$$c_{i\alpha}^u := \frac{f_i x_{i\alpha}^2}{\lambda_\alpha} : \text{the contribution of unit } i \text{ to axis } \alpha,$$

$$c_{j\alpha}^w := \frac{g_j w_{j\alpha}^2}{\lambda_\alpha} : \text{the contribution of word } j \text{ to axis } \alpha,$$

$$h_{i\alpha}^u := \frac{x_{i\alpha}^2}{\sum_\alpha x_{i\alpha}^2} : \text{the contribution of axis } \alpha \text{ to unit } i,$$

CA-CENT	Cosette	Cosette-Marius	Cosette-Valjean	Marius	Valjean
	poupée (0.7)	noce (1.72)	noce (1.0)	théodule (0.61)	mestienne (0.51)
	noce (0.68)	mariage (1.31)	mestienne (0.97)	jondrette (0.59)	fossoyeur (0.46)
	mestienne (0.58)	marié (1.21)	mariage (0.71)	ursule (0.56)	accusé (0.45)
	mariage (0.48)	marier (1.11)	marié (0.68)	vernon (0.53)	maire (0.39)
	marié (0.48)	baron (1.0)	corbillard (0.65)	tante (0.52)	jean (0.37)
	Marius-Valjean	Javert	Javert-Valjean	Myriel	Myriel-Valjean
	noce (1.2)	accusé (1.47)	accusé (1.85)	conventionnel (5.03)	chandelier (6.28)
	mariage (0.85)	arras (1.04)	avocat (1.12)	évêque (3.54)	gendarme (5.06)
	ursule (0.85)	mouchard (0.97)	preuve (1.1)	oratoire (3.39)	panier (4.72)
	marié (0.8)	avocat (0.96)	président (1.08)	hôpital (2.57)	couvert (4.64)
	tableau (0.74)	preuve (0.93)	forçat (1.01)	cathédrale (2.54)	deuil (4.52)

Table 6

The 5 most associated words (similarity in parentheses) vs volumes objects (top) and Cosette-Valjean relationship as found in each tome, regarding the **CA-REG** method ($\lambda = 0.01$). Note that no co-occurrence between Cosette and Valjean were automatically found in volume 3.

$$h_{j\alpha}^w := \frac{w_{j\alpha}^2}{\sum_{\alpha} w_{j\alpha}^2} : \text{the contribution of axis } \alpha \text{ to word } j,$$

For a detailed interpretation of these different quantities, see (REF).

A.2. Unit embedding based of pre-trained word vectors

This methods is justified and detailed in (REF). Let $\mathbf{w}_1, \dots, \mathbf{w}_v$ be pre-trained word vectors which appear in the studied corpus, and the $(n \times v)$ table \mathbf{N} counting the frequency of these words in the n textual units. We first construct the *uncentered vectors* $\tilde{\mathbf{x}}_i$ of each unit i with

$$\tilde{\mathbf{x}}_i = \sum_{j=1}^v \frac{n_{ij}}{n_{i\bullet}} \frac{a}{a + \frac{n_{\bullet j}}{n_{\bullet\bullet}}} \mathbf{w}_j, \quad (8)$$

where $a > 0$ is an hyperparameter which gives less importance to frequent words as $a \rightarrow 0$. In this article, we set a to the recommended value of 0.01. Let $\tilde{\mathbf{X}}$ be the matrix whose columns are vectors $\tilde{\mathbf{x}}_i$, and \mathbf{u} be its first singular vector. We compute *vectors* \mathbf{x}_i of each units i with

$$\mathbf{x}_i = \tilde{\mathbf{x}}_i - \mathbf{u} \mathbf{u}^\top \tilde{\mathbf{x}}_i. \quad (9)$$

This last equation act like a *centration* of unit vectors in the direction of the first singular vector \mathbf{u} .

References