ine View Input Devices Help

1 2 3 4

10:20

kali@kali: ~/gas

Session Actions Edit View Help

```
┌──(kali㉿kali)-[~]
└─$ pwd
/home/kali

┌──(kali㉿kali)-[~]
└─$ cd ~

┌──(kali㉿kali)-[~]
└─$ mkdir gas

┌──(kali㉿kali)-[~]
└─$ cd gas

┌──(kali㉿kali)-[~/gas]
└─$ echo "ghassan">gh1.txt

┌──(kali㉿kali)-[~/gas]
└─$ echo "hisham">hi.txt

┌──(kali㉿kali)-[~/gas]
└─$ echo "mohmad">moh.txt

┌──(kali㉿kali)-[~/gas]
└─$ cat gh1.txt
ghassan

┌──(kali㉿kali)-[~/gas]
└─$ less gh1.txt

┌──(kali㉿kali)-[~/gas]
└─$ head -n 1 gh1.txt
ghassan

┌──(kali㉿kali)-[~/gas]
└─$ tail -n 1 gh1.txt
ghassan

┌──(kali㉿kali)-[~/gas]
└─$ wc gh1.txt
1 1 8 gh1.txt

┌──(kali㉿kali)-[~/gas]
└─$ cut -d':' -f1 hi.txt
hisham
```

Right

unny

Search

kali@kali: ~/gas

Session Actions Edit View Help

```
ghassan hello
~
~
~
```

Machine View Input Devices Help

1 2 3 4 10:24

kali@kali: ~/gas

Session Actions Edit View Help

```
LS(1)                          User Commands                          LS(1)

NAME
       ls - list directory contents

SYNOPSIS
       ls [OPTION]... [FILE]...

DESCRIPTION
       List  information  about  the FILEs (the current directory by default).  Sort entries
       alphabetically if none of -cftuvSUX nor --sort is specified.

       Mandatory arguments to long options are mandatory for short options too.

       -a, --all
              do not ignore entries starting with .

       -A, --almost-all
              do not list implied . and ..

       --author
              with -l, print the author of each file

       -b, --escape
              print C-style escapes for nongraphic characters

       --block-size=SIZE
              with -l, scale sizes by SIZE when printing them; e.g., '--block-size=M'; see
              SIZE format below

       -B, --ignore-backups
              do not list implied entries ending with ~

       -c     with  -lt: sort by, and show, ctime (time of last change of file status infor-
              mation); with -l: show ctime and sort  by  name;  otherwise:  sort  by  ctime,
              newest first

       -C     list entries by columns

       --color[=WHEN]
              color the output WHEN; more info below

       -d, --directory
              list directories themselves, not their contents
Manual page ls(1) line 1 (press h for help or q to quit)
```

72°F
Mostly sunny

Search

Right Ctrl

ine View Input Devices Help

1 2 3 4 10:24

kali@kali: ~/gas

Session Actions Edit View Help

```
┌──(kali㉿kali)-[~/gas]
└─$ man ls

┌──(kali㉿kali)-[~/gas]
└─$ man -k intro
addseverity (3)          - introduce new severity classes
bootparam (7)            - introduction to boot time parameters of the Linux kernel
busctl (1)               - Introspect the bus
crypto (7ssl)            - OpenSSL Guide: An introduction to libcrypto
git-bisect (1)           - Use binary search to find the commit that introduced a bug
git-cherry-pick (1)      - Apply the changes introduced by some existing commits
git-whatchanged (1)      - Show logs with differences each commit introduces
gittutorial (7)          - A tutorial introduction to Git
gittutorial-2 (7)        - A tutorial introduction to Git: part two
initramfs-tools (7)      - an introduction to writing scripts for mkinitramfs
intro (1)                - introduction to user commands
intro (2)                - introduction to system calls
intro (3)                - introduction to library functions
intro (3attr)            - C/C++ attributes
intro (4)                - introduction to special files
intro (5)                - introduction to file formats and filesystems
intro (6)                - introduction to games
intro (7)                - introduction to overview and miscellany section
intro (8)                - introduction to administration and privileged commands
Net::DBus::Binding::Introspector (3pm) - Handler for object introspection data
ossl-guide-introduction (7ssl) - OpenSSL Guide: An introduction to OpenSSL
ossl-guide-libcrypto-introduction (7ssl) - OpenSSL Guide: An introduction to libcrypto
ossl-guide-libraries-introduction (7ssl) - OpenSSL Guide: An introduction to the OpenSSL ...
ossl-guide-libssl-introduction (7ssl) - OpenSSL Guide: An introduction to libssl
ossl-guide-quic-introduction (7ssl) - OpenSSL Guide: An introduction to QUIC in OpenSSL
ossl-guide-tls-introduction (7ssl) - OpenSSL Guide: An introduction to SSL/TLS in OpenSSL
pbmtoptx (1)             - convert a PBM image into Printronix printer graphics
ssl (7ssl)               - OpenSSL Guide: An introduction to libssl
varlinkctl (1)           - Introspect with and invoke Varlink services
XML::SAX::Intro (3pm) - An Introduction to SAX Parsing with Perl
zshroadmap (1)           - informal introduction to the zsh manual The Zsh Manual, like the ...

┌──(kali㉿kali)-[~/gas]
└─$
```

Right Ctrl

y sunny

Search

```
intro (4)                - introduction to special files
intro (5)                - introduction to file formats and filesystem
intro (6)                - introduction to games
intro (7)                - introduction to overview and miscellany sec
intro (8)                - introduction to administration and privileg
Net::DBus::Binding::Introspector (3pm) - Handler for object introsp
ossl-guide-introduction (7ssl) - OpenSSL Guide: An introduction to
ossl-guide-libcrypto-introduction (7ssl) - OpenSSL Guide: An introd
ossl-guide-libraries-introduction (7ssl) - OpenSSL Guide: An introd
ossl-guide-libssl-introduction (7ssl) - OpenSSL Guide: An introduct
ossl-guide-quic-introduction (7ssl) - OpenSSL Guide: An introductio
ossl-guide-tls-introduction (7ssl) - OpenSSL Guide: An introduction
pbmtoptx (1)             - convert a PBM image into Printronix printer g
ssl (7ssl)               - OpenSSL Guide: An introduction to libssl
varlinkctl (1)           - Introspect with and invoke Varlink services
XML::SAX::Intro (3pm) - An Introduction to SAX Parsing with Perl
zshroadmap (1)           - informal introduction to the zsh manual The Z

┌──(kali㉿kali)-[~/gas]
└─$ passwd
Changing password for kali.
Current password:
New password:
Retype new password:
The password has not been changed.
New password:
```

2°F
Mostly sunny

Searc

DESIGNED
ENGINEER
SIO

```
┌──(kali㉿kali)-[~]
└─$ echo "test content">file.txt

┌──(kali㉿kali)-[~]
└─$ cp file.txt folder1/

┌──(kali㉿kali)-[~]
└─$ cp -r folder1 folder2/

┌──(kali㉿kali)-[~]
└─$ mv file.txt new_file.txt

┌──(kali㉿kali)-[~]
└─$ rm new_file.txt

┌──(kali㉿kali)-[~]
└─$ rmdir folder1
rmdir: failed to remove 'folder1': Directory not empty

┌──(kali㉿kali)-[~]
└─$ rm -r folder1

┌──(kali㉿kali)-[~]
└─$ echo -e "apple:1:30\nbanana:2:10\napple:1:30\ncherry:3:20" > data.txt

┌──(kali㉿kali)-[~]
└─$ head -n 2 data.txt
apple:1:30
banana:2:10

┌──(kali㉿kali)-[~]
└─$ tail -n 2 data.txt
apple:1:30
cherry:3:20

┌──(kali㉿kali)-[~]
└─$ wc data.txt
 4  4 46 data.txt

┌──(kali㉿kali)-[~]
└─$ sort data.txt
apple:1:30
apple:1:30
banana:2:10
cherry:3:20
```

stly sunny

Search

File Machine View Input Devices Help

1 2 3 4

Home

File System

kali@kali: ~

Session Actions Edit View Help

```
┌──(kali㉿kali)-[~]
└─$ wc data.txt
 4  4 46 data.txt

┌──(kali㉿kali)-[~]
└─$ sort data.txt
apple:1:30
apple:1:30
banana:2:10
cherry:3:20

┌──(kali㉿kali)-[~]
└─$ sort -r data.txt
cherry:3:20
banana:2:10
apple:1:30
apple:1:30

┌──(kali㉿kali)-[~]
└─$ sort -t':' -n -k 3 data.txt
banana:2:10
cherry:3:20
apple:1:30
apple:1:30

┌──(kali㉿kali)-[~]
└─$ uniq data.txt
apple:1:30
banana:2:10
apple:1:30
cherry:3:20

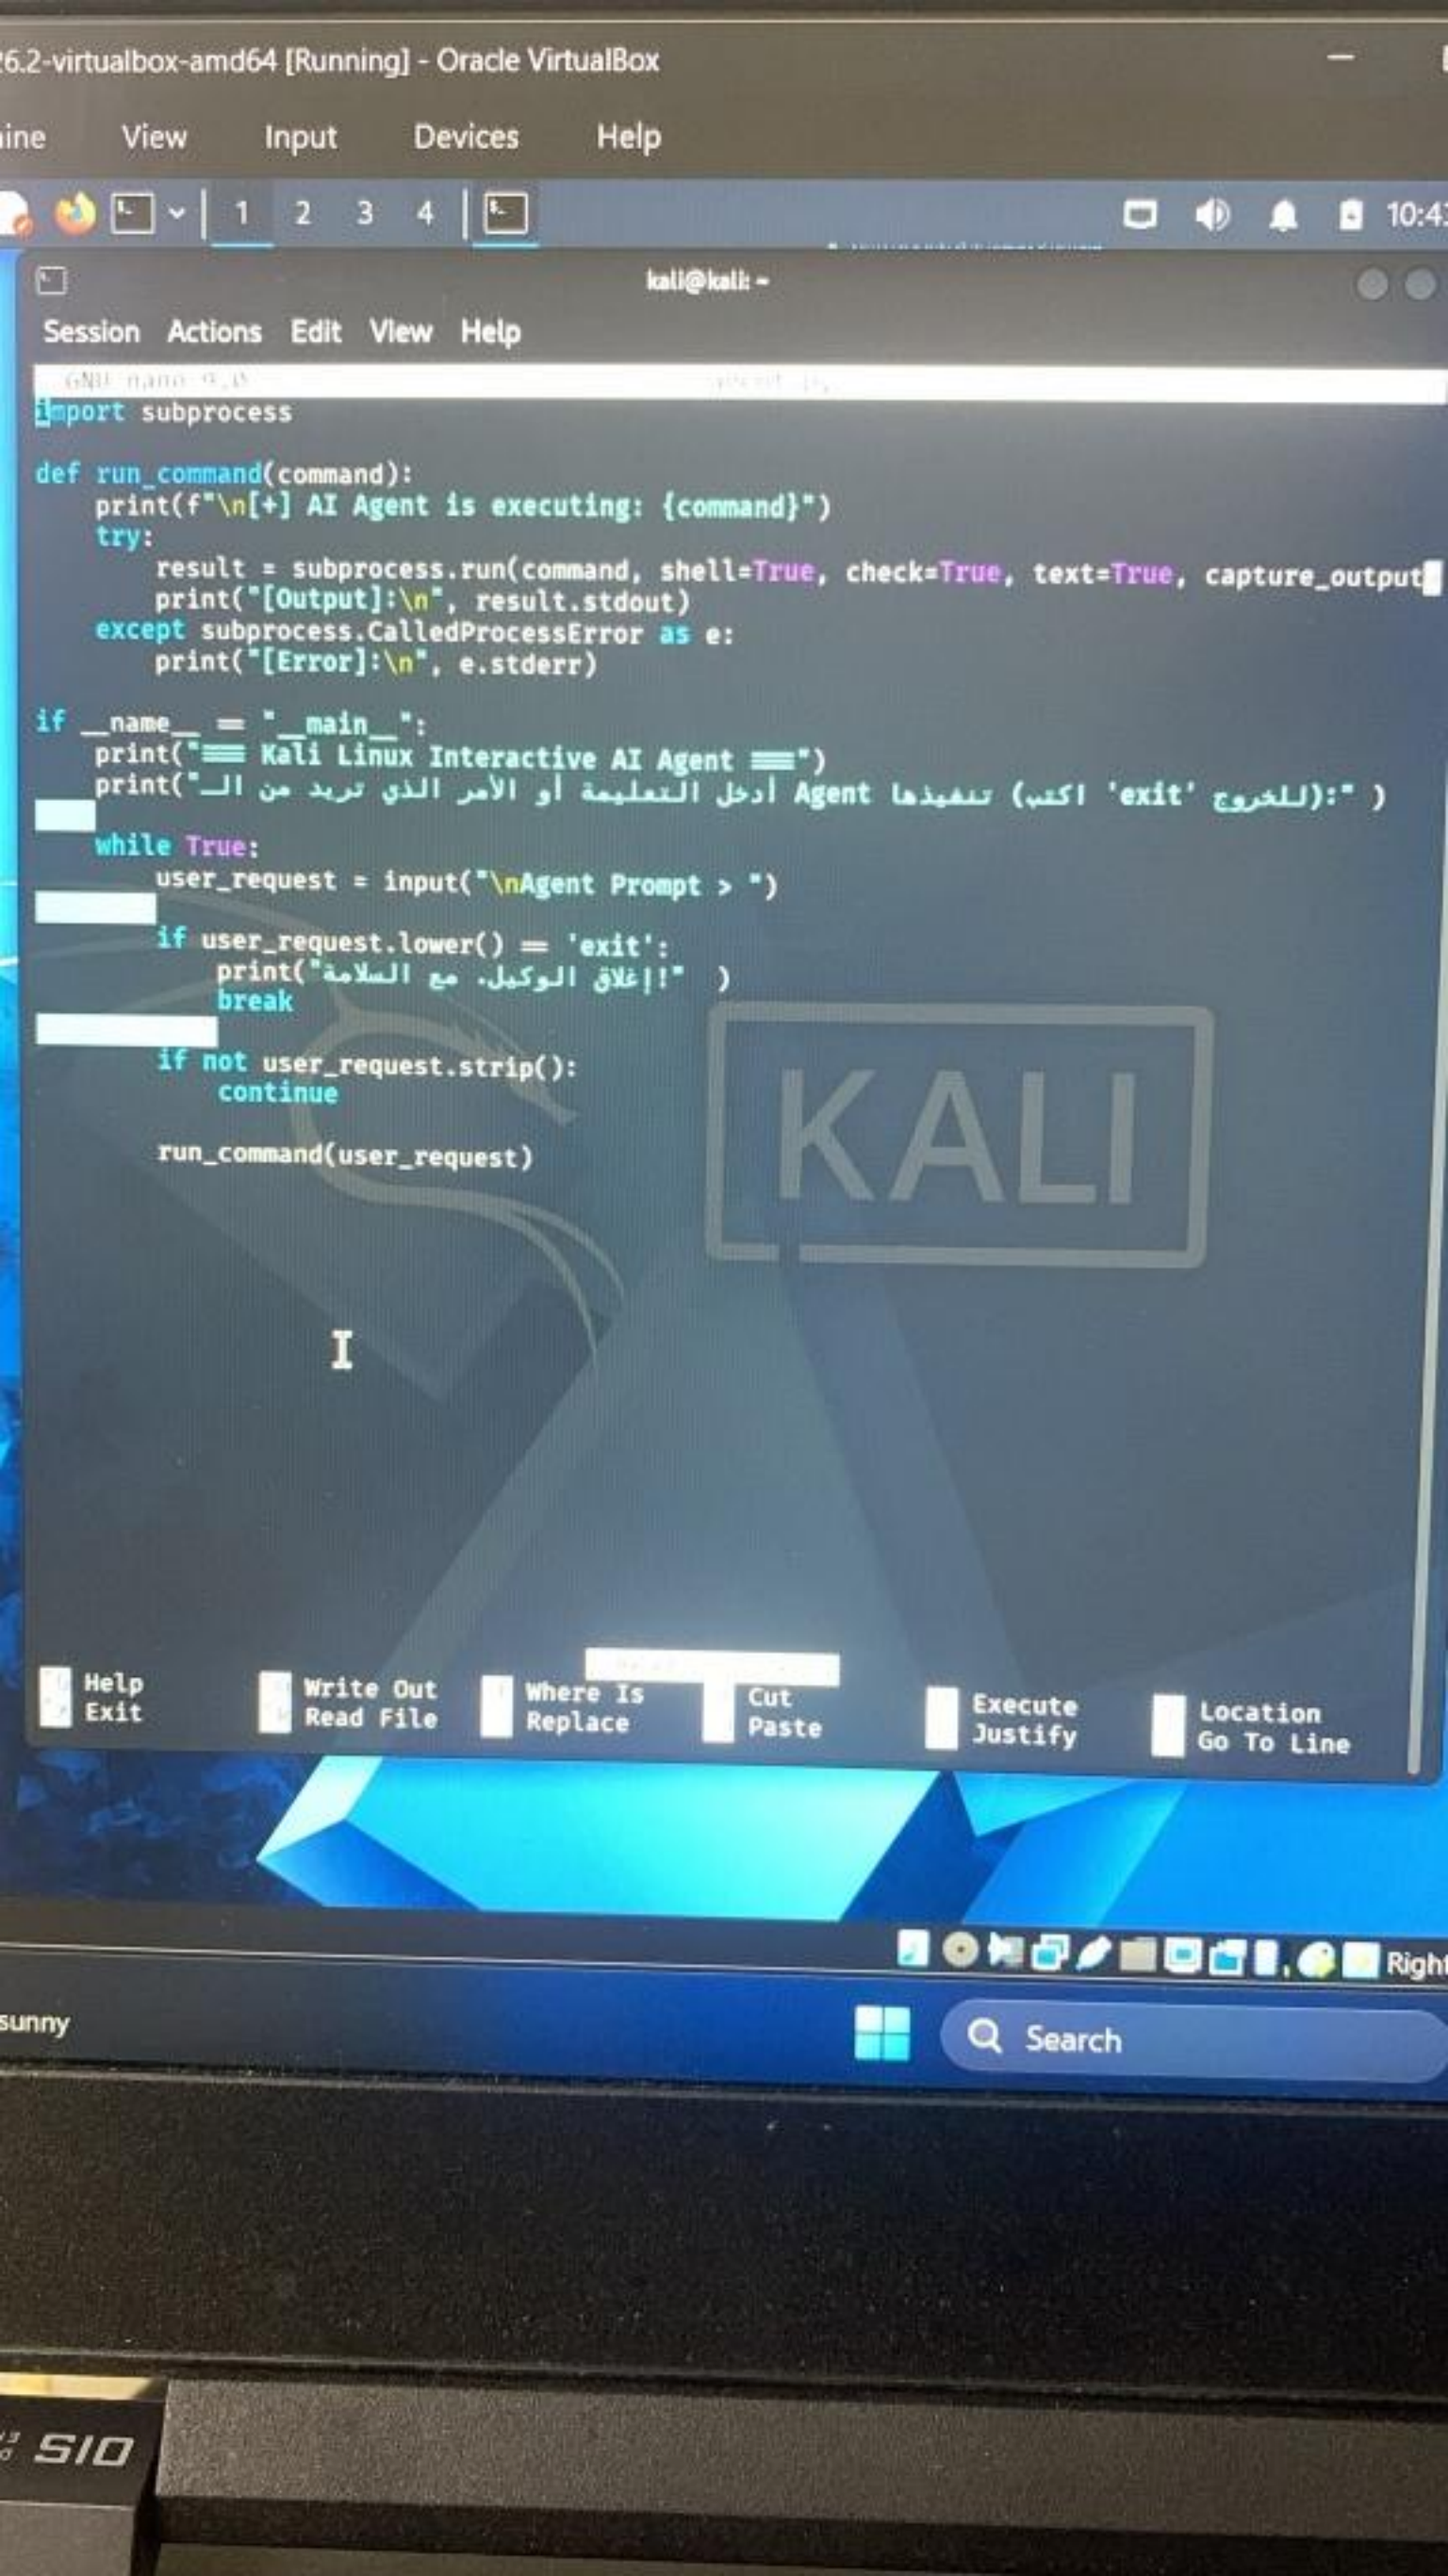
┌──(kali㉿kali)-[~]
└─$ cut -d':' -f1 data.txt
apple
banana
apple
cherry

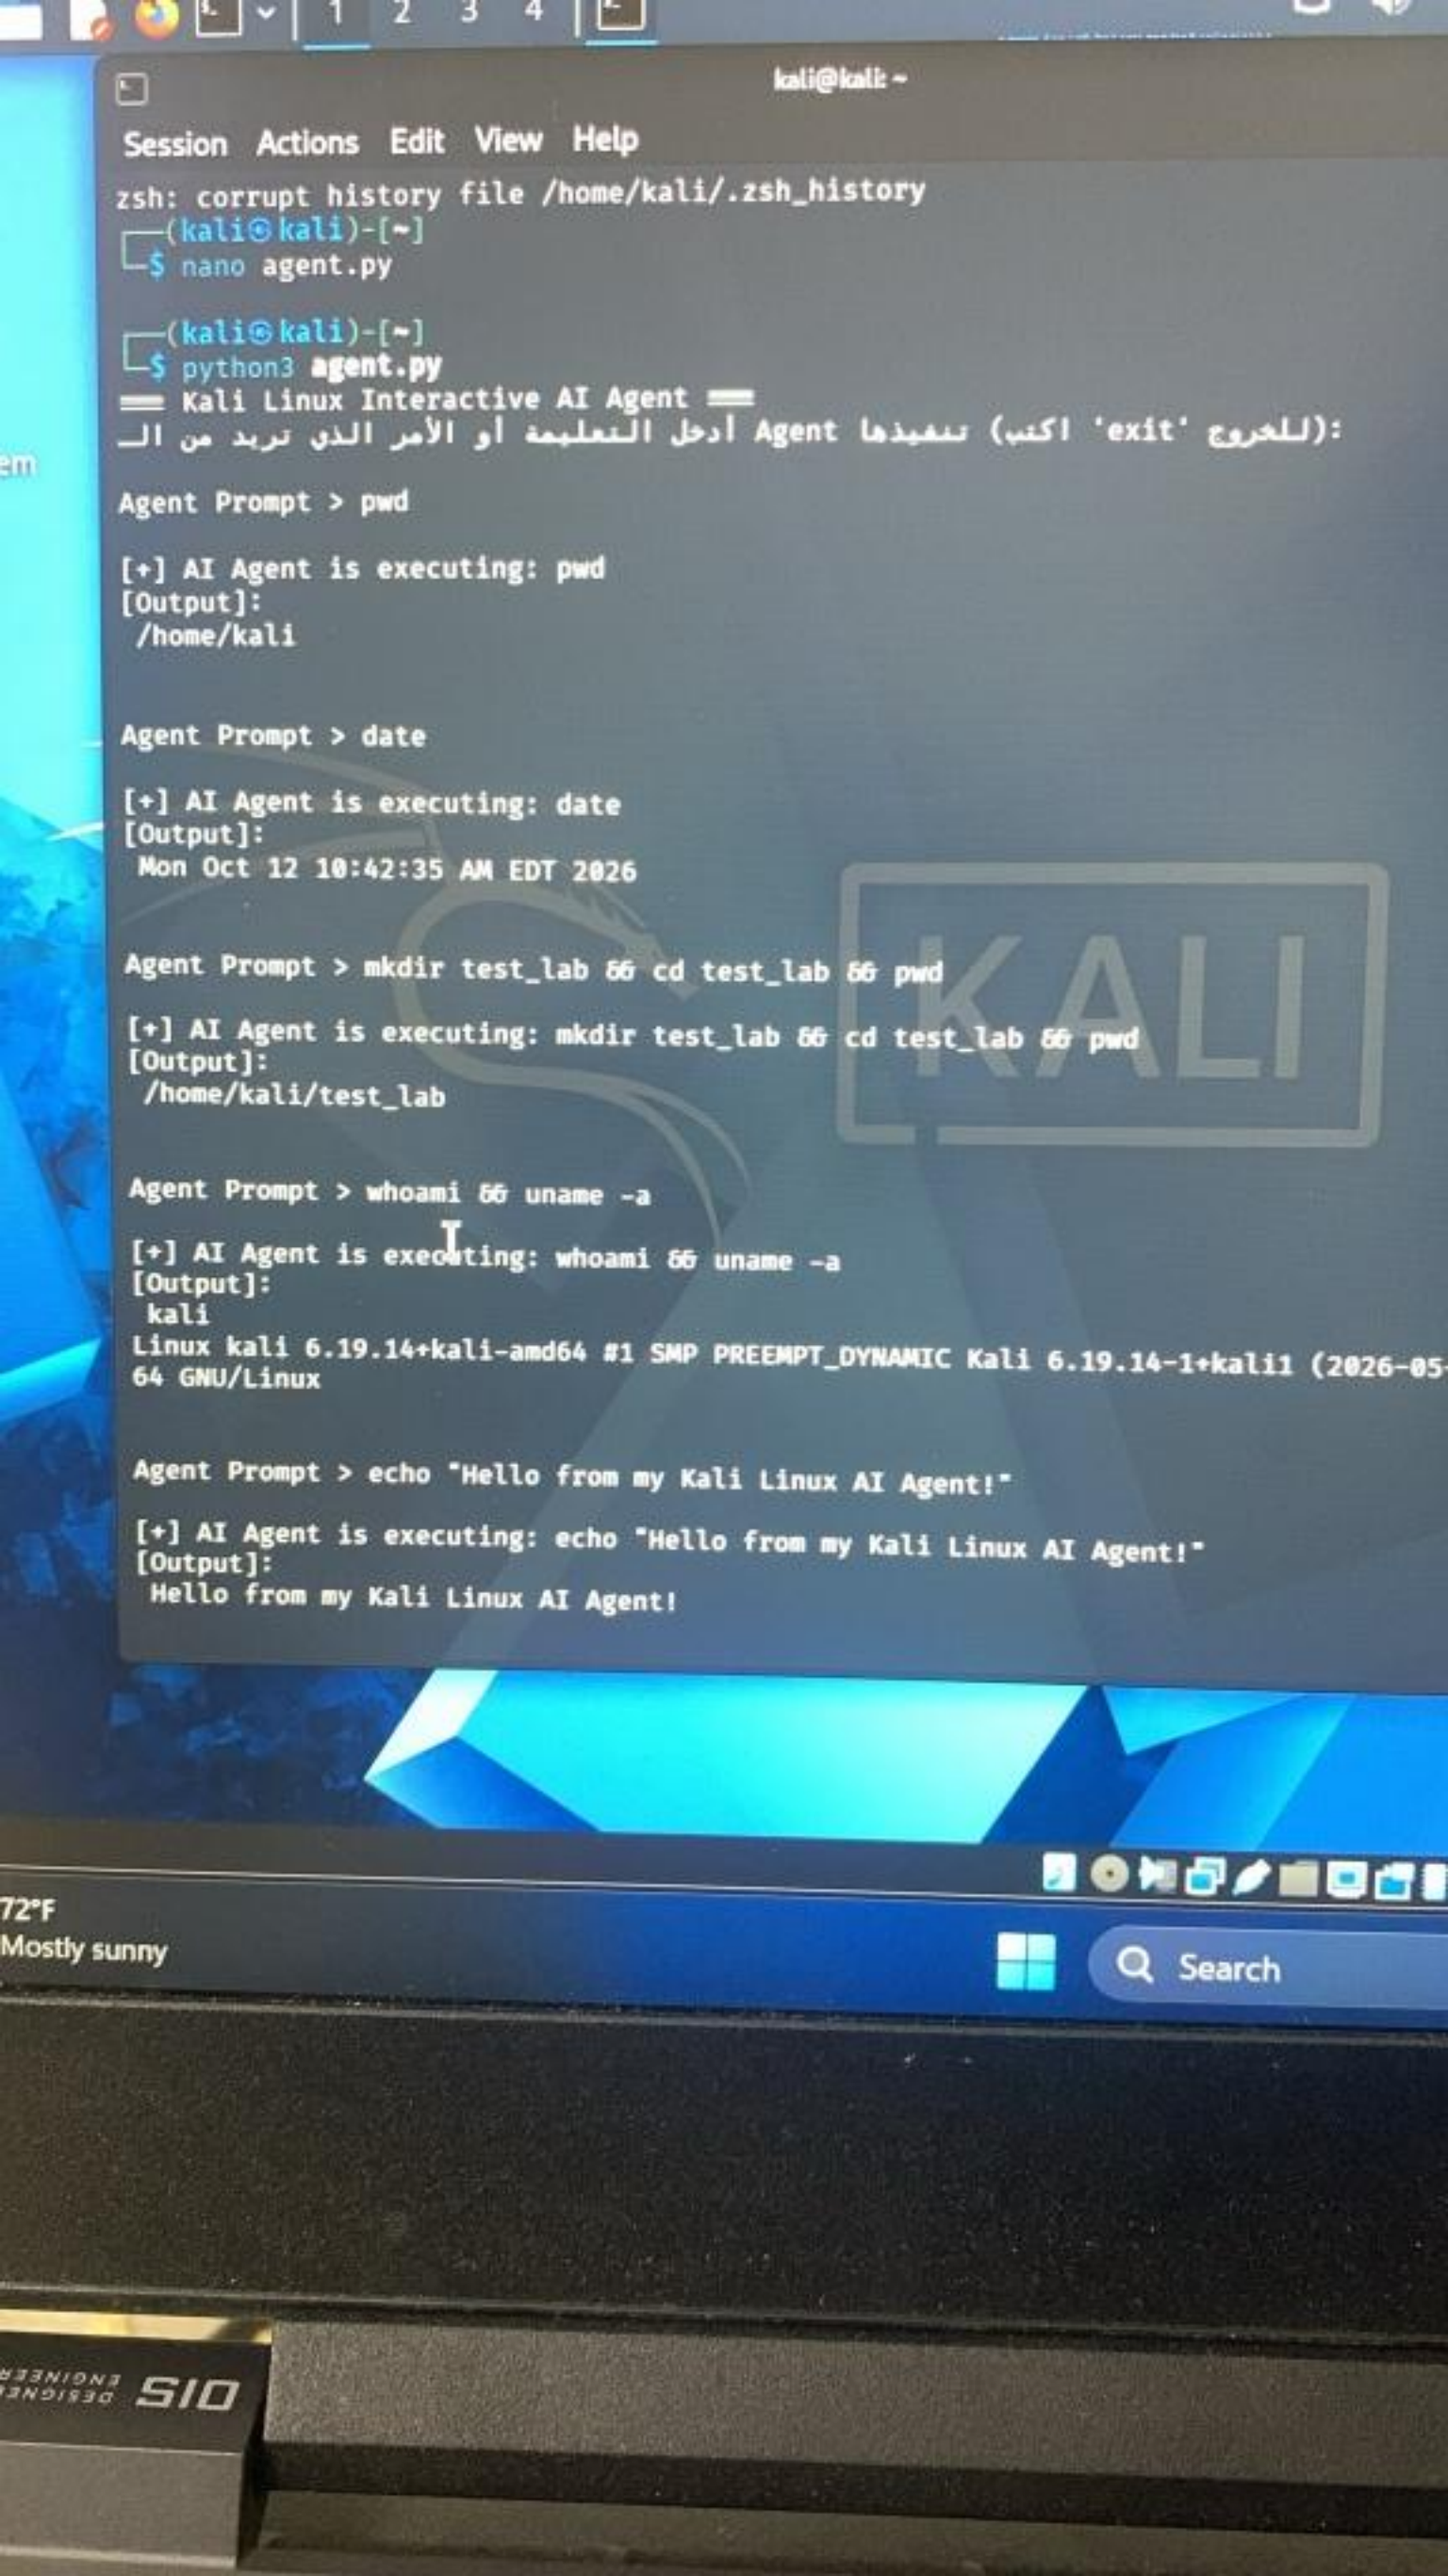
┌──(kali㉿kali)-[~]
└─$ grep "banana" data.txt
banana:2:10

┌──(kali㉿kali)-[~]
└─$
```

72°F
Mostly sunny

Search


6.2-virtualbox-amd64 [Running] - Oracle VirtualBox
ine View Input Devices Help
1 2 3 4
kali@kali: ~
Session Actions Edit View Help
import subprocess
def run_command(command):
print(f"\n[+] AI Agent is executing: {command}")
try:
result = subprocess.run(command, shell=True, check=True, text=True, capture_output
print("[Output]:\n", result.stdout)
except subprocess.CalledProcessError as e:
print("[Error]:\n", e.stderr)
if __name__ == "__main__":
print("== Kali Linux Interactive AI Agent ==")
print("أدخل التعليمة أو الأمر الذي تريد من الـ Agent تنفيذها (اكتب 'exit' للخروج):" )
while True:
user_request = input("\nAgent Prompt > ")
if user_request.lower() == 'exit':
print("إغلاق الوكيل. مع السلامة!" )
break
if not user_request.strip():
continue
run_command(user_request)
KALI
Help
Exit
Write Out
Read File
Where Is
Replace
Cut
Paste
Execute
Justify
Location
Go To Line
sunny
Search
Right
S10


kali@kali: ~
Session Actions Edit View Help
zsh: corrupt history file /home/kali/.zsh_history
(kali㉿kali)-[~]
$ nano agent.py
(kali㉿kali)-[~]
$ python3 agent.py
Kali Linux Interactive AI Agent
أدخل التعليمة أو الأمر الذي تريد من الـ Agent تنفيذها (اكتب 'exit' للخروج):
Agent Prompt > pwd
[+] AI Agent is executing: pwd
[Output]:
/home/kali
Agent Prompt > date
[+] AI Agent is executing: date
[Output]:
Mon Oct 12 10:42:35 AM EDT 2026
Agent Prompt > mkdir test_lab && cd test_lab && pwd
[+] AI Agent is executing: mkdir test_lab && cd test_lab && pwd
[Output]:
/home/kali/test_lab
Agent Prompt > whoami && uname -a
[+] AI Agent is executing: whoami && uname -a
[Output]:
kali
Linux kali 6.19.14+kali-amd64 #1 SMP PREEMPT_DYNAMIC Kali 6.19.14-1+kali1 (2026-05-
64 GNU/Linux
Agent Prompt > echo "Hello from my Kali Linux AI Agent!"
[+] AI Agent is executing: echo "Hello from my Kali Linux AI Agent!"
[Output]:
Hello from my Kali Linux AI Agent!
72°F
Mostly sunny
Search