


# Extremal Graphs for $s_{ij}$

October 1, 2024

```
[1]: def upper_bound_ij(i,j):  
      return (1/2)*sqrt((i+j+1)/(i*(j+1)))  
  
def upper_bound_0j(j):  
    return (1/2)*(1+sqrt((j+2)/(j+1)))  
  
def extremal_graph_ij(s, i, j):  
    G = Graph(s)  
    n = G.order()  
    sp = G.spectrum()  
  
    G.show()  
    print(G.sparse6_string())  
    print(f'lower  $s(\{i\},\{j\}) = \{((sp[i] - sp[n - j - 1])/n).n()\}'$ )  
    if i == j == 0:  
        print(f'upper  $s(\{i\},\{j\}) = \{(2/\sqrt{3}).n()\}'$ )  
    elif i == 0:  
        print(f'upper  $s(\{i\},\{j\}) = \{upper\_bound\_0j(j).n()\}'$ )  
    else:  
        print(f'upper  $s(\{i\},\{j\}) = \{upper\_bound\_ij(i,j).n()\}'$ )  
    return None
```

```
[2]: # Best for  $s(0,0)$   
i,j = 0,0  
K = graphs.CompleteGraph(3)  
G = Graph(loops=True)  
for e in K.edges():  
    G.add_edge(e)  
G.add_edge(1,1)  
G.add_edge(2,2)  
s = G.sparse6_string()  
extremal_graph_ij(s,i,j)
```

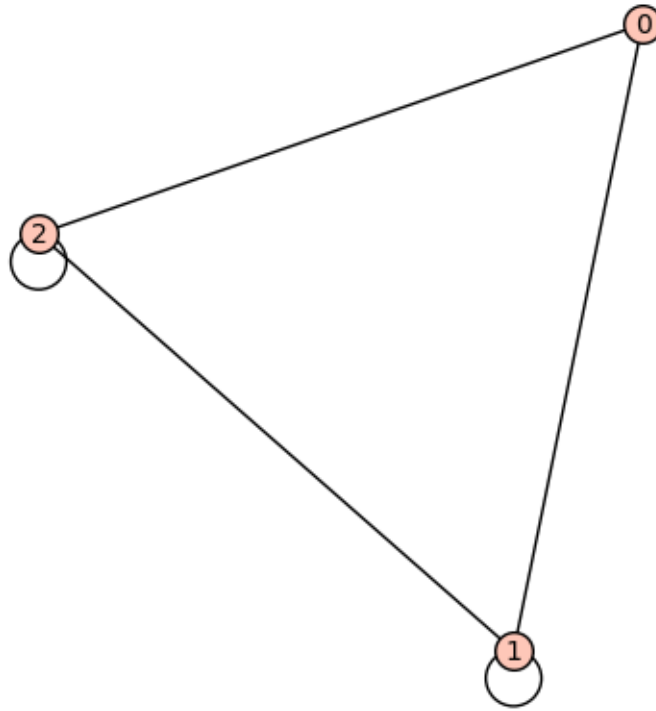

:B`V


lower  $s(0,0) = 1.15470053837925$

upper  $s(0,0) = 1.15470053837925$

```

[3]: # Best for  $s(0,j)$ 
i = 0
for j in range(1,5):
    K = graphs.CompleteGraph(2*j+4)
    G = Graph(loops=True)
    for e in K.edges():
        G.add_edge(e)
    for v in range(j+2,2*j+4):
        G.add_edge(v,v)
    s = G.sparse6_string()
    extremal_graph_ij(s,i,j)


```

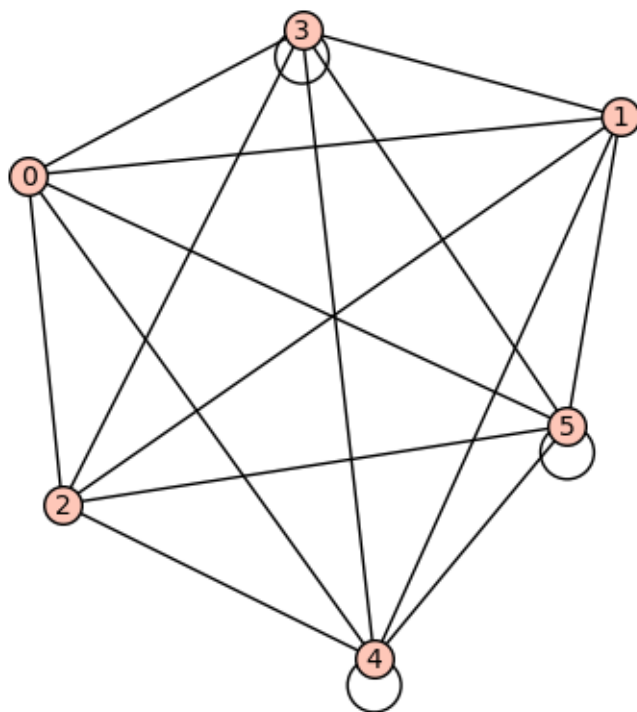


:Ea@\_QM@Gs\_QLD

lower  $s(0,1) = 1.09023021085819$


upper  $s(0,1) = 1.11237243569579$

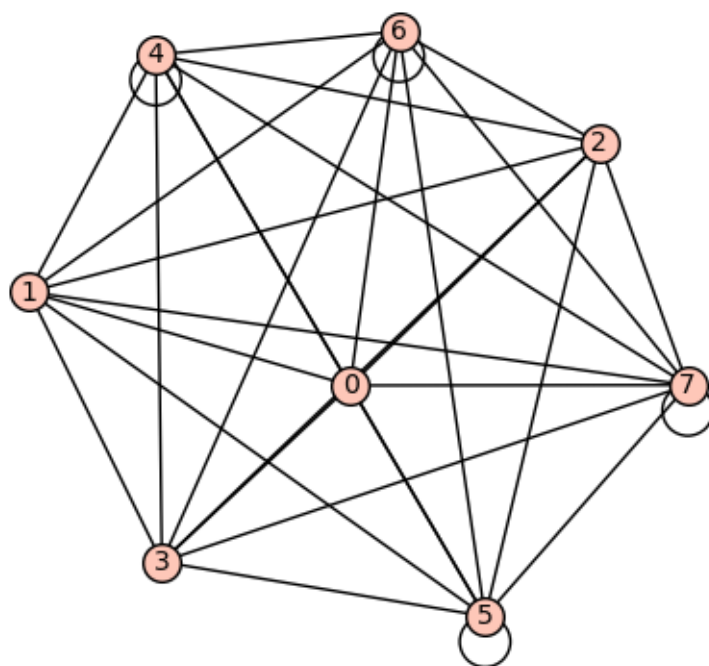

```
:Ga@_Q_QLGcbPWCbPU_QLDX~
lower s(0,2) = 1.06639110926866
upper s(0,2) = 1.07735026918963
```

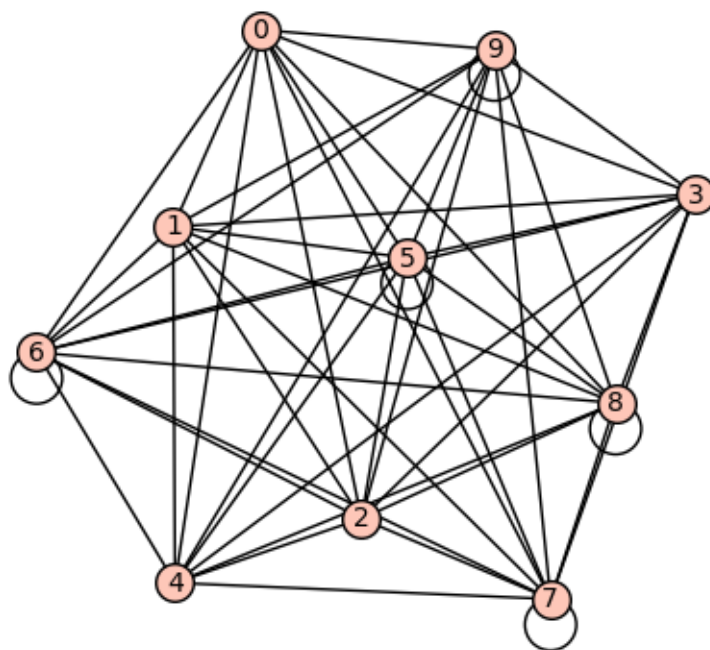


```
:I`?K?a_C0w@CK`W@CK`ROAGXAeN?G`cIWyG@CK`RFOf
lower s(0,3) = 1.05249378105604
upper s(0,3) = 1.05901699437495
```

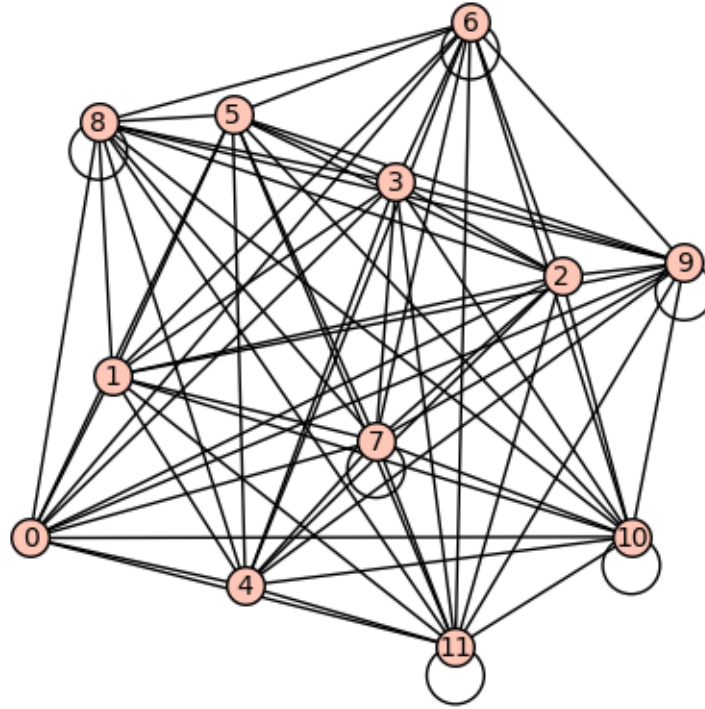

```
:K`?K?a_COw@CKc?aEOhg@CK`RF_COqDK\C?aEOhbgR?G`cIWYCi_COqDK\ATJ
lower s(0,4) = 1.04339977411635
upper s(0,4) = 1.04772255750517
```


```
[4]: # Best for s(k,k-1) if (2k)-Hadamard matrix exists
for k in range(1,5):
    i,j = k,k-1
    K = matrix([[1,-1],[-1,1]])
    try:
        H = hadamard_matrix(2*k)
    except:
        continue
    J = matrix.ones(ZZ,4*k,4*k)
    A = (1/2)*(K.tensor_product(H) + J)
    G = Graph(A)
    G.relabel(G.canonical_label())
    s = G.sparse6_string()
    extremal_graph_ij(s,i,j)
```

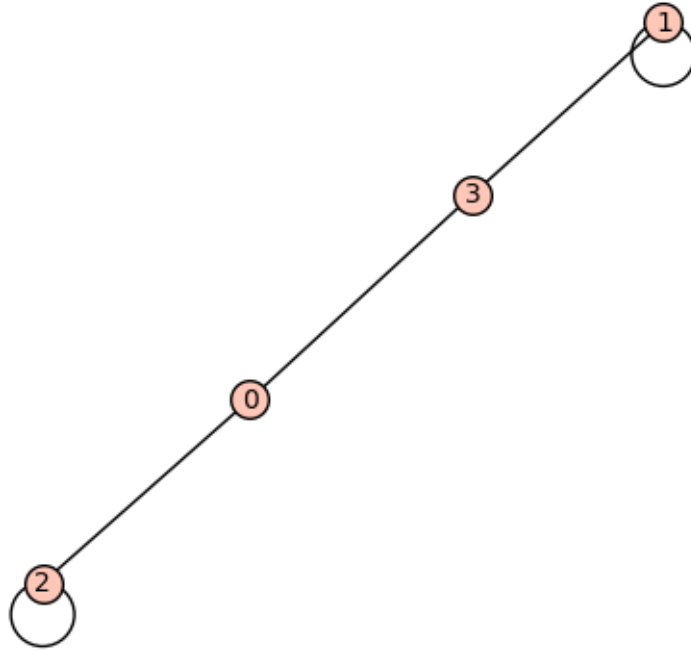

:CkSN

lower  $s(1,0) = 0.707106781186547$


upper  $s(1,0) = 0.707106781186548$

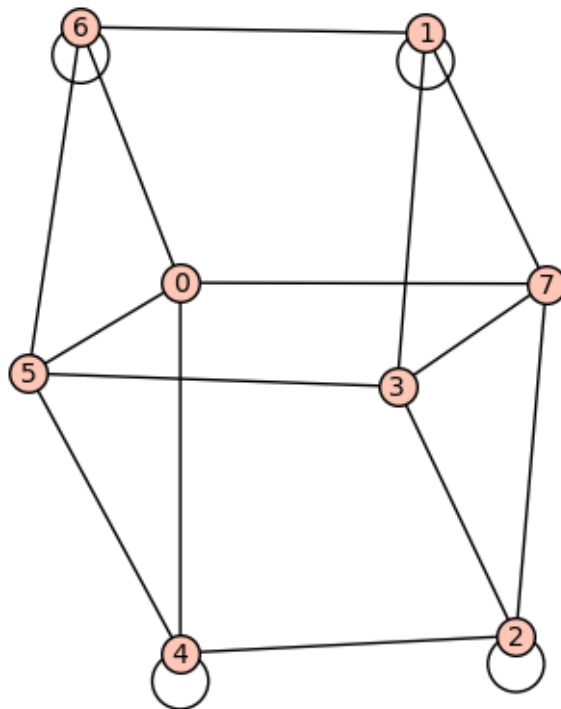

:GehIAQBQ@TgCb

lower  $s(2,1) = 0.5000000000000000$

upper  $s(2,1) = 0.5000000000000000$

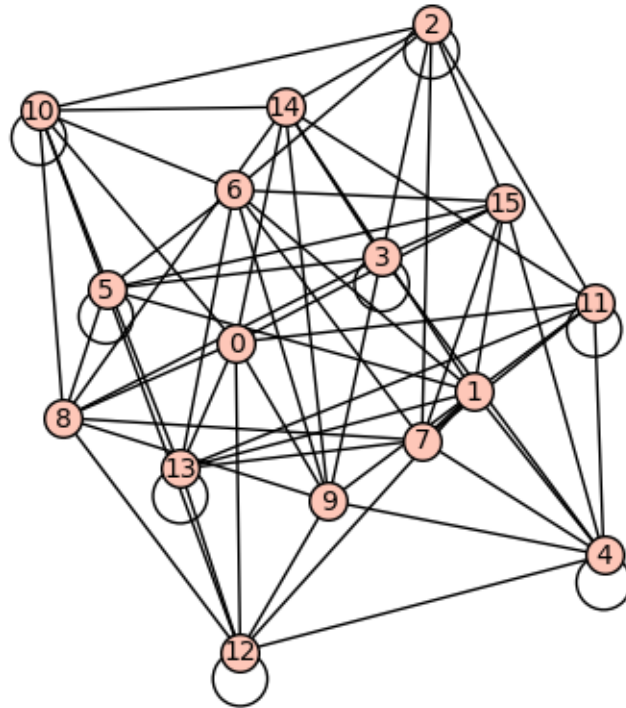

:OcIOwbHCXWaJCPBOES{@cKa?aeOi?afQm?QD0dc?eMhZEoAGYCiV?G`cIW~

lower  $s(4,3) = 0.353553390593274$


upper  $s(4,3) = 0.353553390593274$

```
[5]: # Best for  $s(1,j)$ 
i = 1
for j in range(1,5):
    K1 = graphs.CompleteGraph(j+2)
    K2 = graphs.CompleteGraph(j+1)
    G1 = Graph(loops=True)
    G2 = Graph(loops=True)
    for e in K1.edges():
        G1.add_edge(e)
    for e in K2.edges():
        G2.add_edge(e)
    for v in range(j+1):
        G2.add_edge(v,v)
```

```

G = G1.disjoint_union(G2)
G.relabel(G.canonical_label())
s = G.sparse6_string()
extremal_graph_ij(s,i,j)


```

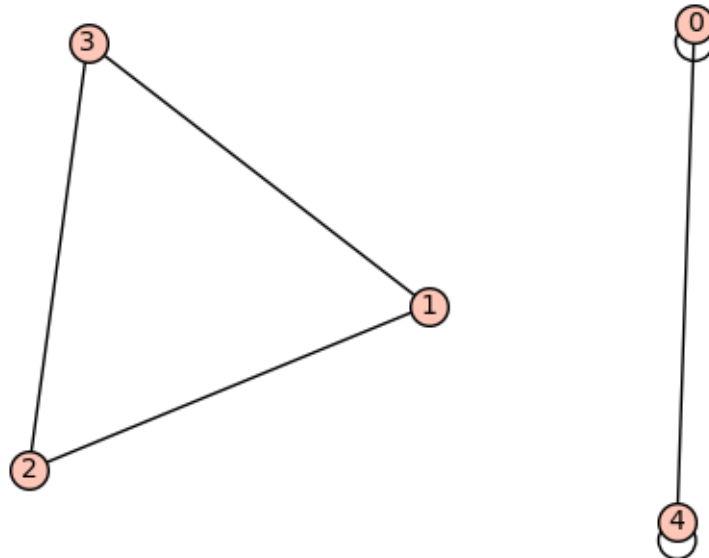

```

:DA`cgR
lower s(1,1) = 0.6000000000000000
upper s(1,1) = 0.612372435695794

```


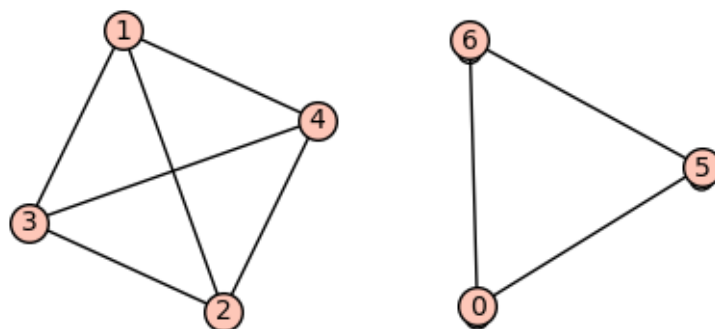


```



:FA`chGwUDZ
lower s(1,2) = 0.571428571428571
upper s(1,2) = 0.577350269189626

```



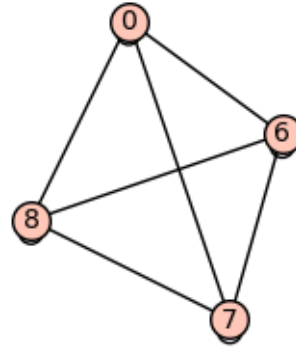


```
:H@GKPPCMG`c_Y@boK\F
lower s(1,3) = 0.5555555555555556
upper s(1,3) = 0.559016994374947
```




```
:J@GKPPCMG`caGXAoN?yGF0e@sHT
lower s(1,4) = 0.5454545454545455
upper s(1,4) = 0.547722557505166
```

```
[6]: # Best for s(2,2) named G_1
i,j = 2,2
s = ':K_ES`s_Q0qDL?G`f_C`SOAGXsoA0iCqEOhdJ'
extremal_graph_ij(s,i,j)
```

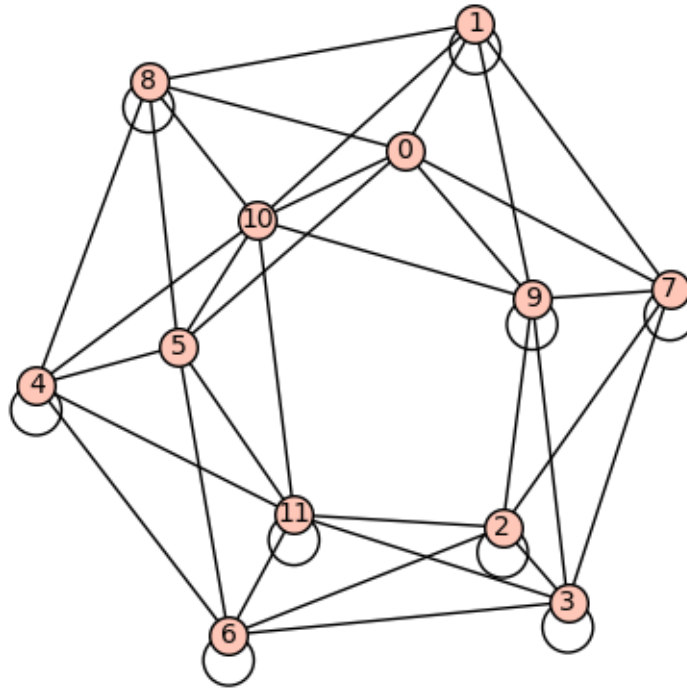


```
:K_ES`s_Q0qDL?G`f_C`SOAGXsoAOiCqEOhdJ
lower s(2,2) = 0.440958551844098
upper s(2,2) = 0.456435464587638
```

```
[7]: #Best for s(2,3) named G_2
i,j = 2,3
s = ':N_EC?aF?G`c_E?Qe_CXAecaPSQEPATQEPATTK`IdtK\\ATkiWyCkYz'
extremal_graph_ij(s,i,j)
```

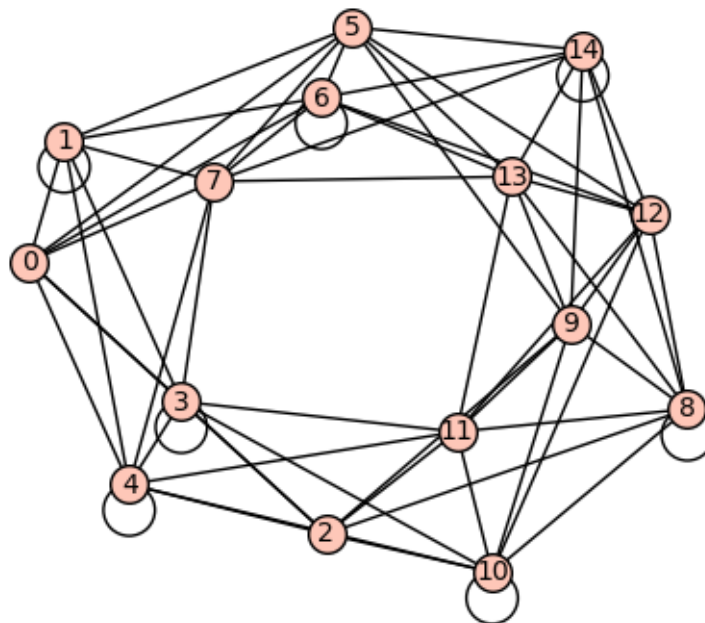


```
:N_EC?aF?G`c_E?Qe_CXAecaPSQEPATQEPATTK`IdtK\ATkiWyCkYz
lower s(2,3) = 0.414584287830377
upper s(2,3) = 0.433012701892219
```

```
[8]: #Best for s(2,4) named G_3
i,j = 2,4
s = ':Oc?GgbaMGqOL?PbsIWYIDK\\AXcIXATOAGXW@CKawAK\\ATk_CXAiUq?PEmlbV^'
extremal_graph_ij(s,i,j)
```

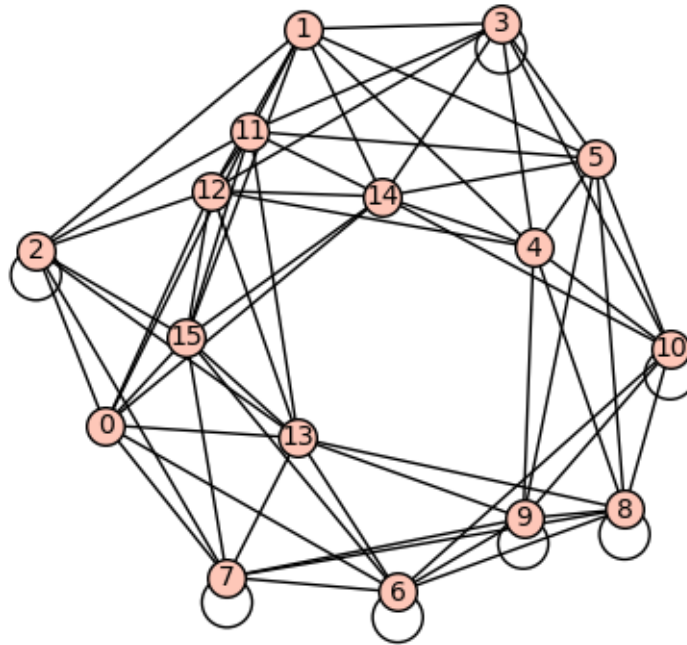


```
:0c?GgbaMGqOL?PbsIWYIDK\AXcIXATOAGXW@CKawAK\ATk_CXAiUq?PEM1bV^
lower s(2,4) = 0.404206628103555
upper s(2,4) = 0.418330013267038
```

```
[9]: # Best for s(3,2) named G_4
i,j = 3,2
s = ':FehIA_t_S'
extremal_graph_ij(s,i,j)
```

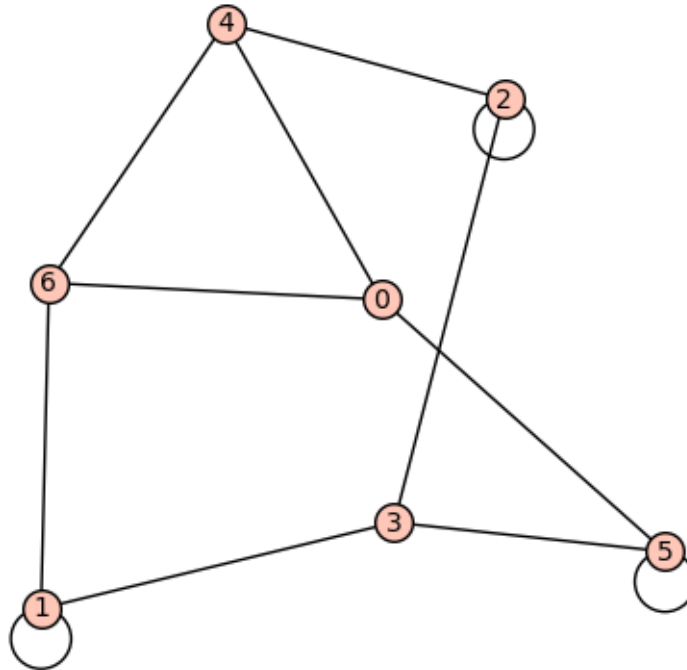


```
:FehIA_t_S
lower s(3,2) = 0.404061017820884
upper s(3,2) = 0.408248290463863
```

```
[10]: #Best for s(3,3) named G_5
i,j = 3,3
s = ':
↪S__@a`BaB`C_D_EFbCDEFG_@AHiaCEFGHJ`BDFGHJK_BCDEHJKL`ABCDGILM`ABCEFILMN_ABDEFIKMO_@CDEGIJNP_
extremal_graph_ij(s,i,j)
```

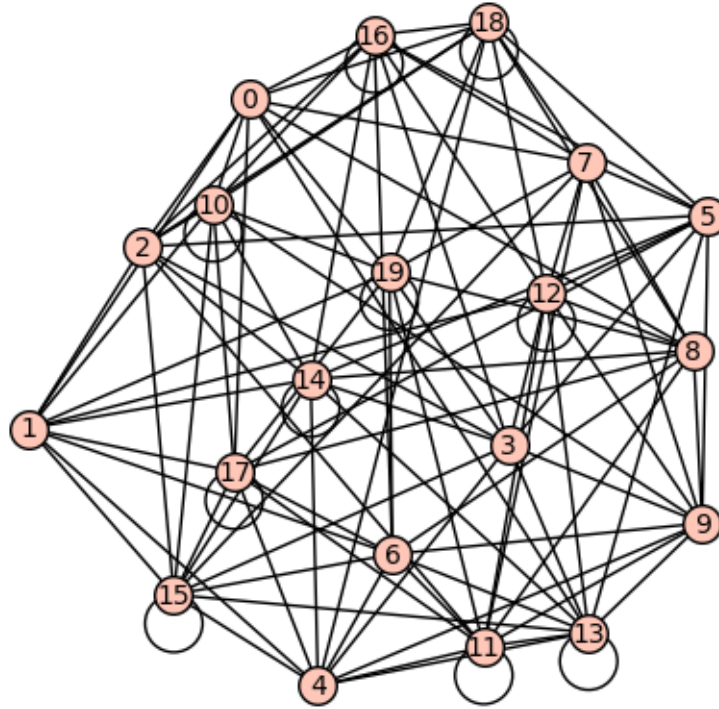


```
:S__@a`BaB`C_D_EFbCDEFG_@AHiaCEFGHJ`BDFGHJK_BCDEHJKL`ABCDGILM`ABCEFILMN_ABDEFIKM
0_@CDEGIJNP_ACDFGIKOQ_@BEFGIJPQR
lower s(3,3) = 0.368220060753790
upper s(3,3) = 0.381881307912987
```

```
[11]: #Best for s(3,4) named G_6
i,j = 3,4
s = ':K@GKPT?QXAecOhxBGWyG@CLC?bGSqTOAG`RhV'
extremal_graph_ij(s,i,j)
```

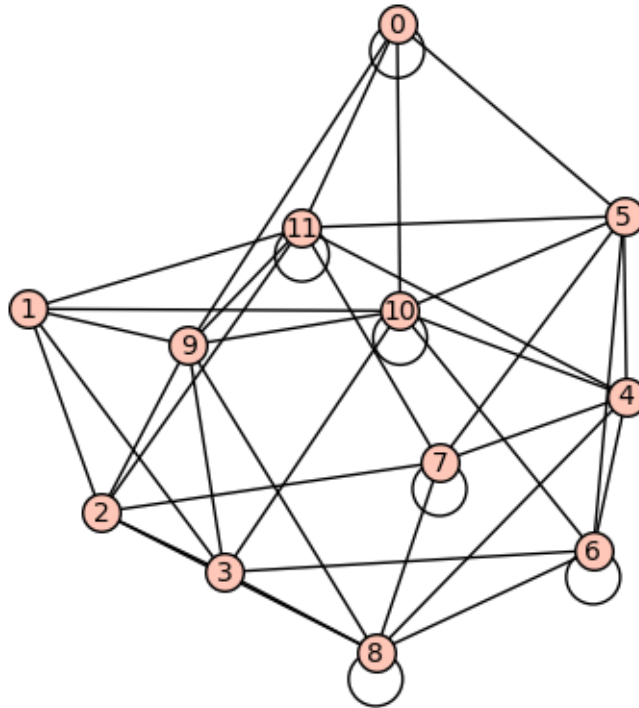

```
:K@GKPT?QXAec0hxBGWyG@CLC?bGSqTOAG`RhV
lower s(3,4) = 0.340561357881856
upper s(3,4) = 0.365148371670111
```


```
[12]: #Best for s(4,4) named G_7
i,j = 4,4
s = ':J`?S@oBG[aDe0pwbJCPsHa0hc^'
extremal_graph_ij(s,i,j)
```

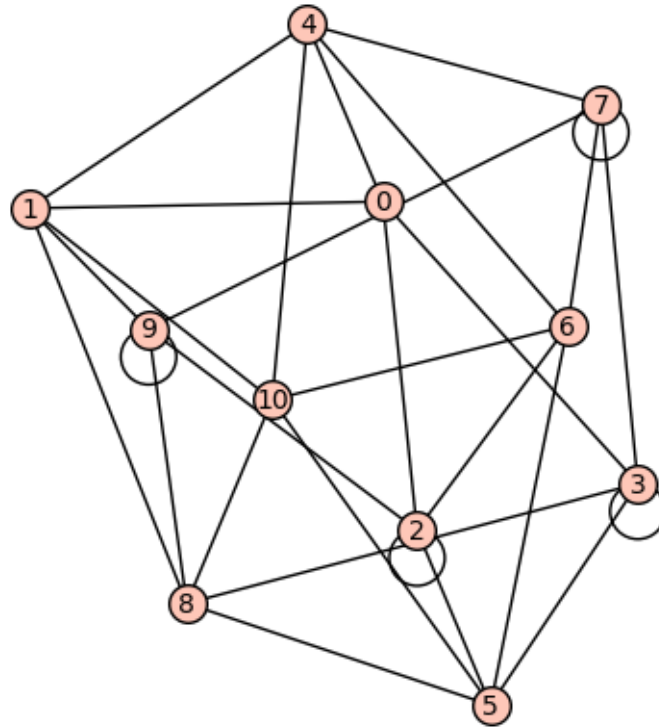

```
:J`?S@oBG[aDe0pwbJCPsHa0hc^
lower s(4,4) = 0.314918328648887
upper s(4,4) = 0.335410196624968
```


```
[13]: #Best for s(3,1) named G_1~c
i = 3
j = 1
H = Graph(':K_ES`s_Q0qDL?G`f_C`SOAGXsoA0iCqEOhdJ')
A = H.adjacency_matrix()
B = matrix.ones(ZZ, H.order(), H.order()) - A
G = Graph(B)
G.relabel(G.canonical_label())
s = G.sparse6_string()
extremal_graph_ij(s,i,j)
```



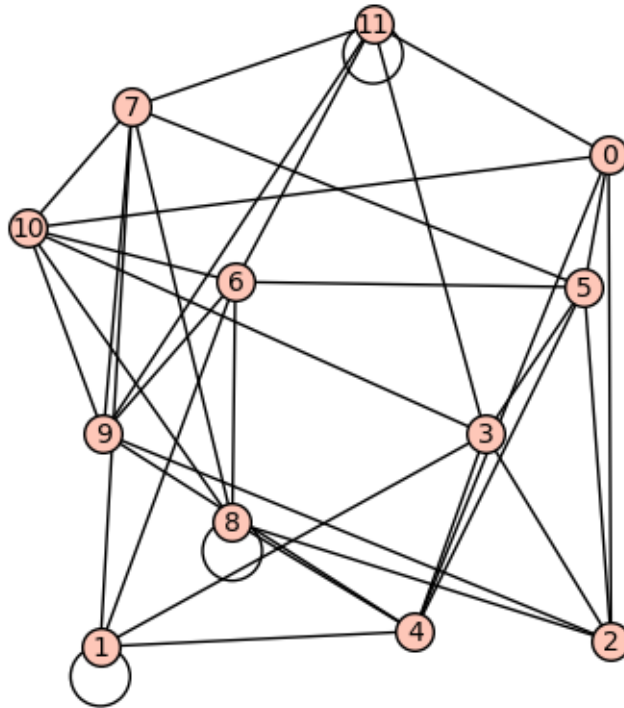


```
:KbAGg@F?0qPJCKaEMaPBF_KpsH_Kpsj
lower s(3,1) = 0.440958551844098
upper s(3,1) = 0.456435464587638
```

```
[14]: #Best for s(4,1) named G_2^c
i = 4
j = 1
H = Graph(':N_EC?aF?G`c_E?Qe_CXAecaPSQEPATQEPATTK`IdtK\\ATkiWyCkYz')
A = H.adjacency_matrix()
B = matrix.ones(ZZ, H.order(),H.order()) - A
G = Graph(B)
G.relabel(G.canonical_label())
s = G.sparse6_string()
extremal_graph_ij(s,i,j)
```

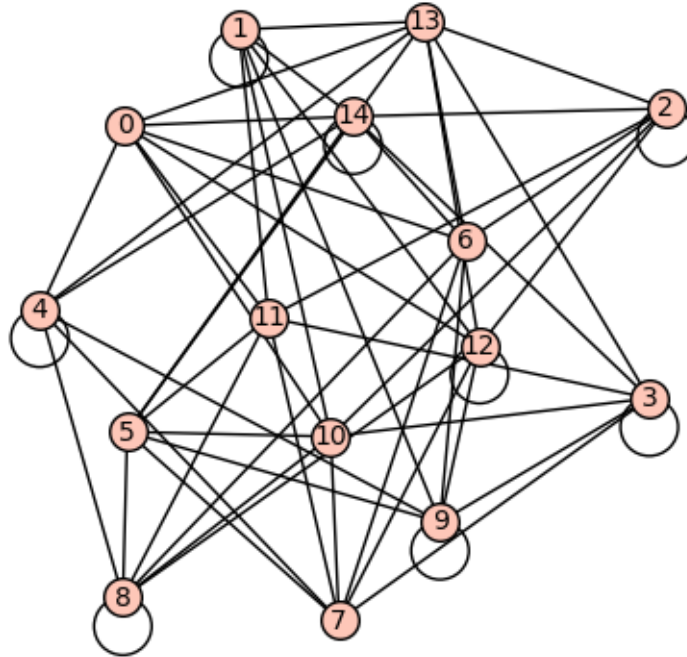

```
:NbI[AU?IXAegSqGbGSqW@CKhsOAGXRg_CPsHX?G`cIXc?aEOhf~
lower s(4,1) = 0.414589061037904
upper s(4,1) = 0.433012701892219
```

```
[15]: #Best for s(4,2) named G_5~c
i = 4
j = 2
H = Graph('':
    ↪S__@a`BaB`C_D_EFbCDEFG_@AHiaCEFGHJ`BDFGHJK_BCDEHJKL`ABCDGILM`ABCEFILMN_ABDEFIKMO_@CDEGIJNP_
A = H.adjacency_matrix()
B = matrix.ones(ZZ, H.order(),H.order()) - A
G = Graph(B)
G.relabel(G.canonical_label())
s = G.sparse6_string()
extremal_graph_ij(s,i,j)
```

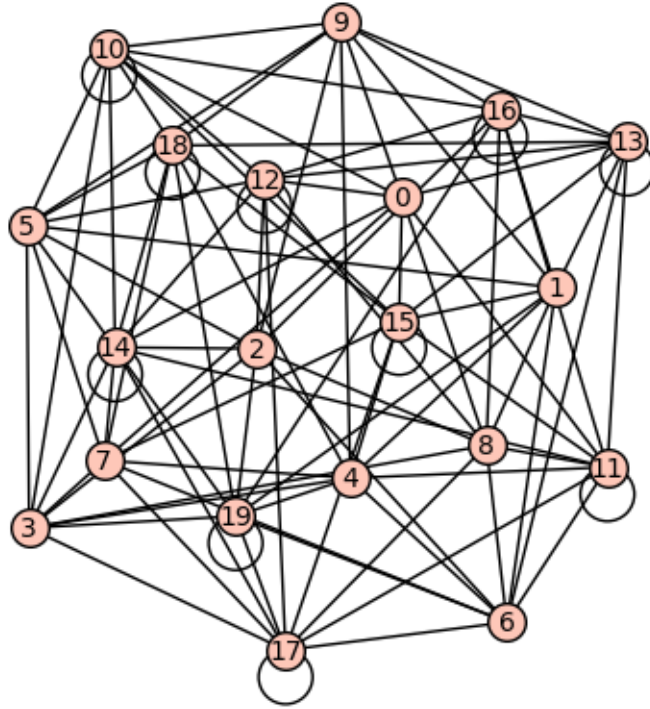

```
:SbA`B`AB`AC_BCDE_@ABE_@ACD_BDHI_CEGJ_ADGIK_@EHJKL_ABFIJKM_@CFIJLN`AGHIJKLObEFGJ
KMNPcDFHILMNQ`ABCDEOPQR
lower s(4,2) = 0.367814729899738
upper s(4,2) = 0.381881307912987
```