

```

# gerardo Herrera... svm (kernel radial "poly") con 28k instancias de normal y recovering y 24

from google.colab import drive
drive.mount('/content/drive')

Mounted at /content/drive

# This Python 3 environment comes with many helpful analytics libraries installed
# It is defined by the kaggle/python Docker image: https://github.com/kaggle/docker-python
# For example, here's several helpful packages to load

import numpy as np # linear algebra
import pandas as pd # data processing, CSV file I/O (e.g. pd.read_csv)

# Input data files are available in the read-only "../input/" directory
# For example, running this (by clicking run or pressing Shift+Enter) will list all files und

import os
for dirname, _, filenames in os.walk('/kaggle/input'):
    for filename in filenames:
        print(os.path.join(dirname, filename))

# You can write up to 5GB to the current directory (/kaggle/working/) that gets preserved as
# You can also write temporary files to /kaggle/temp/, but they won't be saved outside of the

import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
#matplotlib inline

#sensor77 = pd.read_csv('../input/vombas/sensor_procesado.csv')
#sensor77 = pd.read_csv('../input/vombas-28955-balanced-25sensor/sensor2-ordenado_status_sin_
#sensor77 = pd.read_csv('../input/bombas-sensores-conocidos/sensor2.csv')
#sensor77 = pd.read_csv('../input/10ks25/s25balanced10k.csv')
#sensor77 = pd.read_csv('../input/28k-s24-balan-vombas/sensor2-ordenado_status_sin_broken_bal
sensor77 = pd.read_csv('/content/drive/My Drive/datasets/sensor2-ordenado_status_sin_broken_b

cleanup_nums = {"machine_status":      {"NORMAL": 0, "RECOVERING": 1,"BROKEN": 2}}

sensor77.replace(cleanup_nums, inplace=True)

print(sensor77.shape)
sensor77.head()

```

(28002, 27)

	Unnamed: 0	timestamp	sensor_00	sensor_01	sensor_02	sensor_03	sensor_04	sensor_
0	0	2018-04-01 00:00:00	2.465394	47.09201	53.2118	46.310760	634375.0000	47.524
1	1	2018-04-01 00:01:00	2.465394	47.09201	53.2118	46.310760	634375.0000	47.524
2	2	2018-04-01 00:02:00	2.444734	47.35243	53.2118	46.397570	638.8889	48.177
3	3	2018-04-01 00:03:00	2.460474	47.09201	53.1684	46.397568	628125.0000	48.656
4	4	2018-04-01 00:04:00	2.445718	47.13541	53.2118	46.397568	636.4583	49.062

sensor77.isnull()

	Unnamed: 0	timestamp	sensor_00	sensor_01	sensor_02	sensor_03	sensor_04	sens
0	False	False	False	False	False	False	False	
1	False	False	False	False	False	False	False	
2	False	False	False	False	False	False	False	
3	False	False	False	False	False	False	False	
4	False	False	False	False	False	False	False	
...	
27997	False	False	False	False	False	False	False	
27998	False	False	False	False	False	False	False	
27999	False	False	False	False	False	False	False	
28000	False	False	False	False	False	False	False	
28001	False	False	False	False	False	False	False	

28002 rows × 27 columns

```
# sensor77.dropna()
# sensor77.fillna(0, inplace=True)
sensor77.fillna(sensor77.mean(), inplace=True)
```

```
print(sensor77.shape)
sensor77.head()
```

```
(28002, 27)
```


	Unnamed: 0	timestamp	sensor_00	sensor_01	sensor_02	sensor_03	sensor_04	sensor_05
0	0	2018-04-01 00:00:00	2.465394	47.09201	53.2118	46.310760	634375.0000	47.524
1	1	2018-04-01 00:01:00	2.465394	47.09201	53.2118	46.310760	634375.0000	47.524
2	2	2018-04-01 00:02:00	2.444734	47.35243	53.2118	46.397570	638.8889	48.177
3	3	2018-04-01 00:03:00	2.460474	47.09201	53.1684	46.397568	628125.0000	48.656
4	4	2018-04-01 00:04:00	2.445718	47.13541	53.2118	46.397568	636.4583	49.062

```
is_NaN = sensor77.isnull()
row_has_NaN = is_NaN.any(axis=1)
rows_with_NaN = sensor77[row_has_NaN]
```

```
print(rows_with_NaN)
```

```
Empty DataFrame
```

```
Columns: [Unnamed: 0, timestamp, sensor_00, sensor_01, sensor_02, sensor_03, sensor_04,
Index: []
```



```
#Show the number of missing (NaN, NaN, na) data for each column
sensor77.isnull().sum()
```

```
Unnamed: 0      0
timestamp      0
sensor_00      0
sensor_01      0
sensor_02      0
sensor_03      0
sensor_04      0
sensor_11      0
sensor_14      0
```

```
sensor_16      0
sensor_17      0
sensor_18      0
sensor_19      0
sensor_20      0
sensor_21      0
sensor_22      0
sensor_23      0
sensor_25      0
sensor_26      0
sensor_27      0
sensor_28      0
sensor_30      0
sensor_31      0
sensor_44      0
sensor_50      0
sensor_51      0
machine_status 0
dtype: int64
```

```
#sensor77.drop('sensor_15', axis=1, inplace=True);
#sensor77.drop('sensor_15', axis=1, inplace=True)
```

```
#sensor77.drop('sensor_05', axis=1, inplace=True);sensor77.drop('sensor_06', axis=1, inplace=
```

```
#sensor77.drop('sensor_07', axis=1, inplace=True);sensor77.drop('sensor_08', axis=1, inplace=
```

```
#sensor77.drop('sensor_09', axis=1, inplace=True);sensor77.drop('sensor_10', axis=1, inplace=
```

```
#sensor77.drop('sensor_12', axis=1, inplace=True);sensor77.drop('sensor_13', axis=1, inplace=
```

```
#sensor77.drop('timestamp', axis=1, inplace=True)
```

```
#sensor77.drop('Unnamed: 0', axis=1, inplace=True)
```

```
print(sensor77.shape)
sensor77.head()
```

(28002, 27)

	Unnamed: 0	timestamp	sensor_00	sensor_01	sensor_02	sensor_03	sensor_04	sensor_11	sensor_14	sensor_17
0	0	2018-04-01 00:00:00	2.465394	47.09201	53.2118	46.310760	634375.0000	47.52422	419.5747	4
1	1	2018-04-01 00:01:00	2.465394	47.09201	53.2118	46.310760	634375.0000	47.52422	419.5747	4
2	2	2018-04-01 00:02:00	2.444734	47.35243	53.2118	46.397570	638.8889	48.17723	420.8480	4

import time

3	3	01	2.460474	47.09201	53.1684	46.397568	628125.0000	48.65607	420.7494	4628
---	---	----	----------	----------	---------	-----------	-------------	----------	----------	------

```
X=sensor77[['sensor_00', 'sensor_01', 'sensor_02', 'sensor_03', 'sensor_04', 'sensor_11', 'sensor_14', 'sensor_17']]
#y=sensor['target'] # Labels
y=sensor77['machine_status'] # Labels
```

print(X.shape)

X.head()

(28002, 24)

	sensor_00	sensor_01	sensor_02	sensor_03	sensor_04	sensor_11	sensor_14	sensor_17
0	2.465394	47.09201	53.2118	46.310760	634375.0000	47.52422	419.5747	4
1	2.465394	47.09201	53.2118	46.310760	634375.0000	47.52422	419.5747	4
2	2.444734	47.35243	53.2118	46.397570	638.8889	48.17723	420.8480	4
3	2.460474	47.09201	53.1684	46.397568	628125.0000	48.65607	420.7494	4628
4	2.445718	47.13541	53.2118	46.397568	636.4583	49.06298	419.8926	4

```
# Scale the data to be between -1 and 1
from sklearn.preprocessing import StandardScaler
scaler = StandardScaler()
scaler.fit(X)
X = scaler.transform(X)
```

```
# no coorrer
#import time
```

```
#X_train=X
#start = time.time()
#X = sensor77.drop('machine_status', axis=1)
#y = sensor77['machine_status']

#from sklearn import preprocessing
#X_train = preprocessing.scale(X_train)
#X_test = preprocessing.scale(X_test)

#from sklearn.model_selection import train_test_split
#X_train, X_test, y_train, y_test = train_test_split(X, y, test_size = 0.20)

#from sklearn.preprocessing import MinMaxScaler
#scaling = MinMaxScaler(feature_range=(-1,1)).fit(X_train)
#X_train = scaling.transform(X_train)
#X_test = scaling.transform(X_test)

#!pip install sklearn.grid_search

#from sklearn.svm import SVR
#from sklearn.grid_search import GridSearchCV
#svclassifier = SVR(kernel='linear')
#svclassifier.fit(X_train, y_train)

#from sklearn.svm import SVC
#svclassifier = SVC(kernel='linear')
#svclassifier.fit(X_train, y_train)

#stop = time.time()
#print(f"Training time: {stop - start}s")

start = time.time()
#X = sensor77.drop('machine_status', axis=1)
#y = sensor77['machine_status']

from sklearn.model_selection import train_test_split
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size = 0.20)

from sklearn.svm import SVC
#svclassifier = SVC(kernel='rbf', random_state=0, gamma=.01, C=1)
svclassifier = SVC(kernel='poly', degree=8)

svclassifier.fit(X_train, y_train)

stop = time.time()
print(f"Training time: {stop - start}s")

Training time: 46.65305781364441s

y_pred = svclassifier.predict(X_test)
```

```
#Evaluacion
```

```
from sklearn.metrics import classification_report, confusion_matrix
print(confusion_matrix(y_test,y_pred))
print(classification_report(y_test,y_pred))
```

```
[[1552 1252]
 [ 220 2577]]
```

	precision	recall	f1-score	support
0	0.88	0.55	0.68	2804
1	0.67	0.92	0.78	2797
accuracy			0.74	5601
macro avg	0.77	0.74	0.73	5601
weighted avg	0.77	0.74	0.73	5601

```
# validacion cruzada
```

```
from sklearn.model_selection import cross_validate
```

```
#from sklearn.model_selection import cross_val_score
# https://scikit-learn.org/stable/modules/cross\_validation.html
```

```
#start3 = time.time()
from sklearn import svm
from sklearn.model_selection import cross_val_score
start3 = time.time()
#clf = svm.SVC(kernel='rbf', random_state=0, gamma=.01, C=1)
clf = svm.SVC(kernel='poly', degree=8)
#scores = cross_val_score(clf, X, y, cv=5)
scores = cross_val_score(clf, X, y, cv=10)
scores
print(scores.mean())
stop3 = time.time()
print(f"CV Training time: {stop3 - start3}s")
```

```
0.7308073392155863
CV Training time: 491.53056931495667s
```

```
#start3 = time.time()
from sklearn import svm
from sklearn.model_selection import cross_val_score
from sklearn.model_selection import cross_validate
start3 = time.time()
#clf = svm.SVC(kernel='rbf', random_state=0, gamma=.1, C=1)
clf = svm.SVC(kernel='poly', degree=8)
#scores = cross_val_score(clf, X, y, cv=5)
#scores = cross_val_score(clf, X, y, cv=10)
```

```

#cv = cross_val_score(clf, X, y, cv=10)

#cv = cross_validate(clf, X, y, cv=10)

cv1 = cross_validate(clf, X, y, cv=10, scoring = 'accuracy')
#scores
#cv
#print(scores.mean())
#print(cv.mean())
#
f1=cross_validate(clf, X,y, cv=10, scoring = 'f1')
recall_score=cross_validate(clf, X,y, cv=10, scoring = 'recall')
pre_score=cross_validate(clf, X,y, cv=10, scoring = 'precision_macro')
print(confusion_matrix(y_test,y_pred))
print(f"precision_macro_score:")
print(pre_score['test_score'])
print(pre_score['test_score'].mean())
#print(f"test_score:")
#print(cv['test_score'])
#print(cv['test_score'].mean())
#
print(f"accu:")
print(cv1['test_score'])
print(cv1['test_score'].mean())
#
print(f"recall:")
print(recall_score['test_score'])
print(recall_score['test_score'].mean())
print(f"f1score:")
print(f1['test_score'])
print(f1['test_score'].mean())
#
stop3 = time.time()
print(f"CV Training time: {stop3 - start3}s")

[[1552 1252]
 [ 220 2577]]
precision_macro_score:
[0.75208739 0.71308193 0.78386102 0.78510693 0.75843807 0.76749554
 0.78665029 0.7806068 0.75921383 0.82383324]
0.7710375031395585
accu:
[0.70581935 0.68868261 0.73892857 0.73464286 0.71392857 0.72392857
 0.73642857 0.73392857 0.71964286 0.81214286]
0.7308073392155863
recall:
[0.92      0.8579586 0.93785714 0.945      0.92142857 0.92571429
 0.94571429 0.93785714 0.915      0.90714286]
0.9213672886713573
f1score:
[0.75764706 0.73382173 0.78224605 0.78076129 0.76308784 0.77028232
 0.78204371 0.77899733 0.76546161 0.82844097]

```


0.7742789906393964

CV Training time: 1978.1140627861023s

```
# print(scores[])
#print(scores.mean())
#stop3 = time.time()
#print(f"CV Training time: {stop3 - start3}s")

#mejorado
#start3 = time.time()
from sklearn import svm
from sklearn.model_selection import cross_val_score
from sklearn.model_selection import cross_validate

#para confu
import matplotlib.pyplot as plt
from sklearn.metrics import plot_confusion_matrix
#para confu

start3 = time.time()

from sklearn.model_selection import train_test_split
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size = 0.20)

from sklearn.svm import SVC
#clf = SVC(kernel='rbf', random_state=0, gamma=.1, C=1)
clf = svm.SVC(kernel='poly', degree=8)
clf.fit(X_train, y_train)

#scores=cross_validate(model, X,y, cv=10, scoring = ['accuracy','f1','recall','precision'],re

#clf = svm.SVC(kernel='rbf', random_state=0, gamma=.1, C=1)

#GH
clf.fit(X_train,y_train)
y_pred=clf.predict(X_test)
#GH

#scores = cross_val_score(clf, X, y, cv=5)
#scores = cross_val_score(clf, X, y, cv=10)
#cv = cross_val_score(clf, X, y, cv=10)
#cv = cross_validate(clf, X, y, cv=10)
#cv1 = cross_validate(clf, X, y, cv=10,scoring = 'accuracy')

scores = cross_validate(clf, X, y, cv=10,scoring =['accuracy','f1','recall','precision'],retu

#scores
#cv
#print(scores.mean())
#print(cv.mean())
```

```
#  
  
#f1=cross_validate(clf, X,y, cv=10, scoring = 'f1')  
#recall_score=cross_validate(clf, X,y, cv=10, scoring = 'recall')  
#pre_score=cross_validate(clf, X,y, cv=10, scoring = 'precision_macro')  
#print(confusion_matrix(y_test,y_pred))  
#print(f"precision_macro_score:")  
#print(pre_score['test_score'])  
#print(pre_score['test_score'].mean())  
#print(f"test_score:")  
#print(cv['test_score'])  
#print(cv['test_score'].mean())  
#  
#print(f"accu:")  
#print(cv1['test_score'])  
#print(cv1['test_score'].mean())  
#  
#print(f"recall:")  
#print(recall_score['test_score'])  
#print(recall_score['test_score'].mean())  
#print(f"f1score:")  
#print(f1['test_score'])  
#print(f1['test_score'].mean())  
#  
stop3 = time.time()  
print(f"CV Training time: {stop3 - start3}s")  
  
#mejora gh  
  
plot_confusion_matrix(clf, X_test, y_test, cmap=plt.cm.Blues)  
  
plt.show()  
  
gh4 = scores.get("test_accuracy")  
  
print(f"accuracy:")  
print(gh4)  
print(gh4.mean())  
  
gh3 = scores.get("test_precision")  
  
print(f"precision:")  
print(gh3)  
print(gh3.mean())  
  
gh = scores.get("test_recall")  
  
print(f"recall:")  
print(gh)  
print(gh.mean())
```

```
gh2 = scores.get("test_f1")

print(f"f1:")
print(gh2)
print(gh2.mean())

CM = confusion_matrix(y_test, y_pred)
print(f"-----")
print(f"matriz de confusion:")
TN = CM[0][0]
FN = CM[1][0]
TP = CM[1][1]
FP = CM[0][1]
print(f"TN={TN}, FP={FP} ")
print(f"FN={FN}, TP={TP} ")

print(f"-----")
print(f"matriz de confusion %:")
total1=(TN+TP+FN+FP)

print(f"TN={100*TN/total1}, FP={100*FP/total1} ")
print(f"FN={100*FN/total1}, TP={100*TP/total1} ")

print(f"-----")
acc1=(TN+TP)/(TN+TP+FN+FP)
print(f"accuracy1={acc1}")


print(f"-----")
re1=(TP)/(TP+FN)
print(f"reca1={re1}")

print(f"-----")
pre1=(TP)/(TP+FP)
print(f"pre1={pre1}")

print(f"-----")
f1s1=(2*pre1*re1)/(pre1+re1)
print(f"f1score={f1s1}")
```



CV Training time: 586.2809367179871s

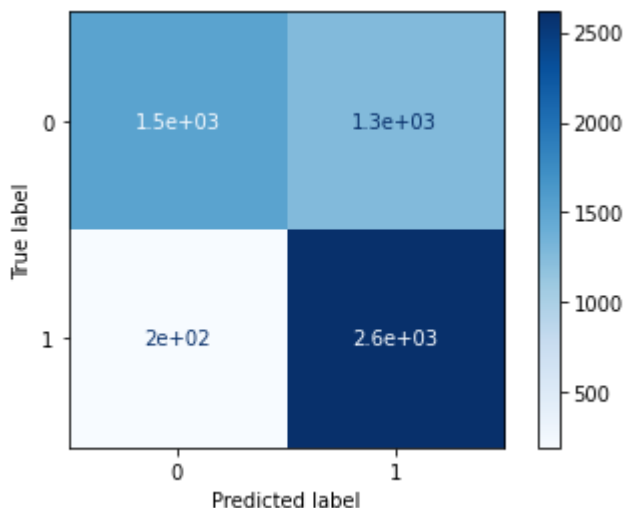

accuracy:

```
[0.70581935 0.68868261 0.73892857 0.73464286 0.71392857 0.72392857
 0.73642857 0.73392857 0.71964286 0.81214286]
0.7308073392155863
```

precision:

```
[0.644      0.64106667 0.67092489 0.66515837 0.65118627 0.65954198
 0.66666667 0.66615931 0.65793529 0.76230492]
0.6684944360713457
```

recall:

```
[0.92      0.8579586  0.93785714 0.945      0.92142857 0.92571429
 0.94571429 0.93785714 0.915      0.90714286]
0.9213672886713573
```

f1:

```
[0.75764706 0.73382173 0.78224605 0.78076129 0.76308784 0.77028232
 0.78204371 0.77899733 0.76546161 0.82844097]
0.7742789906393964
```

matriz de confusion:

TN=1526, FP=1266

FN=195, TP=2614

matriz de confusion %:
TN=27.245134797357615, FP=22.603106588109267
FN=3.481521156936261, TP=46.670237457596855

accuracy1=0.7391537225495447

reca1=0.9305802776788893

pre1=0.6737113402061856

f1score=0.7815817013006429

