


RNAV (GNSS) RWY 10

535328N 0921147W VAR 2°W

		TFC – 123.2		ATF	ARCAL 123.2(K) 
SAFE ALT 100 NM 2700	WAAS Ch 80480 W10A	APCH CRS 095°	MIN ALT ULDUV 2200	LDA 3507	

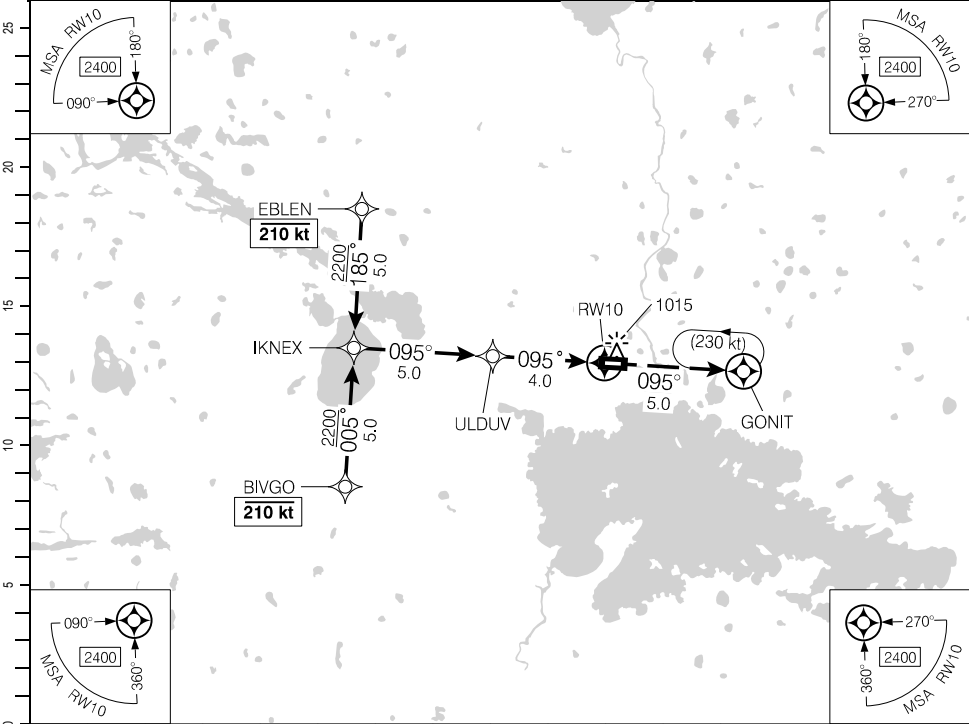

			9	8	7	6	5	4.0	3	2	1.4	DIST FROM RW10
			3800	3470	3150	2830	2510	2200	1870	1560	1380	ALT (3.00° APCH PATH)
IKNEX IAWP/IWP 3800 3.00° 2200 2200 5.0 4.0 ULDUV FAWP 2200 095° MDA TCH 54' RW10 MAWP ELEV 876 TDZE 871 MISSED APPROACH Climb to 2300 track 095° to GONIT. As required shuttle climb.												
RASS: Use CZMD. When using CZSJ add 80'.			CATEGORY	A		B		C		D		
			LPV	1364		(500)		1¼		NOT AUTHORIZED		
Knots	ft/min	Min:Sec	LNAV	1380		(516)		1½		NOT AUTHORIZED		
70	370											
90	480											
110	580											
130	690											
150	800											

RNAV (GNSS) RWY 10

CZPB

EFF 20 FEB 25

Source of Canadian Civil Aeronautical Data: © 2026 NAV CANADA All rights reserved