


ILS Z RWY 08 (DND)

531909N 0602533W VAR 19°W

ATIS – 128.1 340.8	TML – 119.5 267.1 CTR Gander – 120.4 267.1	TWR – 124.5 236.6	GND – 132.0 275.8	
SAFE ALT 100 NM 6000	LOC IYR 110.3	APCH CRS 075°	GP FAFKO 2860	LDA 11052

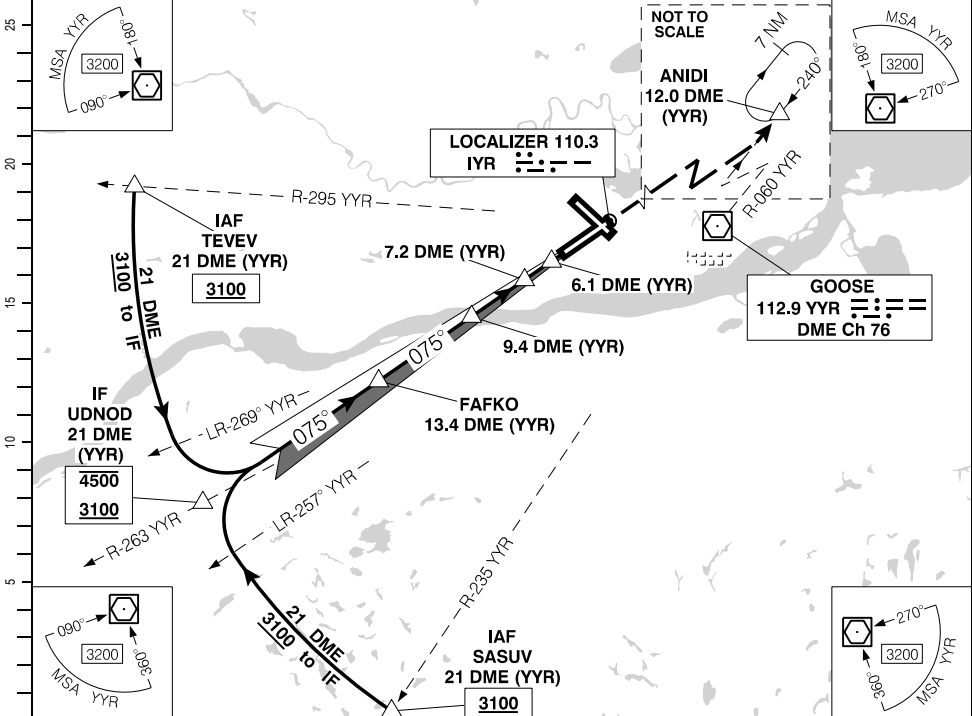

16	15	14.3	13	12	11	10	9	8	7	6.4	DIST FROM DME (YYR)
3630	3320	3100	2680	2360	2040	1720	1400	1090	770	580	ALT (3.00° APCH PATH)
UDNOD 21 DME (YYR)	3100	FAFKO GP 2860	GP 3.00°				9.4 DME (YYR)	MISSED APPROACH Climb 3200 hdg 075° to intercept R-060 (YYR) out to ANIDI (12 DME) and hold.			
Procedure turn NOT AUTHORIZED						075°		7.2 DME (YYR)	6.1 DME (YYR)		
2100		1400 (LOC Only)		720 (LOC Only)		MDA		TCH 57'		ELEV 160 TDZE 160	
7.7		4.1		2.3		1.2		0.6			

			CATEGORY	A	B	C	D
			ILS/DME	360	(200)	½ RVR 26	
			LOC/DME	580	(420)	1 RVR 50	
Knots	ft/min	Min:Sec					
70	370						
90	480						
110	580						
130	690						
150	800						

ILS Z RWY 08 (DND)

CYYR

EFF 19 MAR 26

Source of Canadian Civil Aeronautical Data: © 2026 NAV CANADA All rights reserved