


WARNING:


1. Procedure only available in case of COM failure or at ATC discretion.

NOTES:

1. DME required.
2. In case of COM failure, the Amsterdam ACC Supervisor may be reached on telephone number +3120 406 3999.

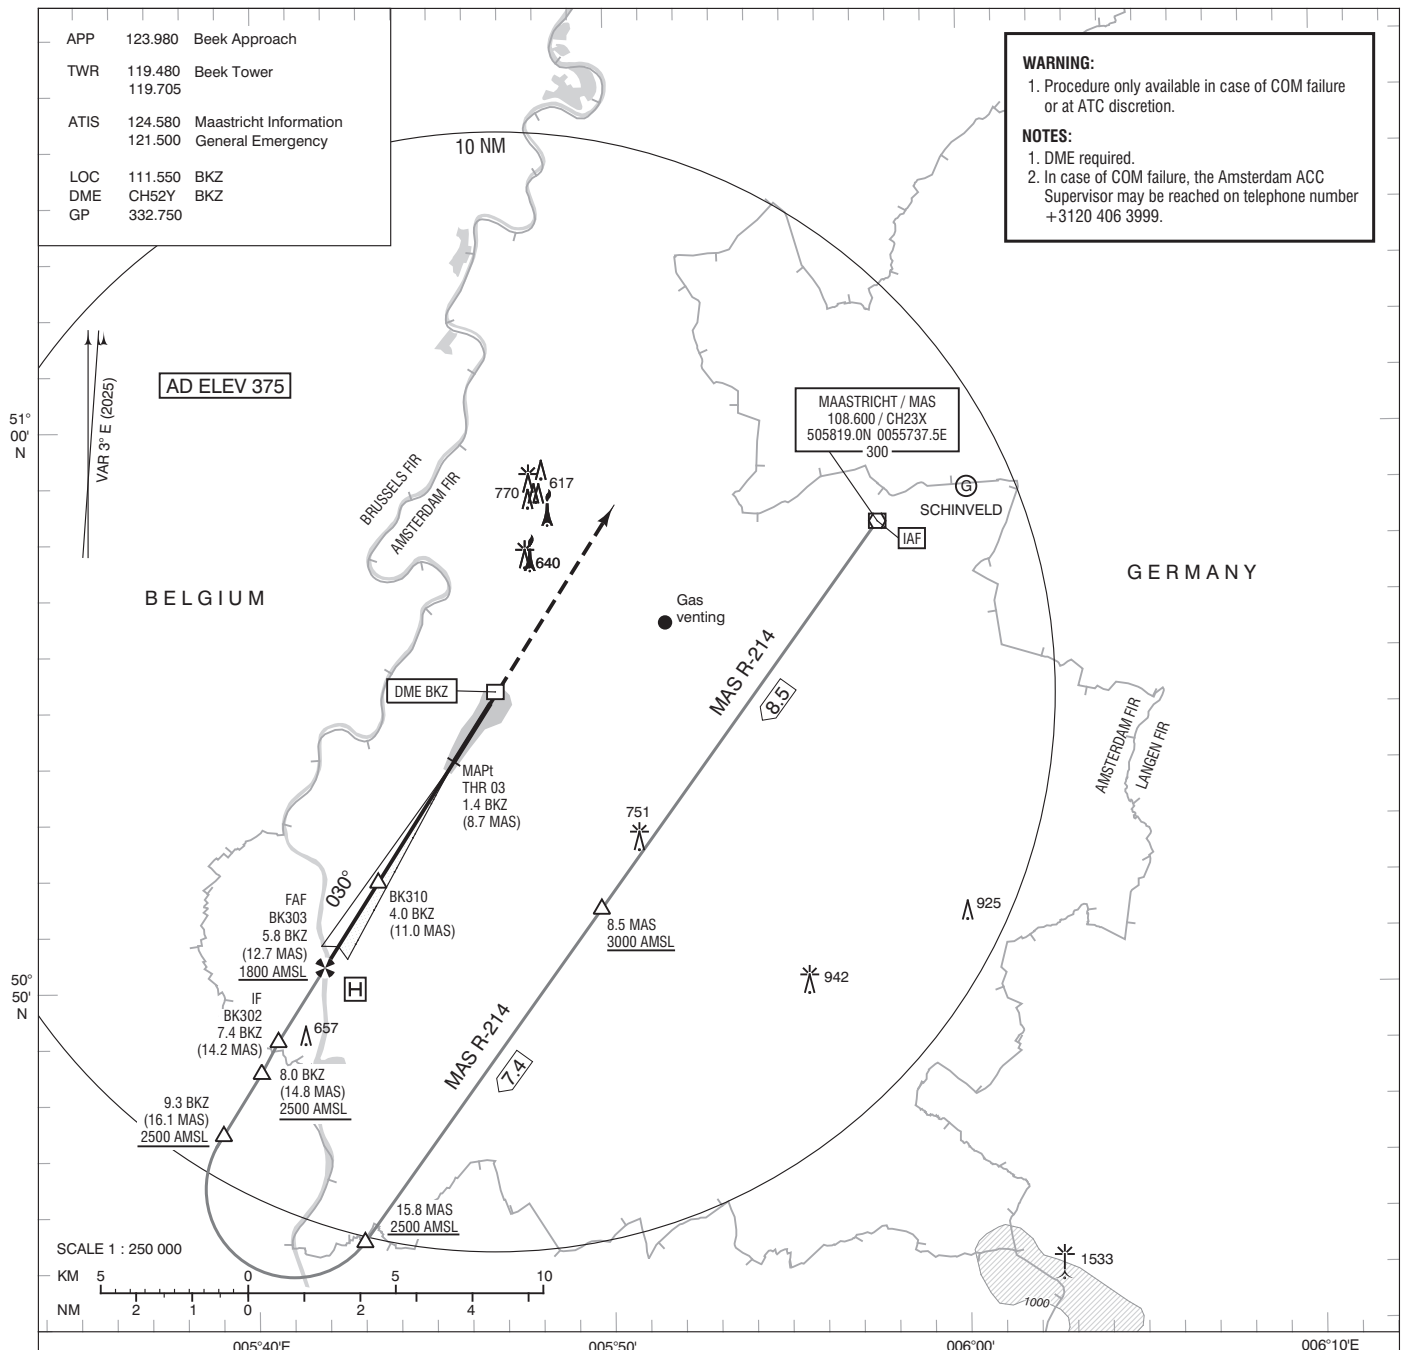

TRANSITION LEVEL BY ATC
TRANSITION ALTITUDE 3000 FT AMSL

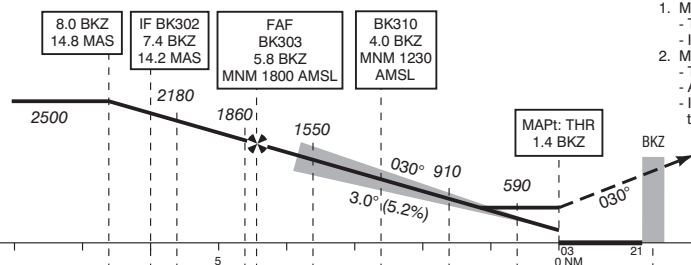

1. Missed approach:
 - Track 030° MAG and climb to 2000 FT AMSL;
 - Inform ATC.
2. Missed approach in case of communication failure:
 - Track 030° MAG and climb to 3000 FT AMSL;
 - At 3000 FT AMSL turn right towards MAS;
 - Intercept MAS R-214 and execute the instrument approach procedure again.

ILS RDH 50 FT

DIST RELATED TO BKZ DME	10	8	7.4	7	6.58	5	4.0	3	2	1.4	0 NM
GS IN KT	60	80	100	120	140	160	180				
VERTICAL SPEED	320 FT/MIN	425 FT/MIN	530 FT/MIN	635 FT/MIN	745 FT/MIN	850 FT/MIN	955 FT/MIN				

OCA (OCH) ELEV THR 03: 365.2 FT										
ACFT CAT	CAT I	LOC MAPT: THR	CIRCLING	THR 03	505406.7N	0054536.2E				
A	513 (148)	720 (360)	890 (520)	BK302	504907.9N	0054034.5E				
B	523 (158)		940 (570)	BK303	505027.1N	0054154.3E				
C	533 (168)		1170 (800)	BK310	505157.6N	0054325.7E				
D	543 (178)									
DL	553 (188)									
CEILING AND VISIBILITY MINIMA				DIRECTIONS ARE MAGNETIC DISTANCES IN NM ALTITUDES AND ELEVATIONS IN FEET						
TAKE-OFF	DAY:	NA	NIGHT:							NA
LANDING	DAY:		NIGHT:							

