


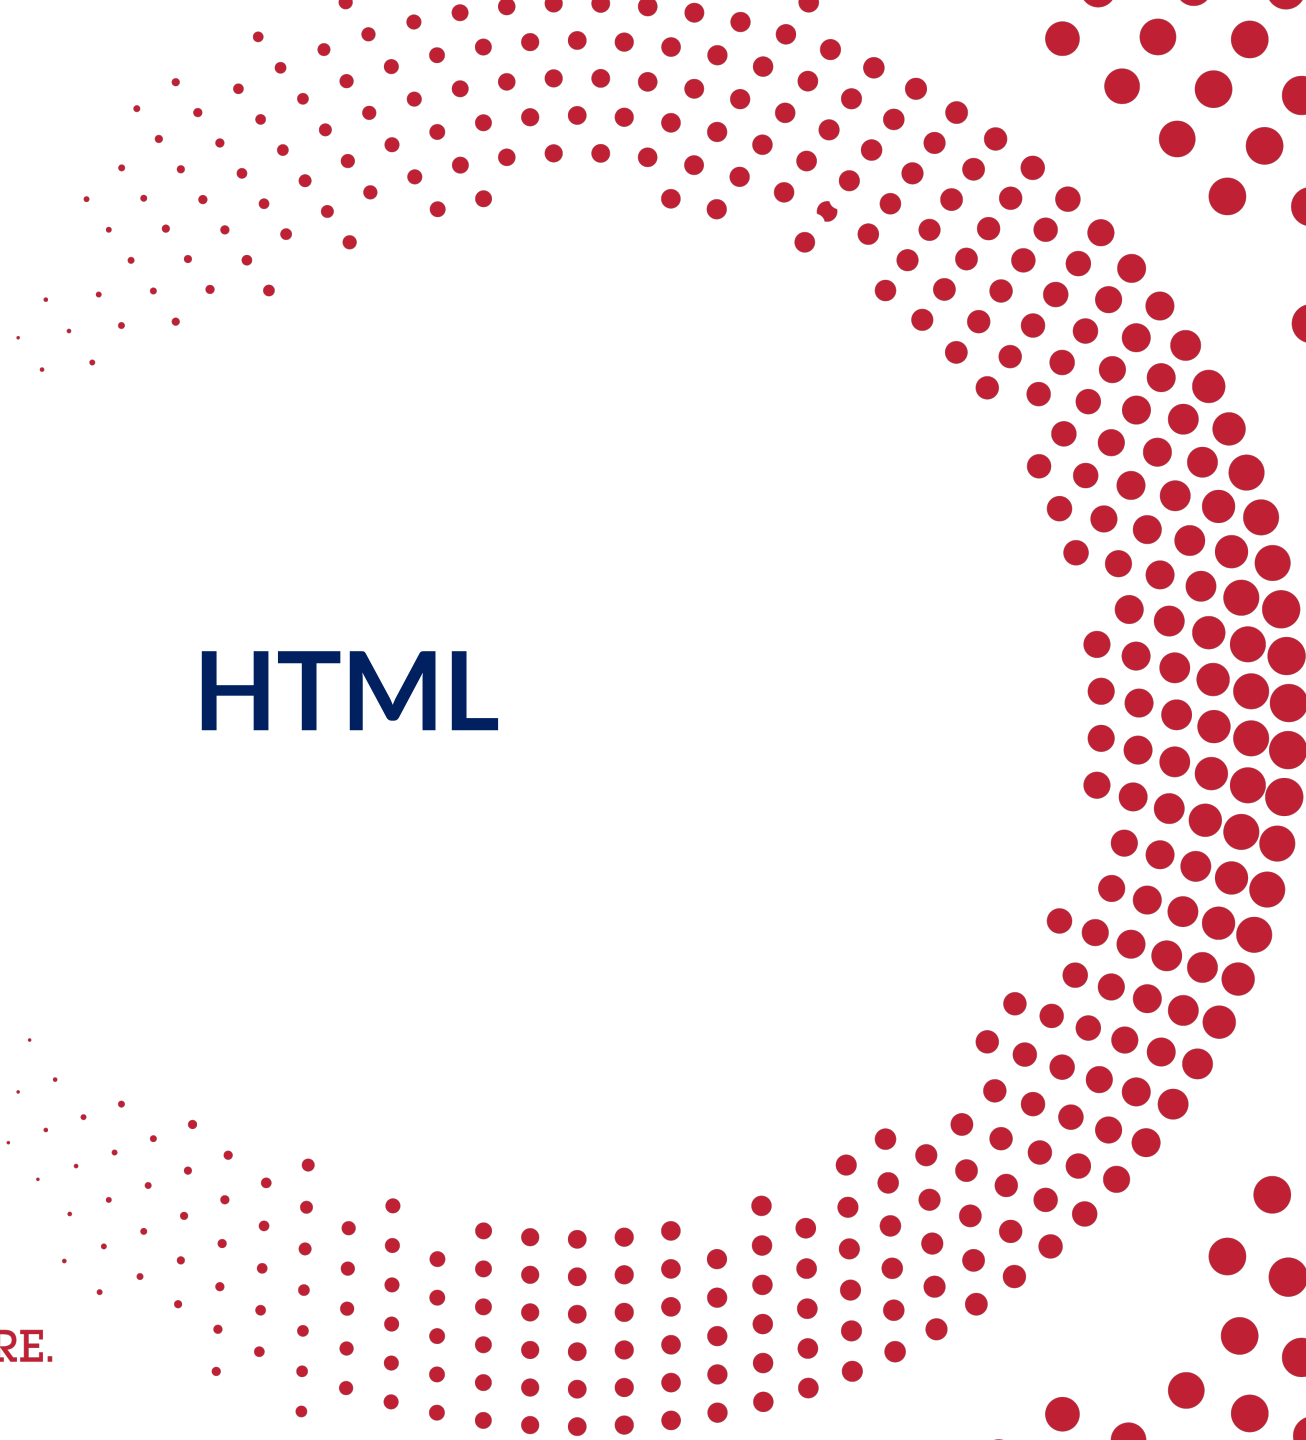

HTML

ONE LOVE. ONE FUTURE.

1. Overview
2. HTML Document Structure
3. Basic Tags
4. Form and Basic Inputs
5. Multimedia
6. Semantic HTML and SEO

A decorative graphic on the left side of the slide. It features a dark blue background with a large, stylized circular pattern composed of many small red dots. The dots are arranged in a way that creates a sense of depth and movement, resembling a spiral or a stylized 'H' shape. The word 'HUST' is written in white, bold, sans-serif capital letters, centered within the blue area.

HUST

1. Overview

1. Overview

- HTML = HyperText Markup Language: is the language for specifying the *static* content of Web pages
- *hypertext*
 - Web pages are more than just text
 - Web pages can contain multimedia, provide links to other documents
- *markup*
 - HTML works by augmenting text with special symbols (tags) to identify the document structure and content type
 - HTML is not a programming language

HTML vs Programming Languages

Criteria	HTML	Programming Language (e.g., Python, JavaScript, C++)
Type	Markup language	Programming language
Purpose	Defines the structure and content of a web page	Performs logic , calculations , and data processing
Control flow	No variables, loops, or conditions	Supports variables, functions, loops, conditionals
Execution	Parsed and rendered by browsers to display content	Executed by compilers or interpreters to perform actions and manipulate data
Example	<code><h1>Hello</h1></code> → displays a heading	<code>if (x > 10) { alert("Big!"); } → runs conditional logic</code>
Interactivity	Static by itself (only defines what is shown)	Dynamic, can respond to user actions and system events


- Roles
 - Every webpage is built with HTML.
 - The first step for front-end development
 - Provides foundation for styling (with CSS) and interactivity (with JavaScript)
- Front-end
 - HTML = Skeleton/Structure
 - CSS = Skin/Design
 - JavaScript = Brain/Interaction

FRONT-END



HTML Document

- A text file with the extension .html or .htm
- Contains the markup code (tags) that defines the structure of a web page
- Can be opened directly from the local machine or served through a web server
- HTML documents are parsed and rendered by web browsers

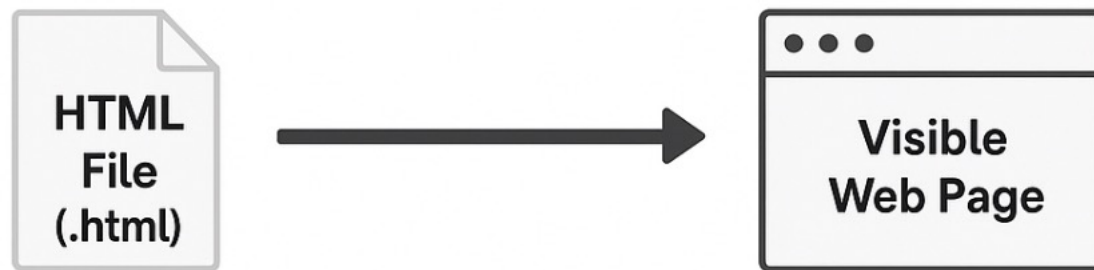

HTML Versions

Version	Year	Key Features & Purpose
HTML 1.0	1993	First public version Support: basic structure and hyperlinks. No support for images, tables, or forms.
HTML 2.0	1995	The first official standard by IETF Introduce: images, basic tables, and forms.
HTML 3.2	1997	Standard by W3C Support: scripting (JavaScript), style (CSS)
HTML 4.01	1999	Support principle of separating content from presentation . It encouraged the use of CSS for styling
HTML5	2014	Considered a "living standard" that is continuously updated. Support semantic tags (<header>, <nav>), multimedia support (<video>, <audio>), etc.




HUST

2. HTML Document Structure

HTML Document Structure

- `<!DOCTYPE html>` Declaration
 - Not an HTML tag
 - An introduction to the browser about the document type
- `<html>`: root of document
- **head**: contains setup information for the browser & the Web page
- **body**: contains the actual content to be displayed in the Web page

```
<!DOCTYPE html>
<html>
  <head>
    <title>
      My first HTML document
    </title>
  </head>
  <body>
    <p>Hello world!</p>
  </body>
</html>
```

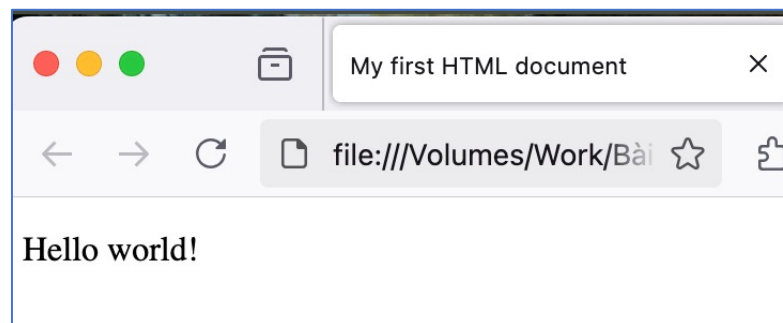

<head> and <body> elements

<html>


<head>

- Title
- Meta
- CSS / JS links

<body>

- Headings, text
- Images, links
- Forms, tables

```
<!DOCTYPE html>
<html>
  <head>
    <title>
      My first HTML document
    </title>
  </head>
  <body>
    <p>Hello world!</p>
  </body>
</html>
```

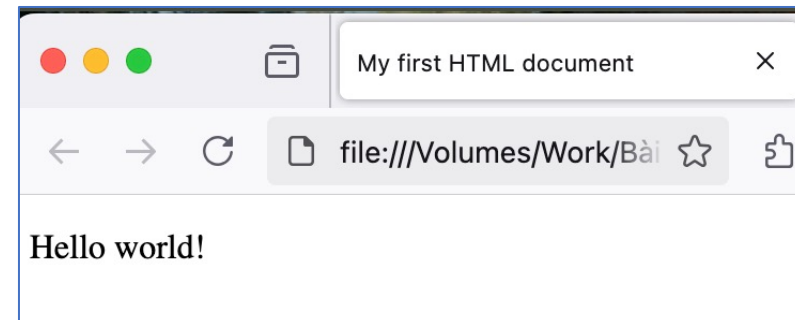

HTML Document Structure

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <title>HTML + CSS + JavaScript Example</title>

  <style>
    h1 {
      color: #2c3e50;
      text-align: center;
    }
  </style>
</head>
<body>

  <h1>My First Web Page</h1>
  <p>This page combines <b>HTML</b>, <i>CSS</i>, and <u>JavaScript</u>.</p>

  <button onclick="showMessage()">Click Me</button>

  <!-- JavaScript -->
  <script>
    function showMessage() {
      alert("Hello! You clicked the button 🎉");
    }
  </script>

</body>
</html>
```

My First Web Page

This page combines **HTML**, *CSS*, and JavaScript.

Click Me

127.0.0.1:5500 says

Hello! You clicked the button 🎉

OK



HUST

3. Basic Tags

Tags and Elements

- HTML specifies a set of *tags* that identify structure of the document and the content type
 - tags are enclosed in `< >`
 - `` specifies an image
 - most tags come in pairs, marking a beginning and ending
 - `<title>` and `</title>` enclose the title of a page
- An HTML *element* is an object enclosed by a pair (in most cases) of tags: `<tagname>Content</tagname>`
 - `<title>My Home Page</title>` is a TITLE element
 - `<p>Part of this text is <b>bold</b></p>` is a PARAGRAPH element that contains a BOLD element

HTML Tags

Version	Year	Number of Tags (approx.)
HTML (draft)	1991	18 tags
HTML 1.0	1993	~20 tags
HTML 2.0	1995	~50 tags
HTML 3.2	1997	~90 tags
HTML 4.01	1999	~91 tags
HTML5	2014	~109–112 tags

Text Layout - Heading

- `<h1>...</h1>`: a large, bold heading
- `<h2>...</h2>`: a slightly smaller heading
- ...
- `<h6>...</h6>`: a tiny heading

```
<!DOCTYPE html>
<html>
<body>

<h1>Heading 1</h1>
<h2>Heading 2</h2>
<h3>Heading 3</h3>
<h4>Heading 4</h4>
<h5>Heading 5</h5>
<h6>Heading 6</h6>

</body>
</html>
```

Heading 1

Heading 2

Heading 3

Heading 4

Heading 5

Heading 6

Text Layout - Paragraph

```
<!DOCTYPE html>
```

```
<html>
```

```
<body>
```

```
<p>
```

This paragraph
contains a lot of lines
but the browser
ignores it.

```
</p>
```

```
<p>
```

This paragraph
contains a lot of spaces
in the source code,
but the browser
ignores it.

```
</p>
```

```
</body>
```

```
</html>
```

This paragraph contains a lot of lines but the browser ignores it.

This paragraph contains a lot of spaces in the source code, but the browser ignores it.

Tag	Description
<p>	Paragraph of text
<hr>	Horizontal rule to separate content
 	Single line break

Text Layout - Paragraph, Div, Span

Tag	Type	Default Behavior	Usage
<p>	Block-level	New line, margin	Text paragraphs
<div>	Block-level	New line, full width	Grouping sections, layout
	Inline	Flows inside text	Styling small text parts

Use <p> for a paragraph

This is a paragraph of text.

Use <div> for containers

<div>

Section Title
First paragraph

Use for inline text

important word.

The Basic Web page – A Worked Example

```
<body>
  <h2>1. p: Paragraph</h2>
  <p>This is a paragraph of text.</p>
  <p>Another paragraph. It starts on a new line and has space above/below.</p>

  <h2>2. div: Block-level container</h2>
  <div>
    <h3>Inside a div</h3>
    <p>This paragraph is inside a div.</p>
  </div>
  <div>
    This is another div. It also starts on a new line and takes full width.
  </div>

  <h2>3. span:  Inline container</h2>
  <p>
    Normal text, but <span>this part is wrapped in a span</span> and it stays inline.
  </p>
  <p>
    Example: <span>word1</span> <span>word2</span> <span>word3</span> (all inline).
  </p>
</body>
```

The Basic Web page – A Worked Example

1. p: Paragraph

This is a paragraph of text.

Another paragraph. It starts on a new line and has space above/below.

2. div: Block-level container

Inside a div

This paragraph is inside a div.

This is another div. It also starts on a new line and takes full width.

3. span: – Inline container

Normal text, but this part is wrapped in a span and it stays inline.

Example: word1 word2 word3 (all inline).

Text Appearance

```
<!DOCTYPE html>
<html>
<body>

<p><b>This text is bold</b></p>
<p><i>This text is italic</i></p>

<p>This is<sub> subscript</sub> and
<sup>superscript</sup></p>

<p><em>This text is italic
too</em></p>

</body>
</html>
```

This text is bold

This text is italic

This is _{subscript} and ^{superscript}

This text is italic too

Text Appearance

Tag	Default Display	Semantic Meaning
<code></code>	Bold (thicker text)	✗ No semantic meaning
<code><i></code>	Italic (slanted text)	✗ No semantic meaning
<code><small></code>	Smaller text than normal	✗ Little semantic use
<code></code>	Italic (like <code><i></code>)	✓ Yes – emphasizes importance
<code></code>	Bold (like <code></code>)	✓ Yes – strong importance

```
<!DOCTYPE html>
<html>
<body>
<h2>An Unordered HTML List</h2>
<ul>
  <li>Coffee</li>
  <li>Tea</li>
  <li>Milk</li>
</ul>

<h2>An Ordered HTML List</h2>
<ol>
  <li>Coffee</li>
  <li>Tea</li>
  <li>Milk</li>
</ol>

</body>
</html>
```

An Unordered HTML List

- Coffee
- Tea
- Milk

An Ordered HTML List

1. Coffee
2. Tea
3. Milk

- There are 3 different types:
- **...**: an ordered list
 - **** identifies each list item
- **...** unordered list
 - **** identifies each list item
- **<dl>...</dl>** a definition list
 - **<dt>** identifies each term
 - **<dd>** identifies its definition

```
<!DOCTYPE html>
<html>
<body>

<h2>Absolute URLs</h2>
<a href="https://www.w3.org/">W3C</a>
<br>
<a href="https://www.google.com/">Google</a>

<h2>Relative URLs</h2>
<a href="html_images.asp">HTML Images</a>
<br>
<a href="/css/default.asp">CSS Tutorial</a>

</body>
</html>
```

Absolute URLs

[W3C](https://www.w3.org/)
[Google](https://www.google.com/)

Relative URLs

[HTML Images](#)
[CSS Tutorial](#)

- `<a href="URL">...</a>`

Images

``

```
<!DOCTYPE html>
<html>
<body>

<h2>Image Size</h2>



</body>
</html>
```

Image Size



Tables

```
<!DOCTYPE html>
<html>
<body>

<table>
  <tr>
    <th>MSSV</th>
    <th>Lớp</th>
  </tr>
  <tr>
    <td>20202020</td>
    <td>KHMT 01</td>
  </tr>
  <tr>
    <td>20212021</td>
    <td>Việt Nhật 02</td>
  </tr>
</table>

</body>
</html>
```

MSSV	Lớp
20202020	KHMT 01
20212021	Việt Nhật 02

`<table>...</table>`: a table element

`<th>...</th>`: a header cell

`<tr>...</tr>`: a row in the table

`<td>...</td>`: a cell



HUST

4. Form and Basic Inputs

- What is a Form?
 - An HTML form is used to collect user input
 - Input data can be sent to a server for processing
- Why are Forms Important?
 - Provide user interaction
 - E.g., login, search, registration
- Basic structure

The diagram illustrates a basic HTML form structure. It is enclosed in a box labeled `<form>` at the top. Inside the box, there are three input fields: "Name:", "Email:", and "Password:", each followed by a text input box. Below these fields is a "Submit" button. To the right of the box, an arrow labeled "User Input" points towards the "Server", indicating the flow of data from the user to the server.

```
<form action="/submit" method="POST">
```

```
<!-- form controls like input, select, textarea -->
```

```
</form>
```

Basic Inputs

```
<form>
```

```
Name: <input type="text"><br><br>
```

```
Password: <input type="password"><br><br>
```

```
Email: <input type="email"><br><br>
```

```
Age: <input type="number" min="1" max="120"><br><br>
```

```
Birthdate: <input type="date"><br><br>
```

```
<button type="submit">Submit</button>
```

```
</form>
```

Name:	Nguyễn Văn A
Password:	
Email:	<input type="email" value="a@gmail.com"/>
Age:	<input type="number" value="30"/>
Birthdate:	<input type="date" value="20/10/2000"/> 
<input type="submit" value="Submit"/>	

`<textarea>` – Multi-line text box

- Used when the user needs to enter long text
- Unlike `<input type="text">`, it supports multiple lines.
- Attributes:
 - `rows` → number of visible text lines.
 - `cols` → width of the textarea in characters.

`<select>` – Dropdown list

- Used to present a list of options.
- Contains `<option>` elements inside.
- User selects one option by default; can allow multiple with multiple attribute.

Textarea and Select

```
<form>
  <!-- Textarea -->
  <label for="comments">Comments:</label><br>
  <textarea id="comments" rows="4" cols="40">
Write your feedback here...
  </textarea><br><br>

  <!-- Select -->
  <label for="country">Choose a country:</label><br>
  <select id="country">
    <option>USA</option>
    <option>UK</option>
    <option>Canada</option>
    <option>Australia</option>
  </select><br><br>

  <button type="submit">Submit</button>
</form>
```

Comments:

Write your feedback here...

Choose a country:

USA



Submit

Checkbox (<input type="checkbox">)

- Allows multiple selections
- Each checkbox is independent
 - <input type="checkbox" id="hobby1"> Sports
 - <input type="checkbox" id="hobby2"> Music

Radio Button (<input type="radio">)

- Allows the user to select only one option from a group.
- To group them, use the same name attribute.
 - <input type="radio" name="gender" value="male"> Male
 - <input type="radio" name="gender" value="female"> Female

Select your hobbies:

- ☒ Sports
- ☐ Music
- ☐ Reading

Select your gender:

- ☐ Male
- ☐ Female
- ☐ Other

Button element: supports three types

- `type="submit"` → submits the form (default)
- `type="reset"` → resets all form fields.
- `type="button"` → generic button (requires JavaScript for action)

```
<button type="submit">Submit</button>  
<button type="reset">Reset</button>  
<button type="button" onclick="alert('Hello!')">Click Me</button>
```

<input type="submit"> Element

Another way to create a submit button.

Only creates submit or reset buttons.

1. action

- Specifies where the form data is sent after submission.
- Usually a URL of a server-side script
- *<form action="/submit">*

2. method


- Defines how the data is sent to the server.
- Common values:
 - GET → Data appended to the URL (visible).
 - POST → Data sent in request body (hidden).
- *<form method="POST">*

3. name

- Gives the form an identifier.
- *<form name="loginForm">*

Form

```
<form action="/submit" method="POST" name="registerForm">  
  Username: <input type="text" name="username"><br>  
  Password: <input type="password" name="password"><br>  
  <button type="submit">Register</button>  
</form>
```

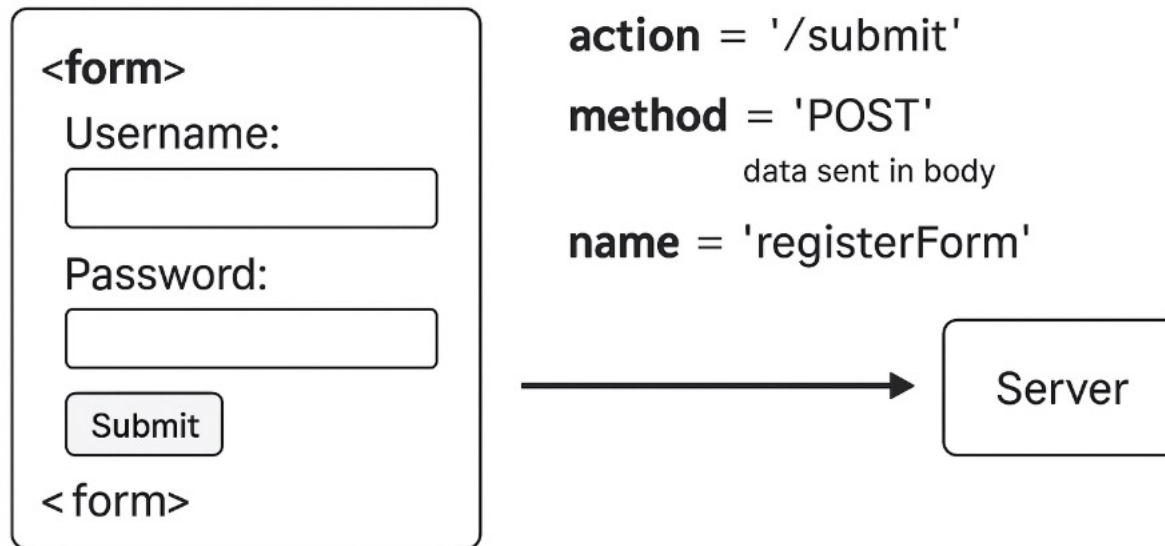

Form Validation

- Provides **basic validation** without JavaScript.
- Increases **data accuracy** before sending to server.
- **required**: ensures the field must be filled before submitting
 - `<input type="text" name="username" required>`
- **pattern**: defines a **regular expression** for input format.
 - `<input type="text" name="zipcode" pattern="[0-9]{5}">`
- **min/max**: sets **minimum and maximum values** for numeric and date inputs.
 - `<input type="number" name="age" min="18" max="99">`
 - `<input type="date" name="dob" min="2000-01-01" max="2025-12-31">`

Form Validation

```
<form>
<label for="username">Username (required):</label><br>
<input type="text" id="username" name="username" required
  oninvalid="this.setCustomValidity('Vui lòng nhập họ tên')"
  oninput="this.setCustomValidity('')">
<br><br>

<label for="email">Email:</label><br>
<input type="email" id="email" name="email" pattern=".+@gmail\.com"
  oninvalid="this.setCustomValidity('Vui lòng nhập email đúng định dạng')"
  oninput="this.setCustomValidity('')">
<br><br>

<label for="age">Age (18-99):</label><br>
<input type="number" id="age" name="age" min="18" max="99"
  oninvalid="this.setCustomValidity('Tuổi nằm trong khoảng 18 và 99')"
  oninput="this.setCustomValidity('')">
<br><br>

<button type="submit">Submit</button>
</form>
```

Username (required):

Email:

Age (18-99):

 Tuổi nằm trong khoảng 18 và 99

A Sample Form - Registration Form

Registration Form

Name:

Password:

Email:

Age:

Birthdate: 

Gender:

☐ Male ☐ Female ☐ Other

Interests:

☐ Sports ☐ Music ☐ Reading

Country: 

Comments:


A decorative graphic on the left side of the slide. It features a dark blue background with a large, stylized circular pattern composed of many small red dots. The dots are arranged in concentric, slightly irregular rings, creating a sense of depth and movement. The word "HUST" is centered within this pattern.

HUST

5. Multimedia

Multimedia

- HTML supports embedding multimedia content directly in web pages.
- Two main categories
 - Images (static visuals).
 - Audio & Video (media playback).
- Built-in tags, e.g., `<img>`, `<audio>`, `<video>`, `<iframe>`
- No need for third-party plugins

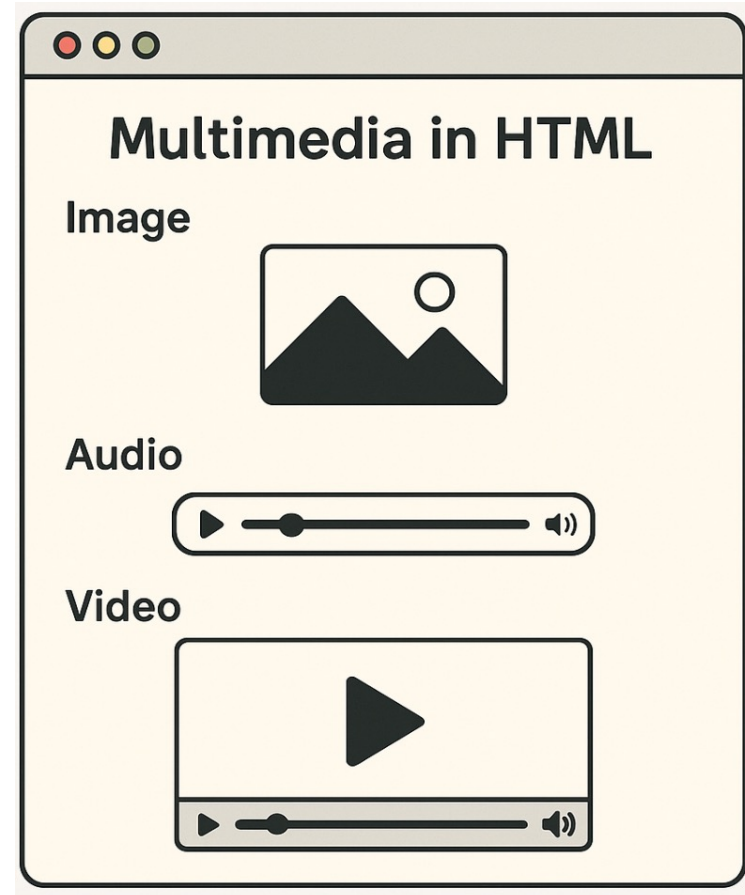

```
<audio controls>  
  <source src="sound.mp3" type="audio/mpeg">  
</audio>
```

```
<video controls>  
  <source src="movie.mp4" type="video/mp4">  
</video>
```

```
<iframe src="https://youtube.com/embed/..."></iframe>
```

Example


Image

Basic image with alt text and width attribute:



Audio

HTML5 audio player:



Video

HTML5 video player






HUST

6. Semantic HTML and SEO

Semantic HTML

- The use of HTML elements to define both meaning and appearance
 - non-semantic tags: `<div>`, `<span>`, `<b>`, `<i>`, `<u>`
 - semantic tags: `<main>`, `<article>`, `<strong>`, `<em>`, `<ins>`
- Roles
 - Code readability and maintenance
 - Search engine understands the web content better

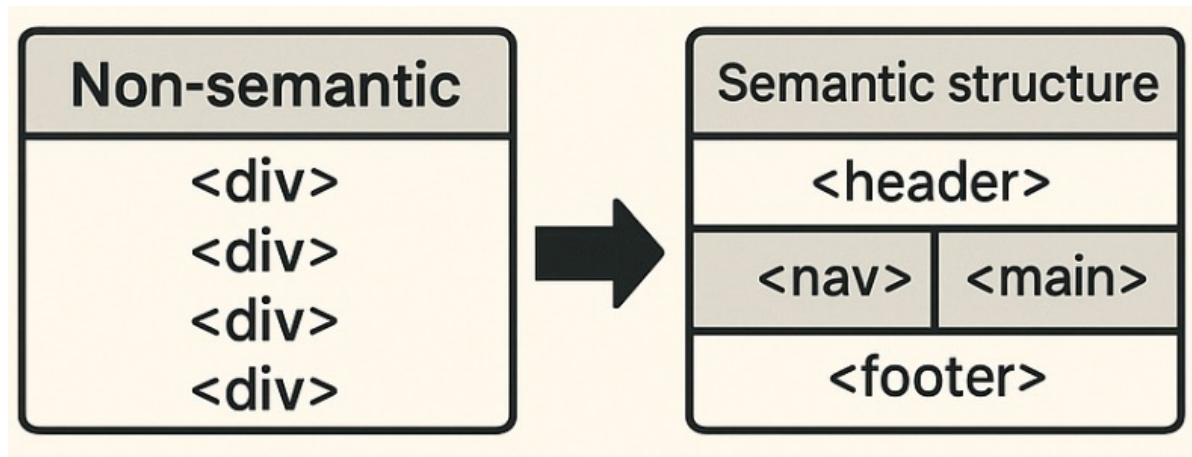

HTML Document Semantic Structure

```
<!DOCTYPE html>
<html>
  <head>
    <meta charset="utf-8">
    <title>...</title>
  </head>
  <body>
    <header>...</header>
    <nav>...</nav>
    <article>
      <section>...</section>
    </article>
    <aside>...</aside>
    <figure>...</figure>
    <footer>...</footer>
  </body>
</html>
```

- **header** – header of a section.
- **footer** – footer for a section
- **nav** – navigation.
- **figure** – embedded content, such as a graphic
- **section** – a generic document or application section
- **article** – an independent piece of content of a document.
- **aside** – a piece of content that is only slightly related to the rest of the page.

News

[Home](#) [Latest](#) [Topics](#) [About](#)

JavaScript Trends 2025

By N.V.A • Updated Sep 24, 2025

Framework ABC

...

Tags: [JS](#), [Types](#)

[12 comments](#)

Trending

- [WebAssembly in Practice](#)
- [Edge Compute](#)

© 2025 IT4409

```
<body>
  <header>
    <h1>News</h1>
  </header>
  <nav aria-label="Primary">
    <a href="/">Home</a>
    <a href="/latest">Latest</a>
    <a href="/topics">Topics</a>
    <a href="/about">About</a>
  </nav>
  <main id="content">
    <article>
      <header>
        <h2>JavaScript Trends 2025</h2>
        <p>By N.V.A • Updated Sep 24, 2025</p>
      </header>
      <section>
        <h3>Framework ABC</h3>
        <p>...</p>
      </section>
      <footer>
        <p>Tags: <a href="/tags/js">JS</a>, <a href="/tags/types">Types</a></p>
        <a href="#comments">12 comments</a>
      </footer>
    </article>

    <aside aria-label="Related">
      <h2>Trending</h2>
      <ul>
        <li><a href="/posts/web-assembly">WebAssembly in Practice</a></li>
        <li><a href="/posts/edge-compute">Edge Compute</a></li>
      </ul>
    </aside>
  </main>
  <footer>
    <small>© 2025 IT4409</small>
  </footer>
</body>
```

main, article, section

Feature	<main>	<article>	<section>
Purpose	Defines the unique, main content	Defines an independent piece of content	Defines a grouping of content
Quantity	One <main> element per page	Multiple <article> elements	Multiple <section> elements
Examples	The entire body of a blog's content.	A post, a news article.	A "Contact Us" section, a "Recent Posts" section

Non-Semantic Tag	Semantic Tag	Meaning / Use Case
<div>	<header>, <nav>, <main>, <section>, <article>, <aside>, <footer>	Use appropriate semantic structural tags instead of generic <div>
	<mark>, <time>, <abbr>, <cite>, <code> etc.	Use inline semantic tags to add meaning instead of plain
		Emphasizes importance (not just bold styling)
<i>		Emphasizes with intonation or stress (not just italic style)
<u>	<ins>	Represents inserted/added content
<center> (deprecated)	CSS → text-align: center;	Layout should be controlled with CSS, not HTML tags
<div> for images/media	<figure> + <figcaption>	Groups media content with its caption in a meaningful way

What is SEO?

- **Search Engine Optimization** improves visibility of websites in search engines.
- Good HTML structure helps search engines **understand content**.

Role of Semantic HTML in SEO

- Semantic elements (like <header>, <main>, <article>, <footer>) give context.
- Search engines better index and rank structured content.
- Improves **accessibility** and **maintainability**.

Example

- <title> → Page title, appears in search results.
- <meta description> → Short summary, influences click-through rate.
- <h1>...<h6> → Heading hierarchy, signals importance of topics.

Basic SEO - Key Points

- Title tag
 - Appears in browser tab and search results.
 - Should be unique, descriptive, around 50–60 characters.
- Meta description
 - Short summary shown in search results.
 - Aim for 140–160 characters, compelling and relevant.
- URLs: use human-readable slugs (avoid long query strings).
 -  example.com/coffee-guide
 -  example.com/page?id=1234
- Headings
 - Use <h1>...<h6> to reflect content hierarchy.
 - Include keywords naturally

Basic SEO - Example

Best Coffee Shops in Hanoi | Local Guide

example.com/coffee-guide

Discover the top coffee shop in Hanoi with our curated local guide. Perfect spots for coffee lovers.

```
<!DOCTYPE html>  
<html lang="en">
```

```
<head>
```

```
  <title>Best Coffee Shops in Hanoi | Local Guide</title>
```

```
  <meta name="description" content="Discover the top coffee shops in  
Hanoi with our curated local guide. Perfect spots for coffee lovers.">
```

```
</head>
```

```
<body>
```

```
  <h1>Best Coffee Shops in Hanoi</h1>
```

```
  <h2>1. Hidden Gem Café</h2>
```

```
  <p>A quiet place with locally roasted beans...</p>
```

```
</body>
```

```
</html>
```

Basic SEO - Key Points

- Links: clear, descriptive text
- Images: include meaningful alt
- Lists: use `<ul>/<ol>` for real lists; don't fake with `<br>`.
- Tables: add `<caption>`, `<thead>`

Links

[Click here](#) ❌

Read our Coffee Guide ✅

Images



``

`` ✅

Lists

Espresso
Latte
Cappuccino ❌

- Espresso
 - Latte
 - Cappuccino
- ✅

Tables

Coffee Prices	
Drink	Price
Espresso	\$2,50
Latte	\$3,50

✅

Espresso	
Latte	\$3,50


SEO Checklist

- Use semantic structure: <header>, <nav>, <main>, <footer>.
- One clear <h1>; logical <h2>–<h6> structure.
- Unique, descriptive <title> per page.
- Helpful <meta name="description">.
- Descriptive anchors; avoid generic link text.
- Meaningful alt text; captions for data tables.
- Mobile-friendly layout; fast loading (images, CSS/JS).
- Structured data (JSON-LD) for rich results when relevant.


- JSON-LD is a lightweight format for Linked Data based on JSON.
- Purpose: Helps search engines and applications understand the context and relationships of your content.

```
"@context": "https://schema.org",
"@type": "Store",
"name": "Tiki",
"image": {
  "@type": "ImageObject",
  "url": "https://salt.tikicdn.com/cache/w500/ts/upload/c0/8b/46/c3f0dc850dd93bfa7af7ada0cbd75dc0.png",
  "width": 1080,
  "height": 1080
},
"telephone": "19006035",
"url": "https://tiki.vn/",
"address": {
  "@type": "PostalAddress",
  "streetAddress": "52 Ut Tich, Tan Son Nhat Ward, Ho Chi Minh City, Viet Nam",
  "addressLocality": "Ho Chi Minh",
  "postalCode": "700000",
  "addressRegion": "Ho Chi Minh",
  "addressCountry": "VN"
},
```

```
"openingHoursSpecification": [
  {
    "@type": "OpeningHoursSpecification",
    "dayOfWeek": [
      "Monday",
      "Tuesday",
      "Wednesday",
      "Thursday",
      "Friday",
      "Saturday",
      "Sunday"
    ],
    "opens": "08:00",
    "closes": "21:00"
  }
],
"geo": {
  "@type": "GeoCoordinates",
  "latitude": "10.79664498748942",
  "longitude": "106.65856519879867"
},
```

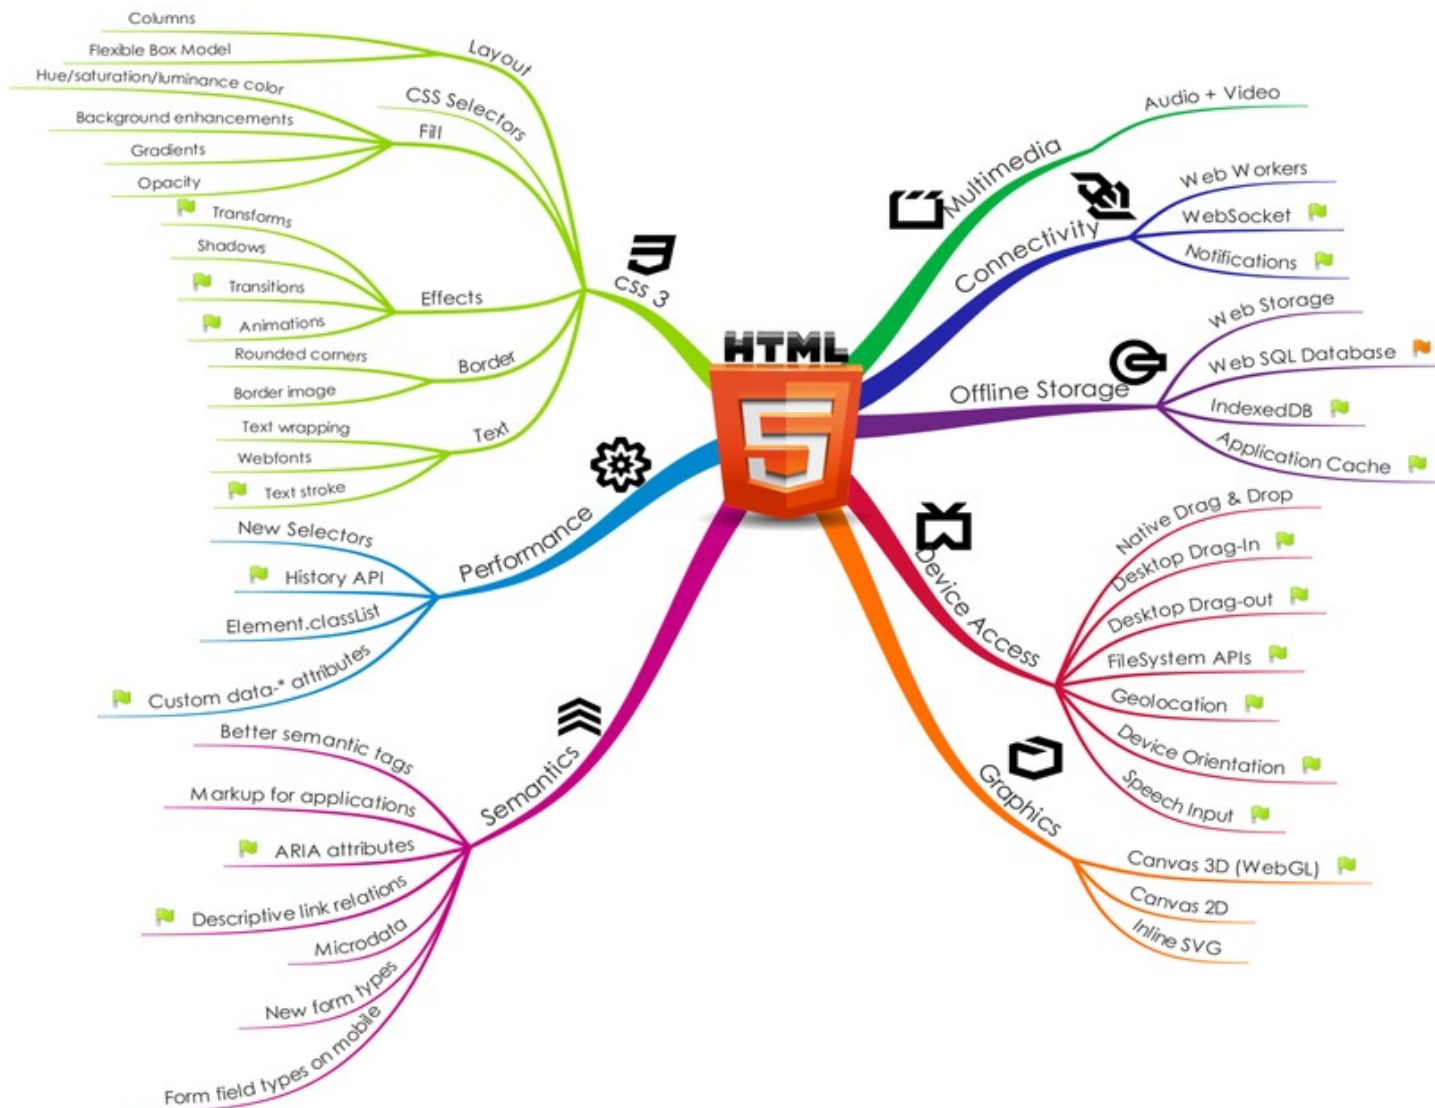

Google page history



Search Stanford

10 results

Search The Web

10 results

1997



Search the web using Google

[More Google!](#)

Copyright ©1999 Google Inc.

1999



Search the web using Google!

Special Searches
[Stanford Search](#)
[Linux Search](#)

[Help!](#)
[About Google!](#)
[Company Info](#)
[Google! Logos](#)

Get Google!
updates monthly:

 [Archive](#)

Copyright ©1998 Google Inc.

1998



[About Google](#) [Jobs@Google](#)

Enter your search terms...

...or [browse web pages](#) by category.

"Best Search Engine" [Yahoo! Internet Life](#)

[Google Goes Mobile With Industry's First Comprehensive Wireless Search Engine](#)

©2000 Google Inc. [About](#) | [Search Tips](#) | [Google Buttons](#) | [Add Google to Your Site](#) | [Jobs@Google](#)

2000

Google page history



Search 1,610,476,000 web pages

[Google Search](#) [I'm Feeling Lucky](#)

[Advanced Search](#)
[Preferences](#)

[Google Web Directory](#)
the web organized by topic

[Google Groups](#)
usenet discussion forum

[Google offers condolences to Tuesday's attack victims](#)

[News links and support information regarding attacks](#)

[Cool Jobs](#) - [Add Google to Your Site](#) - [Advertise with Us](#) - [All About Google](#)

©2001 Google

2001



[Web](#) [Images](#) [Groups](#) [Directory](#) [News](#)

[Google Search](#) [I'm Feeling Lucky](#)

[Advanced Search](#)
[Preferences](#)
[Language Tools](#)

[Advertise with Us](#) - [Search Solutions](#) - [Services & Tools](#) - [Jobs, Press, & Help](#)

©2003 Google - Searching 3,083,324,852 web pages

2003



SOICT

TRƯỜNG CÔNG NGHỆ THÔNG TIN VÀ TRUYỀN THÔNG
School of Information and Communication Technology



[Web](#) [Images](#) [Groups](#) [Directory](#)

[Google Search](#) [I'm Feeling Lucky](#)

[Advanced Search](#)
[Preferences](#)
[Language Tools](#)

[New!](#) [Get the Google Search Appliance for your company.](#)

[Advertise with Us](#) - [Search Solutions](#) - [News and Resources](#) - [Jobs, Press, Cool Stuff...](#)

©2002 Google - Searching 2,073,418,204 web pages

2002



[Web](#) [Images](#) [Groups](#) [News](#) [Froogle](#) [more »](#)

[Google Search](#) [I'm Feeling Lucky](#)

[Advanced Search](#)
[Preferences](#)
[Language Tools](#)

[Advertising Programs](#) - [Business Solutions](#) - [About Google](#)

©2004 Google - Searching 4,285,199,774 web pages

2004

Google page history



2005



2006



2007



2025

- Ex1. Create a simple HTML page including basic tags
- Ex2. Create a sample registration form
- Ex3. Create a HTML page using semantic tags

- Ex4. Create the Facebook's registration page
- Ex5. Create the Google's search page