TECHNICAL WALKTHROUGH

Raw CSVs become CDM-ready data

Python reads, cleans, validates and writes the complete CDM package.

RAW

2 CSVs

→

CDM OUTPUT

2 entities + model.json


5	contacts
4	valid orders
1	quarantined
ISO	UTC timestamps


- ✓ read raw records
- ✓ clean + validate
- ✓ write data + rejects
- ✓ generate model.json

Entry point: python -m src.main

One path from source row to CDM

The target models drive validation, CSV columns and manifest attributes.

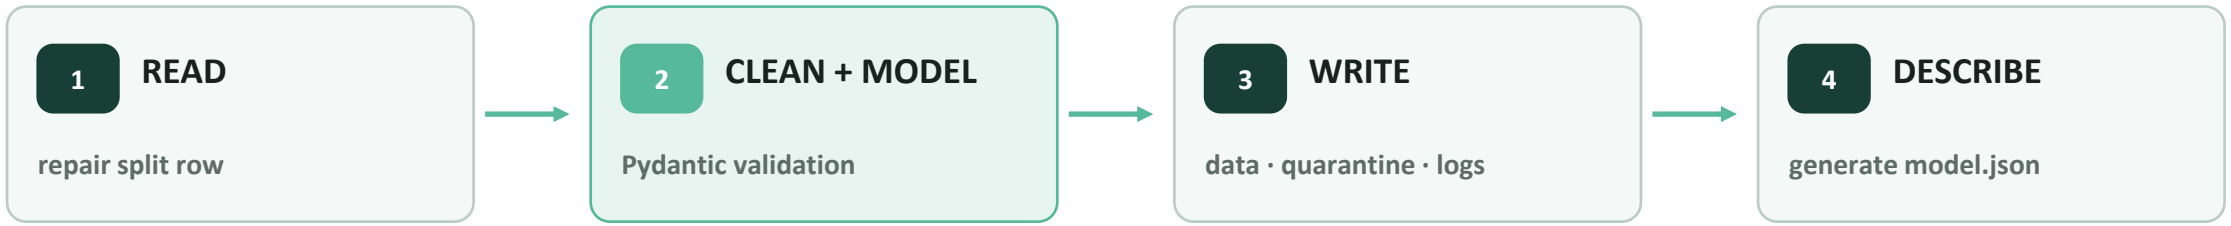

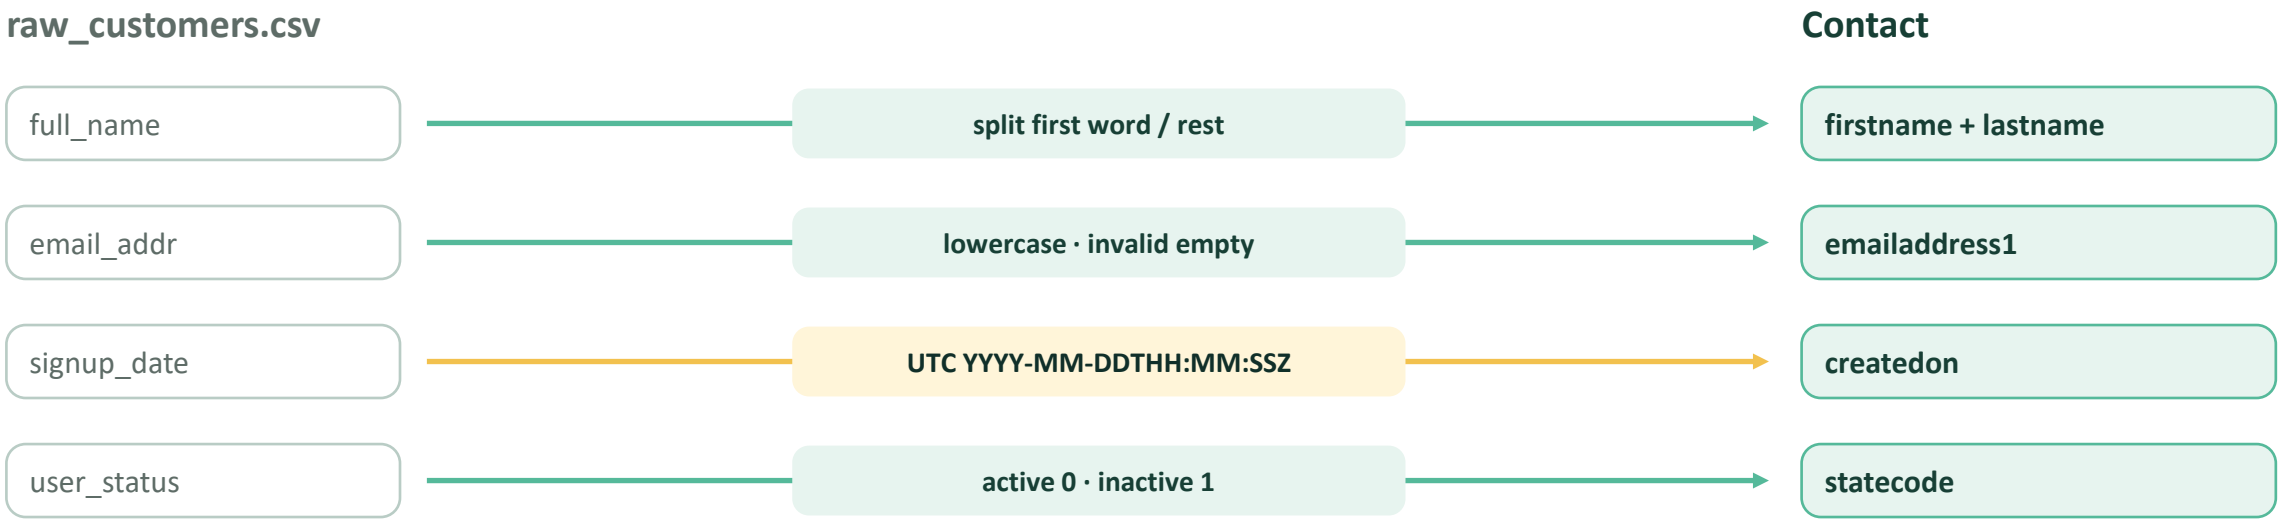

AUTO one command

MODEL single schema source

PEOPLE logs + reasons

python -m src.main

Keep the relationship valid

Every retained SalesOrder points to exactly one Contact.

PARENT

Contact

contactid PK

firstname · lastname

emailaddress1

createdon · statecode

1 — 0..N

contactid <- customerid

CHILD

SalesOrder

salesorderid PK

customerid FK

totalamount · decimal

createdon · UTC

ORD-1005 → CST-999

No Contact match → quarantine + log

Clean target No broken foreign key

Traceable exception raw row + reason

LOAD + DESCRIBE

One run writes data, rejects and metadata

The entity models keep CSV columns and model.json attributes aligned.

python -m src.main

Contact.csv	5 validated contacts
SalesOrder.csv	4 valid orders
quarantine/*.csv	raw rejected row + reason
pipeline-run.log	warnings + final counts

same models

model.json

metadata	name · description · version
entities	Contact · SalesOrder
attributes	name · CDM dataType
partitions	relative CSV locations
relationship	customerid → contactid

Result: rerunning the ETL recreates the same complete CDM package.