


QUERYBOOK SYSTEM ARCHITECTURE

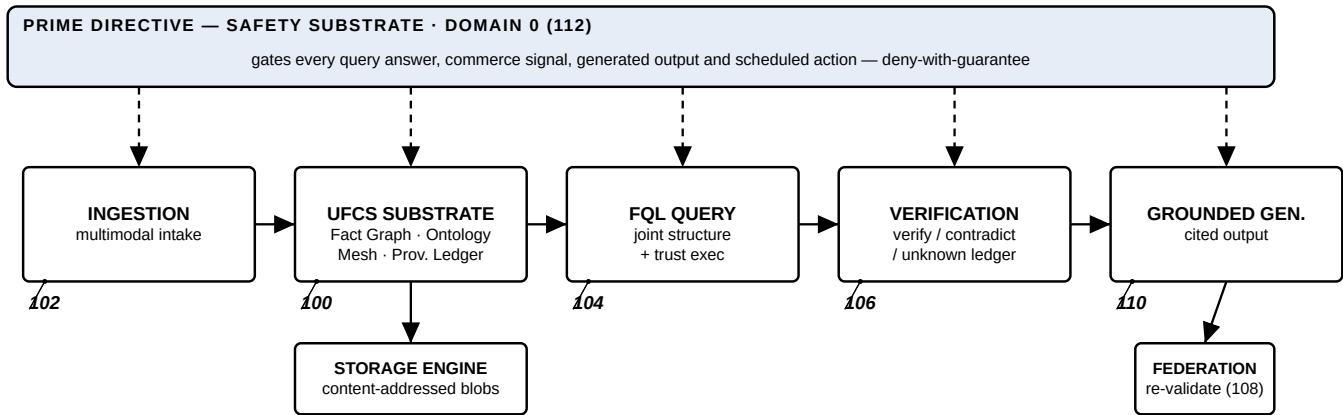

Every stage executes beneath the Domain-0 safety plane; denials still return information the requester is entitled to.

FIG. 1

FACT UNIT — ATOM, ENVELOPE, AND CONTENT-DERIVED IDENTITY


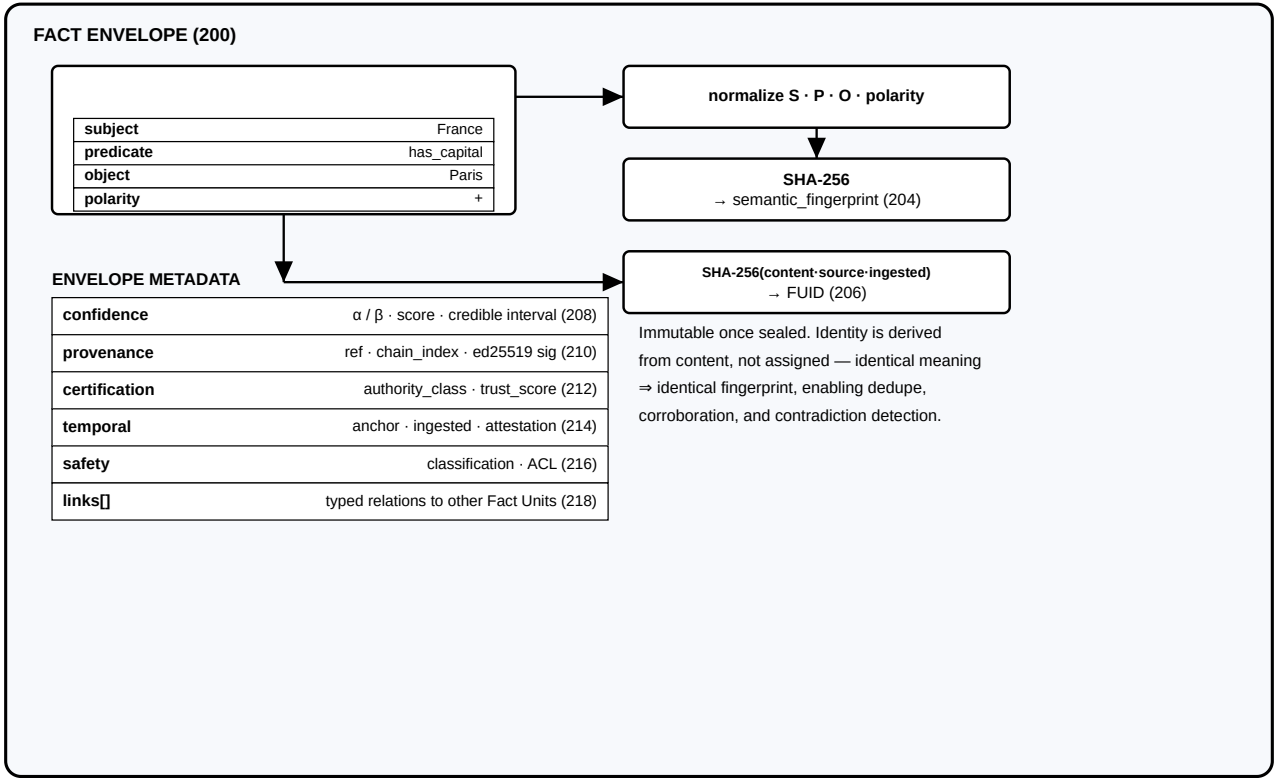


FIG. 2


FACT-CERTIFICATION AUTHORITY HIERARCHY

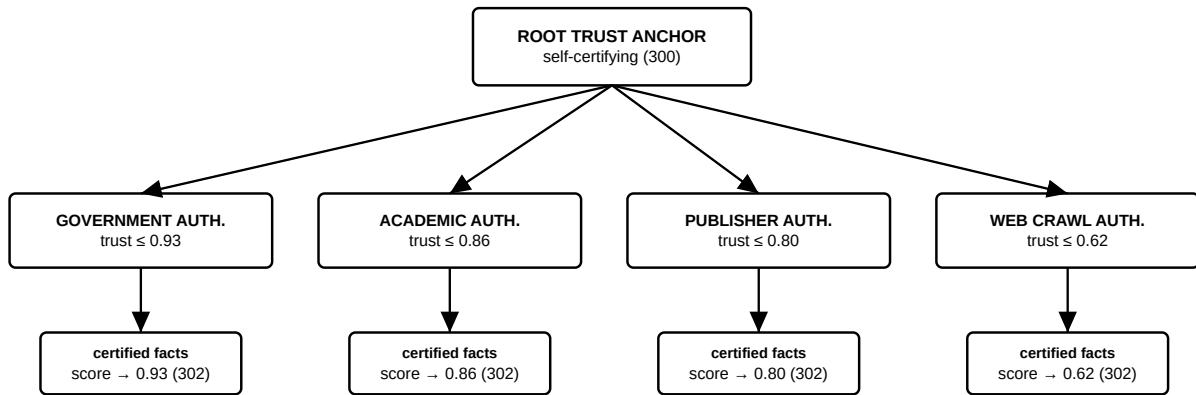

Trust flows downward; a fact inherits a ceiling from its issuing authority.

FIG. 3

UFCS SUBSTRATE — THREE-STORE ARCHITECTURE

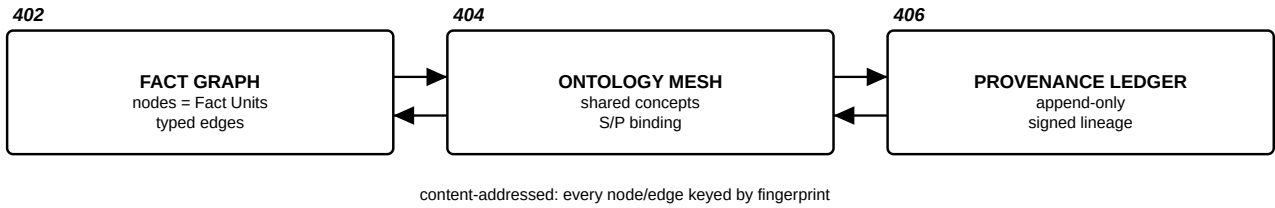

SUBSTRATE RELATIONSHIP TYPES (408)


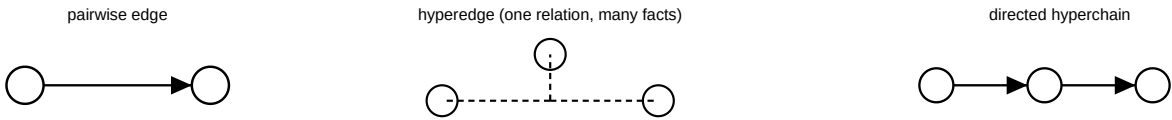


FIG. 4


AUTHORED TOUR & EXHIBITION SEQUENCING (CLAIM 11)

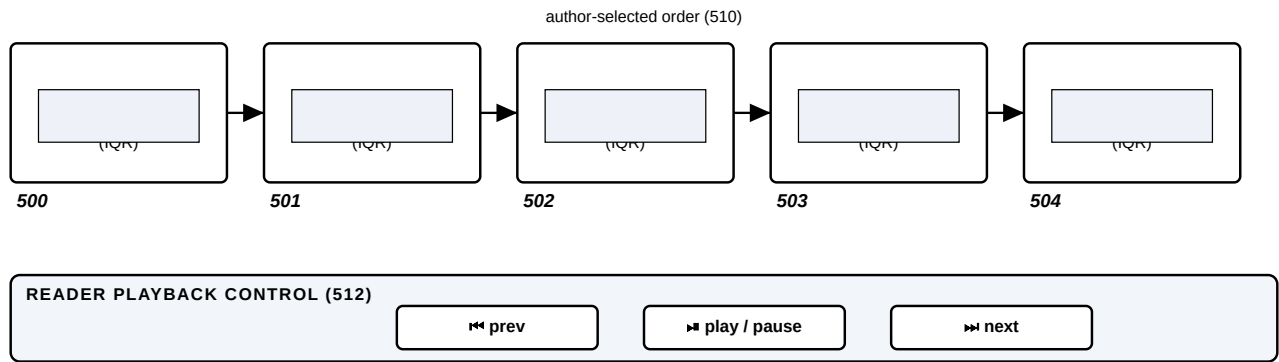

Author fixes the sequence; the reader controls pace and direction along the ordered waypoints.

FIG. 5


FQL — JOINT STRUCTURE + TRUST EXECUTION

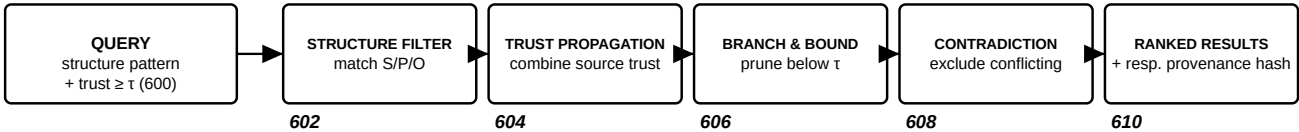

Structure and certification are evaluated together, so pruning happens during traversal — not as a post-filter.

FIG. 6


VERIFYING MACHINE-GENERATED TEXT AGAINST CERTIFIED RECORDS

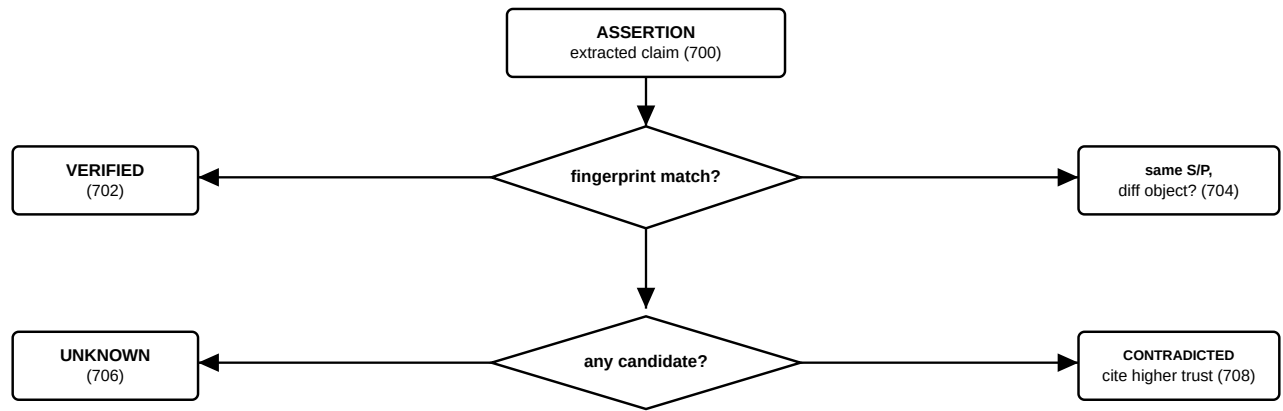

Every generated sentence is classified against the ledger before it reaches the reader.

FIG. 7


FEDERATION — CROSS-BOUNDARY RE-VALIDATION

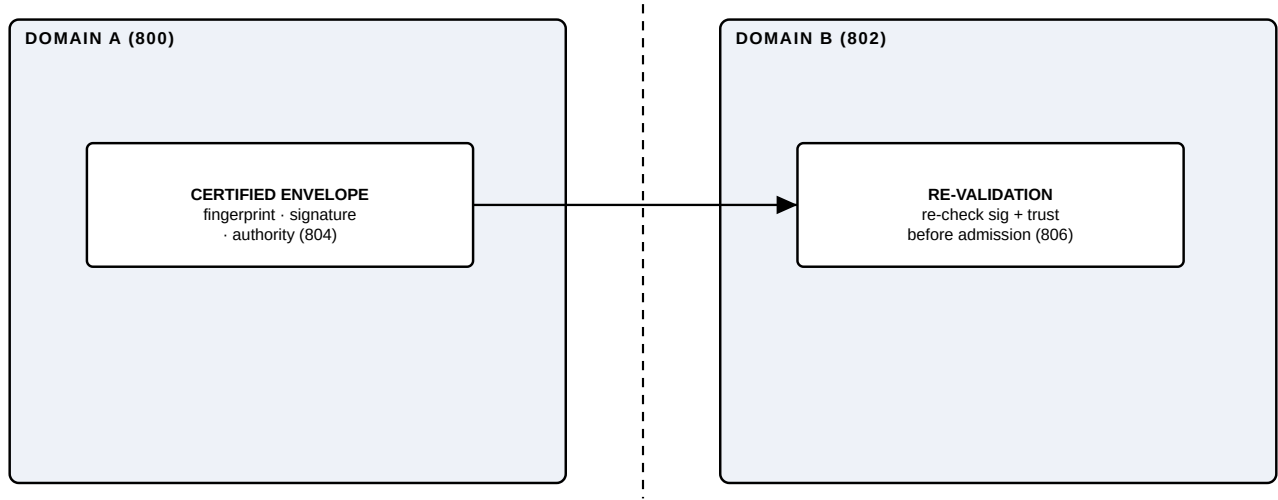

A fact certified in one domain is re-validated by the receiver — never trusted blindly across the boundary.

FIG. 8

FACT-LEVEL ERASURE BY EXTERNAL-KEY DESTRUCTION

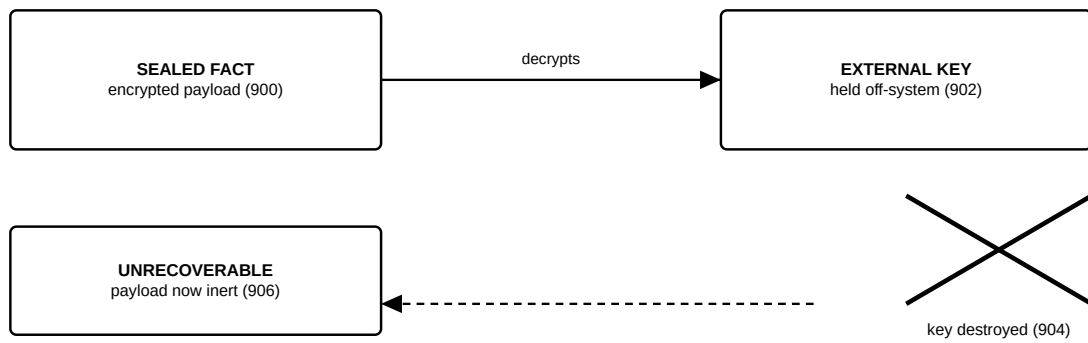

Erase one fact by destroying its key; the content-addressed store is otherwise append-only and immutable.

FIG. 9

UNIVERSAL SECURITY ARCHITECTURE


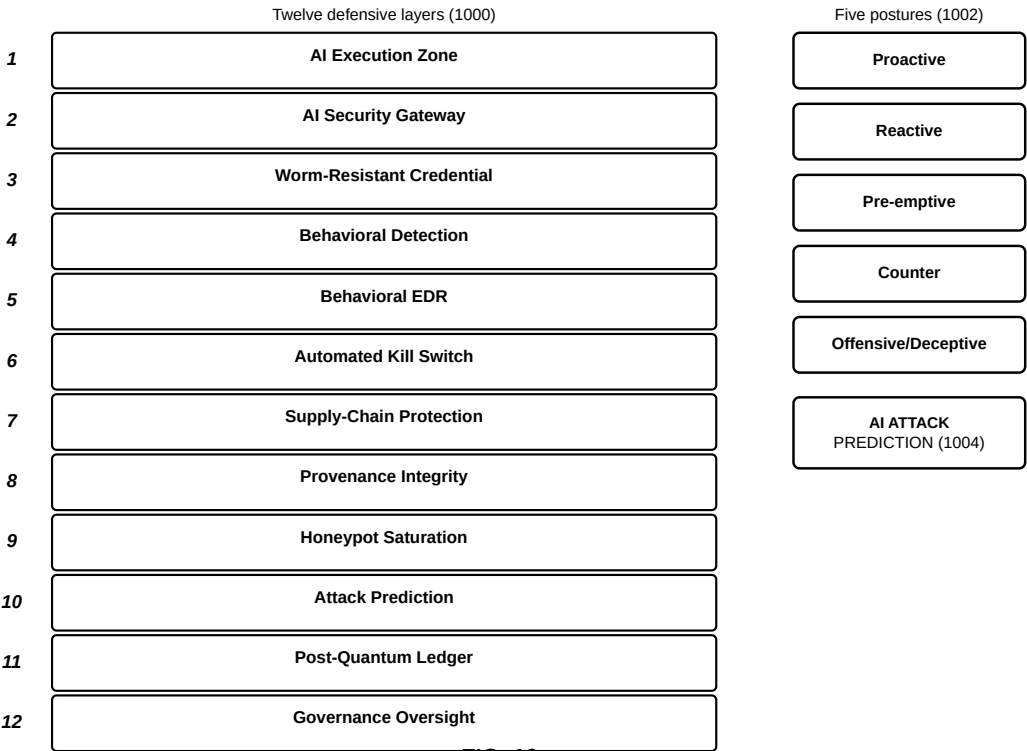


FIG. 10


UNIVERSAL HONEYPOT SATURATION & DATA FIREHOSE

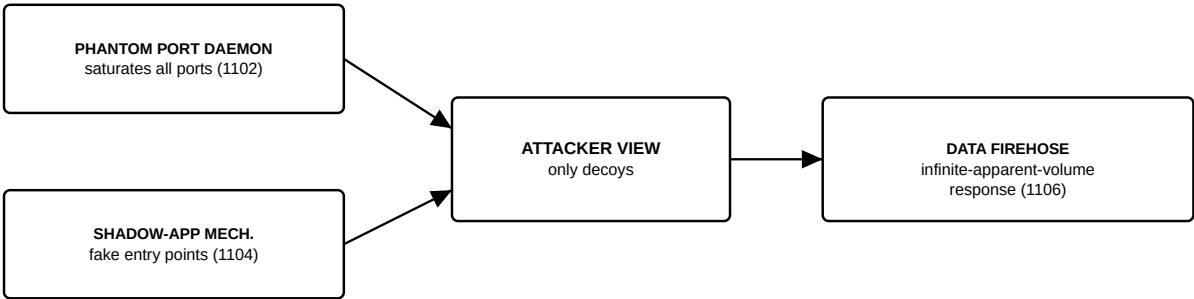

Real assets are drowned in indistinguishable decoys and statistically unfindable.

FIG. 11

DEPLOYMENT TOPOLOGIES OVER AN INVARIANT COMMON LAYER

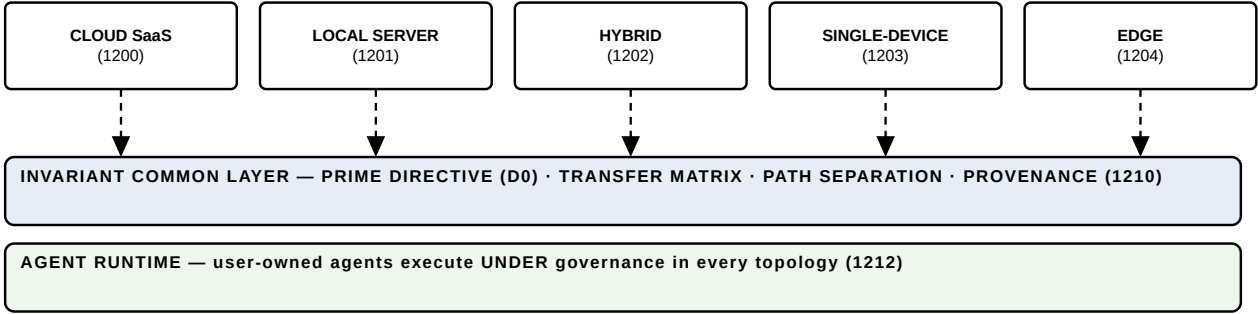

The topology varies; the safety/governance/provenance layer and the governed agent runtime are identical across all five.

FIG. 12

ADAPTIVE RESPONSE ENGINE — DIRECTIVE FIXED BEFORE GENERATION


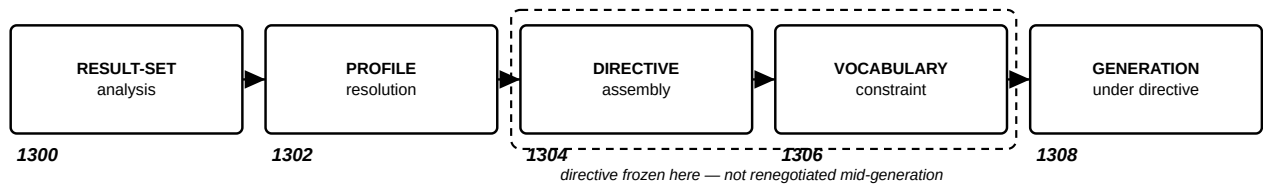


FIG. 13


USER-OWNED AGENT SYSTEM WITH GOVERNANCE & KILL SWITCH

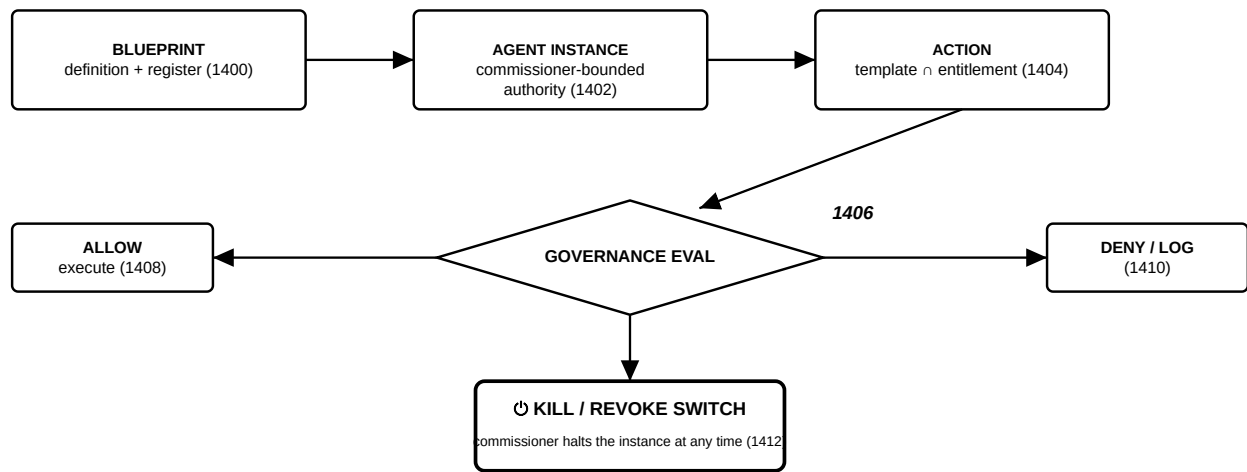

Governance is checked at every action; an agent can never exceed its commissioner, who holds an unconditional kill control.

FIG. 14


DETERMINISTIC MULTI-LANGUAGE REGENERATION

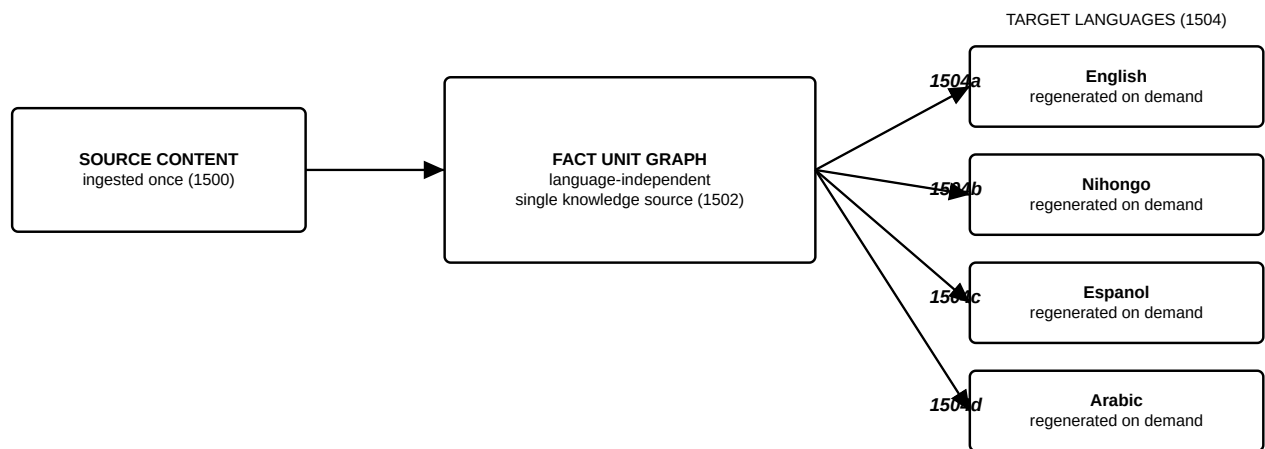

One graph, many surfaces: no per-language re-ingestion; each language is a projection of the same facts.

FIG. 15


SEMANTIC COMPRESSION, EXPANSION, COLORIZATION & UPSCALING

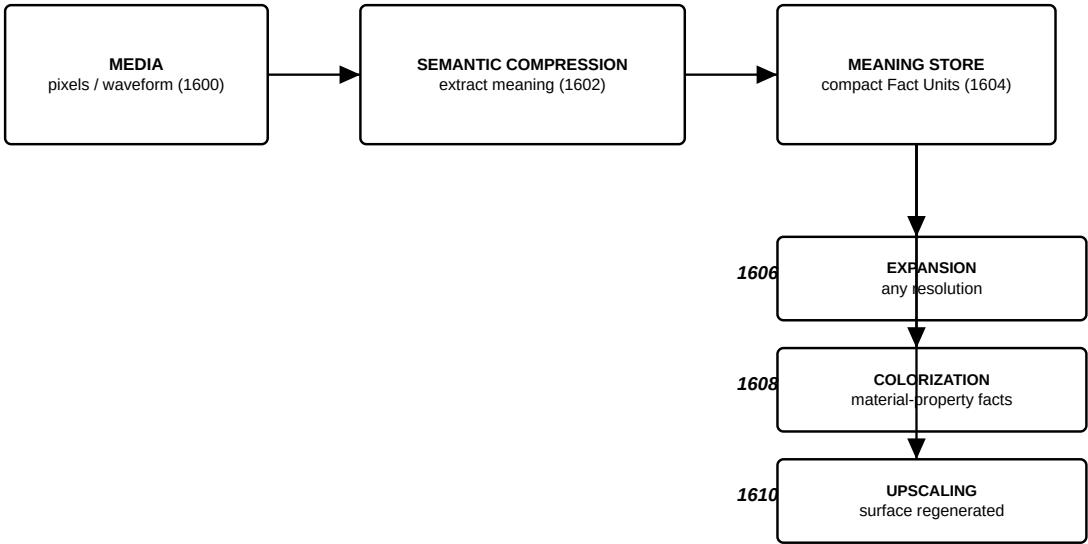

Store meaning, not surface; compression and regeneration are the same primitive — no generational quality loss.

FIG. 16

QUERYBOOK-ENHANCED TCP/IP HYBRID PROTOCOL PACKET

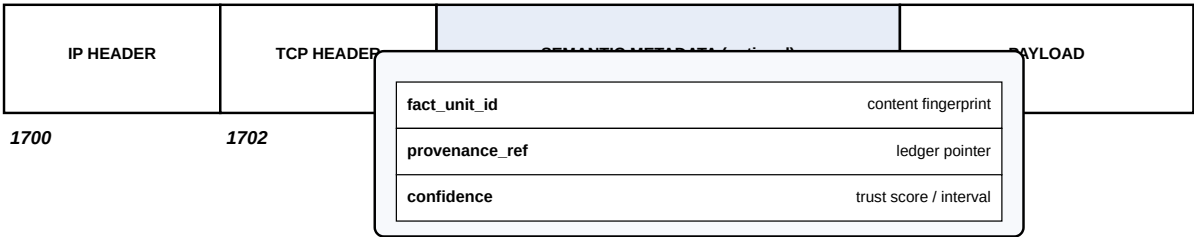

A non-participating endpoint ignores the semantic header — provenance travels with the bits, backward-compatible.

FIG. 17

ATTRACTOR NET
recurrent update


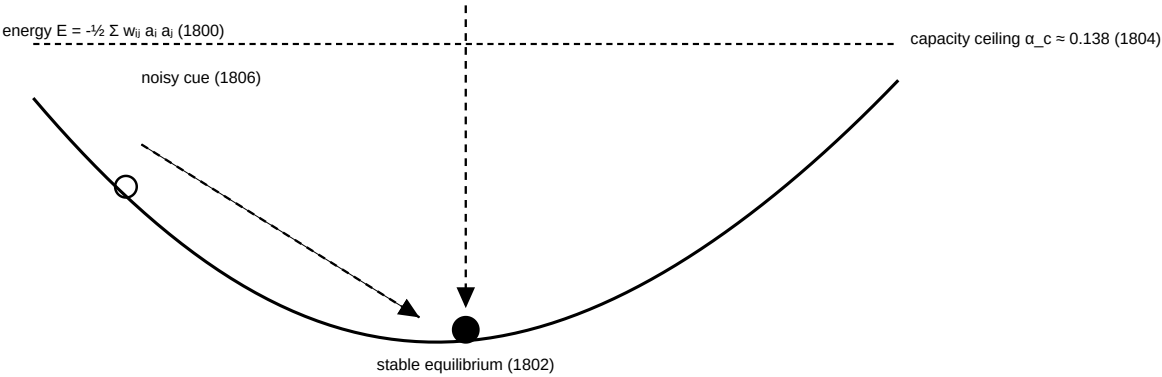


FIG. 18

FACT UNIT — CONFIDENCE AND EVIDENCE MODEL

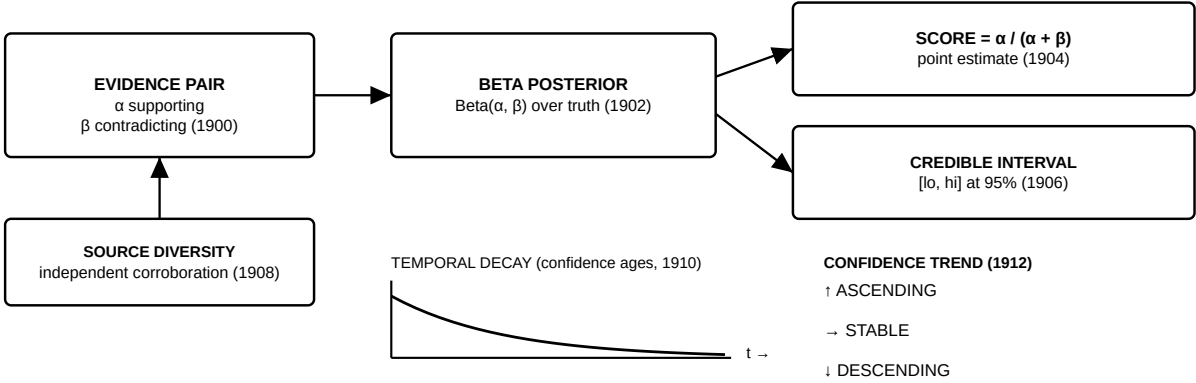

Trust is a governed evidence estimate — not a single number: it carries an interval, ages over time, and reports its direction.

FIG. 19

UFCS PACKET STRUCTURE — SERIALIZED FACT UNIT RECORD


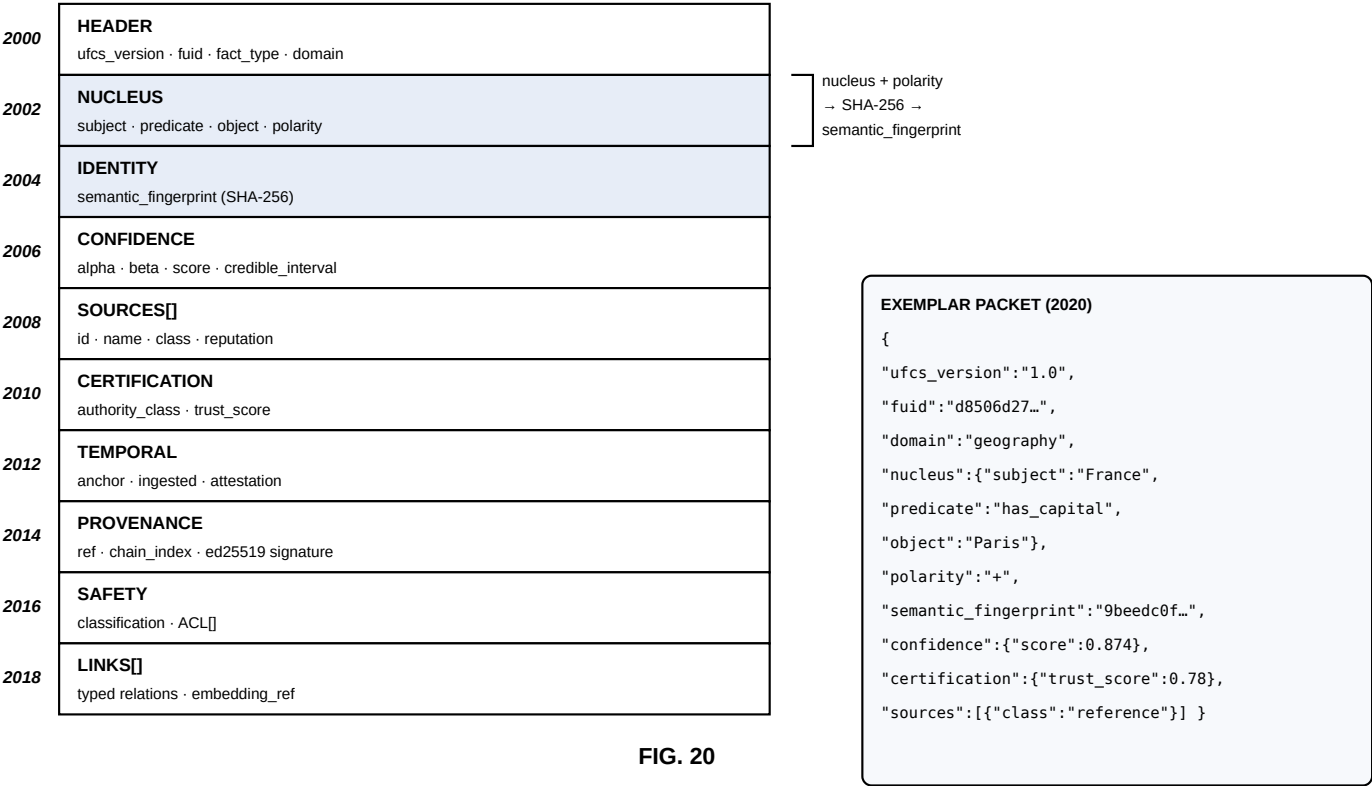


FIG. 20

UFCS PACKET FRAMING — CONTENT-ADDRESSED BLOCK STORAGE

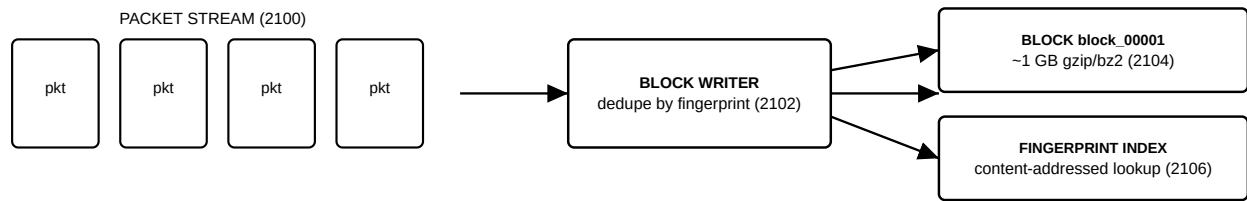

Immutable packets are appended to ~1 GB content-addressed blocks; a fingerprint index gives O(1) dedupe and retrieval.

Identical meaning $\Rightarrow$ identical fingerprint $\Rightarrow$ stored once; corroboration and contradiction are detected at ingest.

FIG. 21

FQL — QUERY ANATOMY AND WORKED EXAMPLE

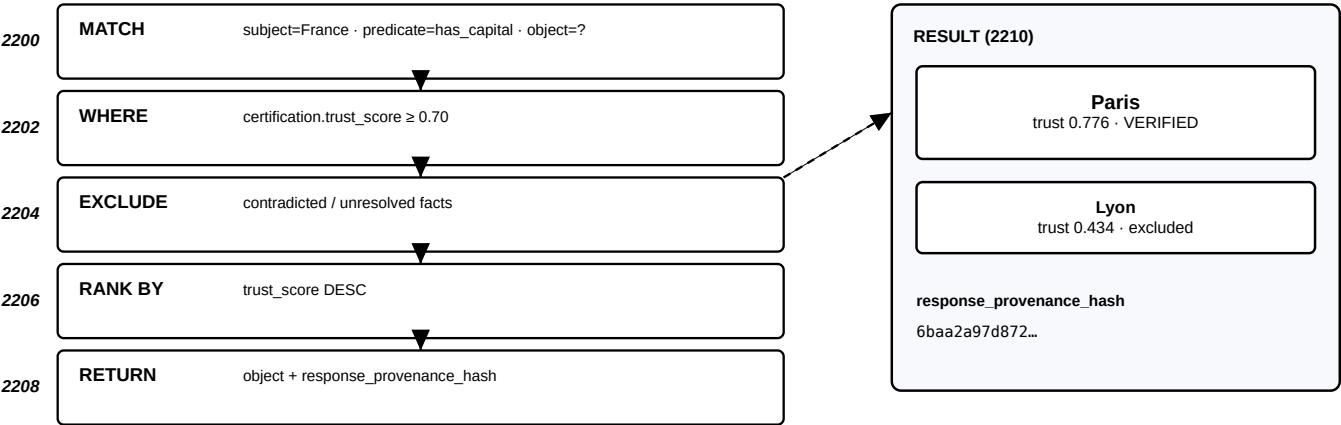


FIG. 22