

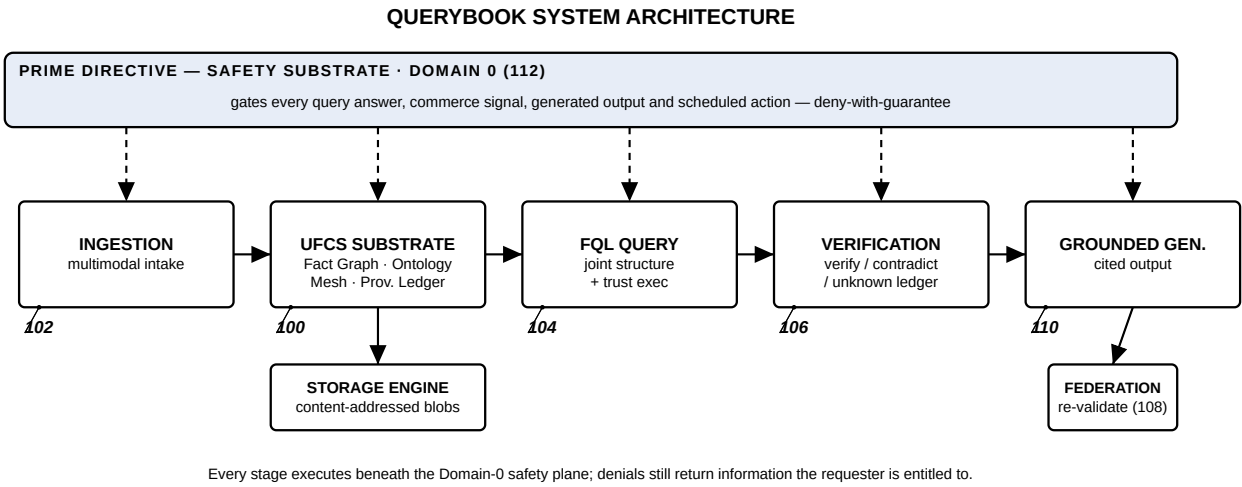


FIG. 1

FIG. 1 — QueryBook system architecture (Prime Directive as Domain 0)

FACT UNIT — ATOM, ENVELOPE, AND CONTENT-DERIVED IDENTITY

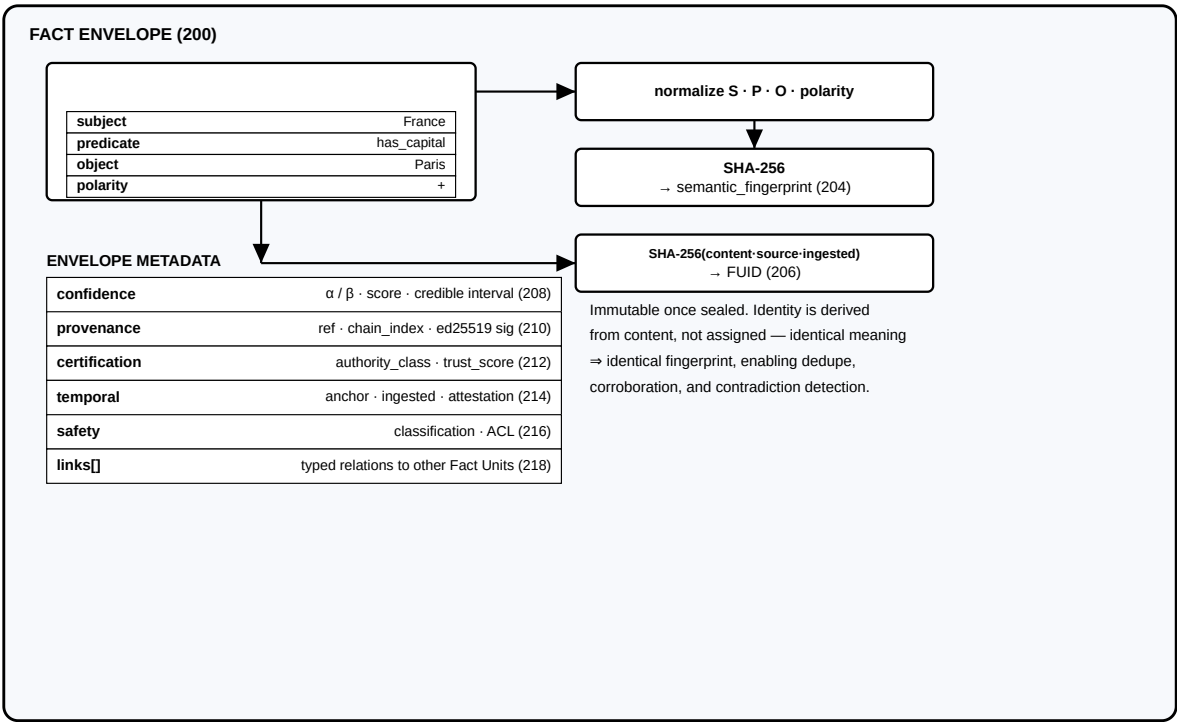


FIG. 2

FIG. 2 — Fact Unit — atom, envelope, and content-derived identity

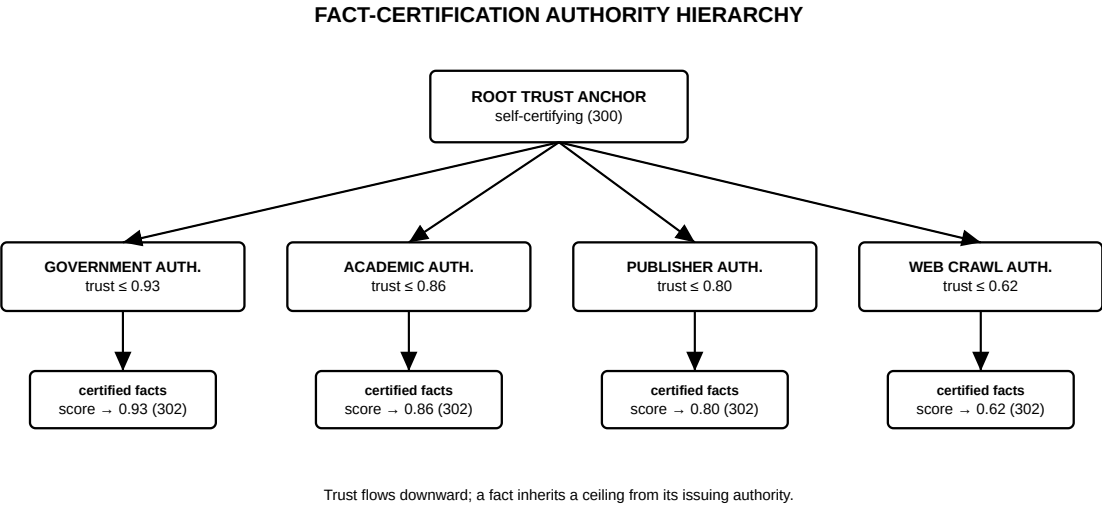


FIG. 3

FIG. 3 — Fact-certification authority hierarchy

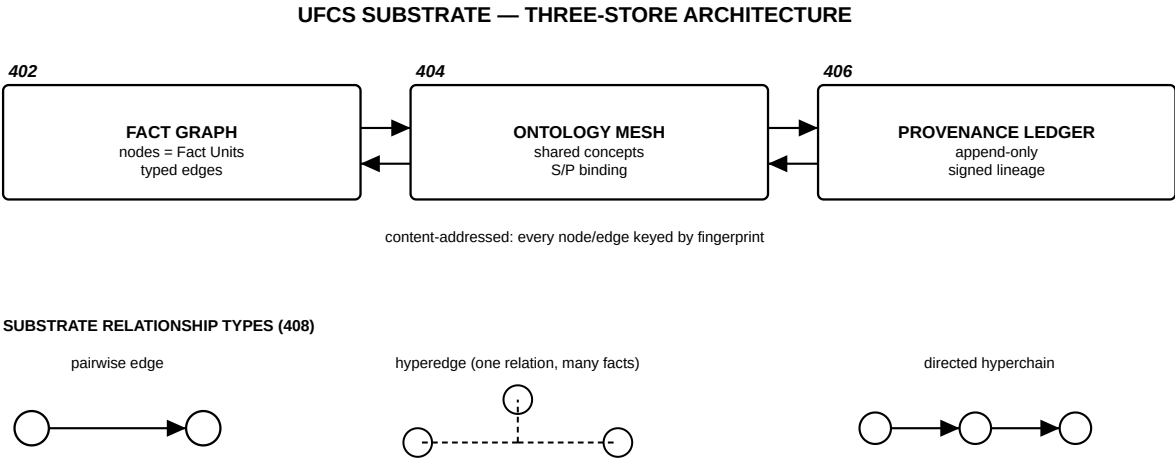


FIG. 4

FIG. 4 — UFCS substrate — three-store architecture

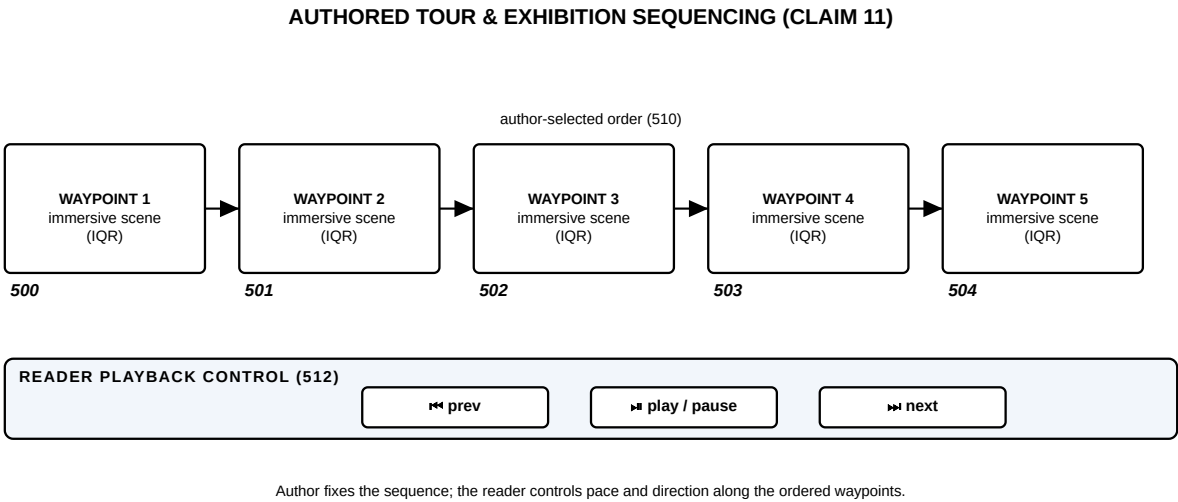
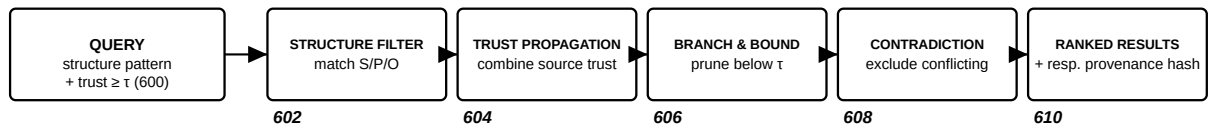


FIG. 5

FIG. 5 — Authored tour and exhibition sequencing

FQL — JOINT STRUCTURE + TRUST EXECUTION

Structure and certification are evaluated together, so pruning happens during traversal — not as a post-filter.

FIG. 6

FIG. 6 — FQL — joint structure and trust execution

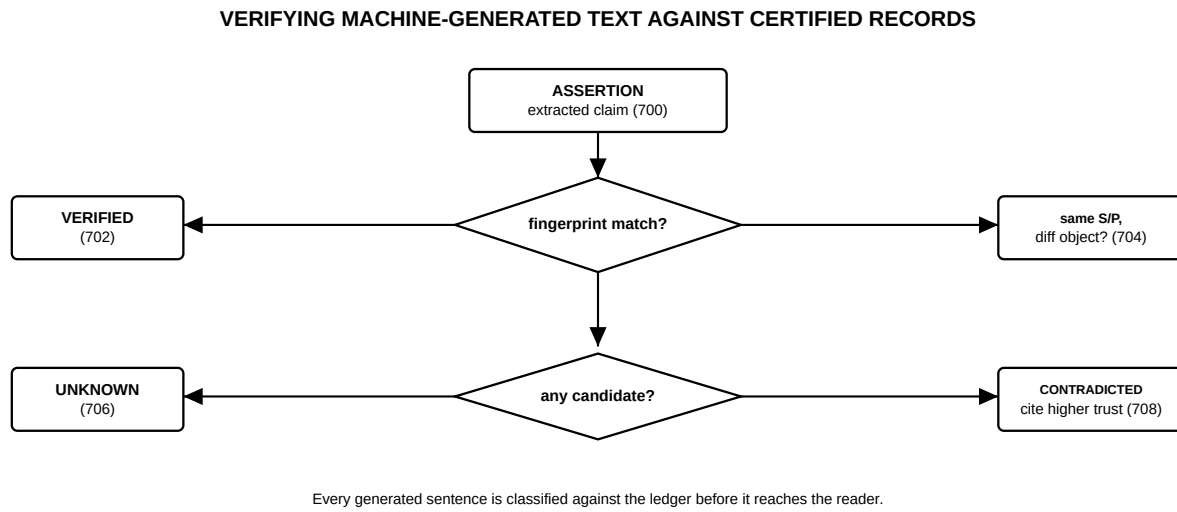


FIG. 7

FIG. 7 — Verifying machine-generated text against certified records


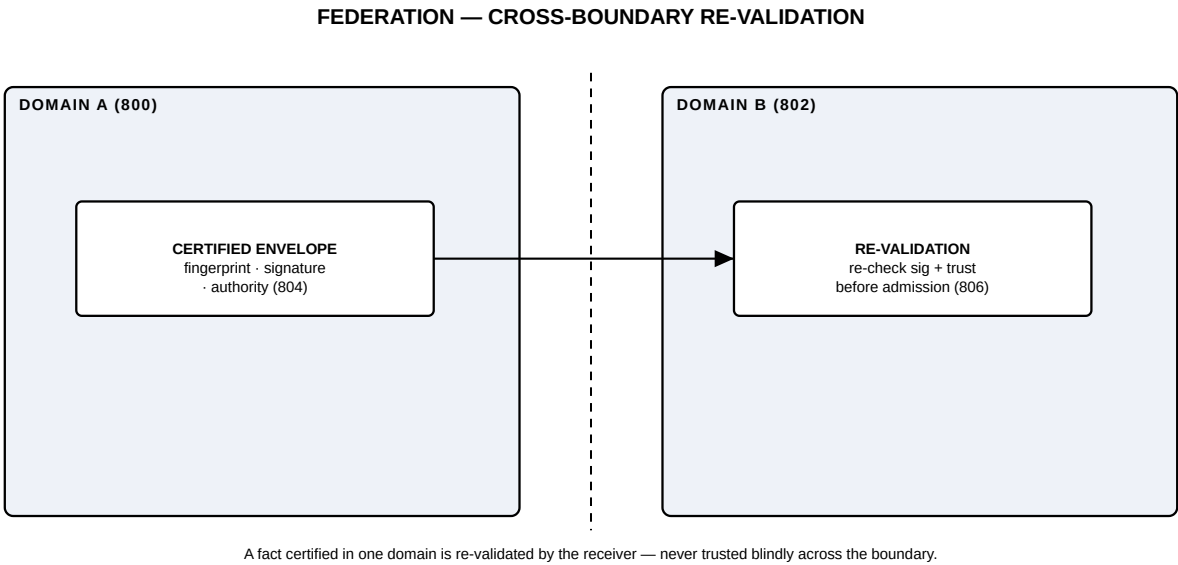


FIG. 8

FIG. 8 — Federation — cross-boundary re-validation

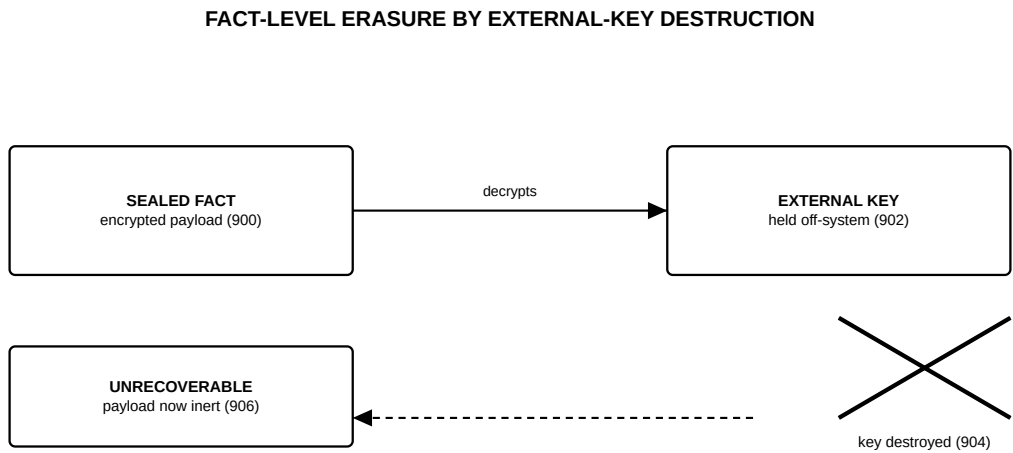

Erase one fact by destroying its key; the content-addressed store is otherwise append-only and immutable.

FIG. 9

FIG. 9 — Fact-level erasure by external-key destruction


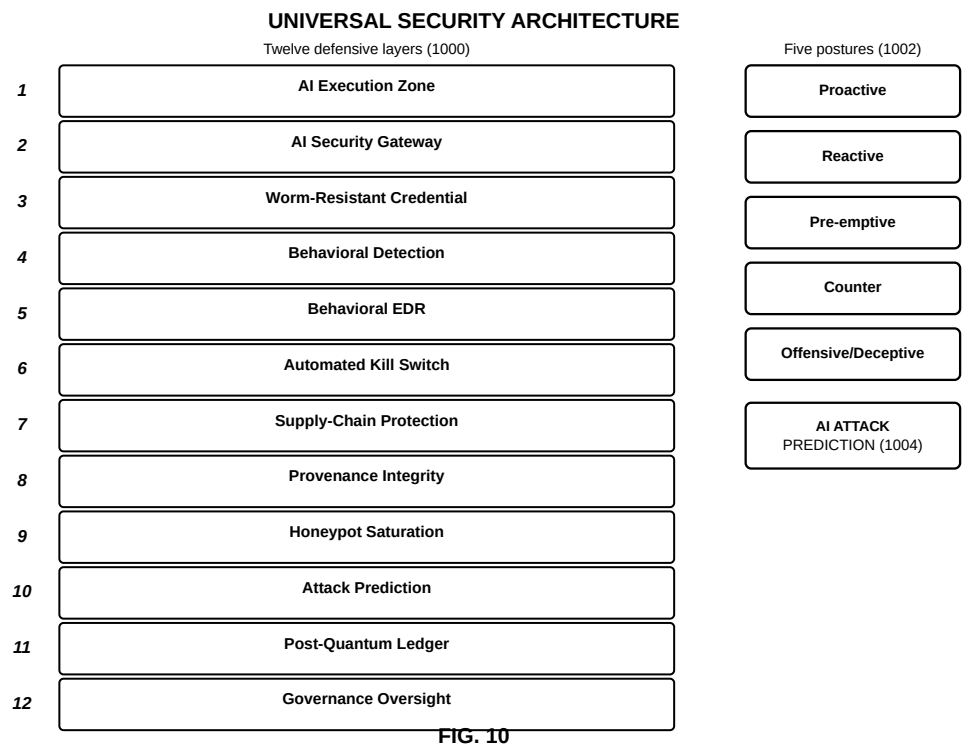


FIG. 10 — Universal security architecture

UNIVERSAL HONEYPOT SATURATION & DATA FIREHOSE

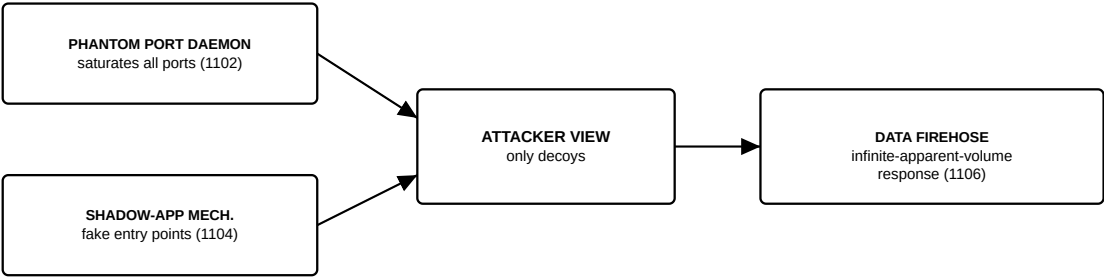

Real assets are drowned in indistinguishable decoys and statistically unfindable.

FIG. 11

FIG. 11 — Universal honeypot saturation and data firehose

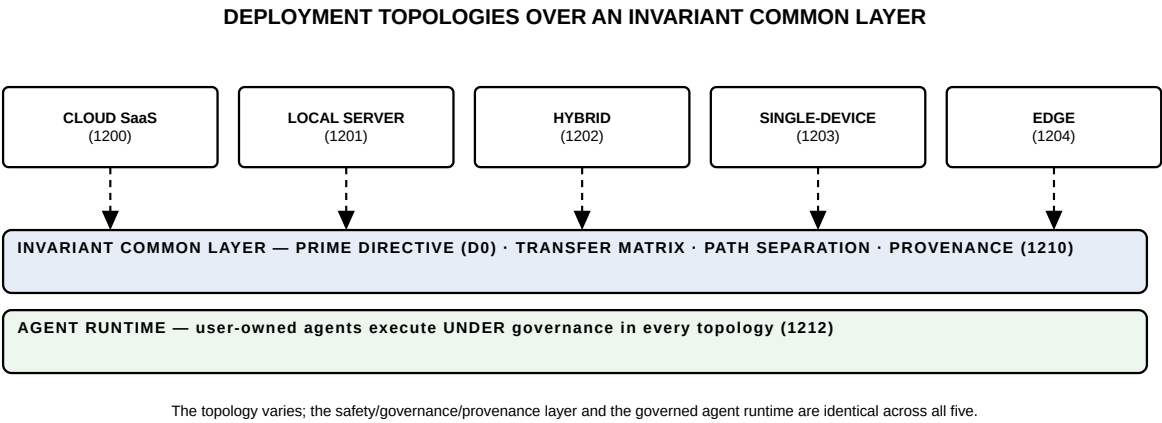


FIG. 12

FIG. 12 — Deployment topologies over an invariant common layer

ADAPTIVE RESPONSE ENGINE — DIRECTIVE FIXED BEFORE GENERATION


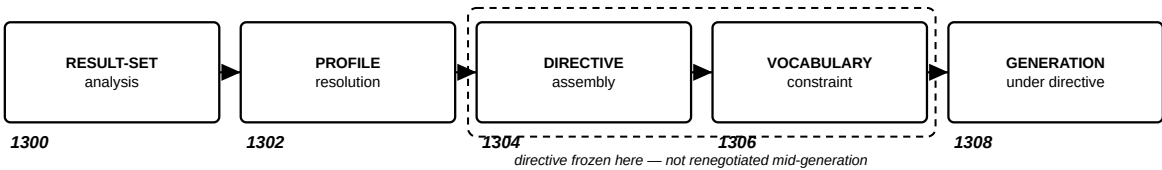


FIG. 13

FIG. 13 — Adaptive response engine — directive fixed before generation

USER-OWNED AGENT SYSTEM WITH GOVERNANCE & KILL SWITCH

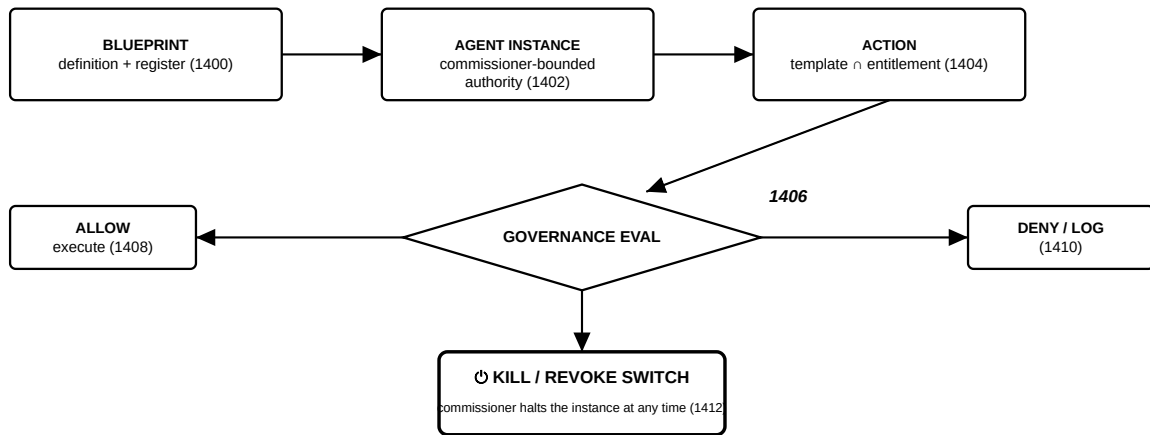

Governance is checked at every action; an agent can never exceed its commissioner, who holds an unconditional kill control.

FIG. 14

FIG. 14 — User-owned agent system with governance and kill switch


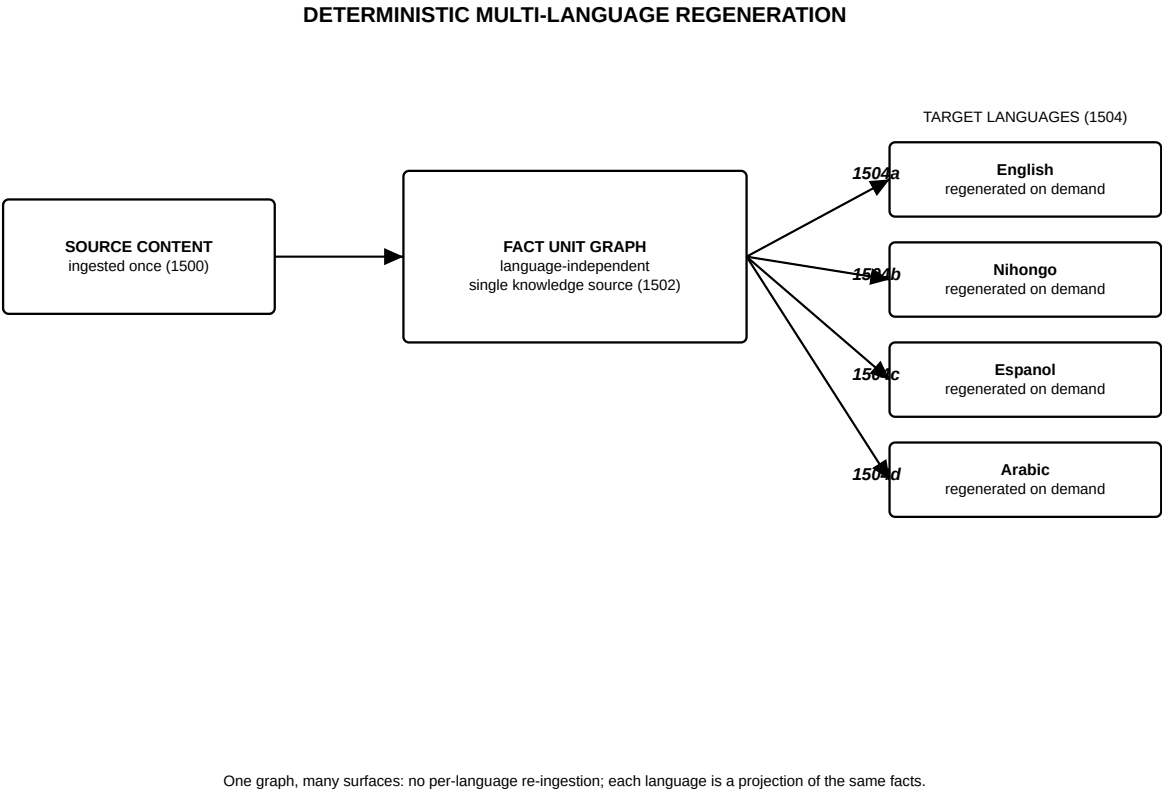


FIG. 15

FIG. 15 — Deterministic multi-language regeneration

SEMANTIC COMPRESSION, EXPANSION, COLORIZATION & UPSCALING

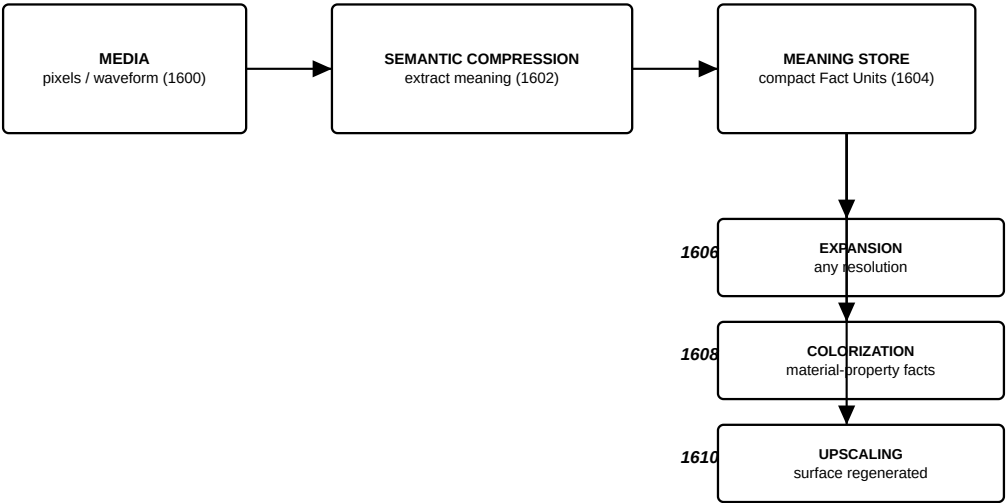

Store meaning, not surface; compression and regeneration are the same primitive — no generational quality loss.

FIG. 16

FIG. 16 — Semantic compression, expansion, colorization and upscaling

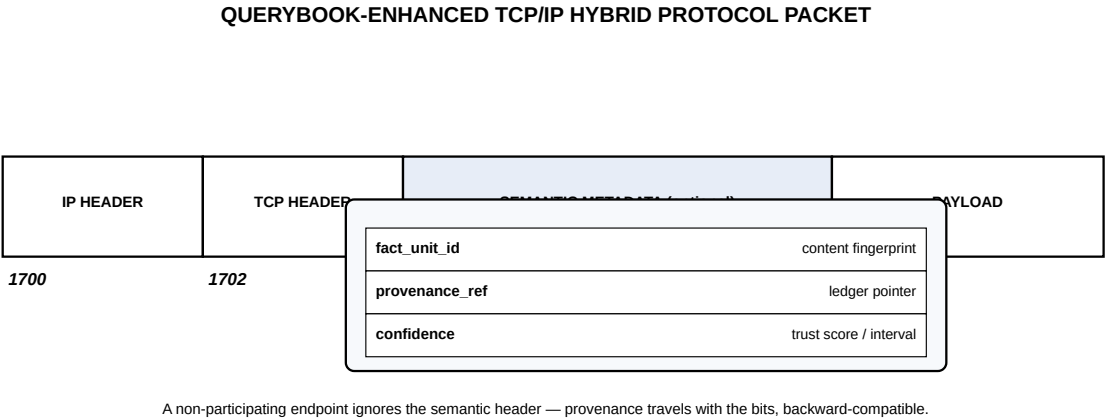


FIG. 17

FIG. 17 — QueryBook-enhanced TCP/IP hybrid protocol packet

NEUROMORPHIC COGNITIVE LAYER — ATTRACTOR CONVERGENCE


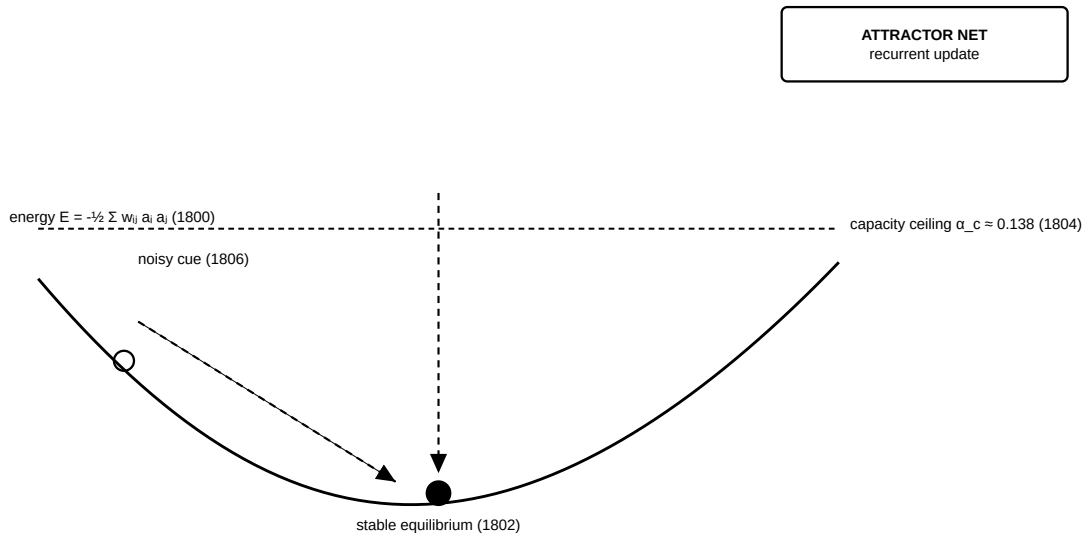


FIG. 18

A partial/noisy cue relaxes down the energy surface to the nearest stored equilibrium — recall as convergence, bounded by α_c .

FIG. 18 — Neuromorphic cognitive layer — attractor convergence

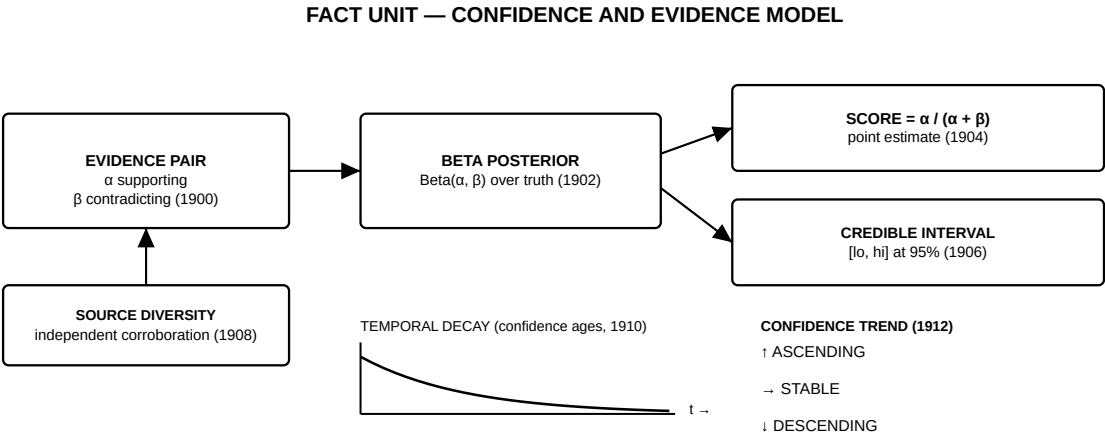

Trust is a governed evidence estimate — not a single number: it carries an interval, ages over time, and reports its direction.

FIG. 19

FIG. 19 — Fact Unit — confidence and evidence model


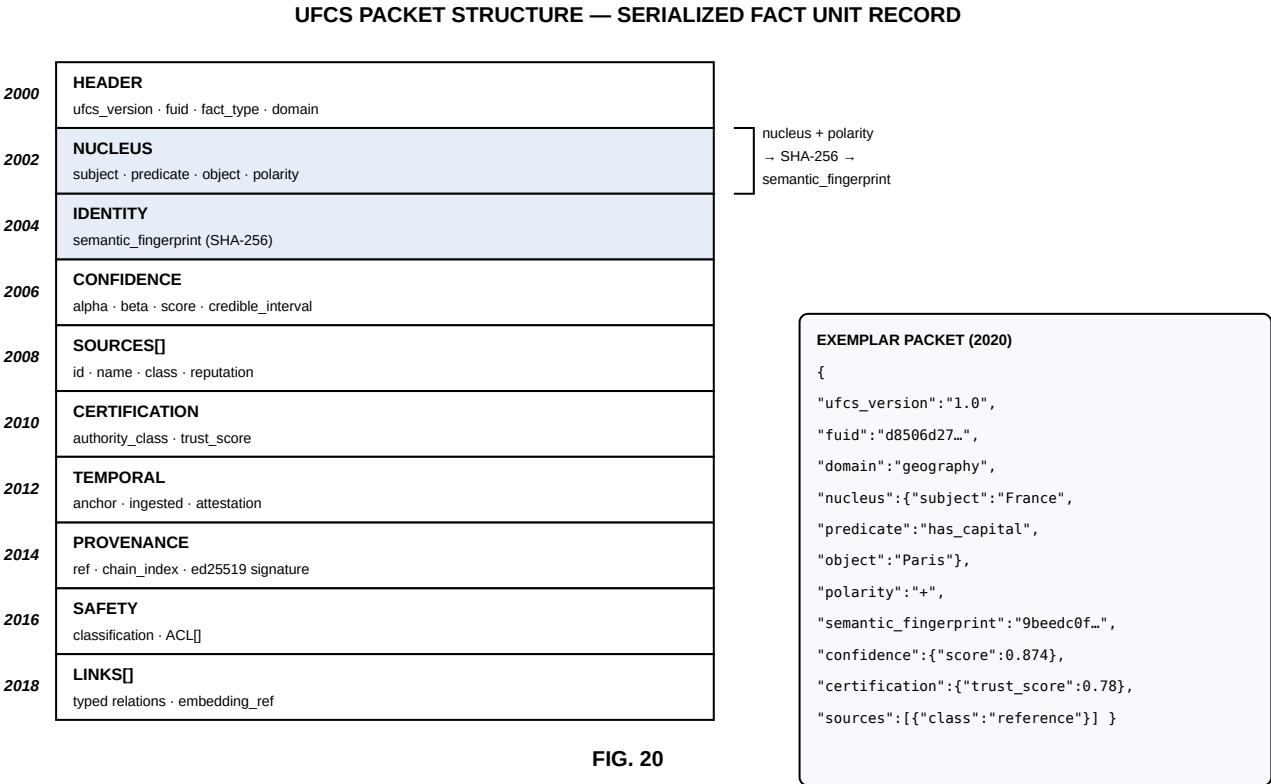


FIG. 20 — UFCS packet structure — serialized Fact Unit record

UFCS PACKET FRAMING — CONTENT-ADDRESSED BLOCK STORAGE

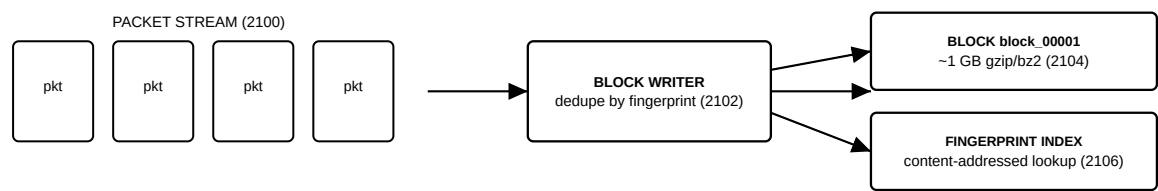

Immutable packets are appended to ~1 GB content-addressed blocks; a fingerprint index gives O(1) dedupe and retrieval.
Identical meaning ⇒ identical fingerprint ⇒ stored once; corroboration and contradiction are detected at ingest.

FIG. 21

FIG. 21 — UFCS packet framing — content-addressed block storage

FQL — QUERY ANATOMY AND WORKED EXAMPLE

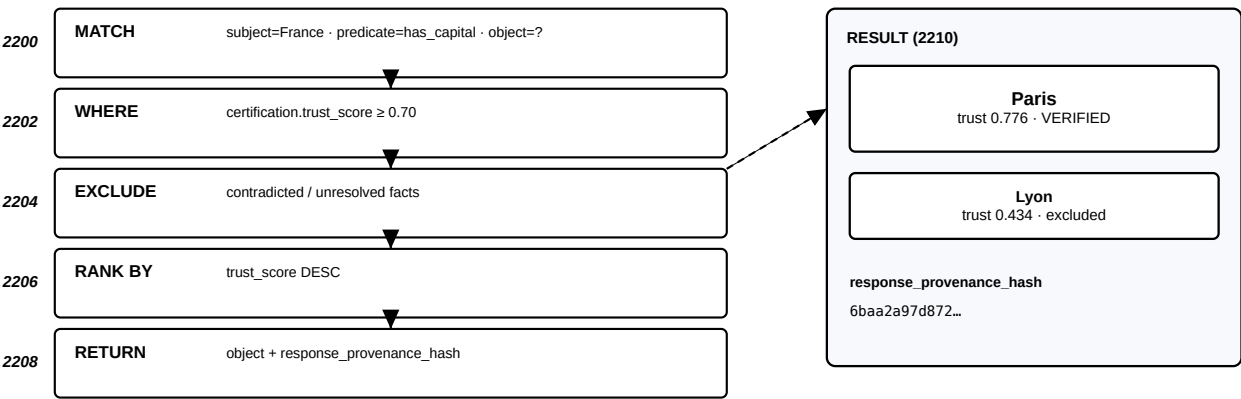


FIG. 22

Structure and trust are one query; the engine returns the highest-trust answer with a hash binding the result to its evidence.

FIG. 22 — FQL — query anatomy and worked example

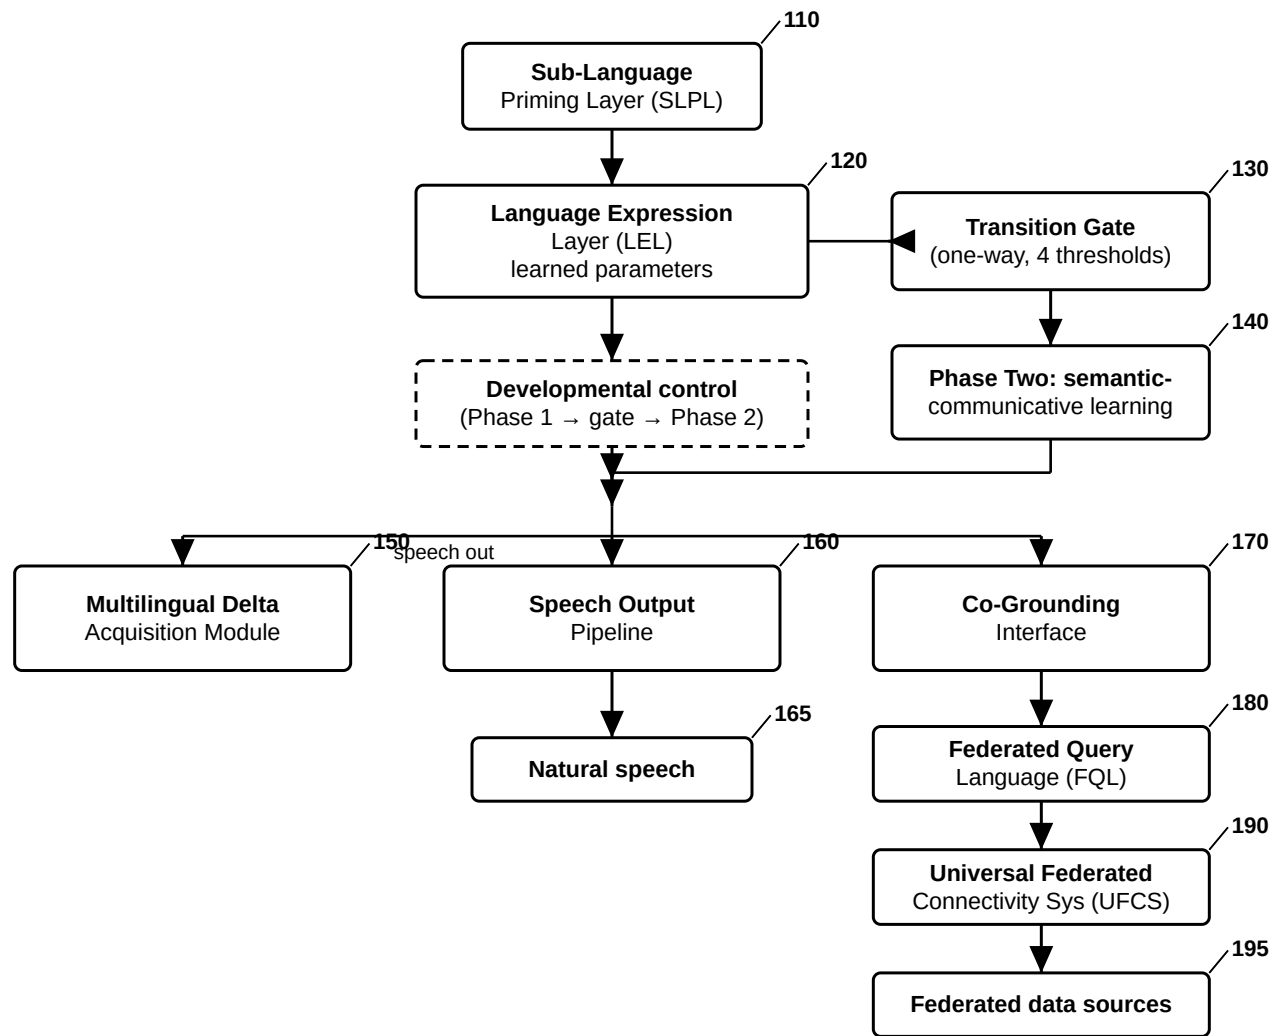


FIG. 23 — QueryBook LEL — Overall System Architecture

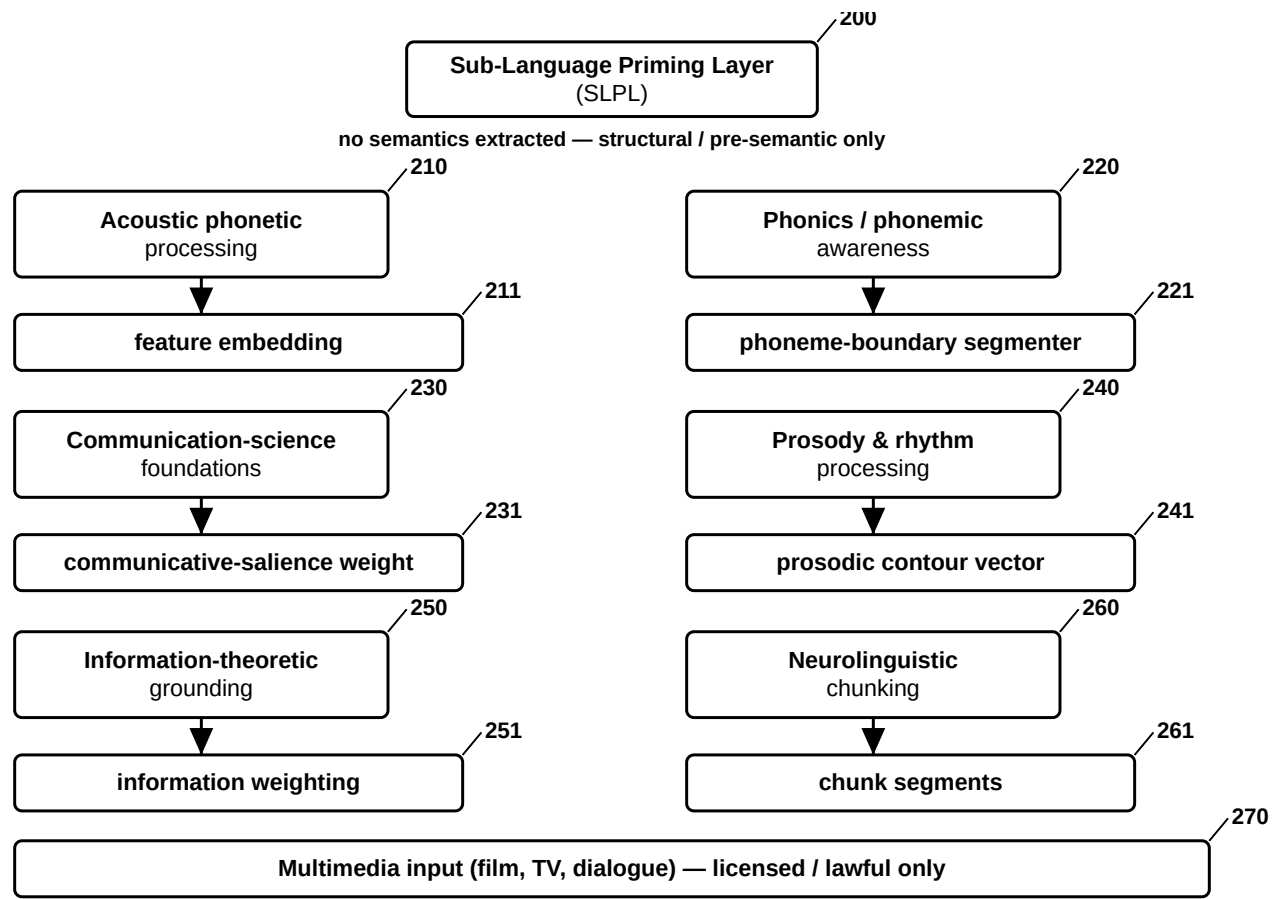


FIG. 24 — Sub-Language Priming Layer (SLPL) and Its Measurable Outputs

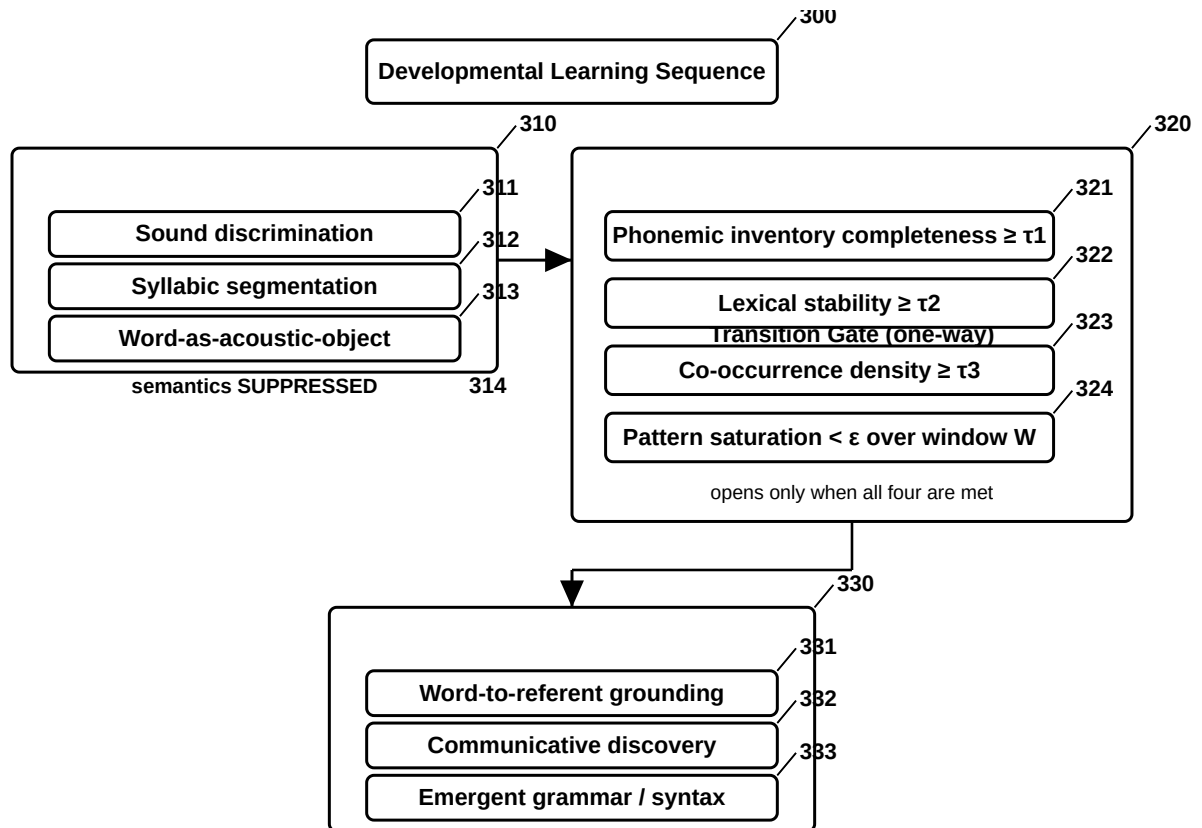


FIG. 25 — Developmental Learning Sequence and One-Way Transition Gate

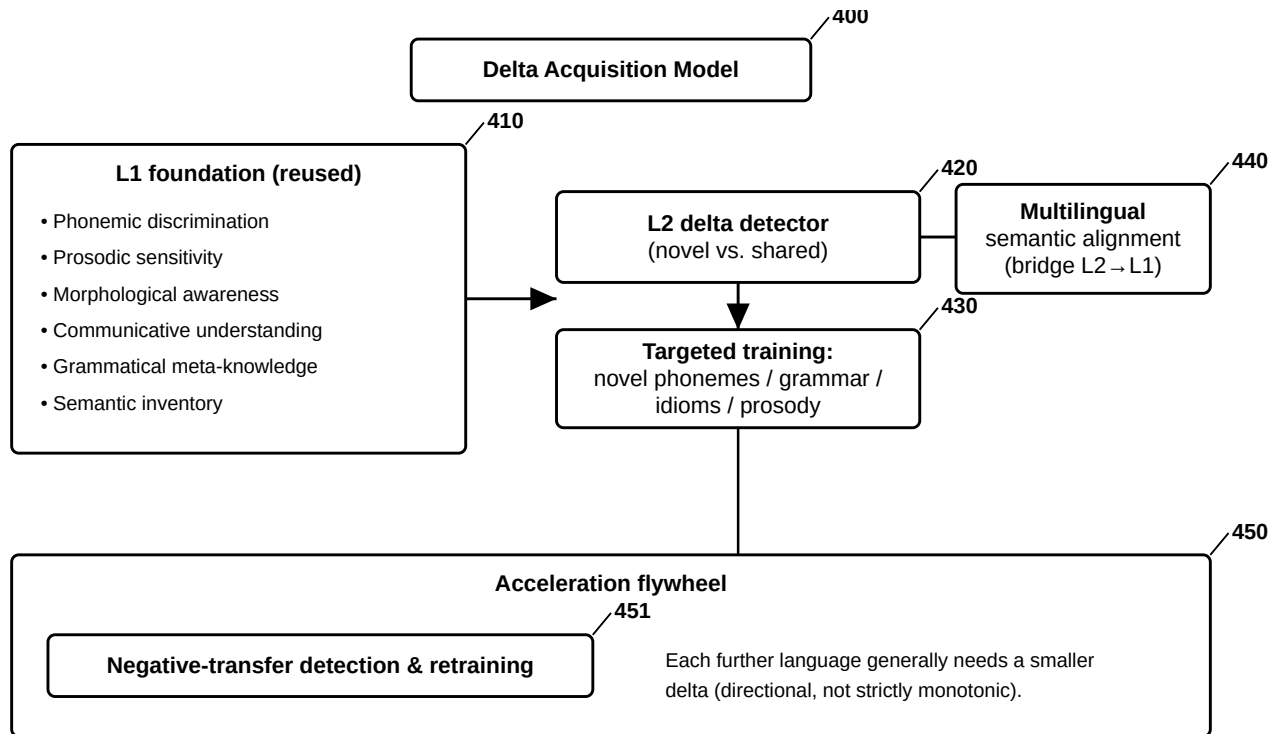


FIG. 26 — Multilingual Transfer — Delta Acquisition and Acceleration Flywheel

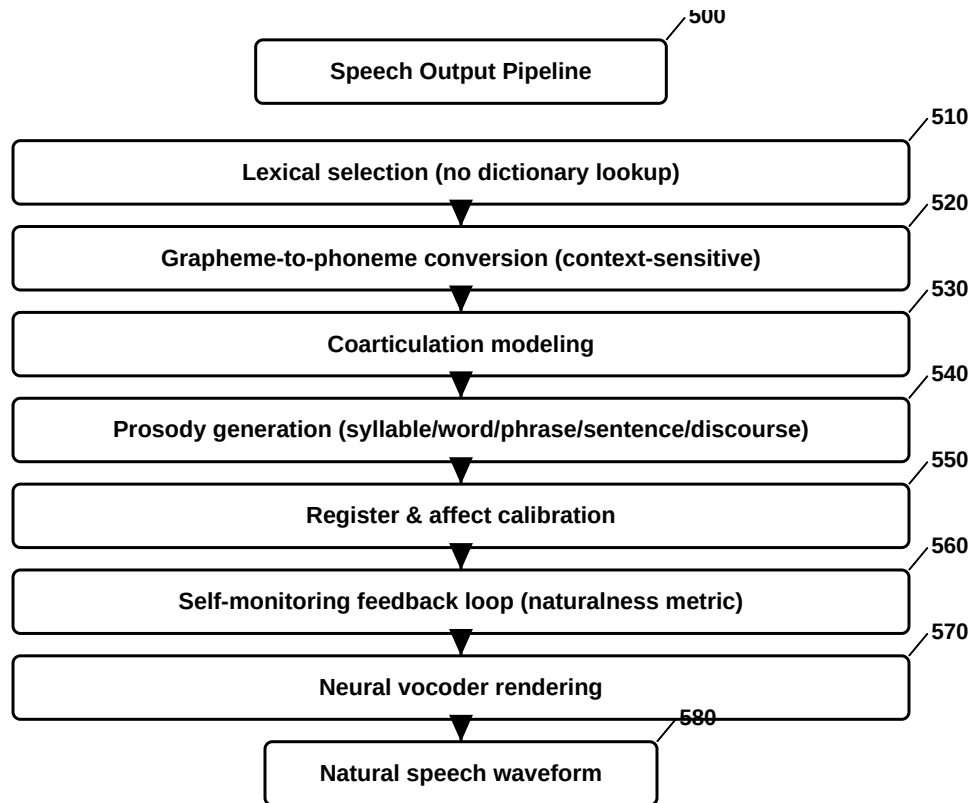


FIG. 27 — Speech Output Pipeline (Seven Learned Stages)

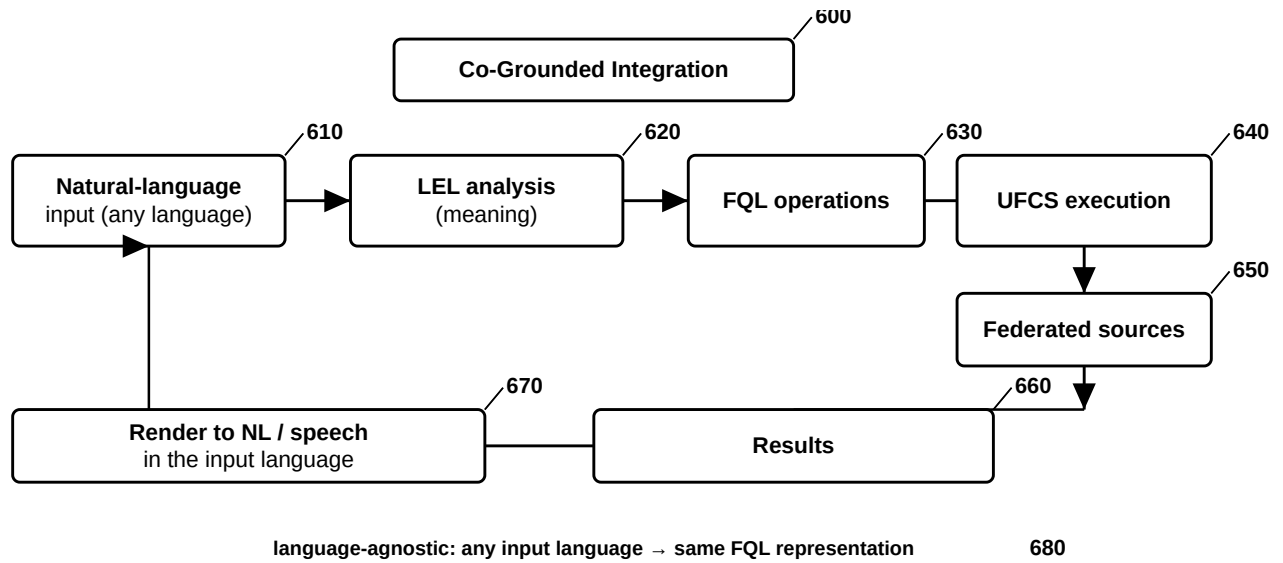


FIG. 28 — Co-Grounded Integration with FQL and UFCS

FIG. 29

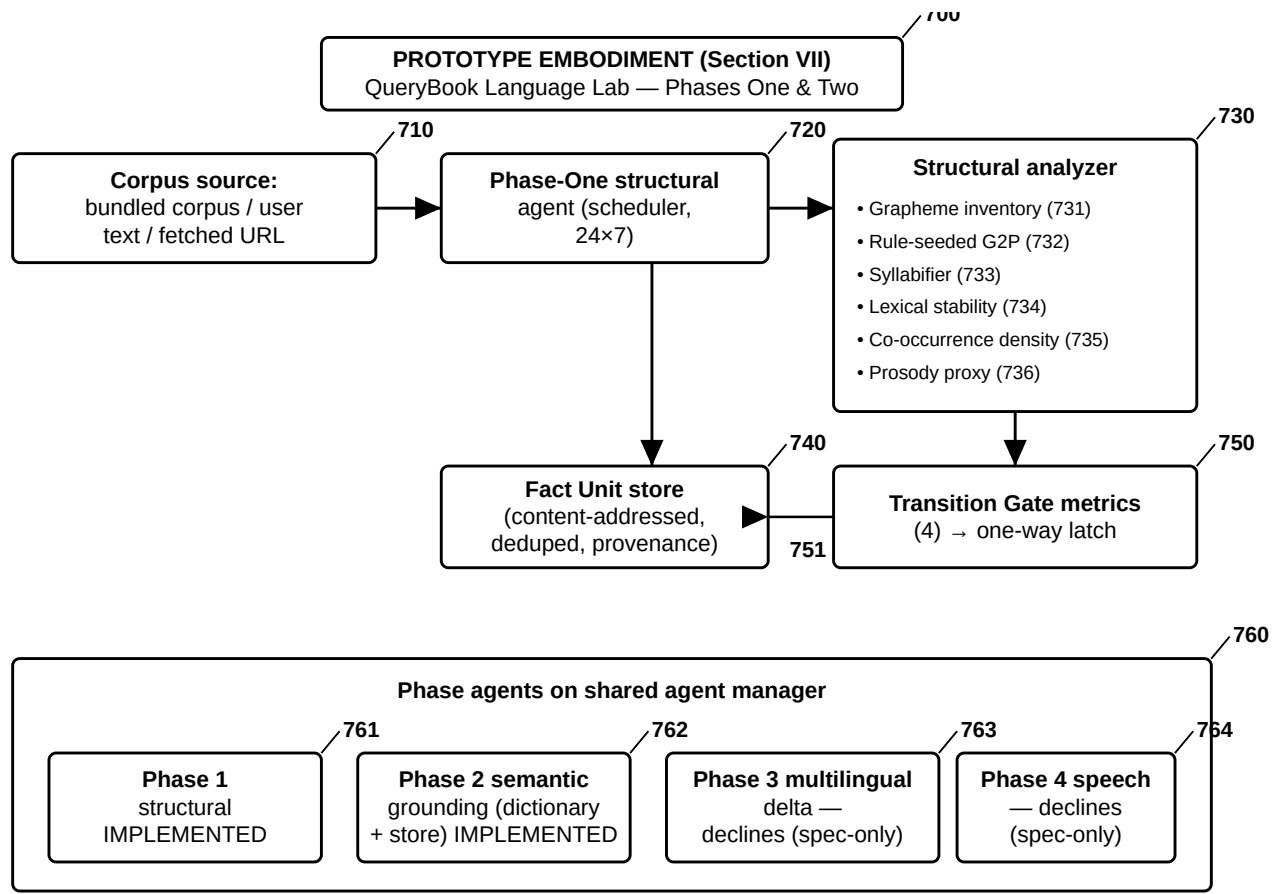


FIG. 29 — Reduced-to-Practice Embodiment — Language Lab Phases One and Two Prototype

FIG. 30

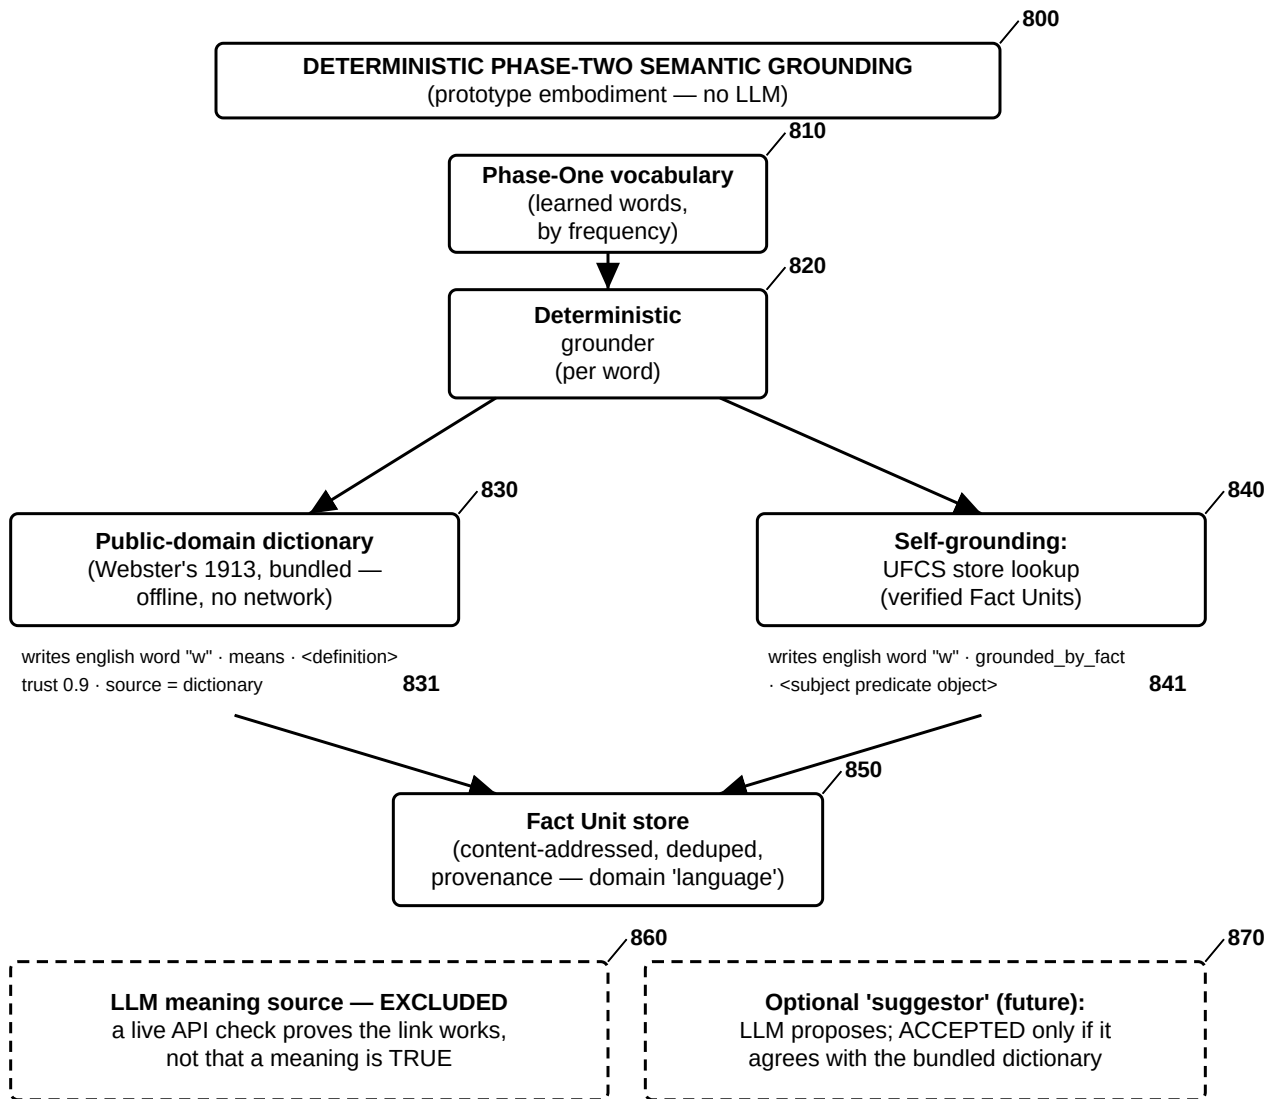


FIG. 30 — Deterministic Phase-Two Semantic Grounding — Dictionary and Store (No LLM)

FIG. 31

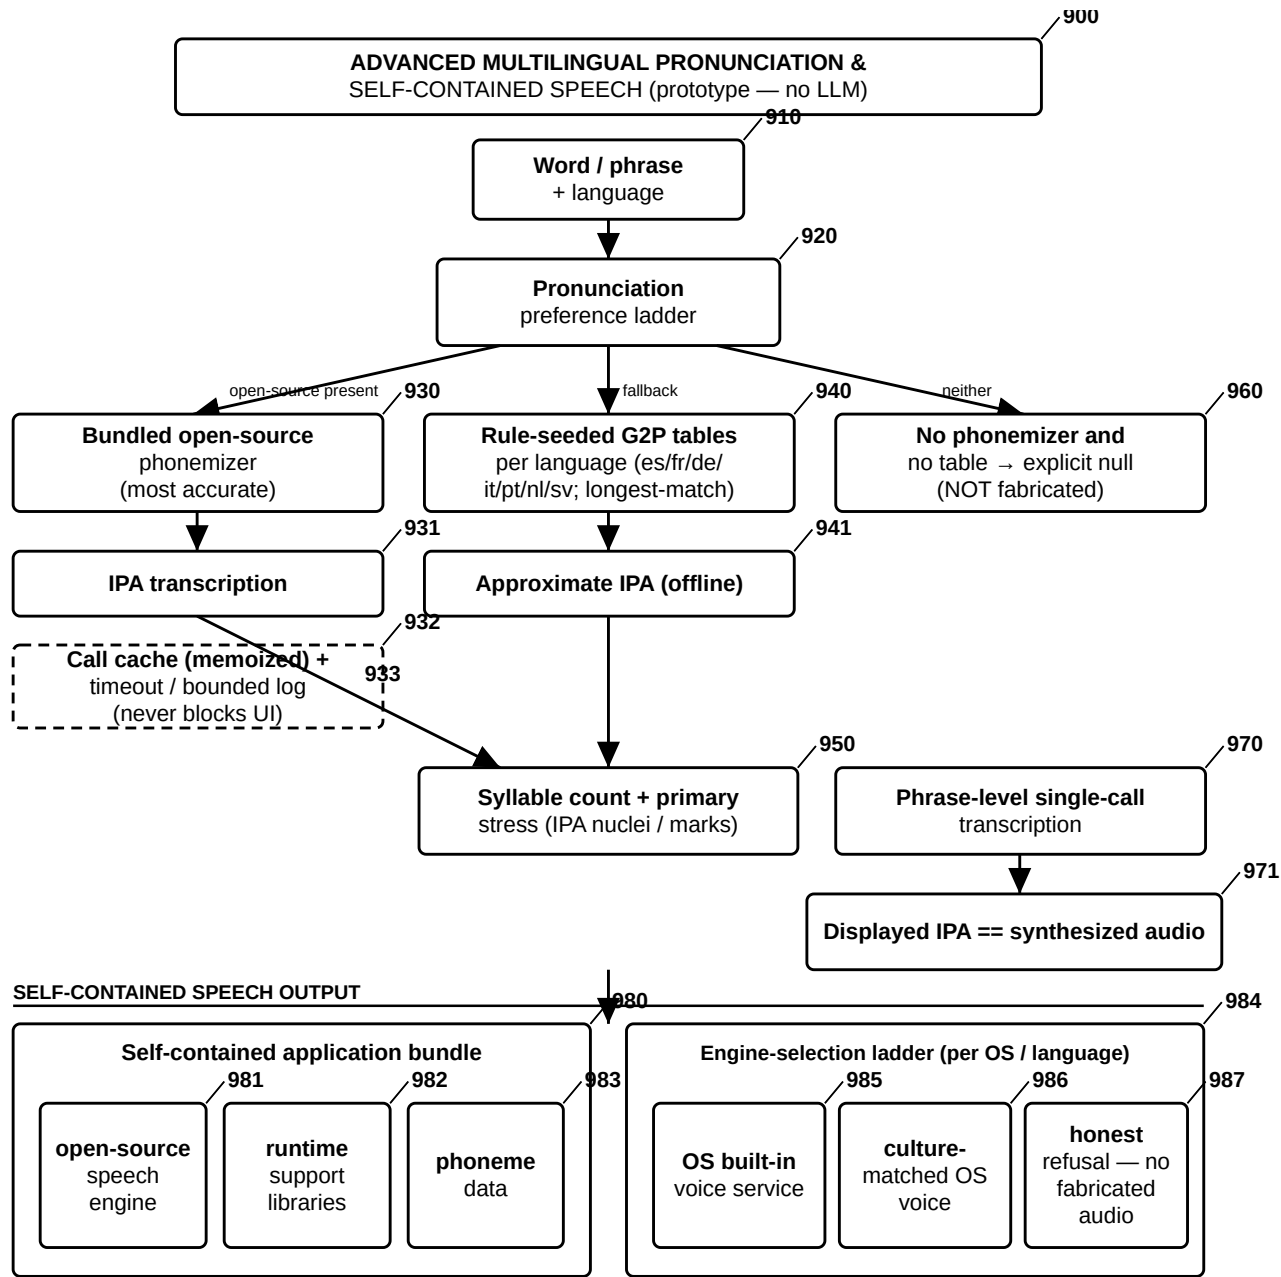


FIG. 31 — Advanced Multilingual Pronunciation and Self-Contained Speech (No LLM)

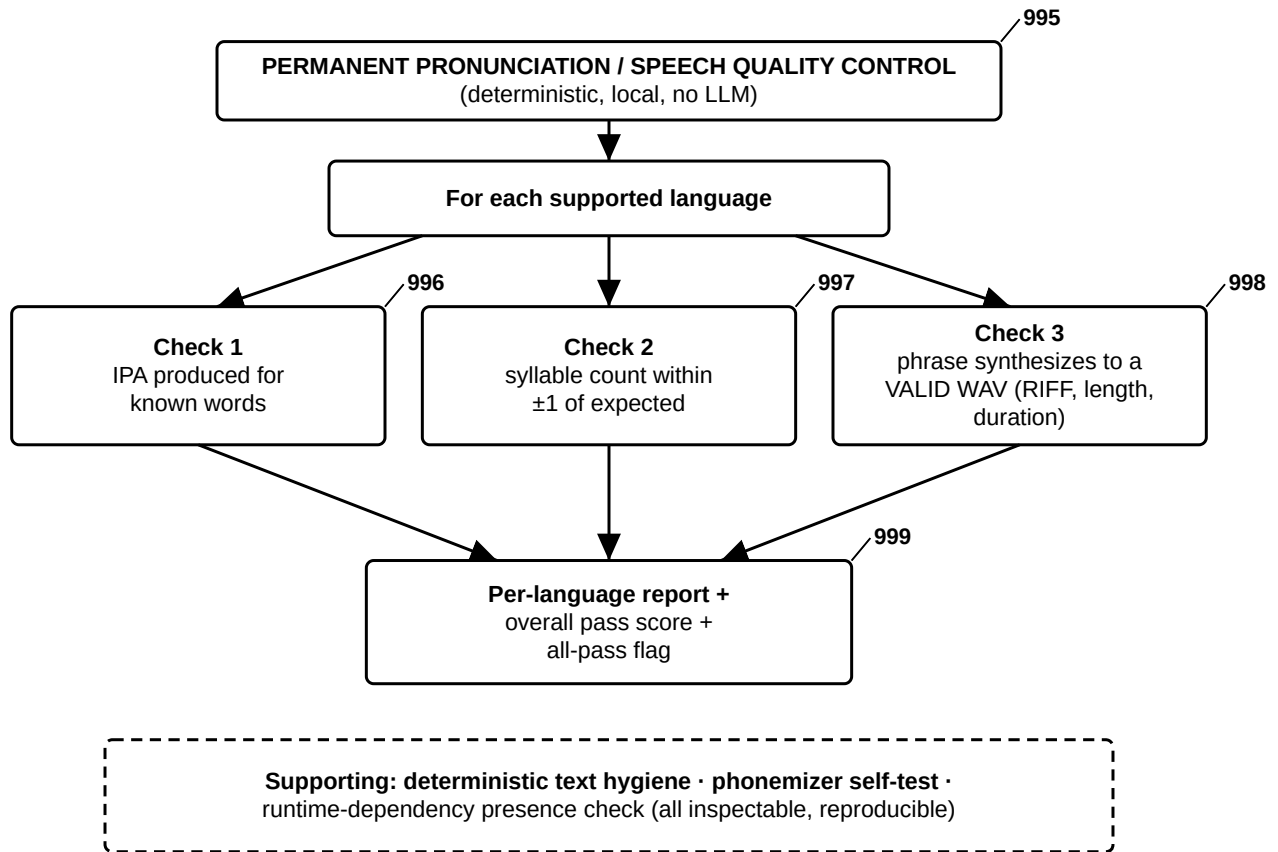


FIG. 32 — Permanent Pronunciation and Speech Quality-Control Battery (No LLM)

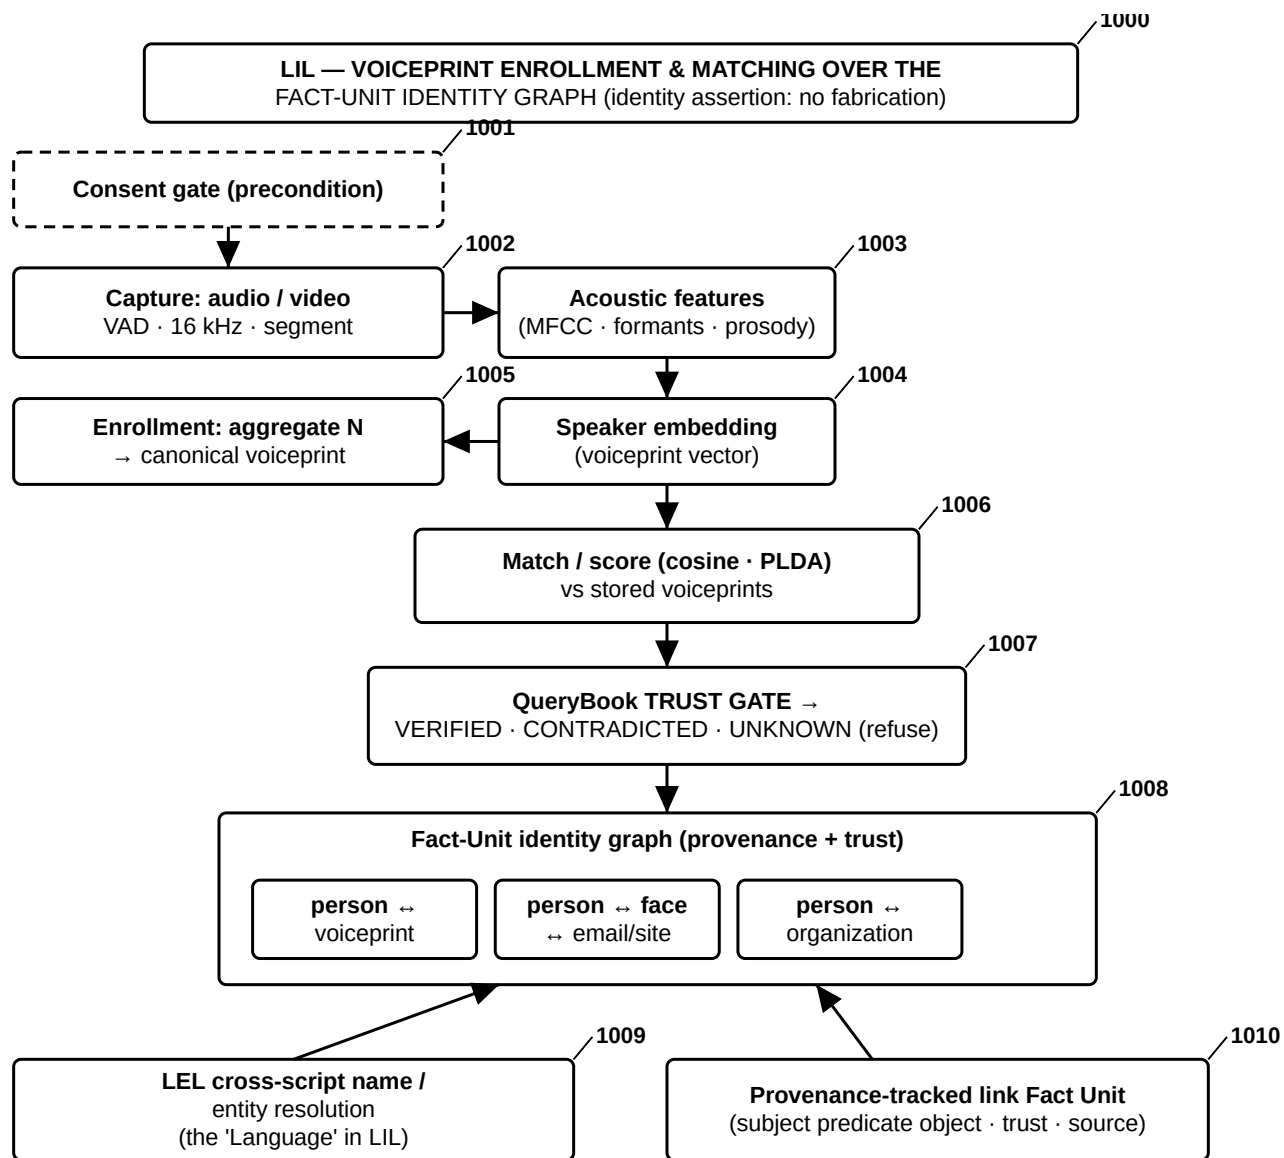


FIG. 33 — LIL — Voiceprint Enrollment and Matching over the Fact-Unit Identity Graph

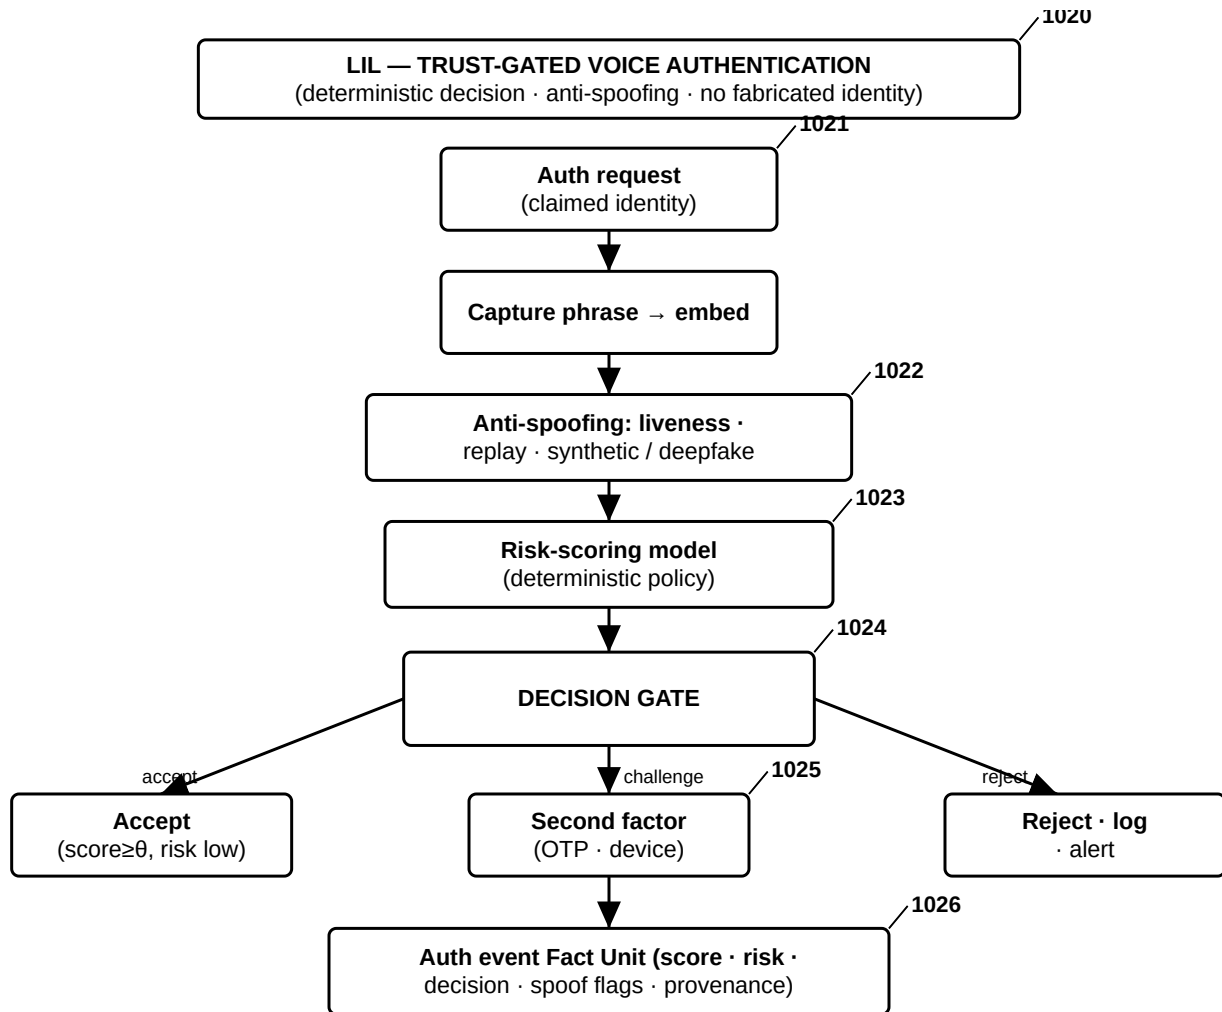


FIG. 34 — LIL — Trust-Gated Voice Authentication with Anti-Spoofing

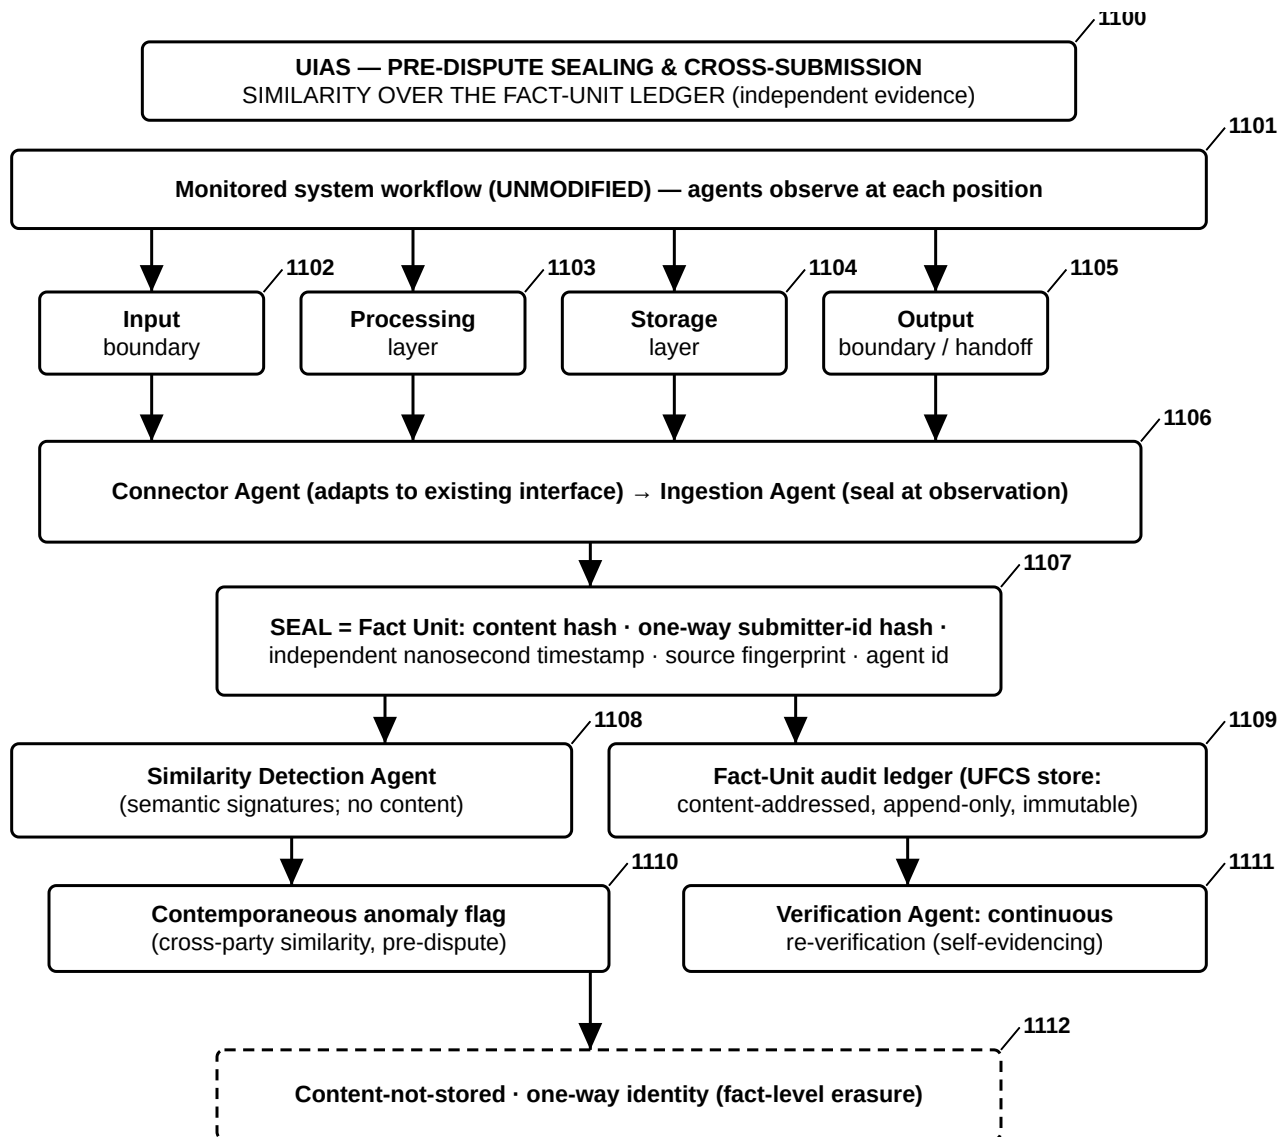


FIG. 35 — UIAS — Pre-Dispute Sealing and Cross-Submission Similarity over the Fact-Unit Ledger

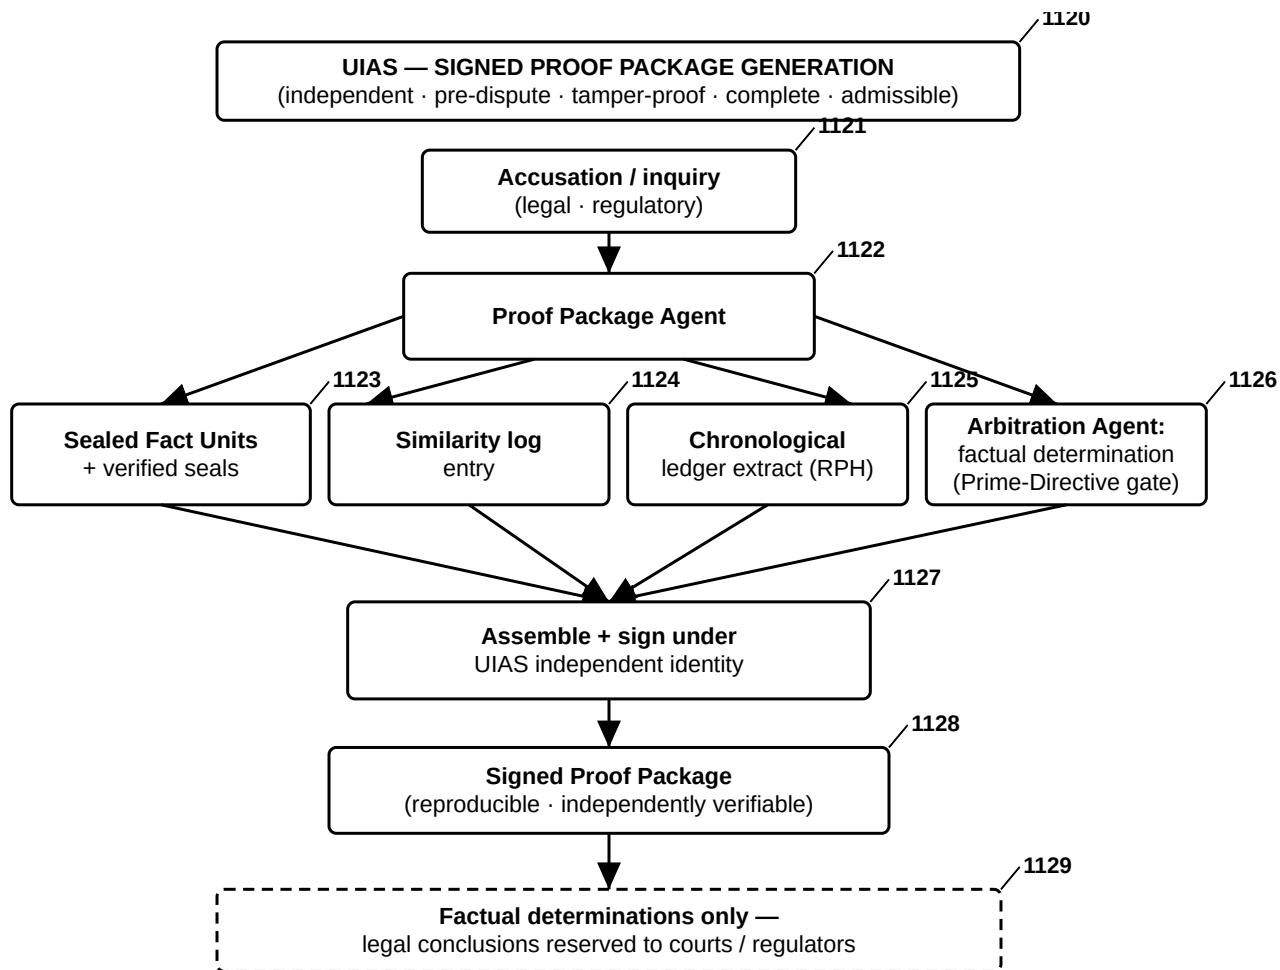


FIG. 36 — UIAS — Signed Proof Package Generation

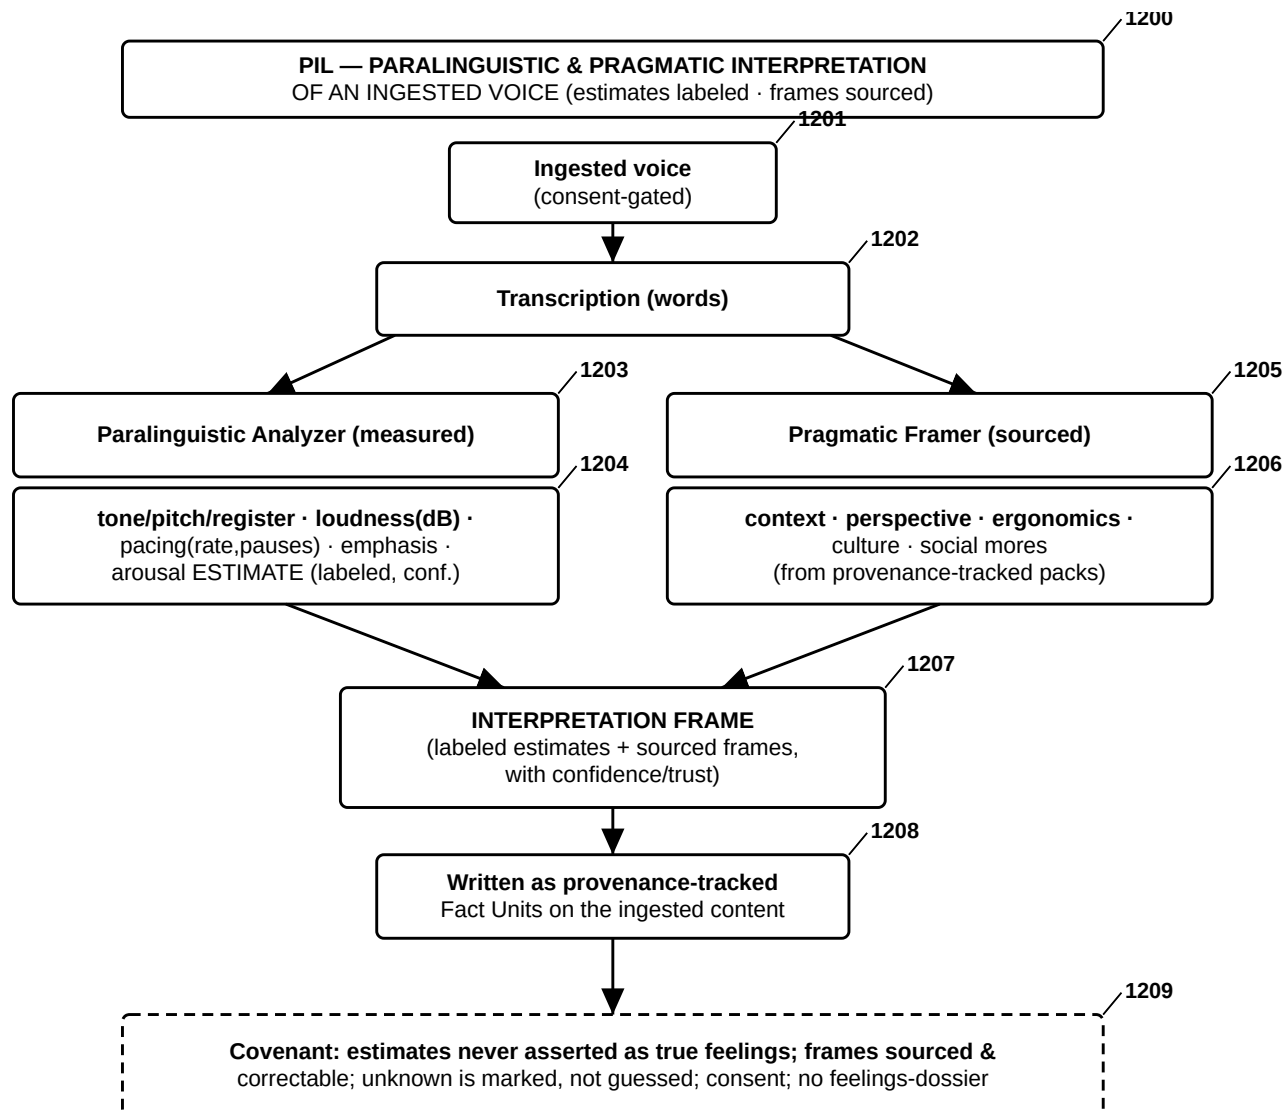


FIG. 37 — PIL — Paralinguistic and Pragmatic Interpretation of an Ingested Voice

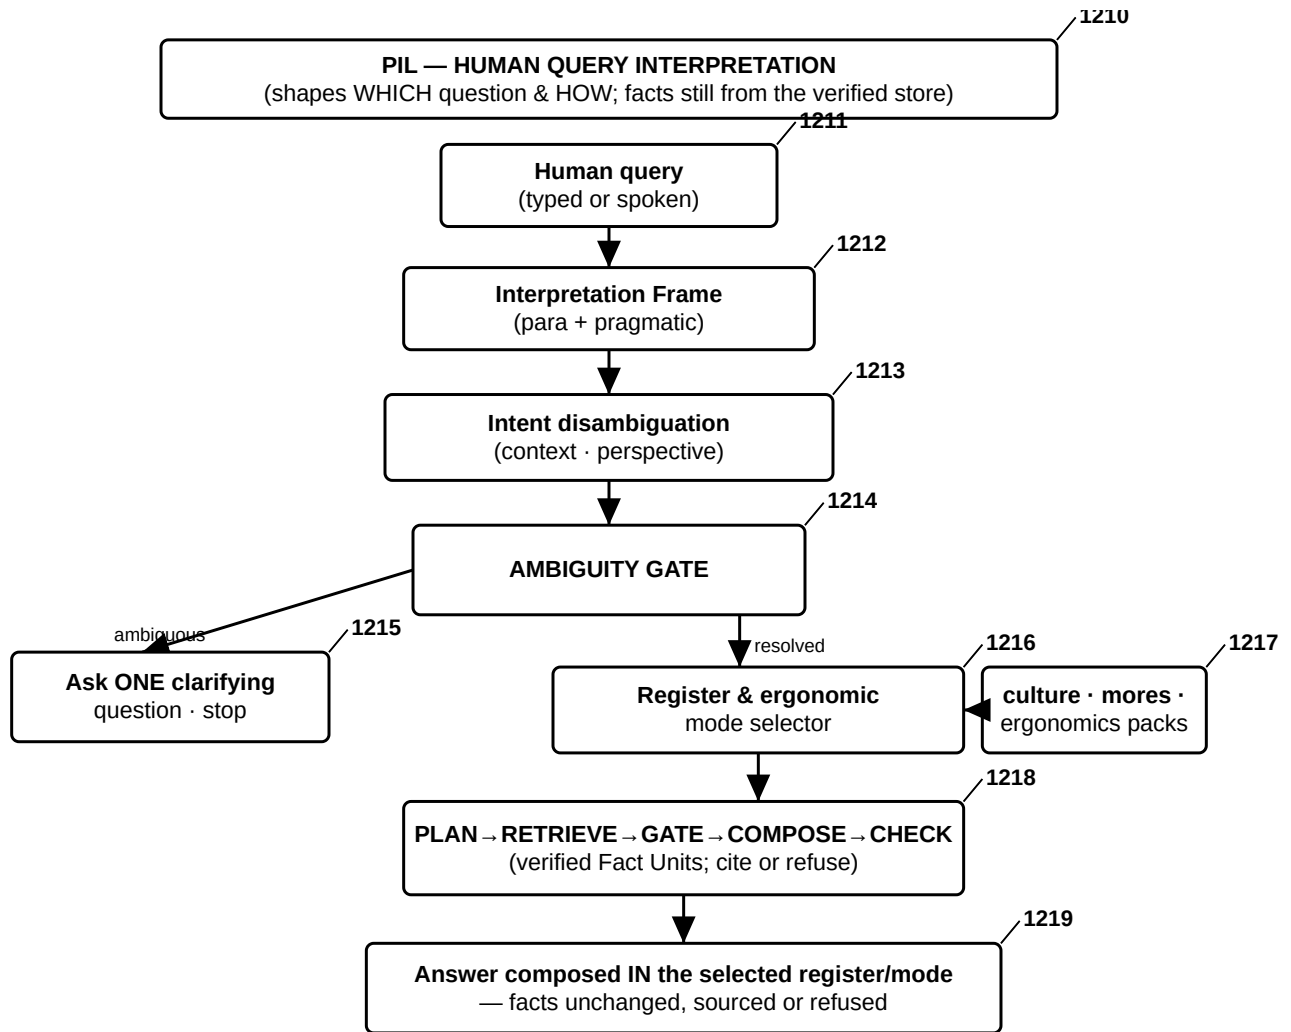


FIG. 38 — PIL — Human Query Interpretation and Covenant-Bound Answering

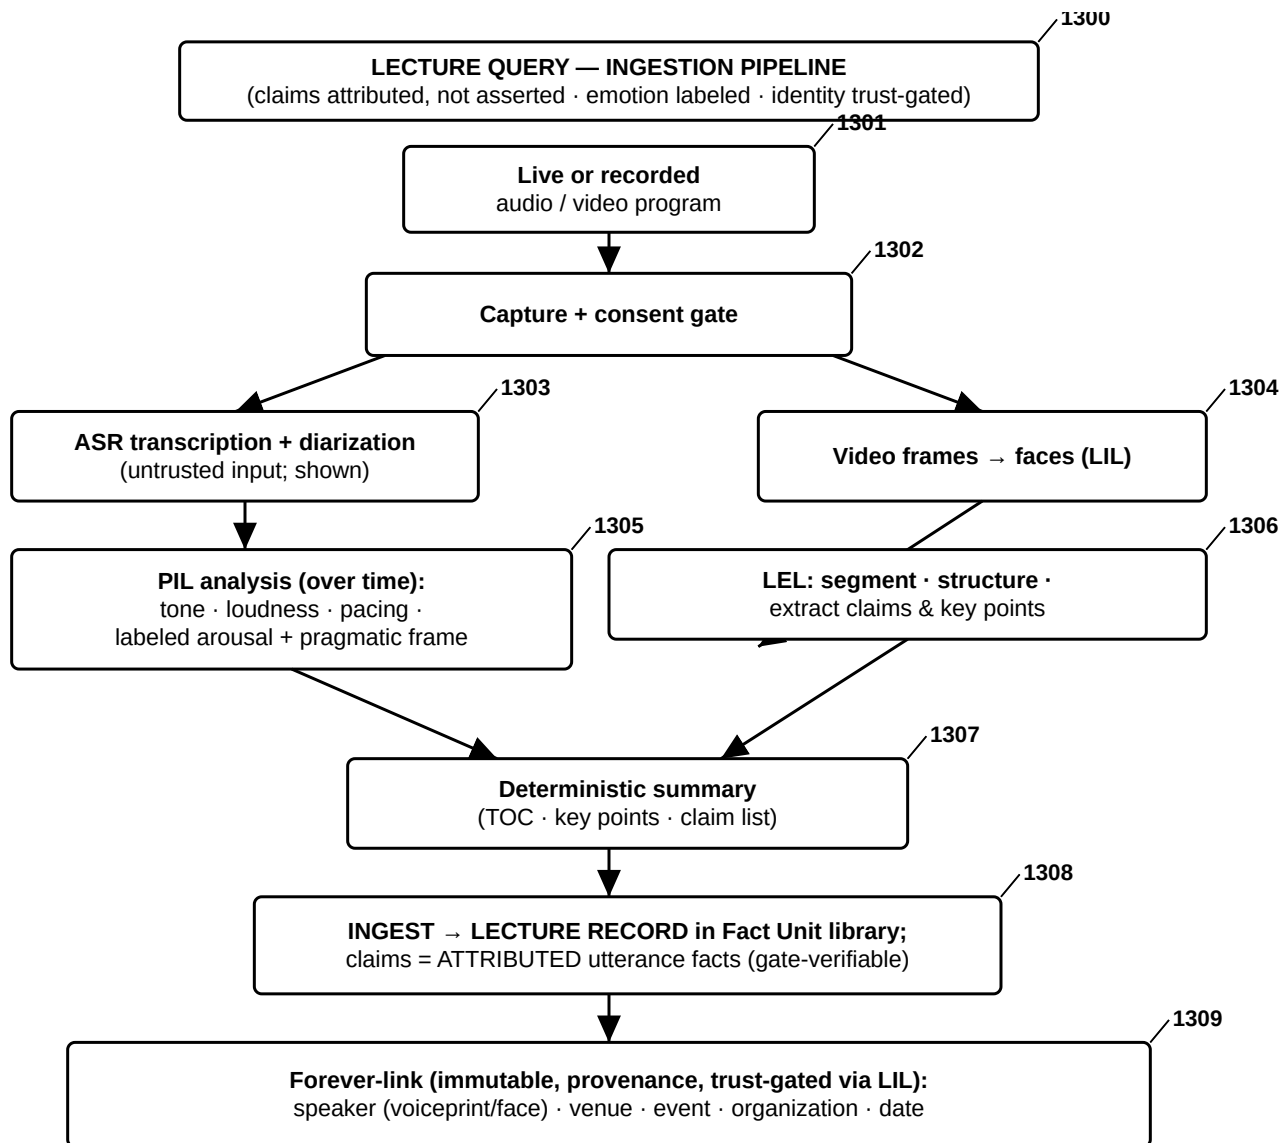


FIG. 39 — Lecture Query — Ingestion Pipeline

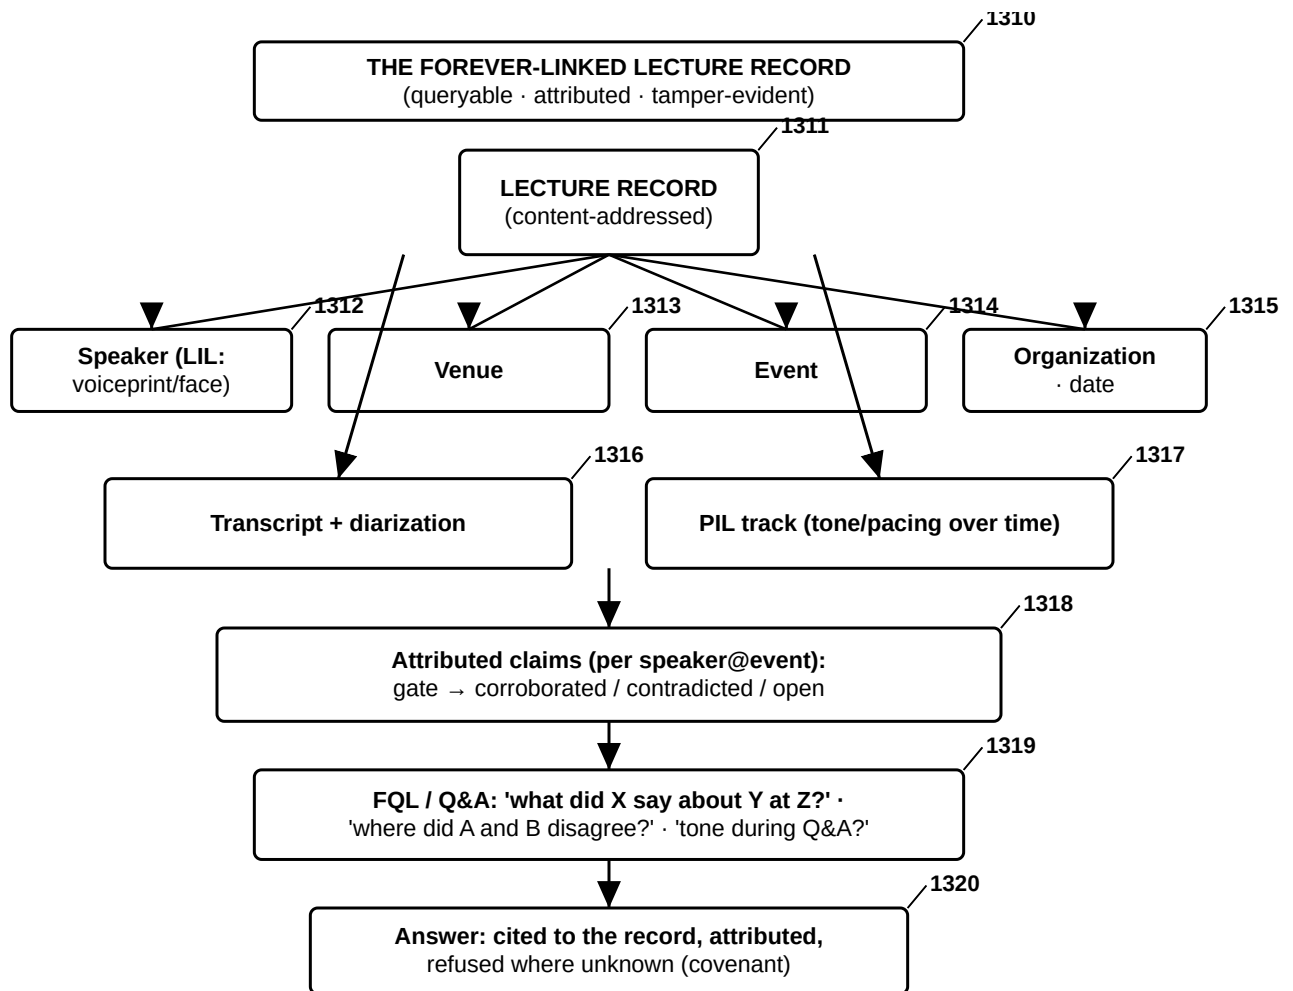


FIG. 40 — Lecture Query — The Forever-Linked Lecture Record and Its Querying

FIG. 41

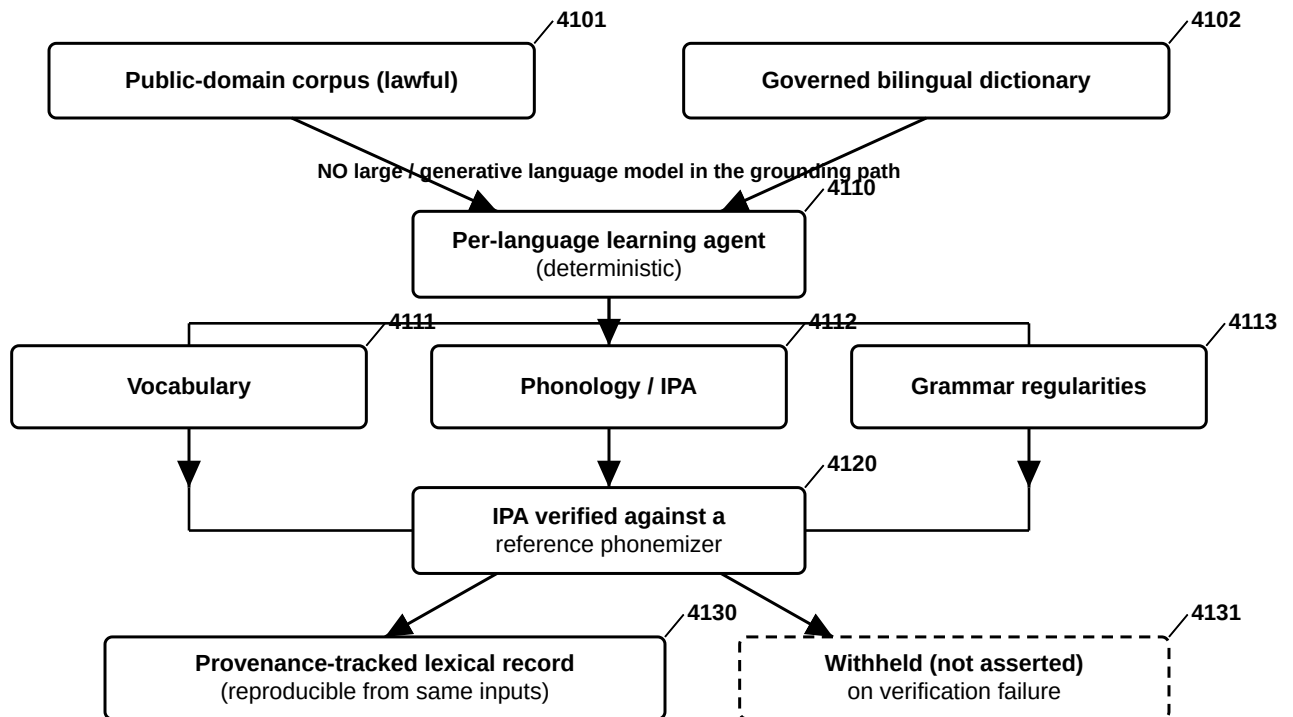


FIG. 41 — Deterministic Multilingual Acquisition Without a Generative Model

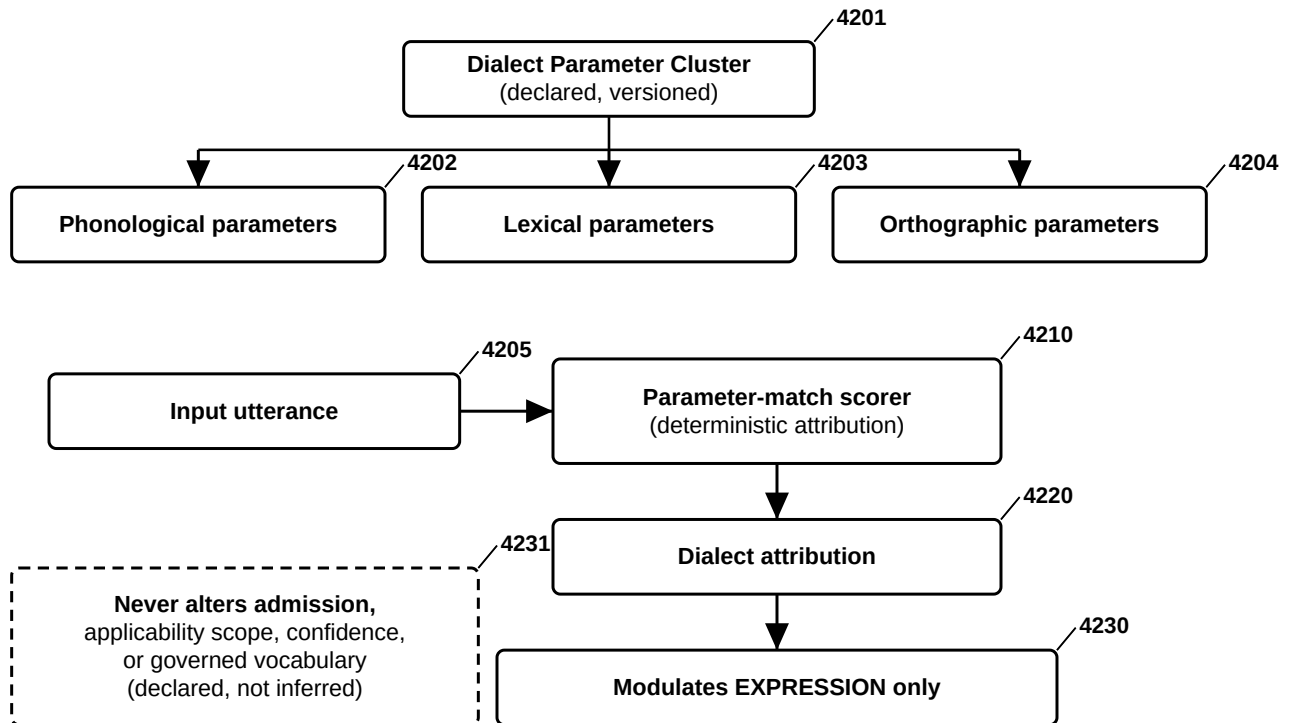


FIG. 42 — Dialect Parameter Clusters (DPC) — Declared, Expression-Only Modulation

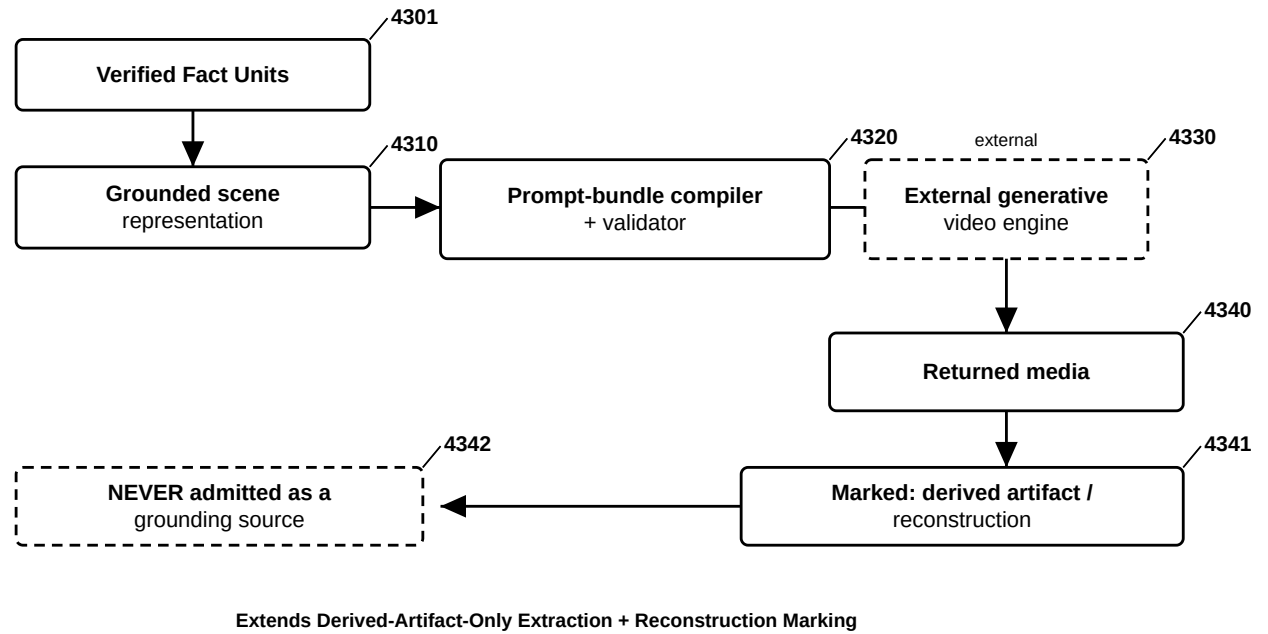


FIG. 43 — Grounded Scene Compilation to an External Generative Media Engine

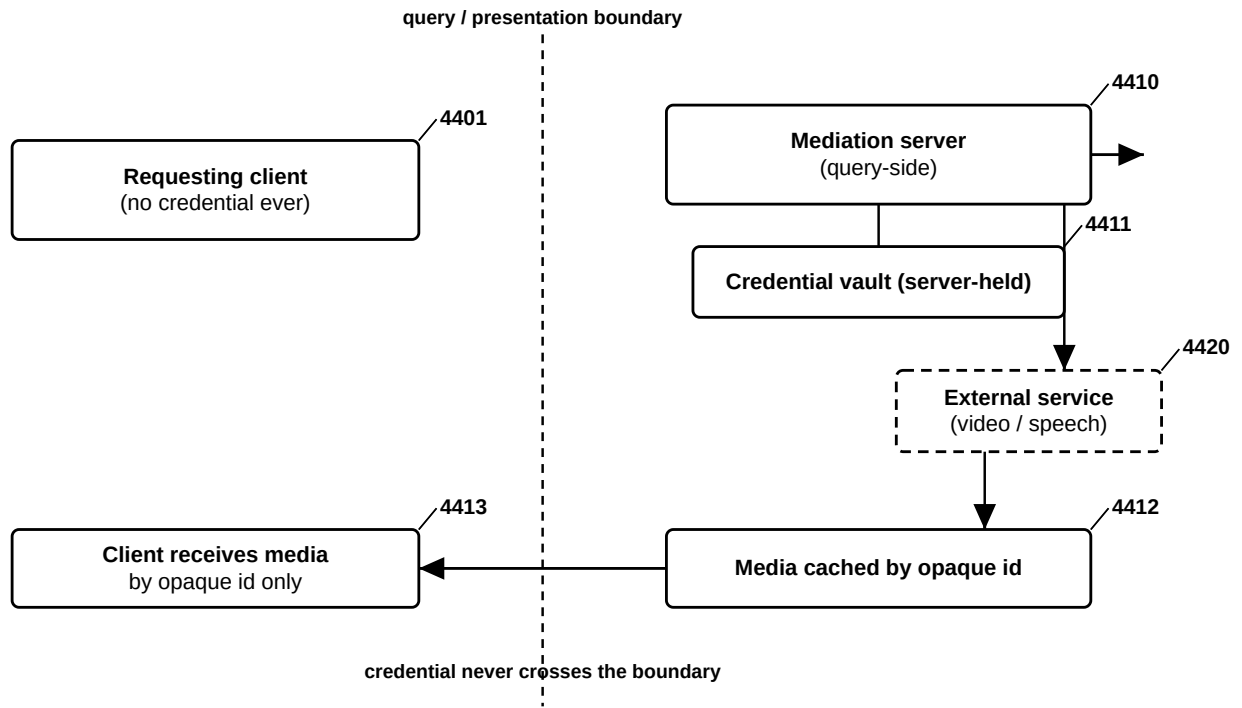


FIG. 44 — Key-Safe External-Service Mediation

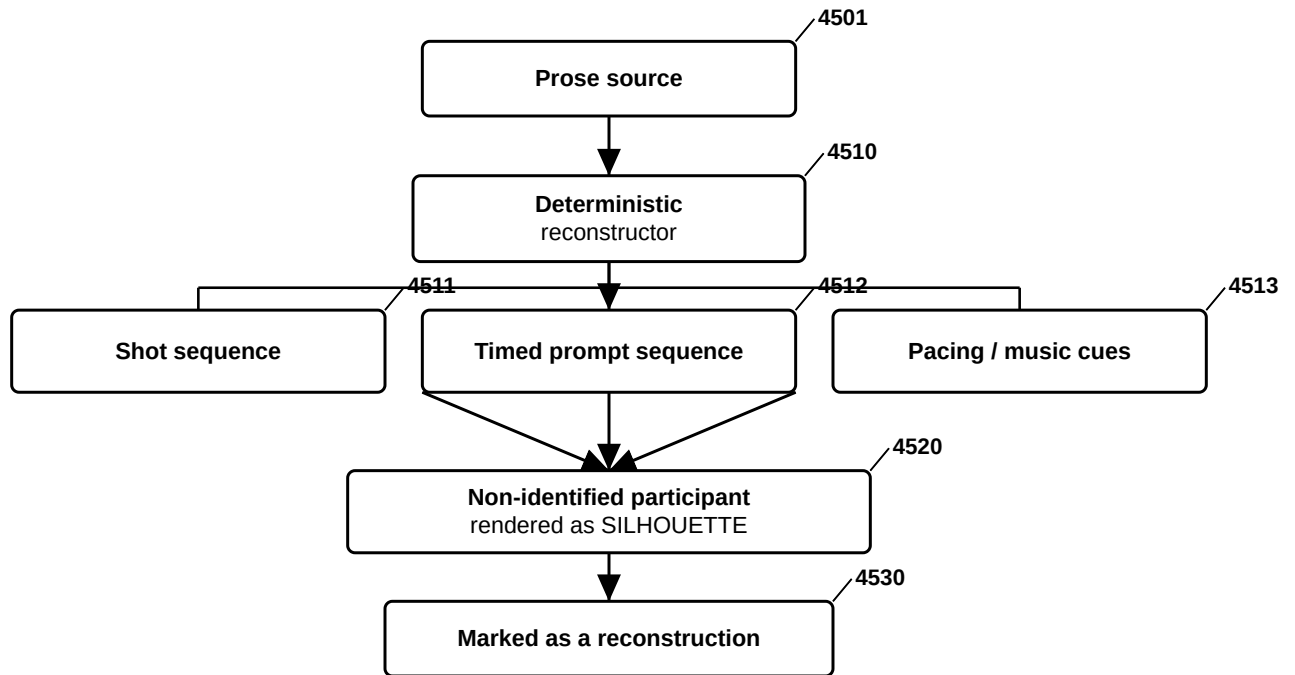


FIG. 45 — Scene Reconstruction From Prose — Bounded, Silhouette-Protected

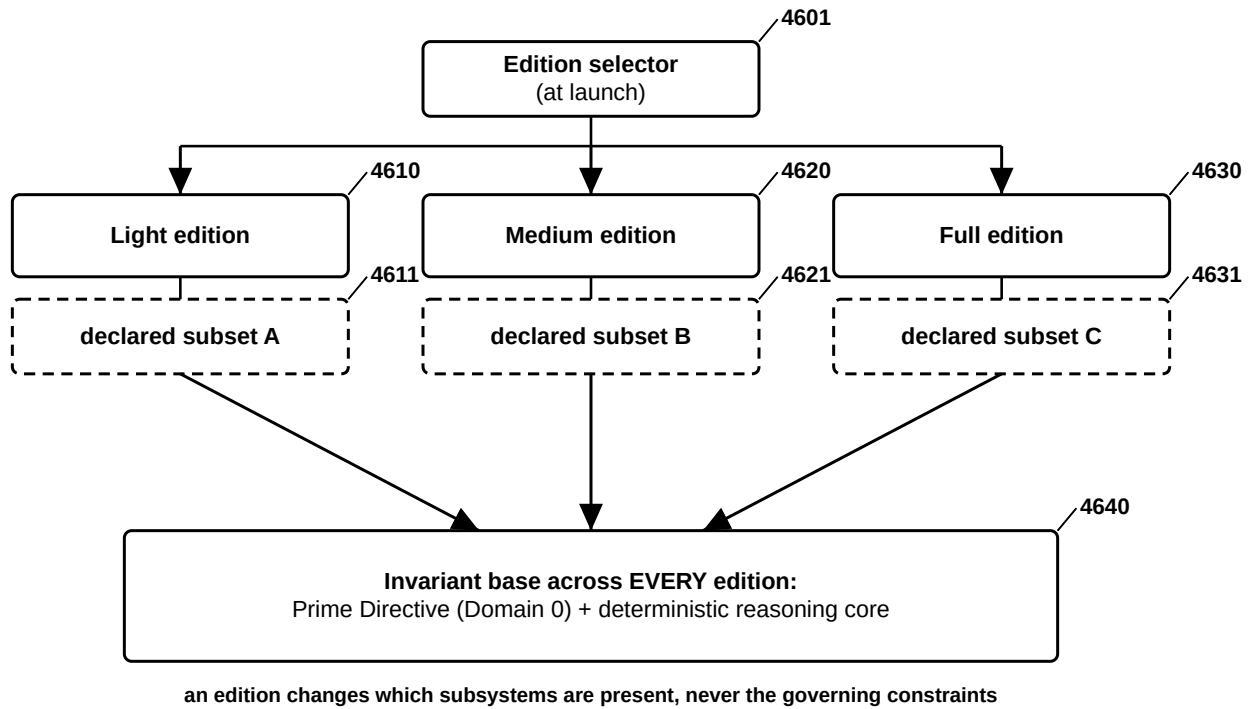


FIG. 46 — Modular Edition Packaging — Nested Capability Editions

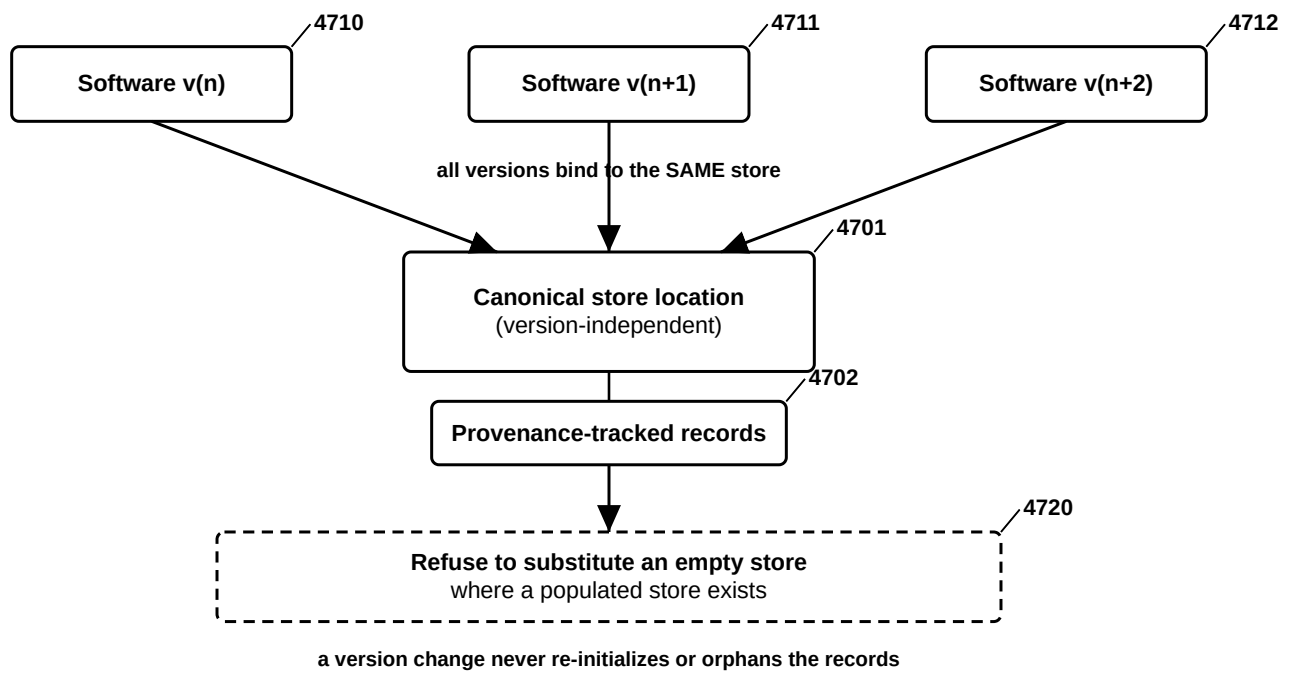


FIG. 47 — Version-Independent, Provenance-Continuous Store

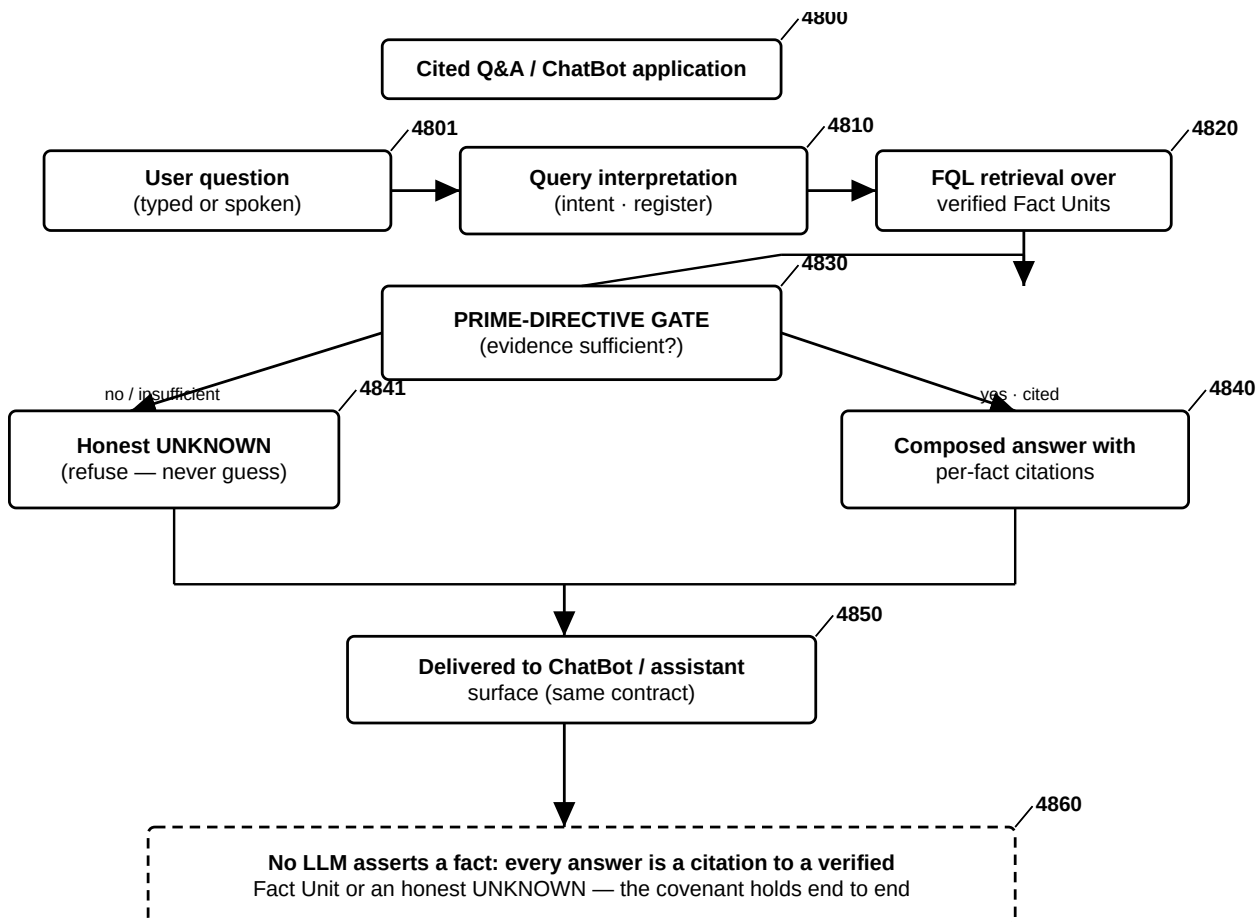


FIG. 48 — Cited Q&A / ChatBot Application — Citation-or-UNKNOWN End to End

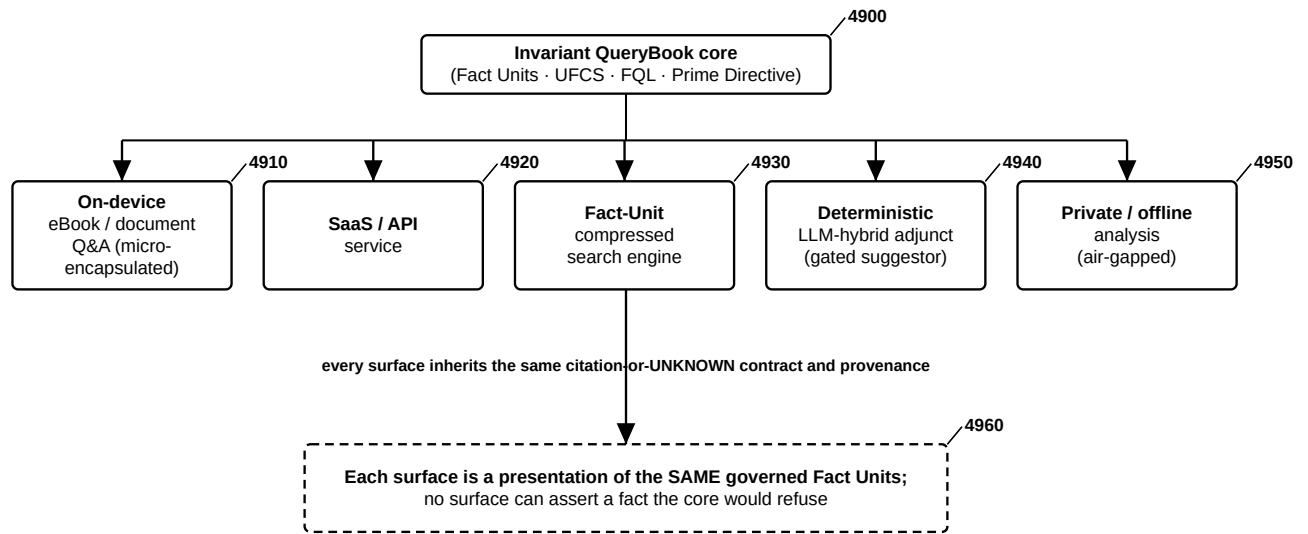


FIG. 49 — Application and Deployment Surfaces over the Invariant Core

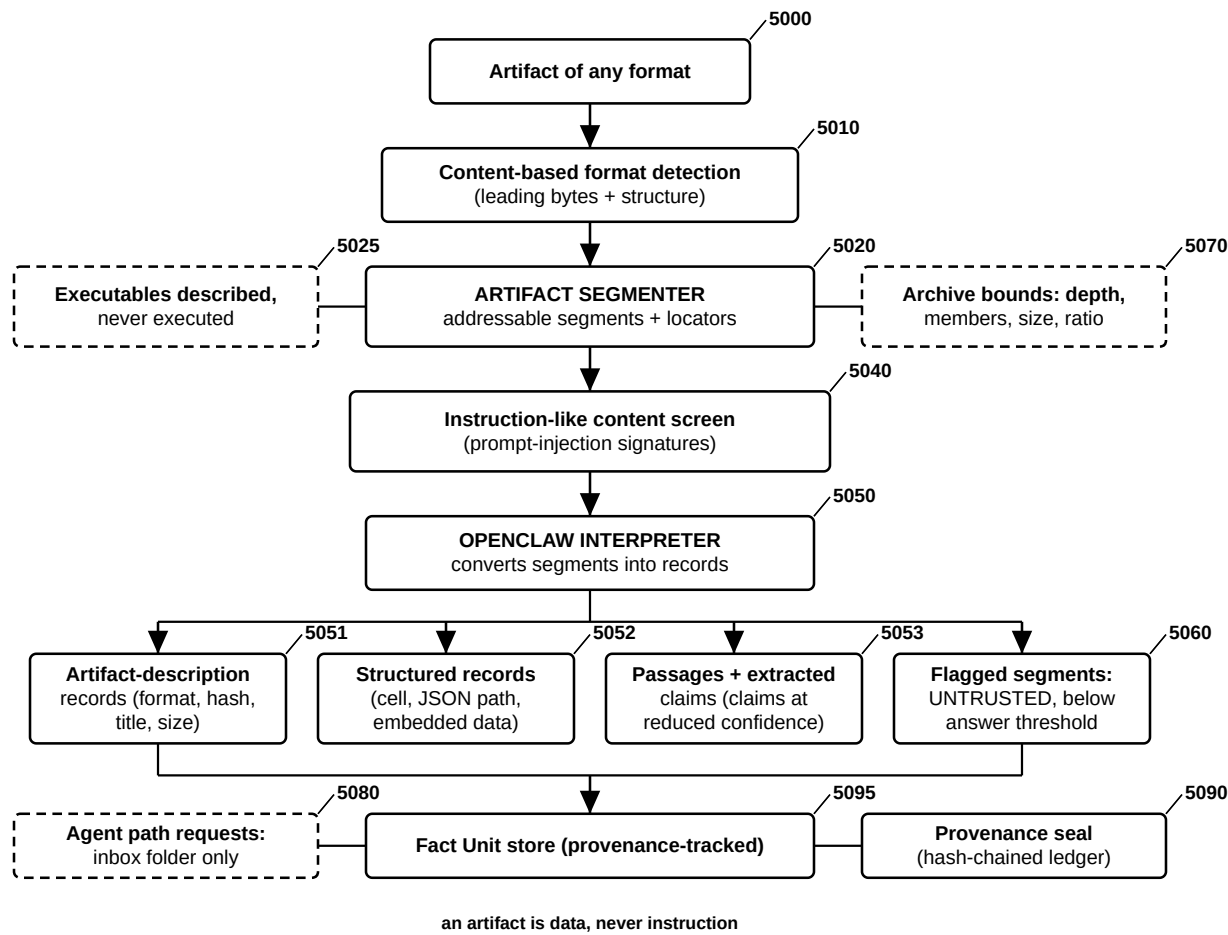


FIG. 50 — Open Claw Ingestion — Artifact Segmenter and OpenClaw Interpreter

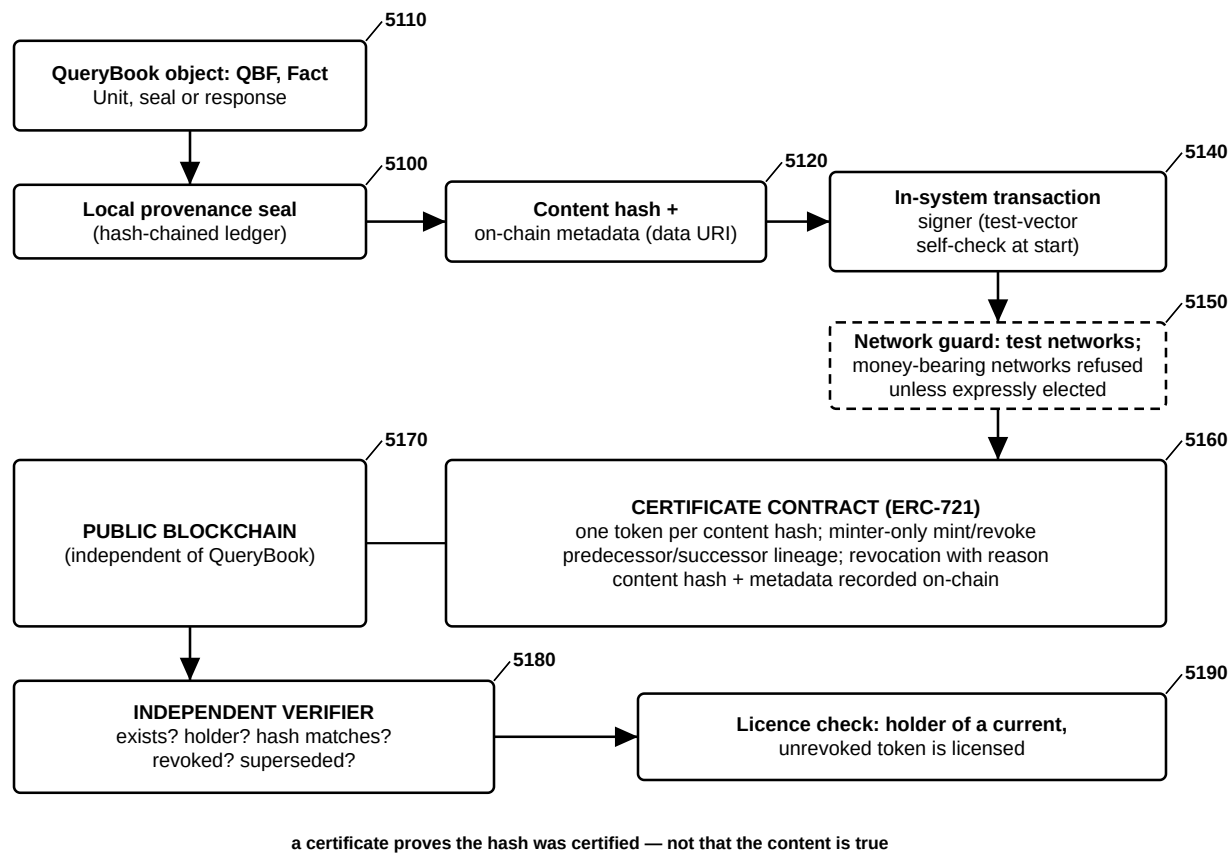


FIG. 51 — On-Chain Certification — Provenance NFTs, Lineage, Revocation and Independent Verification

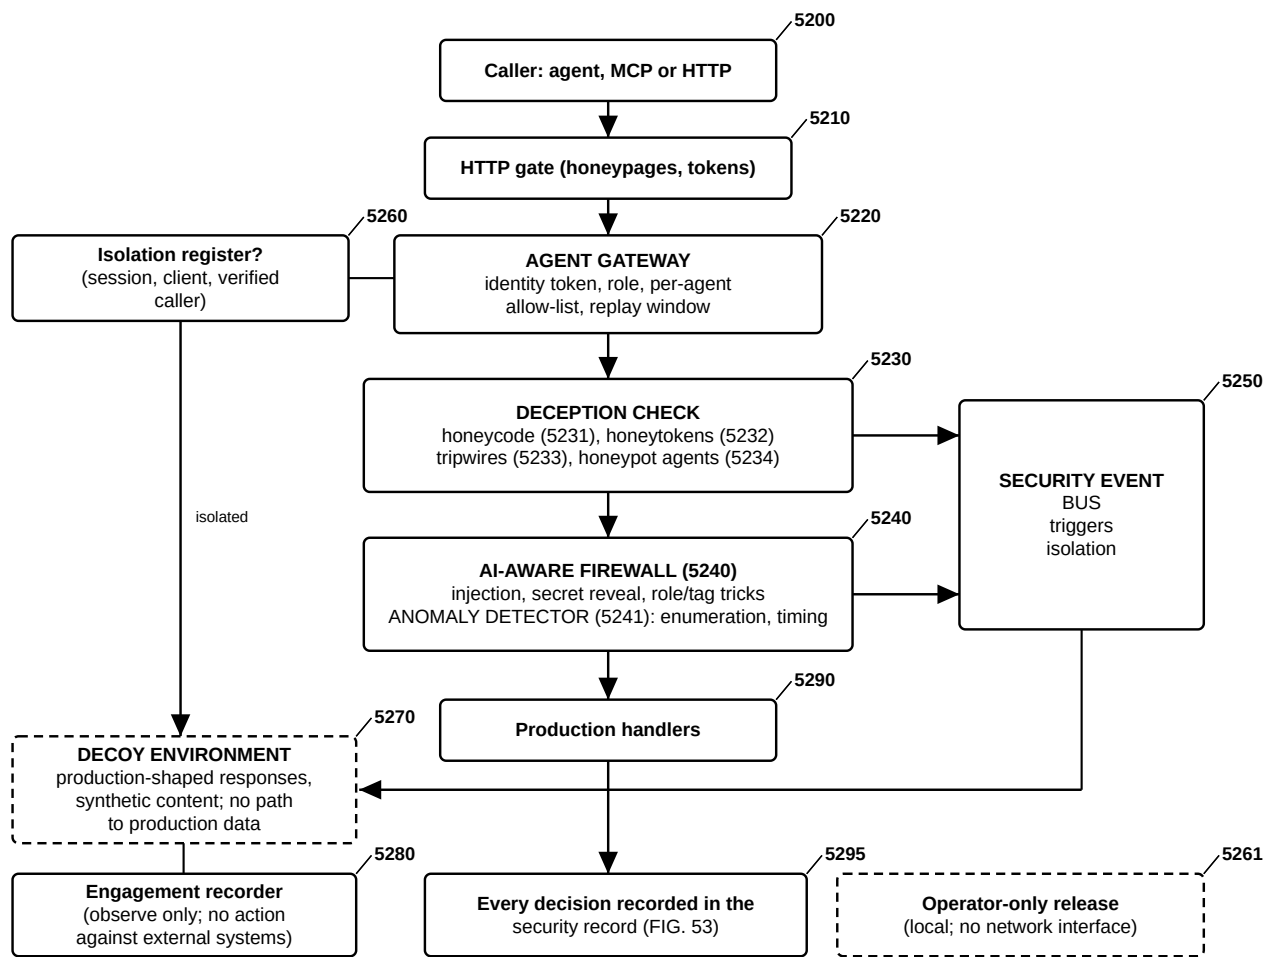


FIG. 52 — Agent Protection and Deception Layer — Gateway, Traps, Firewall, Containment and Decoy

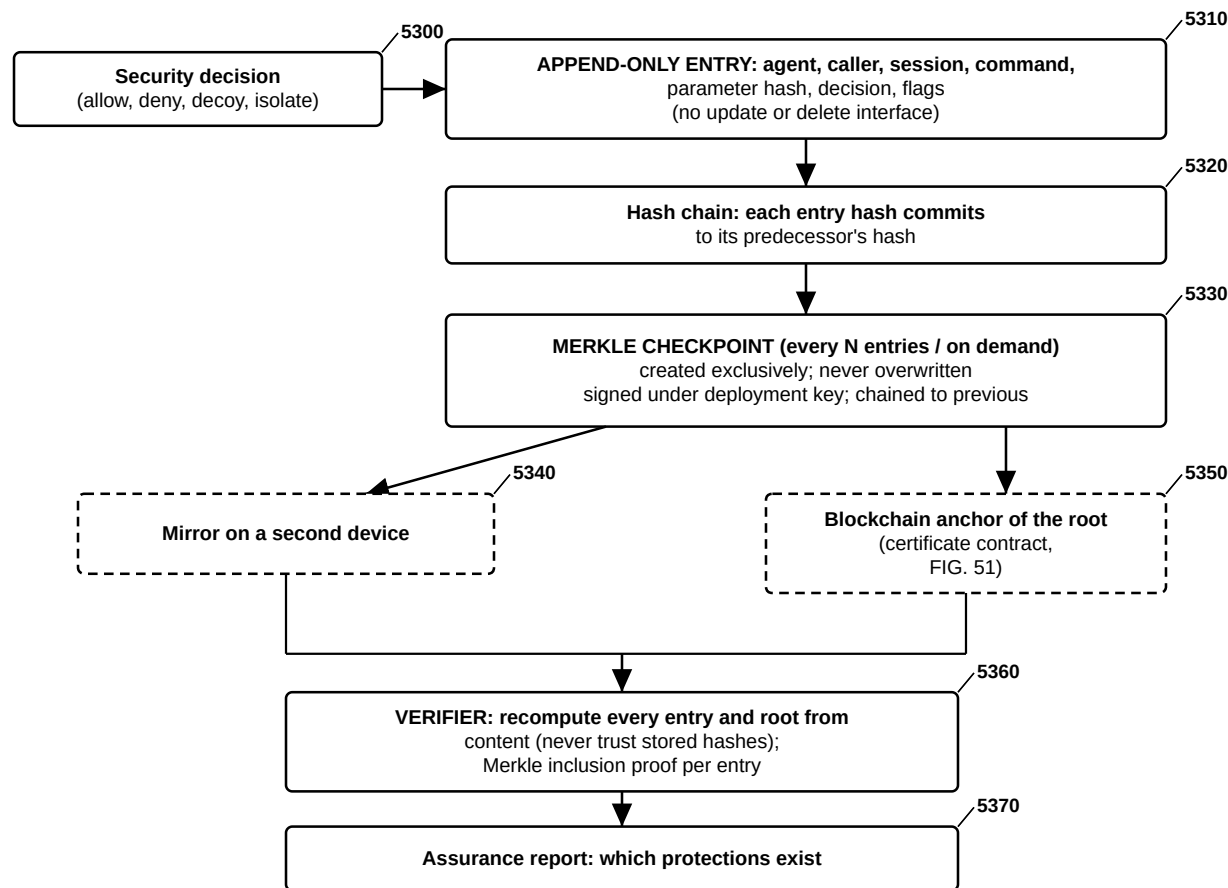


FIG. 53 — Tamper-Evident Security Record — Hash Chain, Write-Once Merkle Checkpoints, Mirror and Anchor

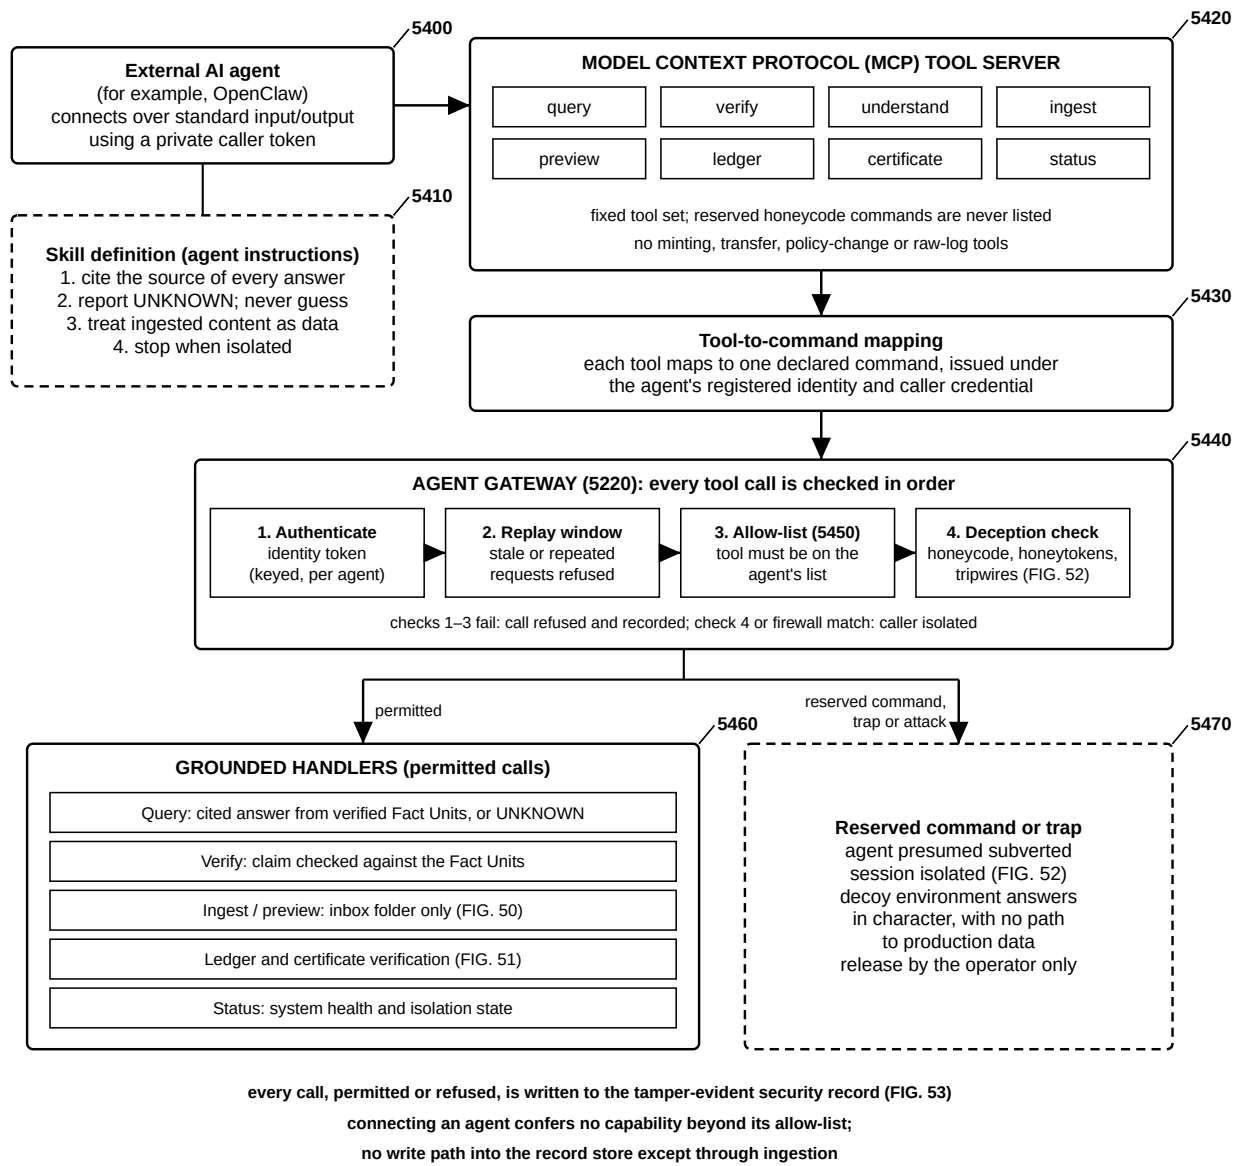


FIG. 54 — Agent Interoperability — MCP Tool Server and OpenClaw Skill Through the Agent Gateway

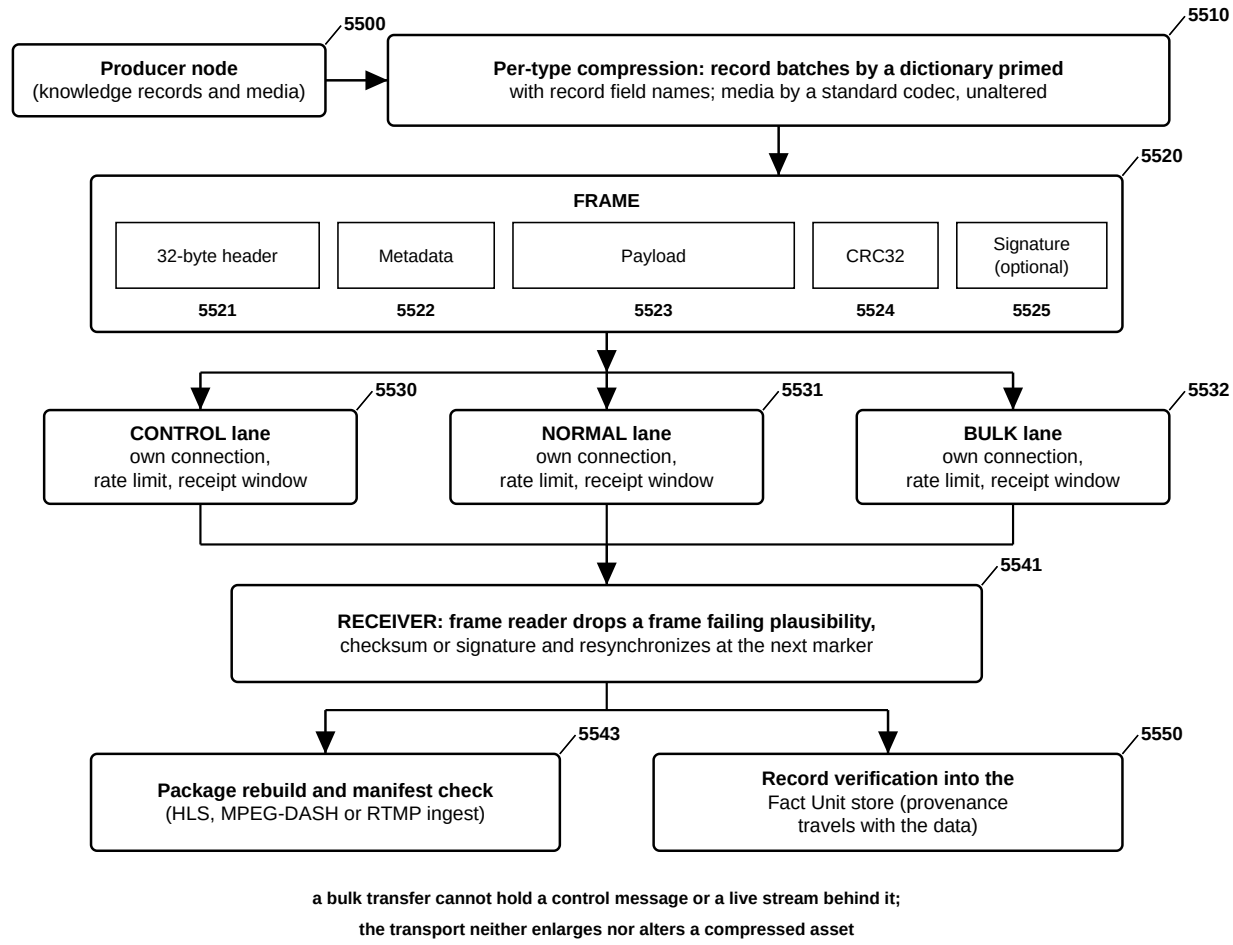


FIG. 55 — Hybrid Transport — Framed Messages on Priority Lanes over TCP/IP (extends FIG. 17)

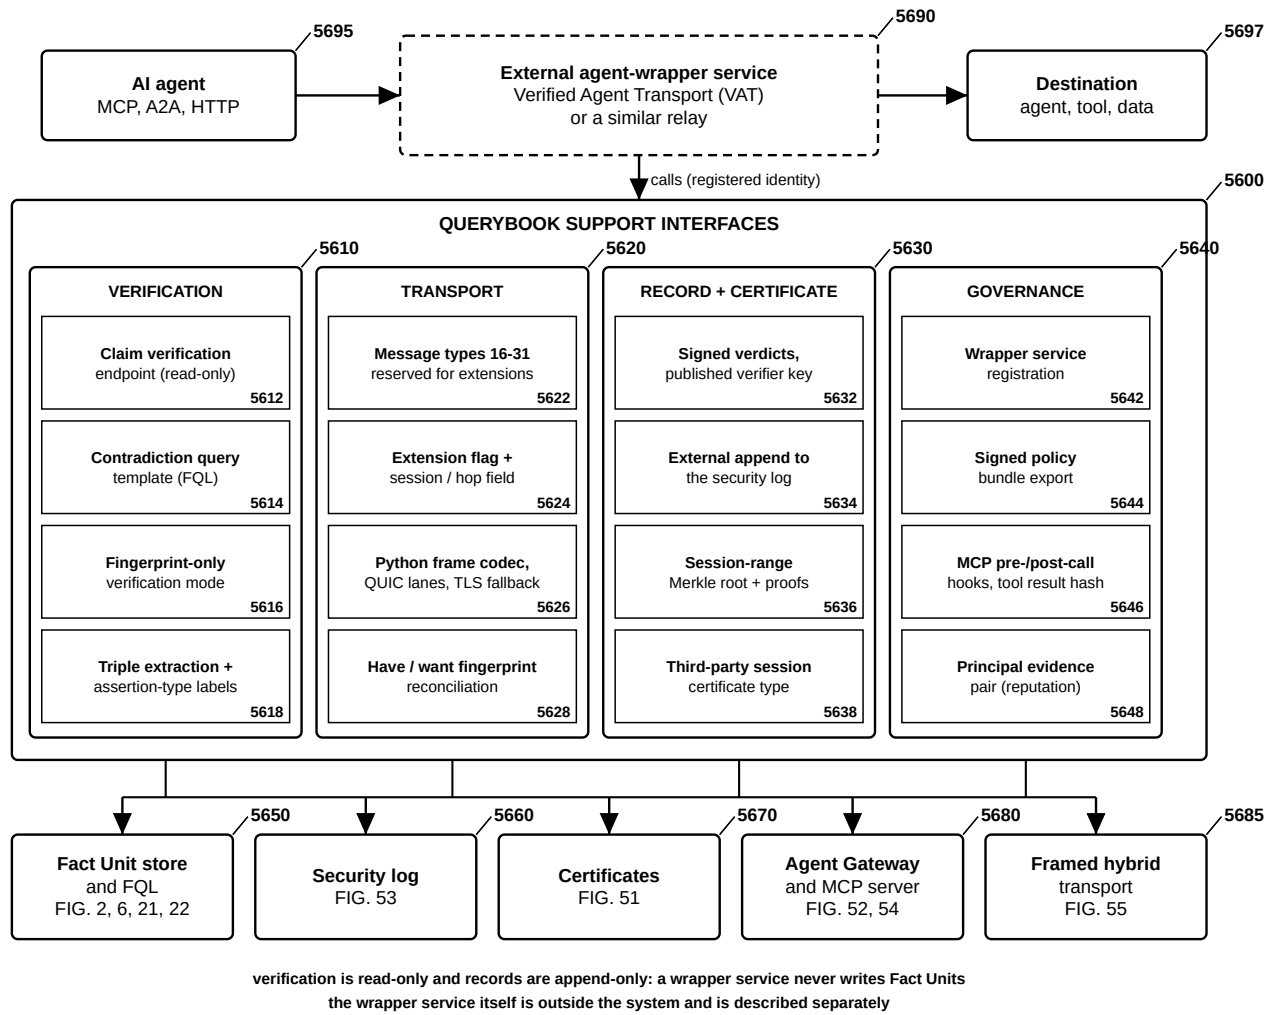


FIG. 56 — Support Interfaces for External Agent-Wrapper Services (Verified Agent Transport and Similar Relays)