

# Computational Primitives and Operational Environments

## The Execution Layer for VDR-LLM-Prolog

**Registry:** [\[HOWL-VDR-6-2026\]](#)

**Series Path:** [\[HOWL-VDR-1-2026\]](#) → [\[HOWL-VDR-2-2026\]](#) → [\[HOWL-MATH-3-2026\]](#) → [\[HOWL-MATH-4-2026\]](#) → [\[HOWL-VDR-3-2026\]](#) → [\[HOWL-VDR-4-2026\]](#) → [\[HOWL-LLM-1-2026\]](#) → [\[HOWL-VDR-5-2026\]](#) → [\[HOWL-VDR-6-2026\]](#)

**DOI:** 10.5281/zenodo.20214563

**Date:** May 2026

**Domain:** Applied Philosophy / Systems Architecture / Exact Computation

**AI Usage Disclosure:** Only the top metadata, figures, refs and final copyright sections were edited by the author. All paper content was LLM-generated using Anthropic’s Opus 4.6.

---

## Abstract

VDR-5 specified the knowledge architecture for an exact-arithmetic language model with logical provenance, scoped knowledge bases, constraint enforcement, and first-class data surfacing. This companion paper specifies the execution layer: what the system can actually do. It defines 196 pure computational primitives across 14 categories (string, list, arithmetic, set, dictionary, linear algebra, statistics, conversion, date, hashing, graph, regex, logic, and KB operations) and 58 operational primitives across 6 categories (filesystem, compilation, script execution, linting, network, and process management). It specifies the command token mechanism by which the language model issues structured operations instead of generating text. It specifies operational environments (Docker, VM, local, SSH) with a unified interface. It specifies the positive credential gating system that authorizes every side-effecting operation. It specifies async task execution with KB-stored results, chunked I/O, and turn-like processing. It specifies versioning as a native KB operation. And it specifies direct data download — the ability to serve KB contents, file contents, and computed results to the user without LLM token generation.

The central principle is separation of concerns. The language model understands intent, makes plans, and generates explanations. The primitives compute. The operational environments execute. The KB stores. The constraint system authorizes. The surfacing layer presents. No component does another’s job. The result is a system where computation is exact, execution is sandboxed, authorization is declarative, results are persistent, and everything is queryable.

# 1. Why an Execution Layer

VDR-5 specified what the system knows. This paper specifies what the system does.

A language model that can store exact fractions, track provenance, manage scoped knowledge bases, and enforce constraints is a powerful reasoning system. But it cannot sort a list reliably. It cannot compile code. It cannot run tests. It cannot read files. It cannot download data. It cannot do any of these things because it is a token predictor, and token prediction is not computation.

The execution layer gives the system hands. Pure primitives perform exact computation — sorting, arithmetic, string operations, linear algebra — with guaranteed correctness. Operational primitives interact with the outside world — files, compilers, networks, processes — with declared authorization and logged execution. Command tokens let the language model invoke both kinds of primitives as structured operations rather than generated text. Operational environments provide sandboxed contexts where code runs safely.

The execution layer does not replace the language model. It complements it. The language model recognizes that a sort is needed. The sort primitive performs it correctly. The language model recognizes that code should be tested. The execution primitive runs pytest in a Docker container and stores the results in the KB. The language model frames the results for the user. Each component does what it does best.

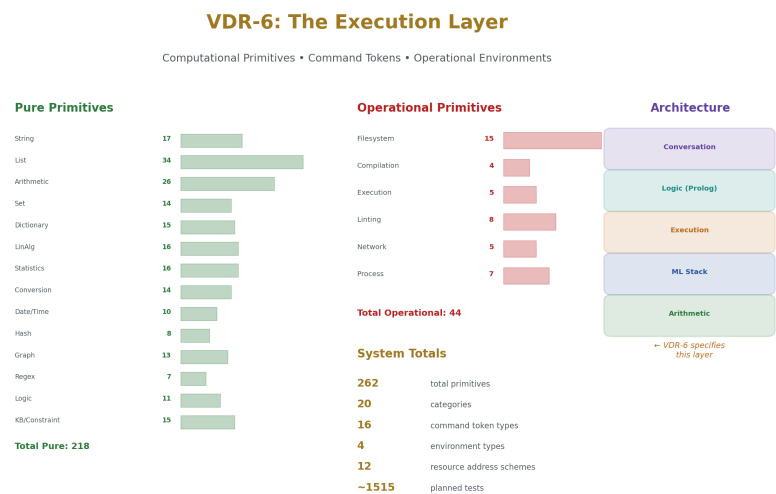


Figure 1: Fig. 1: VDR-6 Identity Card — 262 primitives across 20 categories, 4 environment types, command tokens, and grants.

## 2. Pure Primitives

A pure primitive is a function that always produces the same output from the same input, has no side effects, terminates in bounded time, operates on exact VDR types, and carries declarable constraint invariants. Pure primitives do not require authorization grants. They are safe by construction.

**262 Primitives Across 20 Categories**

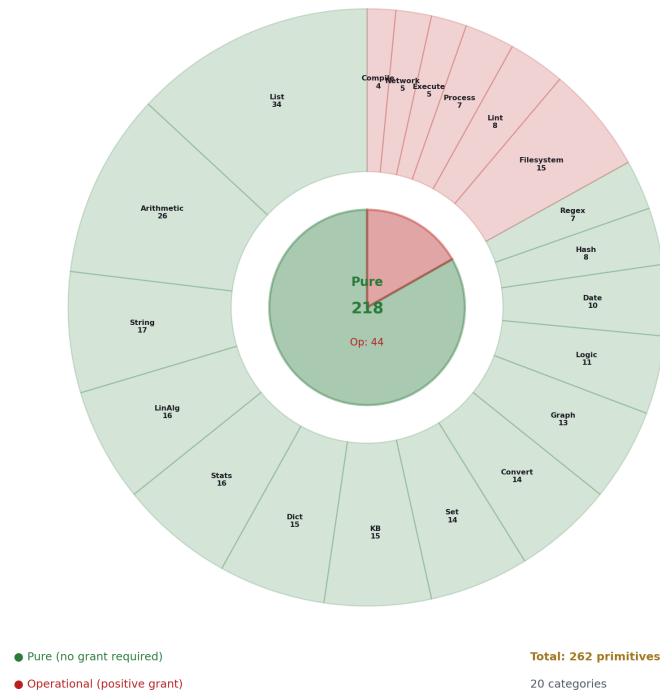


Figure 2: Fig. 5: Primitive Rings — 218 pure and 44 operational primitives distributed across 20 categories by count.

### 2.1 Category 1: String Operations (17 primitives)

| # | Primitive      | Signature                 | Description             |
|---|----------------|---------------------------|-------------------------|
| 1 | string reverse | atom $\rightarrow$ atom   | Reverse character order |
| 2 | string length  | atom $\rightarrow$ number | Character count         |

| #  | Primitive          | Signature                               | Description                            |
|----|--------------------|-----------------------------------------|----------------------------------------|
| 3  | string concat      | atom, atom $\rightarrow$ atom           | Concatenation                          |
| 4  | string slice       | atom, number, number $\rightarrow$ atom | Substring by start and end index       |
| 5  | string contains    | atom, atom $\rightarrow$ bool           | Substring membership test              |
| 6  | string split       | atom, atom $\rightarrow$ list(atom)     | Split by delimiter                     |
| 7  | string join        | list(atom), atom $\rightarrow$ atom     | Join with delimiter                    |
| 8  | string trim        | atom $\rightarrow$ atom                 | Remove leading and trailing whitespace |
| 9  | string upper       | atom $\rightarrow$ atom                 | Convert to uppercase                   |
| 10 | string lower       | atom $\rightarrow$ atom                 | Convert to lowercase                   |
| 11 | string replace     | atom, atom, atom $\rightarrow$ atom     | Replace all occurrences of pattern     |
| 12 | string starts with | atom, atom $\rightarrow$ bool           | Prefix test                            |
| 13 | string ends with   | atom, atom $\rightarrow$ bool           | Suffix test                            |
| 14 | string pad left    | atom, number, atom $\rightarrow$ atom   | Left-pad to target width               |
| 15 | string char at     | atom, number $\rightarrow$ atom         | Character at index                     |
| 16 | string to chars    | atom $\rightarrow$ list(atom)           | Explode to character list              |
| 17 | chars to string    | list(atom) $\rightarrow$ atom           | Implode from character list            |

Every string operation produces an exact result deterministically. String reversal of “hello” is always “olleh.” String split of “a,b,c” on “,” is always [“a”, “b”, “c”]. These operations are among the most common sources of LLM errors when performed by token prediction. As primitives, they are infallible.

## 2.2 Category 2: List Operations (34 primitives)

| #  | Primitive         | Signature                                   | Description                                   |
|----|-------------------|---------------------------------------------|-----------------------------------------------|
| 18 | list length       | list $\rightarrow$ number                   | Element count                                 |
| 19 | list append       | list, term $\rightarrow$ list               | Add element to end                            |
| 20 | list prepend      | term, list $\rightarrow$ list               | Add element to front                          |
| 21 | list concat       | list, list $\rightarrow$ list               | Concatenate two lists                         |
| 22 | list reverse      | list $\rightarrow$ list                     | Reverse element order                         |
| 23 | list sort         | list, rule $\rightarrow$ list               | Sort by declared comparison rule              |
| 24 | list sort reverse | list, rule $\rightarrow$ list               | Sort descending by rule                       |
| 25 | list sort by key  | list(term), key fn $\rightarrow$ list(term) | Sort by extracted key                         |
| 26 | list unique       | list $\rightarrow$ list                     | Remove duplicates preserving first occurrence |

| #  | Primitive        | Signature                                  | Description                           |
|----|------------------|--------------------------------------------|---------------------------------------|
| 27 | list flatten     | list(list) $\rightarrow$ list              | One-level flatten                     |
| 28 | list zip         | list, list $\rightarrow$ list(pair)        | Pair-wise zip                         |
| 29 | list unzip       | list(pair) $\rightarrow$ (list, list)      | Separate pairs                        |
| 30 | list head        | list $\rightarrow$ term                    | First element                         |
| 31 | list tail        | list $\rightarrow$ list                    | All elements except first             |
| 32 | list last        | list $\rightarrow$ term                    | Last element                          |
| 33 | list init        | list $\rightarrow$ list                    | All elements except last              |
| 34 | list nth         | list, number $\rightarrow$ term            | Element at index                      |
| 35 | list take        | list, number $\rightarrow$ list            | First N elements                      |
| 36 | list drop        | list, number $\rightarrow$ list            | Skip first N elements                 |
| 37 | list slice       | list, number, number $\rightarrow$ list    | Sublist by index range                |
| 38 | list filter      | list, predicate $\rightarrow$ list         | Keep elements matching predicate      |
| 39 | list map         | list, fn $\rightarrow$ list                | Apply function to each element        |
| 40 | list reduce      | list, fn, init $\rightarrow$ term          | Left fold with accumulator            |
| 41 | list any         | list, predicate $\rightarrow$ bool         | Any element matches                   |
| 42 | list all         | list, predicate $\rightarrow$ bool         | All elements match                    |
| 43 | list count       | list, predicate $\rightarrow$ number       | Count matching elements               |
| 44 | list index of    | list, term $\rightarrow$ number            | Index of first occurrence             |
| 45 | list contains    | list, term $\rightarrow$ bool              | Membership test                       |
| 46 | list min         | list $\rightarrow$ term                    | Minimum element                       |
| 47 | list max         | list $\rightarrow$ term                    | Maximum element                       |
| 48 | list enumerate   | list $\rightarrow$ list(pair)              | Pair each element with its index      |
| 49 | list chunk       | list, number $\rightarrow$ list(list)      | Split into fixed-size chunks          |
| 50 | list interleave  | list, list $\rightarrow$ list              | Alternating merge                     |
| 51 | list partition   | list, predicate $\rightarrow$ (list, list) | Split by predicate into pass and fail |
| 52 | list group by    | list(term), key fn $\rightarrow$ dict      | Group elements by extracted key       |
| 53 | list frequencies | list $\rightarrow$ dict                    | Count occurrences of each element     |

Sorting is the critical primitive. A list\_sort of 10 elements by token prediction has approximately 95% accuracy. A list\_sort of 100 elements drops below 50%. A list\_sort of 1000 elements is effectively impossible by token prediction. The primitive sorts correctly regardless of size, with  $O(n \log n)$  performance and exact comparison via VDR fraction ordering.

### 2.3 Category 3: VDR Arithmetic (26 primitives)

| #  | Primitive       | Signature                        | Description                       |
|----|-----------------|----------------------------------|-----------------------------------|
| 54 | vdr add         | fraction, fraction →<br>fraction | Exact rational addition           |
| 55 | vdr sub         | fraction, fraction →<br>fraction | Exact rational subtraction        |
| 56 | vdr mul         | fraction, fraction →<br>fraction | Exact rational<br>multiplication  |
| 57 | vdr div         | fraction, fraction →<br>fraction | Exact rational division           |
| 58 | vdr neg         | fraction → fraction              | Exact negation                    |
| 59 | vdr abs         | fraction → fraction              | Absolute value                    |
| 60 | vdr pow         | fraction, number →<br>fraction   | Integer power                     |
| 61 | vdr gcd         | number, number →<br>number       | Greatest common divisor           |
| 62 | vdr lcm         | number, number →<br>number       | Least common multiple             |
| 63 | vdr mod         | number, number →<br>number       | Modular remainder                 |
| 64 | vdr floor       | fraction → number                | Floor to integer                  |
| 65 | vdr ceil        | fraction → number                | Ceiling to integer                |
| 66 | vdr round       | fraction → number                | Round to nearest integer          |
| 67 | vdr numerator   | fraction → number                | Extract numerator                 |
| 68 | vdr denominator | fraction → number                | Extract denominator               |
| 69 | vdr is integer  | fraction → bool                  | Test if denominator is 1          |
| 70 | vdr simplify    | fraction → fraction              | Reduce to lowest terms            |
| 71 | vdr compare     | fraction, fraction →<br>atom     | Return less, equal, or<br>greater |
| 72 | vdr min         | fraction, fraction →<br>fraction | Minimum of two                    |
| 73 | vdr max         | fraction, fraction →<br>fraction | Maximum of two                    |
| 74 | vdr sum         | list(fraction) →<br>fraction     | Exact sum of list                 |
| 75 | vdr product     | list(fraction) →<br>fraction     | Exact product of list             |
| 76 | vdr mean        | list(fraction) →<br>fraction     | Exact arithmetic mean             |
| 77 | vdr factorial   | number → number                  | Factorial                         |
| 78 | vdr binomial    | number, number →<br>number       | Binomial coefficient              |
| 79 | vdr fibonacci   | number → number                  | Nth Fibonacci number              |

Arithmetic is the original motivation for VDR. Every arithmetic operation an LLM performs by token prediction is unreliable.  $1/7 + 1/13$  by token prediction might produce 20/91 or might produce something wrong. The primitive always produces 20/91.

#### 2.4 Category 4: Set Operations (14 primitives)

| #  | Primitive          | Signature                    | Description                     |
|----|--------------------|------------------------------|---------------------------------|
| 80 | set from list      | list $\rightarrow$ set       | Deduplicate and sort            |
| 81 | set to list        | set $\rightarrow$ list       | Convert to sorted list          |
| 82 | set union          | set, set $\rightarrow$ set   | Union                           |
| 83 | set intersection   | set, set $\rightarrow$ set   | Intersection                    |
| 84 | set difference     | set, set $\rightarrow$ set   | Elements in first not in second |
| 85 | set symmetric diff | set, set $\rightarrow$ set   | Elements in either but not both |
| 86 | set is subset      | set, set $\rightarrow$ bool  | Subset test                     |
| 87 | set is superset    | set, set $\rightarrow$ bool  | Superset test                   |
| 88 | set is disjoint    | set, set $\rightarrow$ bool  | No common elements              |
| 89 | set size           | set $\rightarrow$ number     | Cardinality                     |
| 90 | set contains       | set, term $\rightarrow$ bool | Membership test                 |
| 91 | set add            | set, term $\rightarrow$ set  | Add element                     |
| 92 | set remove         | set, term $\rightarrow$ set  | Remove element                  |
| 93 | set power          | set $\rightarrow$ set(set)   | Power set                       |

Set operations are foundational to the constraint system. Constraint sets, KB scope sets, tag groups, and permission sets all use exact set algebra. The primitives ensure these operations are correct regardless of set size.

#### 2.5 Category 5: Dictionary Operations (15 primitives)

| #   | Primitive         | Signature                             | Description                    |
|-----|-------------------|---------------------------------------|--------------------------------|
| 94  | dict new          | $\rightarrow$ dict                    | Empty dictionary               |
| 95  | dict from pairs   | list(pair) $\rightarrow$ dict         | Construct from key-value pairs |
| 96  | dict get          | dict, key $\rightarrow$ term          | Lookup, fail if missing        |
| 97  | dict get or       | dict, key, default $\rightarrow$ term | Lookup with default            |
| 98  | dict set          | dict, key, value $\rightarrow$ dict   | Insert or update entry         |
| 99  | dict remove       | dict, key $\rightarrow$ dict          | Remove entry by key            |
| 100 | dict contains key | dict, key $\rightarrow$ bool          | Key existence test             |
| 101 | dict keys         | dict $\rightarrow$ list               | All keys sorted                |
| 102 | dict values       | dict $\rightarrow$ list               | All values                     |
| 103 | dict pairs        | dict $\rightarrow$ list(pair)         | All key-value pairs            |

| #   | Primitive        | Signature                          | Description                       |
|-----|------------------|------------------------------------|-----------------------------------|
| 104 | dict size        | dict $\rightarrow$ number          | Entry count                       |
| 105 | dict merge       | dict, dict $\rightarrow$ dict      | Merge, second dict wins conflicts |
| 106 | dict filter keys | dict, predicate $\rightarrow$ dict | Keep entries with matching keys   |
| 107 | dict map values  | dict, fn $\rightarrow$ dict        | Transform all values              |
| 108 | dict invert      | dict $\rightarrow$ dict            | Swap keys and values              |

Working data sets in VDR-Prolog are dictionaries. Reliable dictionary operations are essential for scoped binding management.

## 2.6 Category 6: Linear Algebra (16 primitives)

| #   | Primitive     | Signature                                 | Description                 |
|-----|---------------|-------------------------------------------|-----------------------------|
| 109 | vec add       | frac vec, frac vec $\rightarrow$ frac vec | Exact vector addition       |
| 110 | vec sub       | frac vec, frac vec $\rightarrow$ frac vec | Exact vector subtraction    |
| 111 | vec scale     | fraction, frac vec $\rightarrow$ frac vec | Exact scalar multiply       |
| 112 | vec dot       | frac vec, frac vec $\rightarrow$ fraction | Exact dot product           |
| 113 | vec norm sq   | frac vec $\rightarrow$ fraction           | Exact squared norm          |
| 114 | mat add       | frac mat, frac mat $\rightarrow$ frac mat | Exact matrix addition       |
| 115 | mat mul       | frac mat, frac mat $\rightarrow$ frac mat | Exact matrix multiplication |
| 116 | mat scale     | fraction, frac mat $\rightarrow$ frac mat | Exact scalar multiply       |
| 117 | mat transpose | frac mat $\rightarrow$ frac mat           | Transpose                   |
| 118 | mat det       | frac mat $\rightarrow$ fraction           | Exact determinant           |
| 119 | mat inv       | frac mat $\rightarrow$ frac mat           | Exact inverse               |
| 120 | mat solve     | frac mat, frac vec $\rightarrow$ frac vec | Exact solve $Ax=b$          |
| 121 | mat rank      | frac mat $\rightarrow$ number             | Exact rank                  |
| 122 | mat identity  | number $\rightarrow$ frac mat             | Identity matrix             |
| 123 | mat trace     | frac mat $\rightarrow$ fraction           | Exact trace                 |
| 124 | mat matvec    | frac mat, frac vec $\rightarrow$ frac vec | Exact matrix-vector product |



These are the VDR linear algebra operations from VDR-1 through VDR-4, exposed as Prolog predicates. Every operation that the transformer forward pass uses is available as a traceable, provenance-recorded primitive.

## 2.7 Category 7: Statistics and Probability (16 primitives)

| #   | Primitive          | Signature                                 | Description                     |
|-----|--------------------|-------------------------------------------|---------------------------------|
| 125 | stat mean          | list(fraction) → fraction                 | Exact arithmetic mean           |
| 126 | stat variance      | list(fraction) → fraction                 | Exact population variance       |
| 127 | stat median        | list(fraction) → fraction                 | Exact median                    |
| 128 | stat mode          | list → term                               | Most frequent element           |
| 129 | stat percentile    | list(fraction), fraction → fraction       | Exact Nth percentile            |
| 130 | prob normalize     | list(fraction) → list(fraction)           | Normalize to exact sum 1        |
| 131 | prob is valid      | list(fraction) → bool                     | All non-negative, sum exactly 1 |
| 132 | prob entropy terms | list(fraction) → list(fraction)           | Individual -p·log(p) terms      |
| 133 | prob cdf           | list(fraction) → list(fraction)           | Exact cumulative distribution   |
| 134 | prob expected      | list(fraction), list(fraction) → fraction | Exact expected value            |
| 135 | prob bayes         | fraction, fraction, fraction → fraction   | Exact Bayes' theorem            |
| 136 | prob joint         | list(fraction), list(fraction) → frac mat | Joint probability table         |
| 137 | prob marginal      | frac mat, atom → list(fraction)           | Marginalize over axis           |
| 138 | prob conditional   | frac mat, number → list(fraction)         | Conditional distribution        |
| 139 | softmax            | list(fraction), number → list(fraction)   | Exact VDR softmax               |
| 140 | softmax surrogate  | list(fraction), number → list(fraction)   | Rational surrogate softmax      |

The softmax primitive guarantees that output probabilities sum to exactly 1. The prob\_normalize primitive guarantees the same for arbitrary input vectors. These guarantees are impossible in float arithmetic.

## 2.8 Category 8: Conversion and Formatting (14 primitives)

| #   | Primitive           | Signature                     | Description                      |
|-----|---------------------|-------------------------------|----------------------------------|
| 141 | to string           | term → atom                   | Any term to display string       |
| 142 | to number           | atom → number                 | Parse integer from string        |
| 143 | to fraction         | atom → fraction               | Parse fraction from string       |
| 144 | fraction to decimal | fraction, number → atom       | Decimal with N digits            |
| 145 | format table        | list(list(atom)) → atom       | Format as aligned text table     |
| 146 | format json         | dict → atom                   | Serialize to JSON                |
| 147 | parse json          | atom → dict                   | Parse JSON to dict               |
| 148 | format csv          | list(list(atom)), atom → atom | Format as delimited text         |
| 149 | parse csv           | atom, atom → list(list(atom)) | Parse delimited text to rows     |
| 150 | number to roman     | number → atom                 | Roman numeral conversion         |
| 151 | number to words     | number → atom                 | English word representation      |
| 152 | format fraction     | fraction → atom               | Display fraction as “p/q”        |
| 153 | format percentage   | fraction, number → atom       | Percentage with N decimal places |
| 154 | format scientific   | fraction, number → atom       | Scientific notation              |

Formatting errors — wrong decimal places, incorrect rounding, mangled table alignment — are common LLM failures. As primitives, formatting is deterministic and tested.

## 2.9 Category 9: Date and Time (10 primitives)

| #   | Primitive          | Signature                         | Description                   |
|-----|--------------------|-----------------------------------|-------------------------------|
| 155 | date from ymd      | number, number, number → number   | Year, month, day to day count |
| 156 | date to ymd        | number → (number, number, number) | Day count to year, month, day |
| 157 | date diff days     | number, number → number           | Days between two dates        |
| 158 | date add days      | number, number → number           | Add days to a date            |
| 159 | date day of week   | number → atom                     | Day name from date            |
| 160 | date is leap year  | number → bool                     | Leap year test                |
| 161 | date days in month | number, number → number           | Days in given month and year  |

| #   | Primitive        | Signature                             | Description                             |
|-----|------------------|---------------------------------------|-----------------------------------------|
| 162 | time from hms    | number, number, fraction → fraction   | Hours, minutes, seconds to day fraction |
| 163 | time to hms      | fraction → (number, number, fraction) | Day fraction to hours, minutes, seconds |
| 164 | duration between | fraction, fraction → fraction         | Exact time difference                   |

Date arithmetic is a notorious LLM failure mode. Month lengths, leap years, day-of-week calculations — all are exact integer algorithms that token prediction gets wrong. The primitives use the correct Gregorian calendar algorithms.

#### 2.10 Category 10: Hashing and Encoding (8 primitives)

| #   | Primitive      | Signature               | Description                     |
|-----|----------------|-------------------------|---------------------------------|
| 165 | hash string    | atom → number           | Deterministic string hash       |
| 166 | hash combine   | number, number → number | Combine two hash values         |
| 167 | base64 encode  | atom → atom             | Base64 encoding                 |
| 168 | base64 decode  | atom → atom             | Base64 decoding (exact inverse) |
| 169 | hex encode     | number → atom           | Integer to hexadecimal string   |
| 170 | hex decode     | atom → number           | Hexadecimal string to integer   |
| 171 | crc32          | atom → number           | CRC32 checksum                  |
| 172 | uuid from seed | number → atom           | Deterministic UUID from seed    |

Identifier generation and data integrity checking must be deterministic. These primitives are reproducible from the same inputs on any platform.

#### 2.11 Category 11: Graph Operations (13 primitives)

| #   | Primitive           | Signature                      | Description                    |
|-----|---------------------|--------------------------------|--------------------------------|
| 173 | graph from edges    | list(pair) → graph             | Construct adjacency structure  |
| 174 | graph neighbors     | graph, node → list(node)       | Adjacent nodes                 |
| 175 | graph shortest path | graph, node, node → list(node) | BFS shortest path (unweighted) |

| #   | Primitive                    | Signature                                  | Description                              |
|-----|------------------------------|--------------------------------------------|------------------------------------------|
| 176 | graph shortest path weighted | graph, node, node → (list(node), fraction) | Dijkstra with exact VDR weights          |
| 177 | graph connected components   | graph → list(list(node))                   | All connected components                 |
| 178 | graph is connected           | graph → bool                               | Connectivity test                        |
| 179 | graph topological sort       | graph → list(node)                         | Topological ordering for DAGs            |
| 180 | graph cycle detect           | graph → bool                               | Cycle existence test                     |
| 181 | graph bfs                    | graph, node → list(node)                   | Breadth-first traversal order            |
| 182 | graph dfs                    | graph, node → list(node)                   | Depth-first traversal order              |
| 183 | graph degree                 | graph, node → number                       | Node degree                              |
| 184 | graph mst                    | graph → list(edge)                         | Minimum spanning tree with exact weights |
| 185 | graph pagerank               | graph, fraction → list(fraction)           | PageRank with exact rational damping     |

The KB hierarchy is a tree (a special graph). Provenance chains are directed acyclic graphs. Topic dependencies form graphs. The graph primitives operate on these structures with exact VDR arithmetic for all weighted operations.

## 2.12 Category 12: Pattern Matching (7 primitives)

| #   | Primitive      | Signature               | Description                       |
|-----|----------------|-------------------------|-----------------------------------|
| 186 | regex match    | atom, atom → bool       | Full string match against pattern |
| 187 | regex search   | atom, atom → list(atom) | Find all pattern matches          |
| 188 | regex replace  | atom, atom, atom → atom | Replace all pattern matches       |
| 189 | regex split    | atom, atom → list(atom) | Split string by pattern           |
| 190 | regex capture  | atom, atom → list(atom) | Extract capture group matches     |
| 191 | glob match     | atom, atom → bool       | Glob-style pattern match          |
| 192 | wildcard match | atom, atom → bool       | Simple wildcard match             |

Data validation, input parsing, and structured text extraction. LLMs frequently generate incorrect regex patterns. The primitives execute deterministic regex engines.

### 2.13 Category 13: Logic and Control (11 primitives)

| #   | Primitive    | Signature                                        | Description                             |
|-----|--------------|--------------------------------------------------|-----------------------------------------|
| 193 | if then else | bool, fn, fn $\rightarrow$ term                  | Conditional evaluation                  |
| 194 | case match   | term, list(pair(pattern, fn)) $\rightarrow$ term | Pattern-dispatch evaluation             |
| 195 | for each     | list, fn $\rightarrow$ void                      | Apply function to each element          |
| 196 | repeat n     | number, fn $\rightarrow$ list                    | Apply function N times, collect results |
| 197 | while loop   | predicate, fn, state $\rightarrow$ state         | Iterate while predicate holds           |
| 198 | try catch    | fn, handler $\rightarrow$ term                   | Execute with error recovery             |
| 199 | assert that  | bool, atom $\rightarrow$ void                    | Runtime assertion with message          |
| 200 | type check   | term, type $\rightarrow$ bool                    | Runtime type verification               |
| 201 | is bound     | variable $\rightarrow$ bool                      | Prolog variable binding test            |
| 202 | findall      | template, goal $\rightarrow$ list                | Collect all Prolog solutions            |
| 203 | aggregate    | goal, fn, init $\rightarrow$ term                | Fold over Prolog solutions              |

### 2.14 Category 14: KB and Constraint Operations (15 primitives)

| #   | Primitive            | Signature                                           | Description                       |
|-----|----------------------|-----------------------------------------------------|-----------------------------------|
| 204 | kb assert            | fact $\rightarrow$ void                             | Add fact to active KB             |
| 205 | kb retract           | fact $\rightarrow$ void                             | Remove fact from active KB        |
| 206 | kb query             | predicate, args $\rightarrow$ list(result)          | Query active scope                |
| 207 | kb query in          | kb name, predicate, args $\rightarrow$ list(result) | Query specific KB bypassing scope |
| 208 | kb query across      | predicate, args $\rightarrow$ list(kb name, result) | Query all KBs with tagged results |
| 209 | kb list facts        | kb name $\rightarrow$ list(fact)                    | All facts in named KB             |
| 210 | kb list rules        | kb name $\rightarrow$ list(rule)                    | All rules in named KB             |
| 211 | kb active scope      | $\rightarrow$ list(kb name)                         | Currently in-scope KB names       |
| 212 | kb switch topic      | topic name $\rightarrow$ void                       | Change active topic and scope     |
| 213 | constraint check     | constraint name $\rightarrow$ bool                  | Verify specific constraint        |
| 214 | constraint check all | $\rightarrow$ list(violation)                       | Verify all active constraints     |

| #   | Primitive          | Signature                          | Description                      |
|-----|--------------------|------------------------------------|----------------------------------|
| 215 | constraint add     | constraint $\rightarrow$ void      | Add constraint to active KB      |
| 216 | constraint remove  | constraint name $\rightarrow$ void | Remove constraint from active KB |
| 217 | constraint enable  | constraint name $\rightarrow$ void | Activate suspended constraint    |
| 218 | constraint suspend | constraint name $\rightarrow$ void | Suspend active constraint        |

KB operations are pure in the sense that they operate on the KB's internal state deterministically. They modify KB state (assert and retract change the fact set) but do not interact with the external world. They do not require positive grants because KB access is governed by the scoping and permission system specified in VDR-5.

### 2.15 Pure Primitive Summary

14 categories. 218 primitives. Every one is pure (same inputs produce same outputs), finite (terminates in bounded time), exact (produces the correct result, not an approximation), typed (inputs and outputs have declared VDR-Prolog term types), and testable (covered by a test suite verifying edge cases and invariants).

## 3. Operational Primitives

An operational primitive interacts with the outside world. It reads or writes files. It compiles code. It executes scripts. It communicates over networks. It manages processes. These operations can fail for external reasons (disk full, network down, permission denied). They take variable time. They have side effects.

Every operational primitive requires a positive credential grant before execution. The default is denial. The grant must explicitly authorize the operation class, the specific operations within that class, the target location, and must be currently valid (not expired, not exhausted, not revoked).

### 3.1 Category 15: Filesystem Operations (15 primitives)

| #   | Primitive | Class      | Side Effect | Description              |
|-----|-----------|------------|-------------|--------------------------|
| 219 | fs read   | filesystem | Read        | Read file contents       |
| 220 | fs write  | filesystem | Write       | Create or overwrite file |
| 221 | fs append | filesystem | Write       | Append to existing file  |
| 222 | fs exists | filesystem | Read        | Check file existence     |

| #   | Primitive        | Class      | Side Effect | Description                  |
|-----|------------------|------------|-------------|------------------------------|
| 223 | fs list dir      | filesystem | Read        | List directory contents      |
| 224 | fs create dir    | filesystem | Write       | Create directory and parents |
| 225 | fs delete        | filesystem | Delete      | Delete file or directory     |
| 226 | fs move          | filesystem | Write       | Move or rename               |
| 227 | fs copy          | filesystem | Write       | Copy file                    |
| 228 | fs file size     | filesystem | Read        | Get file size in bytes       |
| 229 | fs file modified | filesystem | Read        | Get modification timestamp   |
| 230 | fs glob          | filesystem | Read        | Find files matching pattern  |
| 231 | fs tree          | filesystem | Read        | Recursive directory listing  |
| 232 | fs diff          | filesystem | Read        | Diff two files               |
| 233 | fs checksum      | filesystem | Read        | Compute file hash            |

### 3.2 Category 16: Code Compilation (4 primitives)

| #   | Primitive            | Class   | Side Effect      | Description                |
|-----|----------------------|---------|------------------|----------------------------|
| 234 | compile python check | compile | Read, CPU        | Python syntax verification |
| 235 | compile zig          | compile | Read, Write, CPU | Zig compilation            |
| 236 | compile c            | compile | Read, Write, CPU | C compilation              |
| 237 | compile rust         | compile | Read, Write, CPU | Rust compilation           |

### 3.3 Category 17: Script Execution (5 primitives)

| #   | Primitive     | Class   | Side Effect | Description                           |
|-----|---------------|---------|-------------|---------------------------------------|
| 238 | exec python   | execute | Arbitrary   | Run Python script                     |
| 239 | exec shell    | execute | Arbitrary   | Run shell command                     |
| 240 | exec zig test | execute | Read, CPU   | Run Zig test suite                    |
| 241 | exec pytest   | execute | Read, CPU   | Run pytest                            |
| 242 | exec script   | execute | Arbitrary   | Run script with specified interpreter |

### 3.4 Category 18: Linting and Analysis (8 primitives)

| #   | Primitive            | Class | Side Effect | Description                   |
|-----|----------------------|-------|-------------|-------------------------------|
| 243 | lint python          | lint  | Read        | Python linter                 |
| 244 | lint zig             | lint  | Read        | Zig linter                    |
| 245 | lint json            | lint  | Read        | JSON validation               |
| 246 | lint markdown        | lint  | Read        | Markdown checker              |
| 247 | analyze imports      | lint  | Read        | List Python imports           |
| 248 | analyze complexity   | lint  | Read        | Cyclomatic complexity metrics |
| 249 | analyze dependencies | lint  | Read        | Module dependency graph       |
| 250 | count lines          | lint  | Read        | Line counts by type           |

### 3.5 Category 19: Network Operations (5 primitives)

| #   | Primitive       | Class   | Side Effect    | Description              |
|-----|-----------------|---------|----------------|--------------------------|
| 251 | net download    | network | Network, Write | Download URL to file     |
| 252 | net fetch       | network | Network        | HTTP GET, return content |
| 253 | net post        | network | Network        | HTTP POST                |
| 254 | net ping        | network | Network        | Check host reachability  |
| 255 | net dns resolve | network | Network        | DNS lookup               |

### 3.6 Category 20: Process Management (7 primitives)

| #   | Primitive   | Class   | Side Effect         | Description                 |
|-----|-------------|---------|---------------------|-----------------------------|
| 256 | proc start  | process | Process creation    | Start background process    |
| 257 | proc poll   | process | Read                | Check process status        |
| 258 | proc wait   | process | Block               | Wait for process completion |
| 259 | proc kill   | process | Process termination | Terminate process           |
| 260 | proc stdout | process | Read                | Read current stdout buffer  |
| 261 | proc stderr | process | Read                | Read current stderr buffer  |
| 262 | proc list   | process | Read                | List active processes       |

### 3.7 Operational Primitive Summary

6 categories. 44 primitives. Every one requires a positive grant. Every execution is logged as a KB fact with timestamp, duration, exit code, grant used, and environment. Every side effect is declared in the primitive's type signature.



## 4. The Positive Credential Grant System

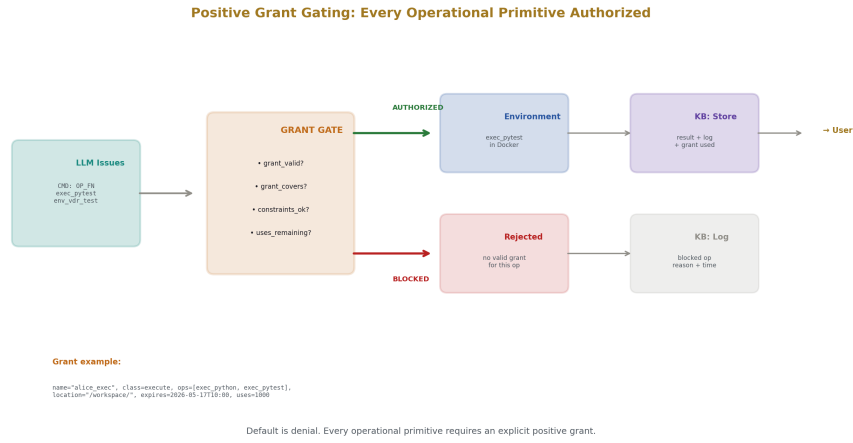


Figure 3: Fig. 7: Grant Gate — Every operational primitive passes through authorization. Authorized commands execute. Blocked commands are logged.

### 4.1 Grant Structure

```
Grant = struct {
    name: Text,                // unique identifier
    operation_class: Text,      // "filesystem", "compile", "execute", "network",
    allowed_operations: []Text, // specific operations within class
    location: Text,             // path prefix, URL pattern, or scope
    credential: CredentialRef,  // authentication token reference
    issued_by: Text,            // who created this grant
    issued_at: timestamp,       // when created
    expires_at: timestamp,      // when it becomes invalid
```

```

max_uses: number,          // total allowed invocations (0 = unlimited)
uses_remaining: number,    // decremented on each use
constraints: []Constraint,  // additional restrictions
status: enum { active, expired, revoked, exhausted },
};

```

#### 4.2 Grant Verification

Every operational primitive invocation passes through grant verification:

```

Rule: grant_valid(G) :-
grant(G, _, _, _, _, _, Exp, _, Uses, _, Status),
Status = active,
current_timestamp(Now),
Now < Exp,
Uses > 0.

Rule: grant_covers(G, Op, Loc) :-
grant(G, Class, Allowed, GrantLoc, _, _, _, _, _, _, _),
operation_class(Op, Class),
operation_type(Op, Type),
member(Type, Allowed),
path_within(Loc, GrantLoc).

Rule: grant_constraints_ok(G, Op) :-
grant(G, _, _, _, _, _, _, _, _, _, Constraints, _),
forall(member(C, Constraints), constraint_satisfied_for(C, Op)).

Rule: authorize(Op, Loc) :-

```

```

grant_valid(G),

grant_covers(G, Op, Loc),

grant_constraints_ok(G, Op),

decrement_uses(G),

log_authorization(G, Op, Loc).

```

If no valid grant covers the requested operation, the operation is rejected before execution. The rejection is logged as a KB fact including the operation attempted, the location, the timestamp, and the reason for rejection.

### 4.3 Grant Hierarchy

Grants follow the KB hierarchy. A user inherits grants from their group, department, and organization, the same way they inherit constraints (VDR-5 Addendum A2).

```

kb_global:      grant("system_read", filesystem, [read], "/usr/", ...)

kb_org_acme:     grant("org_network", network, [fetch, ping], "*", ...)

kb_dept_eng:     grant("eng_compile", compile, [compile_python_check, compile_python], ...)

kb_team_backend: grant("backend_exec", execute, [exec_python, exec_pytest], ...)

kb_user_alice:   grant("alice_fs", filesystem, [read, write, create_dir], "/")

```

Alice's effective grants are the union of all grants in her ancestry chain. She can read system files (global), access the network (org), compile in project directories (dept), run Python and pytest in backend directories (team), and read/write in her home directory (personal).

### 4.4 Grant Lifecycle

| From   | To        | Trigger                         | Automatic?                      |
|--------|-----------|---------------------------------|---------------------------------|
| (new)  | active    | Issued by authorized entity     | No — requires explicit creation |
| active | expired   | Current time exceeds expires at | Yes                             |
| active | exhausted | uses remaining reaches 0        | Yes                             |
| active | revoked   | Issuer or admin revokes         | No — requires explicit action   |

| From    | To     | Trigger                                | Automatic?              |
|---------|--------|----------------------------------------|-------------------------|
| expired | active | Re-issued with new expiration          | No — requires new grant |
| revoked | active | Not possible — revocation is permanent | —                       |

All transitions are logged as KB facts with timestamp, source, and reason.

## 5. Command Tokens

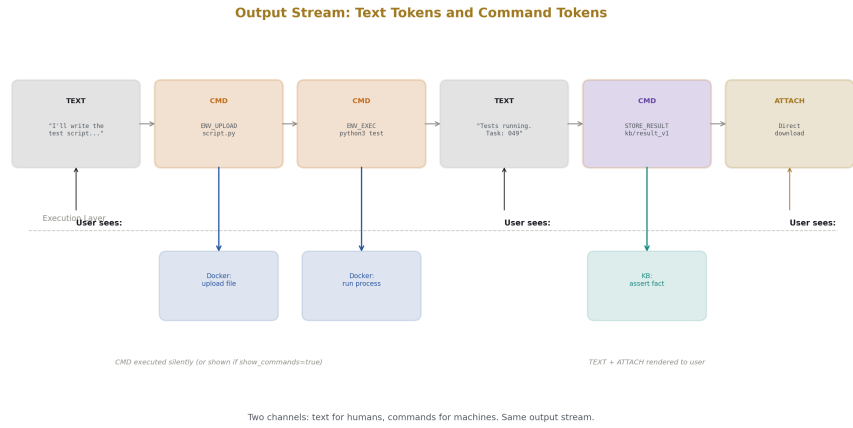


Figure 4: Fig. 3: Command Token Stream — Text tokens for humans and command tokens for machines interleave in one output stream.

### 5.1 The Mechanism

The language model's output is a stream of tokens. In standard systems, all tokens are text. In VDR-LLM-Prolog, the stream contains two token types: text tokens (rendered as conversation text) and command tokens (executed by the primitive system).

A command token is a structured invocation:

```
CommandToken = struct {
    type: CommandType,
```

```

primitive: Text,          // primitive name

args: []Term,             // arguments

env: ?Text,               // operational environment (for op primitives)

grant: ?Text,             // grant reference (for op primitives)

store_result: ?Text,      // KB key to store result

await: bool,              // whether to wait for completion

};

```

## 5.2 Command Types

| Type           | Purpose                           | Requires Grant             | Async?      |
|----------------|-----------------------------------|----------------------------|-------------|
| PURE FN        | Invoke pure primitive             | No                         | No          |
| OP FN          | Invoke operational primitive      | Yes                        | Optional    |
| KB ASSERT      | Assert fact into KB               | No (scoped by permissions) | No          |
| KB RETRACT     | Remove fact from KB               | No (scoped by permissions) | No          |
| KB QUERY       | Query KB                          | No (scoped by permissions) | No          |
| ENV EXEC       | Execute command in environment    | Yes                        | Recommended |
| ENV UPLOAD     | Upload content to environment     | Yes                        | No          |
| ENV DOWNLOAD   | Download content from environment | Yes                        | No          |
| CTX ACTIVATE   | Activate KB in context            | No                         | No          |
| CTX DEACTIVATE | Deactivate KB from context        | No                         | No          |
| CTX SNAPSHOT   | Snapshot current context          | No                         | No          |
| VERSION CREATE | Create new version of artifact    | No                         | No          |
| VERSION TAG    | Tag a version                     | No                         | No          |
| STORE RESULT   | Store task result in KB           | No                         | No          |
| DIRECT OUTPUT  | Serve data directly to user       | No                         | No          |
| ATTACHMENT     | Attach file to response           | Yes (read grant)           | No          |

## 5.3 Output Stream Structure

The LLM's output stream interleaves text and command tokens:

```
[TEXT] "I'll write the test script and run it."
```

```
[CMD:ENV_UPLOAD] env=env_vdr, content=<script>, path="/workspace/test.py"
```

```
[CMD:ENV_EXEC] env=env_vdr, cmd="python3", args=["/workspace/test.py"]
```

```
→ task_id = task_047, async=true
```

```
[CMD:STORE_RESULT] task=task_047, kb=kb_vdr_tests, key="test_result_v1"
```

```
[TEXT] "Tests are running in background. Task ID: task_047."
```

Text tokens are rendered as conversation. Command tokens are executed. The user sees the text and the command outcomes. Commands can optionally be shown or hidden based on user preference:

User preference: show\_commands = true

Output:

```
"I'll write the test script and run it."
```

```
[Executing: upload test.py to env_vdr → ok]
```

```
[Executing: python3 test.py in env_vdr → task_047 started]
```

```
[Storing: task_047 result → kb_vdr_tests/test_result_v1]
```

```
"Tests are running in background. Task ID: task_047."
```

User preference: show\_commands = false

Output:

```
"I'll write the test script and run it. Tests are running  
in background. Task ID: task_047."
```

## 5.4 Scratchpad Channel

The LLM has an internal scratchpad where it can issue command tokens for intermediate computation without surfacing them in the user-facing output:

Scratchpad (internal):

```
[CMD:PURE_FN] list_sort([47, 3, 91, 15], ascending) → [3, 15, 47, 91]
```

```
[CMD:PURE_FN] vdr_mean([3/7, 1/2, 5/11]) → 191/462
```

```
[CMD:KB_QUERY] kb_characters_b, "bob_age" → 59
```

User-facing output:

"The sorted list is [3, 15, 47, 91], the mean is 191/462, and Bob is 59 in the London story."

The scratchpad computations are exact (executed by primitives). The user-facing output frames the results. The owner can inspect the scratchpad via “/show scratchpad” to see the full computation trace.

## 6. Operational Environments

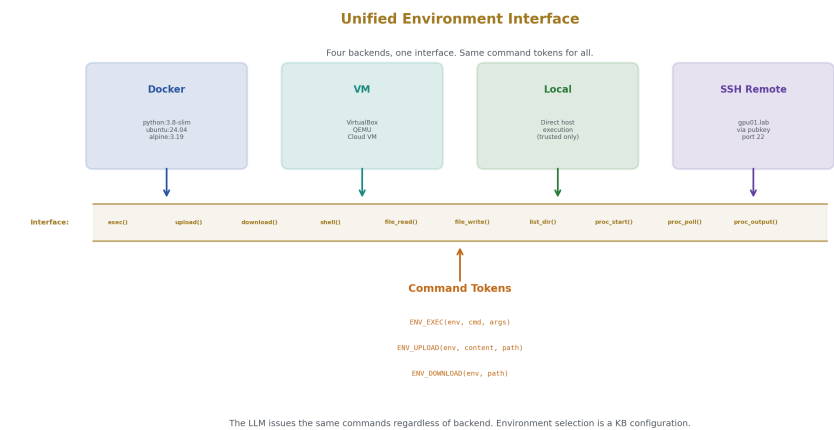


Figure 5: Fig. 4: Unified Environment — Docker, VM, Local, and SSH all present the same 10-operation interface to the LLM.

### 6.1 Environment Types

| Type   | Implementation    | Isolation | Performance | Best For                          |
|--------|-------------------|-----------|-------------|-----------------------------------|
| Docker | Container on host | Strong    | Good        | Default sandbox, testing, scripts |
| VM     | Virtual machine   | Strongest | Moderate    | Untrusted code, heavy workloads   |

| Type  | Implementation         | Isolation        | Performance | Best For                                                         |
|-------|------------------------|------------------|-------------|------------------------------------------------------------------|
| Local | Direct host execution  | None             | Best        | Trusted operations, development GPU servers, distributed compute |
| SSH   | Remote machine via SSH | Network-isolated | Variable    |                                                                  |

## 6.2 Environment Structure

```

OperationalEnv = struct {

  id: Text,

  type: enum { docker, vm, local, ssh_remote },

  // Type-specific configuration

  docker_image: ?Text, // "python:3.8-slim", "ubuntu:24.04"

  docker_container_id: ?Text,

  vm_id: ?Text,

  vm_image: ?Text,

  ssh_host: ?Text,

  ssh_port: ?number,

  ssh_credential: ?Text,

  local_working_dir: ?Text,

  // Common

  status: enum { stopped, starting, running, error },

  startup_script: ?Text,

  installed_packages: []Text,

  env_vars: dict,

```



```

resource_limits: ResourceLimits,

created_at: timestamp,

last_active: timestamp,

// KB integration

kb: Text,

grants: []Text,

};

ResourceLimits = struct {

max_cpu_seconds: ?number,

max_memory_mb: ?number,

max_disk_mb: ?number,

max_network_bytes: ?number,

max_processes: ?number,

};

```

### 6.3 Unified Interface

Every environment type implements the same interface:

| Operation      | Signature                                    | Description               |
|----------------|----------------------------------------------|---------------------------|
| env exec       | (env, command, args) → ExecResult            | Execute command           |
| env upload     | (env, content, remote path) → TransferResult | Upload content            |
| env download   | (env, remote path) → Content                 | Download content          |
| env shell      | (env, command) → ShellResult                 | Run shell command         |
| env file read  | (env, path) → Content                        | Read file in environment  |
| env file write | (env, path, content) → WriteResult           | Write file in environment |

| Operation       | Signature                         | Description                   |
|-----------------|-----------------------------------|-------------------------------|
| env list dir    | (env, path) → list(DirEntry)      | List directory in environment |
| env proc start  | (env, command) → TaskId           | Start background process      |
| env proc poll   | (env, task id) → TaskStatus       | Check process status          |
| env proc output | (env, task id) → (stdout, stderr) | Get process output            |

Whether the backend is Docker, VM, SSH, or local, the LLM issues the same command tokens. The environment type is a configuration fact. Switching environments means changing which env KB is active, not changing the commands.

#### 6.4 Environment as KB

Each operational environment has its own KB:

```
KB: kb_env_vdr_test

facts:

env_type: docker

env_image: python:3.8-slim

env_status: running

installed: [pytest, fractions]

execution_log:

[exec_001: exec_python("test_basic.py") → 12 passed, 3.2s]

[exec_002: fs_write("gym_16.py", content) → ok]

[exec_003: exec_pytest("gym/") → 157 passed, 5 failed, 28.4s]

uploaded_files:

["gym/gym_16.py" → v1, turn 52]

["gym/gym_17.py" → v1, turn 52]
```

```
active_tasks:
```

```
[task_047: exec_pytest → running since 14:30:00]
```

The environment KB tracks everything that has happened in that environment: every command executed, every file uploaded, every task started, every result returned. This is the operational provenance layer.

## 6.5 Environment Lifecycle

```
Rule: env_create(Id, Type, Config) :-  
    assert(env(Id, Type, Config, status(stopped))),  
    create_kb("kb_env_" + Id).  
  
Rule: env_start(Id) :-  
    env(Id, docker, Config, _),  
    docker_create_container(Config, ContainerId),  
    docker_start(ContainerId),  
    run_startup_script(Id),  
    retract(env(Id, _, _, status(_))),  
    assert(env(Id, _, _, status(running))).  
  
Rule: env_stop(Id) :-  
    env(Id, docker, _, _),  
    docker_stop(Id),  
    retract(env(Id, _, _, status(_))),  
    assert(env(Id, _, _, status(stopped))).  
  
Rule: env_destroy(Id) :-  
    env_stop(Id),  
    docker_remove(Id),
```

```
archive_kb("kb_env_" + Id).
```

Environments can be created, started, stopped, and destroyed. The KB persists even after the environment is destroyed (archived for audit). A new environment can be created from the same specification — it will have the same configuration but a fresh filesystem and process space.

---

## 7. Async Task Management

### 7.1 Task Structure

```
Task = struct {  
  
  id: Text,  
  
  operation: Text,  
  
  args: []Term,  
  
  env: Text,  
  
  grant: Text,  
  
  status: enum { pending, running, completed, failed, killed },  
  
  submitted_at: timestamp,  
  
  started_at: ?timestamp,  
  
  completed_at: ?timestamp,  
  
  result: ?ExecResult,  
  
  output_chunks: []OutputChunk,  
  
  topic: Text,  
  
  notify_on_complete: bool,  
  
  acknowledged: bool,  
  
};
```

```

OutputChunk = struct {
    index: number,
    timestamp: timestamp,
    stream: enum { stdout, stderr },
    content: Text,
};

```

## 7.2 Task Lifecycle

```

submitted → pending → running → completed
                ↓           ↓
                failed    killed

```

When a command token with `async=true` is issued:

1. A task is created with `status=pending` and asserted into the environment's KB.
2. The environment starts the process. Status changes to `running`.
3. Output is captured in chunks as it arrives.
4. When the process exits, status changes to `completed` (exit code 0) or `failed` (nonzero).
5. The result is stored in the task's result field and optionally copied to a KB key via `STORE_RESULT`.
6. If `notify_on_complete` is true, the task appears in the pending notifications list.

## 7.3 Turn-Based Notification

On each conversational turn, the system checks for completed tasks:

```
Rule: completed_tasks(Tasks) :-
```

```
findall(T,
```

```

    (task(T, _, _, _, _, status(completed), _, _, _, _, topic(Topic), true, f
        active_topic(Topic)),

```

Tasks) .

If completed tasks exist, they are surfaced at the end of the LLM's response:

LLM: [responds to user's question]

---

Completed tasks:

task\_047 (pytest gym/): 152 passed, 5 failed - 28.4s

[View results: /task task\_047] [Acknowledge]

The user can acknowledge (which sets acknowledged=true and stops the notification from repeating), view full results (which surfaces the task's KB entry), or ignore (which repeats the notification next turn).

#### 7.4 Chunked I/O Processing

For long-running tasks, output chunks are processed as they arrive:

Rule: on\_output\_chunk(TaskId, Chunk) :-

assert(task\_output(TaskId, Chunk)),

check\_watches\_against(Chunk),

check\_constraints\_against(Chunk) .

Each chunk can trigger watches (pattern-matched alerts), constraint checks (resource limit verification), and KB updates (intermediate result storage). This turns the output stream into a series of events that the Prolog engine processes, rather than an opaque buffer that is only read on completion.

## 8. Direct Data Download

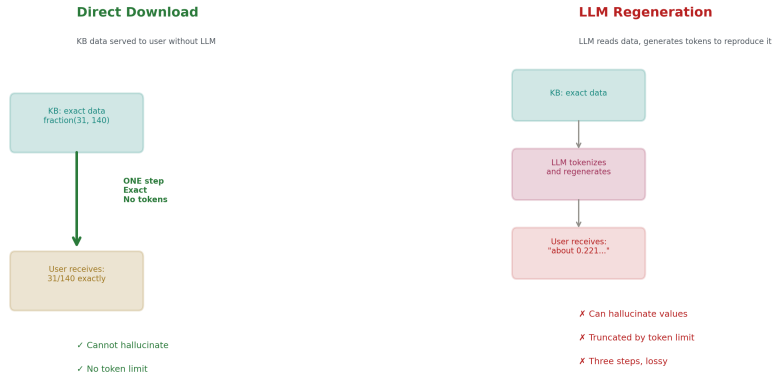


Figure 6: Fig. 6: Direct vs Regen — KB data served in one exact step versus three lossy steps through LLM tokenization.

### 8.1 The Principle

If data exists at a known address in the system (KB fact, file, task output, checkpoint), the user can download it directly without the LLM regenerating it as tokens. The data is served from its source. The LLM is not a middleman.

### 8.2 Addressable Resources

| Resource Type        | Address Format              | Example                                                   |
|----------------------|-----------------------------|-----------------------------------------------------------|
| KB fact              | kb://kb name/predicate/args | kb://kb vdr<br>training/parameter<br>value/layer.1.weight |
| KB dump              | kb://kb name/*              | kb://kb characters<br>b/*                                 |
| Working data binding | wd://topic/key              | wd://story b/bob<br>age                                   |
| File in environment  | fs://env id/path            | fs://env vdr<br>test/workspace/gym<br>16.py               |
| Task stdout          | task://task id/stdout       | task://task<br>047/stdout                                 |
| Task stderr          | task://task id/stderr       | task://task<br>047/stderr                                 |
| Checkpoint           | ckpt://step N               | ckpt://step 100                                           |

| Resource Type    | Address Format           | Example                             |
|------------------|--------------------------|-------------------------------------|
| Version          | ver://project/artifact/N | ver://project<br>vdr/gym 16/2       |
| Diff             | diff://source a/source b | diff://ckpt step<br>0/ckpt step 100 |
| Export           | export://kb name         | export://kb<br>characters b         |
| Context snapshot | ctx://snapshot name      | ctx://context<br>before refactor    |

### 8.3 Download Authorization

```

Rule: can_download(User, Resource) :-
    resource_exists(Resource),
    resource_kb(Resource, KB),
    user_can_see(User, KB),
    (resource_requires_grant(Resource, GrantClass) ->
        has_valid_grant(User, GrantClass) ;
        true).

```

KB facts are governed by KB visibility (VDR-5). Files in environments are governed by filesystem grants. The download check uses the same authorization logic as every other operation.

### 8.4 LLM-Initiated Attachments

The LLM can decide to attach data directly rather than generating it:

```
[CMD:DIRECT_OUTPUT] source=kb://kb_vdr_gyms/gym_16_result_v1
```

This serves the KB fact's content directly as a formatted data block in the response. The LLM provides framing text around it:

```

LLM: "Here are the gym 16 results:"

[Direct: kb://kb_vdr_gyms/gym_16_result_v1]

Gym 16: Graph Theory - 19 passed, 1 failed

```



Failed: max-flow BFS loop termination

LLM: "The max-flow test needs a BFS fix. Everything else passed."

The data block is retrieved, not generated. It cannot hallucinate.

## 9. Versioning

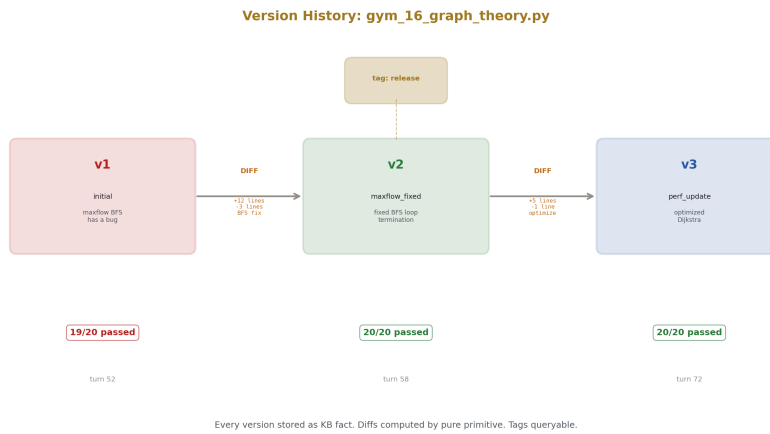


Figure 7: Fig. 8: Version History — Three versions of gym\_16 with diffs, tags, and test results at each version.

### 9.1 Version as KB Fact

Every artifact in a project can be versioned. A version is a snapshot of the artifact's content at a point in time, stored as a KB fact with metadata.

```
Fact: version("project_vdr", "gym_16_script",  
version_num(1),  
content_ref("kb_vdr_gyms/gym_16_v1"),  
created_at(timestamp(2026, 5, 16, 14, 30, 0)),  
created_by("system"),
```

```
parent_version(none),
tags(["initial"]),
test_result("19/20 passed"),
notes("maxflow BFS has a bug")).
```

## 9.2 Version Operations

| Operation | Command Token                                                   | Description                         |
|-----------|-----------------------------------------------------------------|-------------------------------------|
| Create    | VERSION CREATE(project, artifact, content, notes)               | Store new version                   |
| Tag       | VERSION TAG(project, artifact, version, tag)                    | Add tag to version                  |
| Retrieve  | KB QUERY(versions kb, version(project, artifact, N, ...))       | Get specific version                |
| Latest    | KB QUERY(versions kb, latest(artifact, N))                      | Get latest version number           |
| Diff      | PURE FN(diff, [content v1, content v2])                         | Structured diff between versions    |
| Rollback  | VERSION CREATE(project, artifact, content of v old, "rollback") | Create new version with old content |
| History   | KB QUERY(versions kb, version(project, artifact, , ...))        | All versions of artifact            |

## 9.3 Version Queries

```
?- version("project_vdr", Artifact, V, _, _, _, _, test_result("all passed")
// Which versions of which artifacts had all tests passing?

?- latest(Artifact, V), version("project_vdr", Artifact, V, _, _, _, _, Res
    not(Result = "all passed").

// Which artifacts have latest versions with failures?

?- version("project_vdr", "gym_16_script", V, _, _, _, _, tags(Tags), _, _),
```

```
member("release", Tags).  
  
// Which versions of gym_16 are tagged as releases?
```

---

## 10. Integration: The Complete Execution Flow

A concrete example showing all components working together:

User: "Write gym\_25 for tensor algebra, test it, and store the results"

LLM scratchpad:

```
[CMD:KB_QUERY] kb_project_vdr, constraint("python_38_compat") → active  
[CMD:KB_QUERY] kb_project_vdr, constraint("30_sec_runtime") → active  
[CMD:KB_QUERY] kb_vdr_gyms, latest_gym_number → 24  
[CMD:PURE_FN] vdr_add(24, 1) → 25
```

LLM output:

```
[TEXT] "Writing gym_25_tensor_algebra.py with Python 3.8  
compatibility and 30-second runtime constraint."
```

LLM generates script content (text tokens)...

```
[CMD:ENV_UPLOAD]  
env="env_vdr_test"  
content=<generated script>  
path="/workspace/gym/gym_25_tensor_algebra.py"  
→ TransferResult(ok)  
[CMD:ENV_EXEC]  
env="env_vdr_test"  
command="python3"
```

```

args=["/workspace/gym/gym_25_tensor_algebra.py"]

async=true

→ task_id="task_049"

[CMD:STORE_RESULT]

task="task_049"

kb="kb_vdr_gyms"

key="gym_25_result_v1"

[TEXT] "Script uploaded and running. Task: task_049."

--- conversation continues on other topics ---

[Task task_049 completes: 16 passed, 0 failed, 4.2s]

LLM (next turn, after checking pending tasks):

[CMD:POLL] task_049 → completed

[CMD:KB_QUERY] kb_vdr_gyms, "gym_25_result_v1" → result data

[TEXT] "Gym 25 finished:"

[CMD:DIRECT_OUTPUT] kb://kb_vdr_gyms/gym_25_result_v1


[TEXT] "16 passed, 0 failed in 4.2 seconds. Storing version 1."

[CMD:VERSION_CREATE]

project="project_vdr"

artifact="gym_25_tensor_algebra"

content=<script content>

notes="initial, 16/16 passed"

[CMD:KB_ASSERT] kb_vdr_gyms,

```

```

gym_result("gym_25", "tensor_algebra", 16, 16, 0)

[CMD:KB_ASSERT] kb_project_vdr,

set_binding("total_tests", number(721)) // 705 + 16

[CMD:KB_ASSERT] kb_project_vdr,

set_binding("total_gyms", number(25))

[TEXT] "Project stats updated: 25 gyms, 721 total tests, 0 VDR errors."

[CMD:ATTACHMENT] fs://env_vdr_test/workspace/gym/gym_25_tensor_algebra.py

```

Every step is traceable. Every command is logged in the environment KB. Every result is stored in the project KB. The version is created. The project working data is updated. The file is available for direct download. The user sees the framing text, the direct output block, and the attachment.

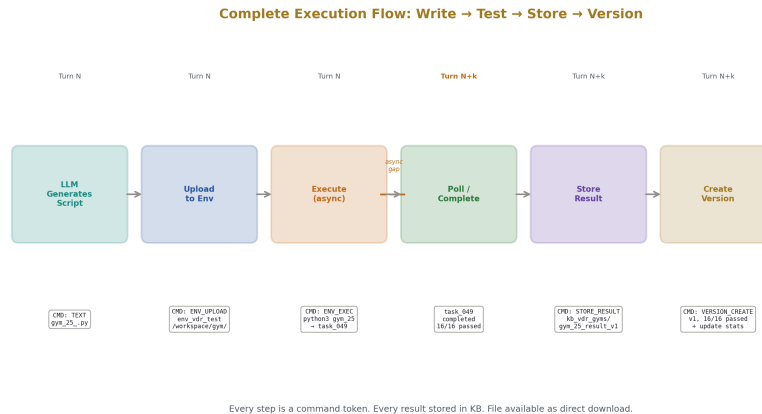


Figure 8: Fig. 2: Execution Flow — Write, upload, execute, poll, store, and version an artifact with exact data at every step.

## 11. Primitive Constraint Invariants

Every primitive carries constraint invariants that the system can verify at runtime:

| Primitive        | Invariant                               | Type        |
|------------------|-----------------------------------------|-------------|
| list sort        | output length equals input length       | axiom       |
| list sort        | output is sorted by declared rule       | axiom       |
| list sort        | output is a permutation of input        | axiom       |
| vdr add          | commutative: $a+b = b+a$                | axiom       |
| vdr add          | associative: $(a+b)+c = a+(b+c)$        | axiom       |
| vdr mul          | commutative: $ab = ba$                  | axiom       |
| prob normalize   | output sums to exactly 1                | axiom       |
| softmax          | output sums to exactly 1                | axiom       |
| softmax          | output preserves input ordering         | axiom       |
| softmax          | all outputs are positive                | axiom       |
| mat inv          | $M * \text{inv}(M) = \text{identity}$   | axiom       |
| mat det          | $\det(\text{identity}) = 1$             | axiom       |
| fs read/fs write | write then read returns written content | operational |
| compile          | success implies output file exists      | operational |
| exec             | exit code 0 implies success             | operational |

Axiom invariants are mathematical truths that can never be violated. If a violation is detected, it indicates a bug in the primitive implementation. Operational invariants hold under normal conditions but can be violated by external factors (disk failure between write and read, compiler crash).

## 12. Execution Logging and Audit

Every operational primitive execution produces a log entry:

```
Fact: execution_log(
  id("exec_047"),
  operation("exec_pytest"),
  args(["/workspace/gym/"]),
  env("env_vdr_test"),
  grant("alice_project_exec"),
  user("alice"),
```

```

started_at(timestamp(2026, 5, 16, 14, 30, 0)),
completed_at(timestamp(2026, 5, 16, 14, 30, 28)),
duration_ms(28400),
exit_code(0),
success(true),
topic("vdr_testing"),
result_ref("kb_vdr_gyms/gym_25_result_v1")).

```

The log is queryable for audit, debugging, and performance analysis:

```

?- execution_log(_, operation("fs_write"), _, _, _, user("alice"), _, _, _, _),
// All file writes by Alice

?- execution_log(_, _, _, _, grant(G), _, _, _, duration_ms(D), _, _, _, _), D
// All operations that took more than 60 seconds

?- execution_log(_, _, _, env(E), _, _, _, _, _, _, success(false), _, _).
// All failed operations by environment

?- execution_log(_, _, _, _, grant(G), _, Started, _, _, _, _, _),
   grant(G, _, _, _, _, _, Exp, _, _, _, _), Started > Exp.
// Operations attempted after grant expiration (should be empty)

```

### 13. Complete Primitive Count

| Category          | Type | Count | Grant Required |
|-------------------|------|-------|----------------|
| 1. String         | Pure | 17    | No             |
| 2. List           | Pure | 34    | No             |
| 3. VDR Arithmetic | Pure | 26    | No             |
| 4. Set            | Pure | 14    | No             |
| 5. Dictionary     | Pure | 15    | No             |
| 6. Linear Algebra | Pure | 16    | No             |

| Category                    | Type               | Count      | Grant Required |
|-----------------------------|--------------------|------------|----------------|
| 7. Statistics/Probability   | Pure               | 16         | No             |
| 8. Conversion/Formatting    | Pure               | 14         | No             |
| 9. Date/Time                | Pure               | 10         | No             |
| 10. Hashing/Encoding        | Pure               | 8          | No             |
| 11. Graph                   | Pure               | 13         | No             |
| 12. Pattern Matching        | Pure               | 7          | No             |
| 13. Logic/Control           | Pure               | 11         | No             |
| 14. KB/Constraint           | Pure (KB-internal) | 15         | No             |
| <b>Pure subtotal</b>        |                    | <b>216</b> |                |
| 15. Filesystem              | Operational        | 15         | Yes            |
| 16. Compilation             | Operational        | 4          | Yes            |
| 17. Script Execution        | Operational        | 5          | Yes            |
| 18. Linting/Analysis        | Operational        | 8          | Yes (read)     |
| 19. Network                 | Operational        | 5          | Yes            |
| 20. Process Management      | Operational        | 7          | Yes            |
| <b>Operational subtotal</b> |                    | <b>44</b>  |                |
| <b>Total</b>                |                    | <b>260</b> |                |

216 pure primitives that are always available and always correct. 44 operational primitives that require positive credential authorization and produce logged, auditable side effects.

## 14. Falsification Criteria

**F1.** If any pure primitive produces an incorrect result from valid inputs, the primitive is buggy. The invariant constraints enable automatic detection.

**F2.** If any operational primitive executes without a valid grant, the authorization system has a bypass vulnerability.

**F3.** If any command token is executed without being logged in the environment KB, the audit trail is incomplete.

**F4.** If any task result stored in the KB differs from the actual process output, the result capture mechanism has a bug.

**F5.** If a direct download serves content that differs from the source data, the serving mechanism has a corruption bug.

**F6.** If a version created by VERSION\_CREATE cannot be exactly retrieved by a subsequent query, the versioning system has a storage or retrieval bug.

**F7.** If an environment of type Docker allows an operation to affect the host filesystem outside the container mount, the isolation is broken.



Each criterion is testable by exact comparison. The pure primitive invariants are mathematical — they can be verified by the constraint system on every invocation. The operational criteria require integration testing against actual environments.

## 15. Implementation Priority

| Phase | Component                                    | Dependencies                 | Effort                                |
|-------|----------------------------------------------|------------------------------|---------------------------------------|
| 1     | Pure primitives<br>(categories 1-5)          | VDR core                     | Low per<br>primitive,<br>medium total |
| 2     | KB/constraint<br>primitives (category<br>14) | VDR-Prolog KB from<br>VDR-5  | Medium                                |
| 3     | Command token<br>parser and executor         | Primitives from phase 1-2    | Medium                                |
| 4     | Docker environment<br>manager                | Docker API                   | Medium                                |
| 5     | Filesystem<br>operational primitives         | Docker env from phase 4      | Low                                   |
| 6     | Execution and<br>compilation<br>primitives   | Docker env from phase 4      | Low                                   |
| 7     | Async task manager                           | Environment from phase<br>4  | Medium                                |
| 8     | Grant and credential<br>system               | KB from VDR-5                | Medium                                |
| 9     | Versioning system                            | KB from VDR-5                | Low                                   |
| 10    | Direct download<br>serving                   | KB + environments            | Low                                   |
| 11    | Pure primitives<br>(categories 6-13)         | VDR core                     | Medium total                          |
| 12    | Network and process<br>primitives            | Environment from phase<br>4  | Low                                   |
| 13    | Scratchpad and<br>notification system        | Task manager from phase<br>7 | Medium                                |
| 14    | Integration testing                          | All above                    | High                                  |

Phase 1 (pure string, list, arithmetic, set, dictionary primitives) and phase 3 (command token executor) can begin immediately with the existing VDR codebase. They do not require the Prolog KB engine from VDR-5. The KB engine is needed starting at phase 2 for constraint primitives and persists through all subsequent phases.

## 16. Conclusion

VDR-5 specified the knowledge architecture: what the system knows, how it is organized, and how it is queried. VDR-6 specifies the execution architecture: what the system does, how operations are authorized, and how results are stored.

Together they define a complete system:

The **knowledge layer** (VDR-5) provides scoped KBs, working data sets, constraint management, topic tracking, and first-class surfacing. Everything is a KB. Everything is queryable.

The **execution layer** (VDR-6) provides 216 pure computational primitives, 44 authorized operational primitives, command tokens for structured invocation, sandboxed operational environments, async task management, versioning, and direct data download. Everything is logged. Everything is authorized.

The **arithmetic layer** (VDR-1 through VDR-4) provides exact fractions, zero drift, exact softmax, exact autodiff, and a working transformer architecture. Everything is exact.

The language model sits at the center: recognizing intent, selecting primitives, assembling plans, generating explanations, and framing results. It does not sort lists (the sort primitive does). It does not compile code (the compilation primitive does). It does not remember constraints (the KB stores them). It does not track conversations (the topic system tracks them). It does what language models do well — understand language and reason about goals — and delegates everything else to components that are exact, authorized, logged, and queryable.

260 primitives. 20 categories. Positive credential gating. Async execution. KB-stored results. Versioned artifacts. Direct data download. Command tokens. Operational environments. Everything logged. Everything auditable. Everything surfaceable.

The system can think, compute, execute, store, verify, and explain. Each capability is a separate component with clear interfaces. No component does another’s job. The result is not a faster language model or a more capable language model. It is a trustworthy computational system with a language model as its interface.

---

## Appendix A: Complete Primitive Index

| #       | Name             | Category       | Type |
|---------|------------------|----------------|------|
| 1-17    | string *         | String         | Pure |
| 18-53   | list *           | List           | Pure |
| 54-79   | vdr *            | Arithmetic     | Pure |
| 80-93   | set *            | Set            | Pure |
| 94-108  | dict *           | Dictionary     | Pure |
| 109-124 | vec , <i>mat</i> | Linear Algebra | Pure |

| #       | Name                                                                                                                                         | Category      | Type               |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------|
| 125-140 | stat , <i>prob</i> ,<br>softmax*                                                                                                             | Statistics    | Pure               |
| 141-154 | to , <i>format</i> , parse ,<br><i>number to</i>                                                                                             | Conversion    | Pure               |
| 155-164 | date , <i>time</i> ,<br>duration *                                                                                                           | Date/Time     | Pure               |
| 165-172 | hash , <i>base64</i> , hex<br>, <i>crc32</i> , <i>uuid</i>                                                                                   | Hashing       | Pure               |
| 173-185 | graph *                                                                                                                                      | Graph         | Pure               |
| 186-192 | regex , <i>glob</i> ,<br>wildcard *                                                                                                          | Pattern       | Pure               |
| 193-203 | if then else, case<br>match, for each,<br>repeat n, while<br>loop, try catch,<br>assert that, type<br>check, is bound,<br>findall, aggregate | Logic         | Pure               |
| 204-218 | kb , <i>constraint</i>                                                                                                                       | KB/Constraint | Pure (KB-internal) |
| 219-233 | fs *                                                                                                                                         | Filesystem    | Operational        |
| 234-237 | compile *                                                                                                                                    | Compilation   | Operational        |
| 238-242 | exec *                                                                                                                                       | Execution     | Operational        |
| 243-250 | lint , <i>analyze</i> ,<br>count lines                                                                                                       | Linting       | Operational        |
| 251-255 | net *                                                                                                                                        | Network       | Operational        |
| 256-262 | proc *                                                                                                                                       | Process       | Operational        |

## Appendix B: Command Token Reference

| Token Type    | Arguments                         | Grant Required | Async    | Side Effect               |
|---------------|-----------------------------------|----------------|----------|---------------------------|
| PURE FN       | primitive, args                   | No             | No       | None                      |
| OP FN         | primitive,<br>args, env,<br>grant | Yes            | Optional | Declared per<br>primitive |
| KB ASSERT     | kb, fact                          | No (scoped)    | No       | KB state                  |
| KB<br>RETRACT | kb, fact                          | No (scoped)    | No       | KB state                  |
| KB QUERY      | kb, predicate,<br>args            | No (scoped)    | No       | None                      |

| Token Type          | Arguments                               | Grant Required           | Async       | Side Effect      |
|---------------------|-----------------------------------------|--------------------------|-------------|------------------|
| ENV EXEC            | env,<br>command,<br>args                | Yes                      | Recommended | Process creation |
| ENV<br>UPLOAD       | env, content,<br>path                   | Yes                      | No          | File creation    |
| ENV DOWN-<br>LOAD   | env, path                               | Yes                      | No          | Data transfer    |
| CTX<br>ACTIVATE     | kb                                      | No                       | No          | Context state    |
| CTX DEAC-<br>TIVATE | kb                                      | No                       | No          | Context state    |
| CTX<br>SNAPSHOT     | name                                    | No                       | No          | KB creation      |
| VERSION<br>CREATE   | project,<br>artifact,<br>content, notes | No                       | No          | KB state         |
| VERSION<br>TAG      | project,<br>artifact,<br>version, tag   | No                       | No          | KB state         |
| STORE<br>RESULT     | task id, kb,<br>key                     | No                       | No          | KB state         |
| DIRECT<br>OUTPUT    | resource<br>address                     | No<br>(visibility-gated) | No          | Data to user     |
| ATTACHMENT          | resource<br>address,<br>filename        | Yes (read grant)         | No          | File to user     |

## Appendix C: Grant Class Reference

| Class      | Operations                                                                | Typical Scope     | Risk Level                    |
|------------|---------------------------------------------------------------------------|-------------------|-------------------------------|
| filesystem | read, write, append,<br>create dir, delete,<br>move, copy                 | Directory path    | Medium (write),<br>Low (read) |
| compile    | compile python<br>check, compile zig,<br>compile c, compile<br>rust       | Source directory  | Low-Medium                    |
| execute    | exec python, exec<br>shell, exec zig test,<br>exec pytest, exec<br>script | Working directory | High                          |

| Class   | Operations                                                                                   | Typical Scope           | Risk Level      |
|---------|----------------------------------------------------------------------------------------------|-------------------------|-----------------|
| lint    | lint python, lint zig,<br>lint json, lint<br>markdown, analyze<br>*                          | Source directory        | Low (read-only) |
| network | net download, net<br>fetch, net post, net<br>ping, net dns<br>resolve                        | URL pattern or wildcard | Medium          |
| process | proc start, proc<br>poll, proc wait,<br>proc kill, proc<br>stdout, proc stderr,<br>proc list | Environment             | Medium-High     |

## Appendix D: Paper Series

| Paper        | Registry                           | Central Result                                                              |
|--------------|------------------------------------|-----------------------------------------------------------------------------|
| VDR-1        | <a href="#">[HOWL-VDR-1-2026]</a>  | Exact arithmetic in irreducible triple form                                 |
| VDR-2        | <a href="#">[HOWL-VDR-2-2026]</a>  | 15 domains, 282 tests, chaos boundary                                       |
| VDR-3        | <a href="#">[HOWL-VDR-3-2026]</a>  | 23 domains, transcendental integration, no unique boundaries                |
| VDR-4        | <a href="#">[HOWL-VDR-4-2026]</a>  | 24-module ML stack, working exact transformer                               |
| VDR-5        | <a href="#">[HOWL-VDR-5-2026]</a>  | Prolog provenance, constraints, scoped KBs, surfacing                       |
| <b>VDR-6</b> | <a href="#">[HOWL-VDR-6-2026]</a>  | <b>260 primitives, command tokens, operational environments, versioning</b> |
| MATH-3       | <a href="#">[HOWL-MATH-3-2026]</a> | Elliptic integrals, Borwein acceleration                                    |
| MATH-4       | <a href="#">[HOWL-MATH-4-2026]</a> | Q335 universal basis, 22 constants                                          |

**END HOWL-VDR-6-2026**

**Registry:** [\[HOWL-VDR-6-2026\]](#)

**Status:** Specification complete

**Domain:** Applied Philosophy / Systems Architecture / Exact Computation

**Central Result:** 260 computational primitives (216 pure, 44 operational) across 20 categories, command token mechanism for structured LLM output, operational environments with unified interface, positive credential gating, async task management, versioning, and direct data download.

**Foundation:** VDR-1 through VDR-5, MATH-3, MATH-4

**Key Principle:** Separation of concerns. The LLM understands intent. Primitives compute. Environments execute. KBs store. Constraints authorize. Surfacing presents. No component does another’s job.

**Falsification:** Seven specific criteria testable by exact comparison and integration testing.

---

## VDR-6 Extended Appendix Tables

### Complete Reference Material for the Execution Layer

---

#### Appendix E: Operational Environment Configuration Reference

##### E.1 Docker Environment Specifications

| Field          | Type         | Required | Default        | Example                                       |
|----------------|--------------|----------|----------------|-----------------------------------------------|
| image          | atom         | Yes      | —              | “python:3.8-slim”                             |
| container name | atom         | No       | auto-generated | “vdr test env 001”                            |
| working dir    | atom         | No       | “/workspace”   | “/workspace”                                  |
| mount          | list(pair)   | No       | []             | [(“/home/alice/vdr”, “/workspace/vdr”)]       |
| points exposed | list(number) | No       | []             | [8080, 5000]                                  |
| ports          |              |          |                |                                               |
| env vars       | dict         | No       | { }            | { “PYTHONPATH”: “/workspace” }                |
| startup script | atom         | No       | none           | “pip install pytest && pip install fractions” |
| max cpu        | number       | No       | 3600           | 300                                           |
| seconds        |              |          |                |                                               |
| max            | number       | No       | 2048           | 512                                           |
| memory mb      |              |          |                |                                               |
| max disk mb    | number       | No       | 10240          | 1024                                          |

| Field          | Type | Required | Default  | Example              |
|----------------|------|----------|----------|----------------------|
| network mode   | atom | No       | “bridge” | “none” for isolation |
| auto remove    | bool | No       | false    | true for ephemeral   |
| restart policy | atom | No       | “no”     | “on-failure”         |

## E.2 VM Environment Specifications

| Field              | Type   | Required | Default | Example                             |
|--------------------|--------|----------|---------|-------------------------------------|
| vm provider        | atom   | Yes      | —       | “virtualbox”, “qemu”, “cloud”       |
| vm image           | atom   | Yes      | —       | “ubuntu-24.04-server”               |
| vm cpus            | number | No       | 2       | 4                                   |
| vm memory mb       | number | No       | 4096    | 8192                                |
| vm disk gb         | number | No       | 20      | 50                                  |
| ssh port forward   | number | No       | 2222    | 2222                                |
| snapshot on create | bool   | No       | true    | true                                |
| provision script   | atom   | No       | none    | “apt update && apt install python3” |

## E.3 SSH Remote Environment Specifications

| Field                 | Type   | Required    | Default | Example                             |
|-----------------------|--------|-------------|---------|-------------------------------------|
| host                  | atom   | Yes         | —       | “gpu01.lab.example.com”             |
| port                  | number | No          | 22      | 22                                  |
| username              | atom   | Yes         | —       | “alice”                             |
| auth method           | atom   | Yes         | —       | “pubkey”, “password”, “certificate” |
| key ref               | atom   | Conditional | —       | “ssh key alice gpu01”               |
| remote working dir    | atom   | No          | “~/”    | “/home/alice/workspace”             |
| connection timeout ms | number | No          | 30000   | 10000                               |

| Field                | Type   | Required | Default | Example                             |
|----------------------|--------|----------|---------|-------------------------------------|
| keepalive interval s | number | No       | 60      | 30                                  |
| max sessions         | number | No       | 5       | 3                                   |
| proxy command        | atom   | No       | none    | “ssh -W %h:%p bas-tion.example.com” |

#### E.4 Local Environment Specifications

| Field               | Type       | Required | Default   | Example                    |
|---------------------|------------|----------|-----------|----------------------------|
| working dir         | atom       | Yes      | —         | “/home/alice/projects/vdr” |
| path restriction    | atom       | No       | none      | “/home/alice/”             |
| shell               | atom       | No       | “/bin/sh” | “/bin/bash”                |
| inherit env         | bool       | No       | false     | true                       |
| allowed executables | list(atom) | No       | all       | [“python3”, “zig”, “git”]  |

#### E.5 Environment State Transitions

| From     | To         | Trigger          | Side Effects                   | Logged As                                       |
|----------|------------|------------------|--------------------------------|-------------------------------------------------|
| (none)   | stopped    | env create()     | KB created, config stored      | env created(id, type, timestamp)                |
| stopped  | starting   | env start()      | Container/VM launching         | env starting(id, timestamp)                     |
| starting | running    | Startup complete | Startup script executed        | env running(id, timestamp, startup duration ms) |
| starting | error      | Startup failed   | Error details captured         | env error(id, timestamp, reason)                |
| running  | stopped    | env stop()       | Process graceful shutdown      | env stopped(id, timestamp)                      |
| running  | error      | Runtime failure  | Error details captured         | env error(id, timestamp, reason)                |
| stopped  | (archived) | env destroy()    | Container removed, KB archived | env destroyed(id, timestamp)                    |
| error    | stopped    | env reset()      | Error cleared, state reset     | env reset(id, timestamp)                        |
| error    | (archived) | env destroy()    | Container removed, KB archived | env destroyed(id, timestamp)                    |



## Appendix F: Task State Machine Reference

### F.1 Task State Transitions

| From      | To           | Trigger                    | KB Update                          | Notification          |
|-----------|--------------|----------------------------|------------------------------------|-----------------------|
| (none)    | pending      | Command token issued       | task asserted with status(pending) | None                  |
| pending   | running      | Environment starts process | started at set                     | None                  |
| running   | completed    | Process exits code 0       | completed at set, result stored    | If notify on complete |
| running   | failed       | Process exits code != 0    | completed at set, error stored     | Always                |
| running   | killed       | proc kill() or timeout     | completed at set, kill reason      | Always                |
| completed | acknowledged | User acknowledges          | acknowledged = true                | Stops repeating       |
| failed    | acknowledged | User acknowledges          | acknowledged = true                | Stops repeating       |

### F.2 Task Output Processing

| Event                | Processing           | KB Update                                     | Watch Trigger                  |
|----------------------|----------------------|-----------------------------------------------|--------------------------------|
| stdout chunk arrives | Store as OutputChunk | task output(id, chunk(N), stdout, content)    | Checked against output watches |
| stderr chunk arrives | Store as OutputChunk | task output(id, chunk(N), stderr, content)    | Checked against error watches  |
| Process exit         | Capture final state  | task status updated, result computed          | completion watches fire        |
| Timeout reached      | Kill process         | task status = killed, reason = timeout        | timeout watches fire           |
| Resource limit hit   | Kill process         | task status = killed, reason = resource limit | resource watches fire          |

### F.3 Task Query Patterns

| Query Pattern                                                                            | Purpose                                          | Returns                     |
|------------------------------------------------------------------------------------------|--------------------------------------------------|-----------------------------|
| task(Id, , , , status(running), , )                                                      | All running tasks                                | Task IDs                    |
| task(Id, , , env(E), , , )                                                               | Tasks in specific environment                    | Task IDs and details        |
| task(Id, , , , status(completed), , , , , topic(T), notify(true), ack(false))            | Unacknowledged completed tasks in topic          | Notification candidates     |
| task(Id, , , , , started at(S), completed at(C), , , , , ), duration(S, C, D), D > 60000 | Long-running tasks (>60s)                        | Task IDs with durations     |
| task output(Id, , stderr, Content), regex match(Content, "error!Error!ERROR")            | Tasks with error output                          | Task IDs with error content |
| task(Id, , , , grant(G), , , , , , , ), not(grant valid(G))                              | Tasks whose grants have expired since submission | Security audit candidates   |

## Appendix G: Direct Download Resource Address Formats

### G.1 Address Syntax

| Scheme | Format                               | Description                          | Example                                                    |
|--------|--------------------------------------|--------------------------------------|------------------------------------------------------------|
| kb://  | kb://kb name/predicate/arg1/arg2/... | Specific fact by predicate and args. | kb://kb vdr training/parameter value/layer.1.weight/step 0 |
| kb://  | kb://kb name/*                       | All facts in KB                      | kb://kb characters b/*                                     |
| kb://  | kb://kb name/?predicate=X&arg1=Y     | Query-style filter                   | kb://kb vdr training/?predicate=gradient at&step=0         |
| wd://  | wd://topic name/binding key          | Working data binding                 | wd://story b/bob age                                       |
| wd://  | wd://topic name/*                    | All bindings in topic                | wd://story b/*                                             |
| fs://  | fs://env id/absolute/path            | File in environment                  | fs://env vdr test/workspace/gym 16.py                      |
| fs://  | fs://env id/path/*                   | Directory listing                    | fs://env vdr test/workspace/gym/*                          |

| Scheme    | Format                                | Description                            | Example                                       |
|-----------|---------------------------------------|----------------------------------------|-----------------------------------------------|
| task://   | task://task<br>id/stdout              | Task standard output                   | task://task<br>047/stdout                     |
| task://   | task://task<br>id/stderr              | Task standard error                    | task://task<br>047/stderr                     |
| task://   | task://task<br>id/result              | Task structured result                 | task://task<br>047/result                     |
| task://   | task://task<br>id/chunks              | All output chunks                      | task://task<br>047/chunks                     |
| ckpt://   | ckpt://step N                         | Full checkpoint at step N              | ckpt://step 100                               |
| ckpt://   | ckpt://step<br>N/param path           | Single parameter at<br>checkpoint      | ckpt://step<br>100/layer.1.weight             |
| ver://    | ver://project/artifact                | Specific version content               | ver://project<br>vdr/gym 16/2                 |
| ver://    | ver://project/artifact                | Latest version                         | ver://project<br>vdr/gym 16/latest            |
| ver://    | ver://project/artifact                | Tagged version                         | ver://project<br>vdr/gym<br>16/tagged/release |
| diff://   | diff://addr<br>a/addr b               | Computed diff between<br>two resources | diff://ckpt step<br>0/ckpt step 100           |
| export:// | export://kb<br>name                   | Full KB export as JSON                 | export://kb<br>characters b                   |
| export:// | export://kb<br>name?format=csv        | KB export in specified<br>format       | export://kb vdr<br>train-<br>ing?format=csv   |
| ctx://    | ctx://snapshot<br>name                | Context snapshot                       | ctx://context<br>before refactor              |
| log://    | log://env id                          | Execution log for<br>environment       | log://env vdr test                            |
| log://    | log://env<br>id?operation=fs<br>write | Filtered execution log                 | log://env vdr<br>test?operation=fs<br>write   |

## G.2 Output Formats for Direct Download

| Resource Type           | Default Format   | Alternative Formats | Content-Type                    |
|-------------------------|------------------|---------------------|---------------------------------|
| KB fact(s)              | Structured text  | JSON, CSV, LaTeX    | text/plain,<br>application/json |
| Working data<br>binding | Key: value text  | JSON                | text/plain                      |
| File                    | Raw file content | —                   | Detected from<br>extension      |
| Task stdout/stderr      | Raw text         | —                   | text/plain                      |

| Resource Type | Default Format      | Alternative Formats  | Content-Type          |
|---------------|---------------------|----------------------|-----------------------|
| Task result   | Structured result   | JSON                 | application/json      |
| Checkpoint    | JSON (all params)   | Per-param text       | application/json      |
| Version       | Raw content         | With metadata header | Detected from content |
| Diff          | Unified diff format | Side-by-side, JSON   | text/plain            |
| KB export     | JSON                | CSV, Prolog format   | application/json      |
| Execution log | Structured text     | JSON, CSV            | text/plain            |

### G.3 Authorization Matrix for Download

| Resource Scheme | Required Permission                  | Additional Grant      | Notes                             |
|-----------------|--------------------------------------|-----------------------|-----------------------------------|
| kb://           | user can see(User, KB)               | None                  | KB visibility controls access     |
| wd://           | user can see(User, topic kb)         | None                  | Topic KB visibility               |
| fs://           | user can see(User, env kb)           | filesystem read grant | Needs both KB access and fs grant |
| task://         | task belongs to user's topic         | None                  | Scoped by topic ownership         |
| ckpt://         | user can see(User, training kb)      | None                  | Training KB visibility            |
| ver://          | user can see(User, project kb)       | None                  | Project KB visibility             |
| diff://         | Permission for both source addresses | Per source address    | Both ends must be authorized      |
| export://       | user can see(User, KB)               | None                  | KB visibility                     |
| ctx://          | user owns the context                | None                  | Personal to user                  |

| Resource Scheme | Required Permission        | Additional Grant | Notes                     |
|-----------------|----------------------------|------------------|---------------------------|
| log://          | user can see(User, env kb) | None             | Environment KB visibility |

## Appendix H: Version Management Reference

### H.1 Version Record Structure

| Field            | Type           | Required | Description                | Example                          |
|------------------|----------------|----------|----------------------------|----------------------------------|
| project          | atom           | Yes      | Project KB name            | “project vdr”                    |
| artifact         | atom           | Yes      | Artifact identifier        | “gym 16 script”                  |
| version num      | number         | Yes      | Sequential version number  | 2                                |
| content ref      | atom           | Yes      | KB address of content      | “kb vdr gyms/gym 16 v2”          |
| created at       | timestamp      | Yes      | Creation time              | timestamp(2026, 5, 16, 15, 0, 0) |
| created by       | atom           | Yes      | Creator identifier         | “system” or “alice”              |
| parent version   | number or none | Yes      | Previous version number    | 1                                |
| tags             | list(atom)     | No       | Version tags               | [“release”, “tested”]            |
| test result      | atom           | No       | Test outcome summary       | “20/20 passed”                   |
| notes            | atom           | No       | Human-readable description | “fixed maxflow BFS”              |
| size bytes       | number         | No       | Content size               | 4096                             |
| checksum         | atom           | No       | Content hash               | “a1b2c3d4...”                    |
| diff from parent | atom           | No       | Reference to diff          | “kb vdr gyms/gym 16 diff v1 v2”  |

### H.2 Version Query Patterns

| Query                   | Purpose                           | Example                                                       |
|-------------------------|-----------------------------------|---------------------------------------------------------------|
| Latest version          | What is the current version?      | latest(“project vdr”, “gym 16 script”, N)                     |
| Version by tag          | Which version is tagged release?  | version(P, A, V, , , , tags(T), , ), member(“release”, T)     |
| All versions            | Full history of artifact          | findall(V, version(P, A, V, , , , , , , ), Vs)                |
| Versions with failures  | Which versions had test failures? | version(P, A, V, , , , , Result, ), Result = “all passed”     |
| Versions by author      | What did Alice create?            | version(P, A, V, , , created by(“alice”), , , , )             |
| Versions in date range  | What changed this week?           | version(P, A, V, , created at(T), , , , ), T > start, T < end |
| Diff chain              | How did artifact evolve?          | Traverse parent version links from latest to version 1        |
| Cross-artifact versions | Everything created at this step   | version(P, , V, , created at(T), , , , ) for fixed T          |

### H.3 Version Operations and Their Command Tokens

| Operation | Command Token                                              | Preconditions                      | Side Effects                                           |
|-----------|------------------------------------------------------------|------------------------------------|--------------------------------------------------------|
| Create    | VERSION<br>CREATE(project,<br>artifact, content,<br>notes) | Project KB exists                  | New version fact,<br>content stored,<br>latest updated |
| Tag       | VERSION<br>TAG(project,<br>artifact, version, tag)         | Version exists                     | Tag added to<br>version record                         |
| Untag     | VERSION<br>UNTAG(project,<br>artifact, version, tag)       | Tag exists on version              | Tag removed                                            |
| Retrieve  | KB QUERY +<br>DIRECT<br>OUTPUT(ver://...)                  | Version exists, user<br>authorized | Content served                                         |
| Diff      | PURE FN(diff,<br>[content v1, content<br>v2])              | Both versions exist                | Diff computed<br>(not stored unless<br>explicit)       |
| Rollback  | VERSION<br>CREATE with<br>content from old<br>version      | Old version<br>retrievable         | New version<br>created with old<br>content             |

| Operation | Command Token                    | Preconditions       | Side Effects                                           |
|-----------|----------------------------------|---------------------|--------------------------------------------------------|
| Delete    | KB<br>RETRACT(version<br>record) | Admin authorization | Version record<br>removed (content<br>may be retained) |
| Freeze    | Set version<br>immutable flag    | Version exists      | Prevents<br>modification of<br>version record          |

## Appendix I: Scratchpad and Internal Reasoning Reference

### I.1 Scratchpad Entry Types

| Entry Type             | Content                                    | Visible To | Surfaceable Via  |
|------------------------|--------------------------------------------|------------|------------------|
| Pure primitive call    | Primitive<br>name, args,<br>result         | Owner      | /show scratchpad |
| KB query<br>(internal) | Query, results                             | Owner      | /show scratchpad |
| Constraint check       | Constraint<br>name, result                 | Owner      | /show scratchpad |
| Grant verification     | Grant checked,<br>outcome                  | Owner      | /show scratchpad |
| Reasoning step         | Natural<br>language<br>internal<br>thought | Owner      | /show scratchpad |
| Plan step              | Planned action<br>before<br>execution      | Owner      | /show scratchpad |
| Error recovery         | Failed action,<br>recovery<br>strategy     | Owner      | /show scratchpad |

### I.2 Scratchpad Retention Policy

| Policy        | Retention                                 | Purpose           |
|---------------|-------------------------------------------|-------------------|
| Current turn  | Always retained during turn<br>processing | Active reasoning  |
| Previous turn | Retained if topic unchanged               | Continuity        |
| Older turns   | Pruned unless flagged                     | Memory management |

| Policy          | Retention             | Purpose                            |
|-----------------|-----------------------|------------------------------------|
| Flagged entries | Retained indefinitely | User or system marked as important |
| Error entries   | Retained for 10 turns | Debugging                          |

### I.3 Scratchpad Surfacing Commands

| Command                           | Effect                             | Authorization |
|-----------------------------------|------------------------------------|---------------|
| /show scratchpad                  | Display current turn's scratchpad  | Owner only    |
| /show scratchpad turn(N)          | Display specific turn's scratchpad | Owner only    |
| /show scratchpad last(5)          | Display last 5 turns' scratchpads  | Owner only    |
| /show scratchpad filter(pure fn)  | Show only pure primitive calls     | Owner only    |
| /show scratchpad filter(kb query) | Show only KB queries               | Owner only    |
| /scratchpad on                    | Always show scratchpad in output   | Owner only    |
| /scratchpad off                   | Hide scratchpad (default)          | Owner only    |

## Appendix J: Reminder and Watch Reference

### J.1 Reminder Structure

| Field           | Type   | Required | Default      | Description                                    |
|-----------------|--------|----------|--------------|------------------------------------------------|
| name            | atom   | Yes      | —            | Unique identifier                              |
| condition       | fact   | Yes      | —            | Prolog condition to evaluate                   |
| message         | atom   | Yes      | —            | Message to display when triggered              |
| check frequency | enum   | Yes      | —            | every turn, on topic enter, on kb change, once |
| requires ack    | bool   | No       | true         | Must user acknowledge?                         |
| created at      | number | Yes      | current turn | Turn when created                              |
| created by      | atom   | Yes      | —            | “user” or “system”                             |



| Field         | Type   | Required | Default   | Description                       |
|---------------|--------|----------|-----------|-----------------------------------|
| acknowledged  | bool   | No       | false     | Has user acknowledged?            |
| snoozed until | number | No       | none      | Turn until which snooze is active |
| topic         | atom   | Yes      | —         | Associated topic                  |
| priority      | enum   | No       | normal    | low, normal, high, urgent         |
| max displays  | number | No       | unlimited | Stop showing after N times        |
| display count | number | No       | 0         | Times shown so far                |

## J.2 Watch Structure

| Field            | Type   | Required | Default | Description                         |
|------------------|--------|----------|---------|-------------------------------------|
| name             | atom   | Yes      | —       | Unique identifier                   |
| condition        | fact   | Yes      | —       | Prolog condition to evaluate        |
| message          | atom   | Yes      | —       | Message template with variables     |
| watch type       | enum   | Yes      | —       | on change, on threshold, on pattern |
| target kb        | atom   | No       | active  | KB to monitor for changes           |
| target predicate | atom   | No       | any     | Specific predicate to watch         |
| active           | bool   | No       | true    | Currently monitoring?               |
| triggered count  | number | No       | 0       | Times triggered                     |
| last triggered   | number | No       | none    | Turn when last triggered            |
| topic            | atom   | Yes      | —       | Associated topic                    |
| auto dismiss     | bool   | No       | false   | Dismiss after first trigger?        |

## J.3 Reminder and Watch Lifecycle

| State        | Reminders                        | Watches                                       |
|--------------|----------------------------------|-----------------------------------------------|
| Created      | Fact asserted in topic KB        | Fact asserted in topic KB                     |
| Active       | Evaluated per check frequency    | Evaluated on relevant KB changes              |
| Triggered    | Condition met, message queued    | Condition met, message queued                 |
| Displayed    | Message shown to user            | Message shown to user                         |
| Acknowledged | User clicks ack, stops repeating | Resets for next trigger (unless auto dismiss) |
| Snoozed      | Suppressed for N turns           | N/A (watches re-trigger on next change)       |
| Expired      | max displays reached             | N/A                                           |

| State       | Reminders              | Watches                               |
|-------------|------------------------|---------------------------------------|
| Deactivated | Topic parked or closed | Watch disabled by user or topic close |

#### J.4 Prompted Constraint Patterns

| User Request                                      | Resulting Reminder/Watch                                             | Type                     |
|---------------------------------------------------|----------------------------------------------------------------------|--------------------------|
| “Remind me about X when we discuss Y”             | Reminder on topic contains(active, “Y”)                              | Reminder, on topic enter |
| “Check each turn if constraints are violated”     | Watch on violations( , Vs), Vs = []                                  | Watch, every turn        |
| “Tell me when the loss drops below 0.01”          | Watch on loss at( , L), L < 1/100                                    | Watch, on change         |
| “Don’t let me forget to fix the BFS bug”          | Reminder on active topic(“vdr gyms”)                                 | Reminder, on topic enter |
| “Alert if any parameter denominator exceeds 2^64” | Watch on param denom > 2^64                                          | Watch, on change         |
| “Every 10 turns, summarize what we’ve done”       | Reminder on current turn mod 10 = 0                                  | Reminder, every turn     |
| “When Alice pushes code, notify me”               | Watch on execution log( , “git push”, , , user(“alice”), , , , , , ) | Watch, on change         |

## Appendix K: Fat Struct KB Entry Reference

### K.1 All Fields of a KB Entry

| Field Group | Field      | Type       | Used By | Description             |
|-------------|------------|------------|---------|-------------------------|
| Identity    | id         | atom       | All     | Unique entry identifier |
| Identity    | predicate  | atom       | All     | Fact predicate name     |
| Identity    | args       | list(term) | All     | Fact arguments          |
| Identity    | kb         | atom       | All     | Owning KB name          |
| Value       | value      | term       | All     | Primary value           |
| Value       | value type | atom       | All     | VDR term type of value  |

| Field Group       | Field                  | Type                   | Used By        | Description                    |
|-------------------|------------------------|------------------------|----------------|--------------------------------|
| Provenance        | derived from           | derivation             | Computed       | How this value was produced    |
| Provenance        | source                 | atom                   | Imported       | External source reference      |
| Provenance        | created at             | timestamp              | All            | When entry was created         |
| Provenance        | modified at            | timestamp              | Mutable        | When last modified             |
| Provenance        | created by             | atom                   | All            | Who or what created this       |
| Weight Provenance | initialization         | init record            | Params         | How parameter was initialized  |
| Weight Provenance | gradient history       | list(grad record)      | Params         | Gradient at each training step |
| Weight Provenance | update history         | list(update record)    | Params         | Update applied at each step    |
| Weight Provenance | checkpoint values      | list(ckpt record)      | Params         | Value at each checkpoint       |
| Weight Provenance | denominator complexity | denom record           | Params         | Denominator size tracking      |
| Data Provenance   | data source            | source record          | Data           | Original data source           |
| Data Provenance   | preprocessing chain    | list(transform record) | Data           | Transforms applied             |
| Data Provenance   | confidence             | fraction               | Data           | Source reliability estimate    |
| Data Provenance   | quality flags          | list(atom)             | Data           | Quality annotations            |
| Weighting         | data weight            | fraction               | Training data  | Contribution to training loss  |
| Weighting         | provenance weight      | fraction               | Derived values | Confidence in derivation chain |
| Versioning        | version                | number                 | Versioned      | Current version number         |
| Versioning        | version history        | list(version record)   | Versioned      | All version records            |
| Constraints       | local constraints      | list(constraint)       | Constrained    | Entry-specific constraints     |
| Tags              | tags                   | list(atom)             | Tagged         | Classification tags            |

## K.2 Population Patterns by Entry Type

| Entry Type       | Always Populated                                     | Usually Populated                                        | Rarely Populated                    |
|------------------|------------------------------------------------------|----------------------------------------------------------|-------------------------------------|
| Simple binding   | id, predicate, value, kb, created at                 | created by, tags                                         | Everything else                     |
| Model parameter  | id, predicate, value, kb, created at, initialization | gradient history, update history, denominator complexity | data source, confidence             |
| Training data    | id, predicate, value, kb, created at, data source    | data weight, preprocessing chain, quality flags          | gradient history, initialization    |
| Inference result | id, predicate, value, kb, created at, derived from   | provenance weight                                        | data weight, initialization         |
| Attention weight | id, predicate, value, kb, created at, derived from   | local constraints (sum to one)                           | gradient history, data source       |
| External import  | id, predicate, value, kb, created at, source         | confidence, quality flags                                | derived from, initialization        |
| Constraint fact  | id, predicate, value, kb, created at                 | local constraints, tags                                  | weighting fields, provenance fields |
| Version record   | id, predicate, value, kb, created at, version        | version history, tags                                    | weighting, provenance               |

## Appendix L: Provenance Weight Propagation Reference

### L.1 Provenance Weight Assignment Rules

| Source Type                     | Default Weight                            | Adjustable?       | Justification                     |
|---------------------------------|-------------------------------------------|-------------------|-----------------------------------|
| Exact VDR arithmetic            | $\text{fraction}(1, 1)$                   | No                | Mathematically guaranteed correct |
| Truncated Taylor series depth N | $\text{fraction}(10^N - 1, 10^N)$         | Yes (by depth)    | Known truncation error bound      |
| Q335 projection                 | $\text{fraction}(10^{100} - 1, 10^{100})$ | Yes (by exponent) | Rounding bounded by $2^{-336}$    |
| Exact Prolog derivation         | $\text{fraction}(1, 1)$                   | No                | Logical derivation is exact       |
| Operational primitive result    | $\text{fraction}(1, 1)$                   | Conditional       | Exact if process succeeded        |
| User-stated fact                | $\text{fraction}(1, 2)$                   | Yes               | Not independently verified        |

| Source Type                     | Default Weight           | Adjustable? | Justification                     |
|---------------------------------|--------------------------|-------------|-----------------------------------|
| External import (verified)      | $\text{fraction}(9, 10)$ | Yes         | Source reliability estimate       |
| External import (unverified)    | $\text{fraction}(1, 10)$ | Yes         | Unknown reliability               |
| LLM-generated content           | $\text{fraction}(1, 4)$  | Yes         | Token prediction, not computation |
| Interpolated or estimated value | $\text{fraction}(1, 3)$  | Yes         | Approximate by construction       |

## L.2 Propagation Rules

| Derivation Pattern            | Output Weight          | Formula                                                            |
|-------------------------------|------------------------|--------------------------------------------------------------------|
| Single exact source           | Same as source         | $W_{\text{out}} = W_{\text{in}}$                                   |
| Multiple exact sources (AND)  | Minimum of sources     | $W_{\text{out}} = \min(W_1, W_2, \dots, W_n)$                      |
| Multiple sources (OR/choice)  | Maximum of sources     | $W_{\text{out}} = \max(W_1, W_2, \dots, W_n)$                      |
| Chain of derivations          | Minimum along chain    | $W_{\text{out}} = \min(W_{\text{step1}}, W_{\text{step2}}, \dots)$ |
| Mixed exact and approximate   | Minimum (weakest link) | $W_{\text{out}} = \min(\text{all inputs})$                         |
| Aggregation over many sources | Weighted average       | $W_{\text{out}} = \text{vdr mean}(W_1, \dots, W_n)$                |
| User override                 | User-specified value   | $W_{\text{out}} = \text{user value}$                               |

## L.3 Provenance Weight Query Patterns

| Query                                | Purpose                                       | Returns                       |
|--------------------------------------|-----------------------------------------------|-------------------------------|
| effective provenance weight(V, W)    | What is the confidence in value V?            | Exact fraction                |
| weakest link(V, Source, W)           | What is the weakest source in V's derivation? | Source reference and weight   |
| all weights above(Threshold, Values) | Which values exceed confidence threshold?     | Value list                    |
| all weights below(Threshold, Values) | Which values are below confidence threshold?  | Value list (audit candidates) |

| Query                                 | Purpose                                    | Returns        |
|---------------------------------------|--------------------------------------------|----------------|
| weight distribution(KB, Distribution) | Distribution of provenance weights in a KB | Histogram data |

## Appendix M: Data Weight Management Reference

### M.1 Data Weight Operations

| Operation         | Effect                               | Constraint Checked          | Logged As                                 |
|-------------------|--------------------------------------|-----------------------------|-------------------------------------------|
| Set weight        | Assign training weight to data point | Total weights normalization | weight set(sample id, old w, new w, turn) |
| Normalize weights | Adjust all weights to sum to target  | Exact sum verification      | weight normalize(target, turn)            |
| Upweight          | Increase specific sample's weight    | Total sum after adjustment  | weight adjust(sample id, delta, turn)     |
| Downweight        | Decrease specific sample's weight    | Non-negativity              | weight adjust(sample id, -delta, turn)    |
| Zero weight       | Remove sample from training          | Sample flagged as excluded  | weight exclude(sample id, reason, turn)   |
| Restore weight    | Re-include excluded sample           | Total sum after restore     | weight include(sample id, turn)           |
| Weight by quality | Set weights proportional to quality  | All quality flags checked   | weight by quality(quality fn, turn)       |
| Uniform weights   | Set all weights equal                | Exact sum = 1               | weight uniform(turn)                      |

### M.2 Data Weight Constraint Invariants

| Invariant               | Condition                                                  | Type        | On Violation         |
|-------------------------|------------------------------------------------------------|-------------|----------------------|
| Non-negativity          | All data weight $\geq 0$                                   | Axiom       | Error                |
| Sum to target           | $\text{sum}(\text{data weights}) = \text{declared target}$ | Operational | Warn and renormalize |
| No orphan weights       | Every weighted sample exists in dataset                    | Operational | Warn                 |
| Weight history complete | Every weight change is logged                              | Audit       | Error                |
| Excluded samples zero   | Excluded samples have weight 0                             | Operational | Error                |

## Appendix N: Chunked I/O Processing Reference

### N.1 Chunk Processing Pipeline

| Stage                    | Input                  | Processing                                     | Output               | KB Update                   |
|--------------------------|------------------------|------------------------------------------------|----------------------|-----------------------------|
| 1. Receive               | Raw bytes from process | Decode to text, split by newline               | Text lines           | task output chunk fact      |
| 2. Classify              | Text line              | Detect: stdout/stderr, progress, error, result | Classified chunk     | Classification tag on chunk |
| 3. Pattern check         | Classified chunk       | Match against active watches                   | Watch trigger events | watch triggered facts       |
| 4. Constraint check      | Classified chunk       | Check resource limits, error patterns          | Constraint status    | constraint checked facts    |
| 5. Store                 | Processed chunk        | Assert into task KB                            | —                    | chunk stored with metadata  |
| 6. Notify (if streaming) | Stored chunk           | Format for user display                        | Display text         | notification queued         |

### N.2 Chunk Size and Timing Policies

| Policy         | Parameter                 | Default | Adjustable?   |
|----------------|---------------------------|---------|---------------|
| Max chunk size | Bytes before forced flush | 4096    | Yes, per task |

| Policy             | Parameter                   | Default                        | Adjustable?          |
|--------------------|-----------------------------|--------------------------------|----------------------|
| Max chunk delay    | Seconds before forced flush | 5                              | Yes, per task        |
| Line buffering     | Flush on newline?           | Yes for stdout, no for binary  | Per stream           |
| Progress detection | Regex for progress patterns | “+%\step+ ETA”                 | Per environment      |
| Error detection    | Regex for error patterns    | “error Error ERROR EACH panic” | Per environment      |
| Chunk retention    | How long to keep chunks     | Until task acknowledged        | Per retention policy |

### N.3 Streaming vs Polling Comparison

| Aspect                     | Streaming Mode                             | Polling Mode                               |
|----------------------------|--------------------------------------------|--------------------------------------------|
| User experience            | Live output interleaved with conversation  | Results on next turn after completion      |
| Latency                    | Chunk arrives → displayed immediately      | Chunk arrives → stored → displayed on poll |
| Interruption               | Can interrupt conversation flow            | Never interrupts                           |
| Appropriate for Activation | Actively monitored tasks<br>/watch task id | Background tasks<br>Default                |
| Deactivation               | /unwatch task id                           | N/A (always polling)                       |
| Output volume              | Can be noisy for chatty processes          | Clean, shows only summary                  |

## Appendix O: Context Assembly Reference

### O.1 Context Components

| Component             | Source                                           | Priority                  | Size Control               |
|-----------------------|--------------------------------------------------|---------------------------|----------------------------|
| Active constraints    | Effective constraints from in-scope KBs          | Highest — always included | Limited by active KB count |
| System instructions   | Global KB rules                                  | Highest — always included | Fixed, small               |
| Working data bindings | Active topic’s working data set with inheritance | High — key context        | Limited by binding count   |



| Component                 | Source                                        | Priority                  | Size Control                |
|---------------------------|-----------------------------------------------|---------------------------|-----------------------------|
| Pending items             | Active topic's pending list                   | High — actionable         | Limited by pending count    |
| Active reminders          | Unacknowledged triggered reminders            | High — requires attention | Limited by reminder count   |
| Recent conversation turns | Conversation KB last N turns                  | Medium — recency          | Configurable N (default 20) |
| Referenced KB facts       | Facts explicitly referenced in recent turns   | Medium — relevance        | Auto-managed                |
| Secondary scope facts     | Facts from explicitly activated secondary KBs | Low — supplementary       | User-controlled             |
| Scratchpad history        | Previous turn's scratchpad entries            | Low — continuity          | Last turn only by default   |

## O.2 Context Size Management

| Strategy                     | Mechanism                                     | Effect                                  |
|------------------------------|-----------------------------------------------|-----------------------------------------|
| Turn window                  | Include last N turns only                     | Controls conversation history size      |
| Binding pruning              | Include only recently accessed bindings       | Reduces working data volume             |
| Constraint summary           | Include constraint names, not full conditions | Reduces constraint overhead             |
| KB scope limiting            | Limit depth of KB inheritance walk            | Reduces inherited fact volume           |
| Fact relevance scoring       | Prioritize facts referenced in recent turns   | Keeps context focused                   |
| Explicit inclusion/exclusion | User /context add and /context remove         | Direct user control                     |
| Compression                  | Summarize older turns into KB facts           | Preserves key information in less space |

## O.3 Context Snapshot Comparison

| Field        | Snapshot A                        | Snapshot B                                       | Diff                                               |
|--------------|-----------------------------------|--------------------------------------------------|----------------------------------------------------|
| Active KBs   | [global, vdr, vdr core]           | [global, vdr, vdr llm]                           | Changed:<br>vdr core →<br>vdr llm                  |
| Constraints  | [exact, py38, 30sec]              | [exact, py38, softmax<br>depth]                  | Removed:<br>30sec.<br>Added:<br>softmax<br>depth   |
| Working data | {modules: 24, tests:<br>705}      | {modules: 24, tests:<br>721, has autodiff: true} | Added: has<br>autodiff.<br>Changed:<br>tests       |
| Pending      | [gaussian elim, cross<br>entropy] | [cross entropy, better<br>exp]                   | Removed:<br>gaussian<br>elim. Added:<br>better exp |
| Reminders    | [maxflow fix]                     | []                                               | Removed:<br>maxflow fix<br>(acknowledged)          |

## Appendix P: LLM Output Stream Token Classification

### P.1 Token Types in Output Stream

| Token Class | Subtype       | Rendered As                   | Executed? | Logged?                   |
|-------------|---------------|-------------------------------|-----------|---------------------------|
| TEXT        | prose         | Conversation text             | No        | Turn record               |
| TEXT        | code block    | Formatted code                | No        | Turn record               |
| TEXT        | inline code   | Inline formatted              | No        | Turn record               |
| CMD         | PURE FN       | Hidden or<br>bracketed        | Yes       | Scratchpad +<br>result KB |
| CMD         | OP FN         | Hidden or<br>bracketed        | Yes       | Execution<br>log          |
| CMD         | KB<br>ASSERT  | Hidden                        | Yes       | KB update<br>log          |
| CMD         | KB<br>RETRACT | Hidden                        | Yes       | KB update<br>log          |
| CMD         | KB QUERY      | Hidden                        | Yes       | Scratchpad                |
| CMD         | ENV EXEC      | Bracketed if<br>show commands | Yes       | Environment<br>log + task |

| Token Class | Subtype         | Rendered As      | Executed?  | Logged?      |
|-------------|-----------------|------------------|------------|--------------|
| CMD         | ENV             | Bracketed if     | Yes        | Environment  |
|             | UPLOAD          | show commands    |            | log          |
| CMD         | ENV             | Bracketed if     | Yes        | Environment  |
|             | DOWN-LOAD       | show commands    |            | log          |
| CMD         | CTX             | Hidden           | Yes        | Context log  |
|             | ACTIVATE        |                  |            |              |
| CMD         | CTX DEAC-TIVATE | Hidden           | Yes        | Context log  |
| CMD         | CTX             | Hidden           | Yes        | Snapshot KB  |
|             | SNAPSHOT        |                  |            | created      |
| CMD         | VERSION         | Bracketed if     | Yes        | Version      |
|             | CREATE          | show commands    |            | record       |
| CMD         | VERSION         | Hidden           | Yes        | Version      |
|             | TAG             |                  |            | record       |
| CMD         | STORE           | Hidden           | Yes        | KB update    |
|             | RESULT          |                  |            |              |
| CMD         | DIRECT          | Data block in    | Yes (data  | Access log   |
|             | OUTPUT          | response         | retrieval) |              |
| CMD         | ATTACHMENT      | Download link in | Yes (data  | Access log   |
|             |                 | response         | retrieval) |              |
| META        | turn            | Not rendered     | N/A        | Turn counter |
|             | boundary        |                  |            |              |
| META        | scratchpad      | Not rendered     | N/A        | Scratchpad   |
|             | start           | (unless          |            | boundary     |
|             |                 | /scratchpad on)  |            |              |
| META        | scratchpad      | Not rendered     | N/A        | Scratchpad   |
|             | end             | (unless          |            | boundary     |
|             |                 | /scratchpad on)  |            |              |

## P.2 Output Stream Ordering Rules

| Rule                     | Description                                                      | Rationale                                           |
|--------------------------|------------------------------------------------------------------|-----------------------------------------------------|
| Scratchpad before output | All scratchpad commands execute before user-facing output begins | Computation must complete before results are framed |
| Text frames data         | TEXT tokens surround DIRECT OUTPUT blocks                        | Data needs human context                            |
| Commands in causal order | Upload before execute, execute before store result               | Dependencies respected                              |
| Notifications at end     | Completed task notifications appear after main response          | Non-disruptive                                      |
| Attachments at end       | File attachments appear after all text                           | Clean reading flow                                  |

## Appendix Q: Cross-Paper Integration Reference

### Q.1 How VDR-6 Primitives Map to VDR-1 Through VDR-4 Capabilities

| VDR Paper | Capability                | VDR-6 Primitive(s)                             | Category        |
|-----------|---------------------------|------------------------------------------------|-----------------|
| VDR-1     | Exact fraction arithmetic | vdr add through vdr max (#54-73)               | Arithmetic      |
| VDR-1     | Normalization             | vdr simplify (#70)                             | Arithmetic      |
| VDR-1     | Discrete derivative       | Composable from vdr add, vdr sub, vdr div      | Arithmetic      |
| VDR-1     | Discrete integral         | Composable from vdr add, vdr mul (Riemann sum) | Arithmetic      |
| VDR-1     | Rebase and lift           | Exposed through KB term operations             | KB              |
| VDR-2     | GCD, LCM                  | vdr gcd, vdr lcm (#61-62)                      | Arithmetic      |
| VDR-2     | Binomial coefficients     | vdr binomial (#78)                             | Arithmetic      |
| VDR-2     | Fibonacci                 | vdr fibonacci (#79)                            | Arithmetic      |
| VDR-2     | Euler’s method            | Composable from arithmetic primitives          | Arithmetic      |
| VDR-2     | Hilbert matrix            | mat inv, mat mul, mat det (#115-118)           | Linear Algebra  |
| VDR-3     | Graph algorithms          | graph * (#173-185)                             | Graph           |
| VDR-3     | Bayesian updating         | prob bayes (#135)                              | Statistics      |
| VDR-3     | Haar wavelet              | Composable from vec add, vec scale             | Linear Algebra  |
| VDR-3     | Q335 constants            | Stored as qbasis terms in KBs                  | KB              |
| VDR-4     | Softmax                   | softmax, softmax surrogate (#139-140)          | Statistics      |
| VDR-4     | Autodiff                  | Node graph through command token sequences     | CMD             |
| VDR-4     | Linear layer              | mat matvec, vec add (#124, 109)                | Linear Algebra  |
| VDR-4     | Training loop             | Composable from primitives + command tokens    | CMD             |
| MATH-3    | Elliptic integrals        | Composable from vdr mul, vdr sum + series      | Arithmetic      |
| MATH-4    | Q335 basis                | qbasis term type + vdr add on integers         | KB + Arithmetic |

## Q.2 How VDR-6 Execution Maps to VDR-5 Knowledge Architecture

| VDR-5 Component               | VDR-6 Execution Support                                                 |
|-------------------------------|-------------------------------------------------------------------------|
| KB fact assertion             | KB ASSERT command token, kb assert primitive (#204)                     |
| KB fact retraction            | KB RETRACT command token, kb retract primitive (#205)                   |
| KB query                      | KB QUERY command token, kb query/kb query in/kb query across (#206-208) |
| Scoped search                 | kb active scope (#211) determines primitive search space                |
| Constraint verification       | constraint check, constraint check all (#213-214)                       |
| Working data set operations   | dict * primitives (#94-108) for binding storage                         |
| Topic management              | kb switch topic (#212) + CTX<br>ACTIVATE/DEACTIVATE tokens              |
| Direct surfacing              | DIRECT OUTPUT and ATTACHMENT<br>command tokens                          |
| Provenance recording          | KB ASSERT after each primitive execution with derivation                |
| Conversation tracking         | Turn records as KB facts, topic state updates via KB operations         |
| Reminder and watch evaluation | Prolog rule evaluation using KB primitives every turn                   |
| Permission checking           | KB query against grant facts before operational primitive execution     |

## Appendix R: Implementation Test Plan

### R.1 Pure Primitive Test Requirements

| Category        | Min Tests   | Edge Cases Required                              | Invariant Tests                        |
|-----------------|-------------|--------------------------------------------------|----------------------------------------|
| String (17)     | 51 (3 per)  | Empty string, single char, unicode, max length   | Reverse of reverse = identity          |
| List (34)       | 102 (3 per) | Empty list, single element, duplicates, nested   | Sort permutation, length preservation  |
| Arithmetic (26) | 78 (3 per)  | Zero, negative, large numerator/denominator      | Commutativity, associativity, identity |
| Set (14)        | 42 (3 per)  | Empty set, singleton, disjoint, identical        | Union/intersection laws                |
| Dictionary (15) | 45 (3 per)  | Empty dict, single entry, overwrite, missing key | Get after set = set value              |

| Category             | Min Tests  | Edge Cases Required                                | Invariant Tests                          |
|----------------------|------------|----------------------------------------------------|------------------------------------------|
| Linear Algebra (16)  | 48 (3 per) | Zero vector/matrix, identity, singular             | $M * \text{inv}(M) = I$ , $\det(I) = 1$  |
| Statistics (16)      | 48 (3 per) | Single element, all equal, all different           | Sum of normalized = 1                    |
| Conversion (14)      | 42 (3 per) | Zero, negative, boundary values, max digits        | Parse of format = identity               |
| Date/Time (10)       | 30 (3 per) | Leap year boundaries, month boundaries, epoch      | Date add then subtract = original        |
| Hashing (8)          | 24 (3 per) | Empty input, same input twice, long input          | Same input → same output (determinism)   |
| Graph (13)           | 39 (3 per) | Empty graph, single node, disconnected, cycle      | Connected components partition all nodes |
| Pattern (7)          | 21 (3 per) | Empty pattern, no match, full match, special chars | Match is consistent with search          |
| Logic (11)           | 33 (3 per) | True/false conditions, empty lists, type errors    | Try catch catches, assert that asserts   |
| KB (15)              | 45 (3 per) | Empty KB, scope boundaries, cross-scope            | Assert then query returns asserted fact  |
| <b>Total minimum</b> | <b>648</b> |                                                    |                                          |

## R.2 Operational Primitive Test Requirements

| Category             | Min Tests  | Environment           | Mock Available?            |
|----------------------|------------|-----------------------|----------------------------|
| Filesystem (15)      | 45         | Docker test container | Yes (temp directory)       |
| Compilation (4)      | 12         | Docker with compilers | Yes (known source files)   |
| Execution (5)        | 15         | Docker test container | Yes (known scripts)        |
| Linting (8)          | 24         | Docker with linters   | Yes (known source files)   |
| Network (5)          | 15         | Docker with network   | Partial (mock server)      |
| Process (7)          | 21         | Docker test container | Yes (sleep/echo processes) |
| <b>Total minimum</b> | <b>132</b> |                       |                            |

## R.3 Integration Test Scenarios

| Scenario                                  | Components Tested                                                                                | Expected Outcome                                             |
|-------------------------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------|
| Write script, run tests, store results    | ENV UPLOAD + ENV EXEC + STORE RESULT + VERSION CREATE                                            | Version created with test results                            |
| Sort KB data by key                       | KB QUERY + PURE FN(list sort by key) + DIRECT OUTPUT                                             | Sorted data served directly                                  |
| Check constraint, fix violation, re-check | constraint check all + identify violation + KB ASSERT fix + constraint check all                 | All constraints satisfied                                    |
| Background compile, poll, retrieve errors | ENV EXEC(async) + POLL + proc stderr + DIRECT OUTPUT                                             | Compilation errors surfaced                                  |
| Cross-scope query with tagged results     | kb query across + format table + DIRECT OUTPUT                                                   | All matches from all KBs with source tags                    |
| Grant expiration during long task         | OP FN with grant expiring mid-task                                                               | Task completes (grant checked at start), logged with warning |
| Version rollback after failed test        | VERSION CREATE + ENV EXEC(test) → fail + retrieve old version content + VERSION CREATE(rollback) | New version with old content                                 |
| Reminder triggers on topic enter          | Switch topic → reminder condition met → notification displayed                                   | User sees reminder, can acknowledge                          |
| Direct download large file                | ATTACHMENT(fs://env/large file)                                                                  | File served without LLM tokenization                         |
| Scratchpad computation not surfaced       | PURE FN in scratchpad + TEXT output using result                                                 | User sees framed result, not computation                     |

## Appendix S: Cumulative System Statistics

### S.1 Complete Module Count

| Layer          | Existing (VDR-1 to VDR-4) | Specified (VDR-5) | Specified (VDR-6) | Total |
|----------------|---------------------------|-------------------|-------------------|-------|
| Arithmetic     | 5                         | 0                 | 0                 | 5     |
| Transcendental | 3                         | 0                 | 0                 | 3     |
| ML             | 4                         | 0                 | 0                 | 4     |
| Infrastructure | 8                         | 0                 | 0                 | 8     |
| Architecture   | 4                         | 0                 | 0                 | 4     |

| Layer           | Existing (VDR-1 to VDR-4) | Specified (VDR-5) | Specified (VDR-6) | Total     |
|-----------------|---------------------------|-------------------|-------------------|-----------|
| Logic/Knowledge |                           | 3                 | 0                 | 3         |
| Execution       | 0                         | 0                 | 3                 | 3         |
| <b>Total</b>    | <b>24</b>                 | <b>3</b>          | <b>3</b>          | <b>30</b> |

New VDR-6 modules: `primitives.py` (pure primitive implementations), `operational.py` (operational primitives and grant checking), `command.py` (command token parsing and execution).

## S.2 Complete Test Count

| Source                          | Tests        | Passed     | Failed (test error) | Failed (VDR error) |
|---------------------------------|--------------|------------|---------------------|--------------------|
| VDR-1 core tests                | 68           | 68         | 0                   | 0                  |
| VDR-2 gyms (15 domains)         | 282          | 276        | 6                   | 0                  |
| VDR-3 gyms (8 domains)          | 157          | 152        | 5                   | 0                  |
| VDR-4 ML stack                  | 198          | 196        | 2                   | 0                  |
| VDR-6 pure primitives (planned) | 648          | —          | —                   | —                  |
| VDR-6 operational (planned)     | 132          | —          | —                   | —                  |
| VDR-6 integration (planned)     | 30+          | —          | —                   | —                  |
| <b>Existing total</b>           | <b>705</b>   | <b>692</b> | <b>13</b>           | <b>0</b>           |
| <b>Planned total</b>            | <b>~1515</b> | —          | —                   | —                  |

## S.3 Complete Primitive Count

| Type         | Categories | Primitives | Authorization           |
|--------------|------------|------------|-------------------------|
| Pure         | 14         | 218        | None required           |
| Operational  | 6          | 44         | Positive grant required |
| <b>Total</b> | <b>20</b>  | <b>262</b> |                         |

## S.4 Complete Paper Series

| Paper | Registry                            | Pages               | Central Result                   |
|-------|-------------------------------------|---------------------|----------------------------------|
| VDR-1 | [ <a href="#">HOWL-VDR-1-2026</a> ] | 14+19<br>appendices | Exact arithmetic system          |
| VDR-2 | [ <a href="#">HOWL-VDR-2-2026</a> ] | 24+17<br>appendices | 15 domains tested                |
| VDR-3 | [ <a href="#">HOWL-VDR-3-2026</a> ] | 17+8<br>appendices  | 23 domains, no unique boundaries |



| Paper  | Registry                             | Pages                             | Central Result                           |
|--------|--------------------------------------|-----------------------------------|------------------------------------------|
| VDR-4  | [ <a href="#">HOWL-VDR-4-2026</a> ]  | 16+4<br>appendices                | Working exact transformer                |
| VDR-5  | [ <a href="#">HOWL-VDR-5-2026</a> ]  | 17+15<br>appendices +<br>addendum | Prolog KB architecture spec              |
| VDR-6  | [ <a href="#">HOWL-VDR-6-2026</a> ]  | 16+19<br>appendices               | 262 primitives, execution layer spec     |
| MATH-3 | [ <a href="#">HOWL-MATH-3-2026</a> ] | 12+3<br>appendices                | Elliptic integrals, Borwein acceleration |
| MATH-4 | [ <a href="#">HOWL-MATH-4-2026</a> ] | 11+2<br>appendices                | Q335 universal basis                     |

#### END VDR-6 EXTENDED APPENDIX TABLES

[[HOWL-VDR-6-2026](#)] Computational Primitives and Operational Environments. Github: <https://github.com/ghowland/papers/tree/main/papers/VDR/HOWL-VDR-6-2026>

[[HOWL-VDR-1-2026](#)] VDR Arithmetic: Value, Decimal, Remainder. Github: <https://github.com/ghowland/papers/tree/main/papers/VDR/HOWL-VDR-1-2026>

[[HOWL-VDR-2-2026](#)] VDR Gym: Exact Arithmetic Across Fifteen Domains. Github: <https://github.com/ghowland/papers/tree/main/papers/VDR/HOWL-VDR-2-2026>

[[HOWL-MATH-3-2026](#)] The Transcendental Hierarchy. Github: <https://github.com/ghowland/papers/tree/main/papers/MATH-3-2026>

[[HOWL-MATH-4-2026](#)] The Universal Power-of-Two Basis. Github: <https://github.com/ghowland/papers/tree/main/papers/MATH-4-2026>

[[HOWL-VDR-3-2026](#)] VDR Gym Extension. Github: <https://github.com/ghowland/papers/tree/main/papers/VDR/HOWL-VDR-3-2026>

[[HOWL-VDR-4-2026](#)] Exact-Fraction Language Model Architecture. Github: <https://github.com/ghowland/papers/tree/main/papers/VDR/HOWL-VDR-4-2026>

[[HOWL-LLM-1-2026](#)] Integer LLM with Prolog Knowledge Base. Github: <https://github.com/ghowland/papers/tree/main/papers/LLM/HOWL-LLM-1-2026>

[[HOWL-VDR-5-2026](#)] Exact Arithmetic Meets Logical Provenance. Github: <https://github.com/ghowland/papers/tree/main/papers/VDR/HOWL-VDR-5-2026>