

Dev Days

The screenshot displays a development environment with three main components:

- GitHub Copilot Sidebar:** Located on the left, it shows a sidebar with navigation options: Home, My work, Automations, Search, Sessions, Pinned, James Hub, Repo actions canvas, Chats, and captions-converter. The 'Build caption converter' session is selected.
- Code Editor:** The central area shows a file named 'Build caption converter · main'. It contains a large text block with a prompt: 'Okay, I want to create a static website that I'll deploy to GitHub Actions that all it does is convert subtitle caption files like VTT or sRT files to different file formats back and forth should be able to understand all of these. I should be able to upload a file that's locally on my machine, then should be able to convert it into the format that I want inside of it set up the entire website, scaffold the GitHub actions, and let's get it going and choose whatever framework you want. I don't even care if it's just static HTML, CSS just figure it out whatever's the best for this go'. Below this, it says 'Loaded skill web-artifacts-builder' and 'I'll build this as a browser-only React/TypeScript app so subtitle files never leave the device, then add GitHub Pages'.
- Web Browser:** On the right, a browser window shows a local development server at 'http://127.0.0.1:4180/'. The page title is 'CaptionStack' and the main heading is 'CAPTION CONVERTER'. The text on the page reads: 'Your captions. Any format.' and 'Convert subtitle files in seconds. No uploads, no accounts, and nothing leaves'.

Riding the waves

Wave 1

Wave 2

Today


Wave 3

Pair programmer



Code completion
(2021-2023)

Beyond pair
programmers

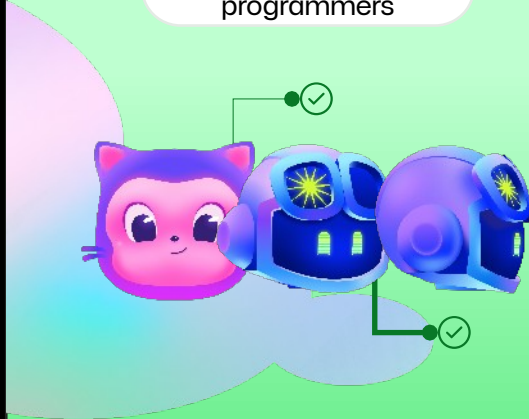


Agentic SDLC
(2024-2025)

Teams + agents



Hybrid teams
(2026+)

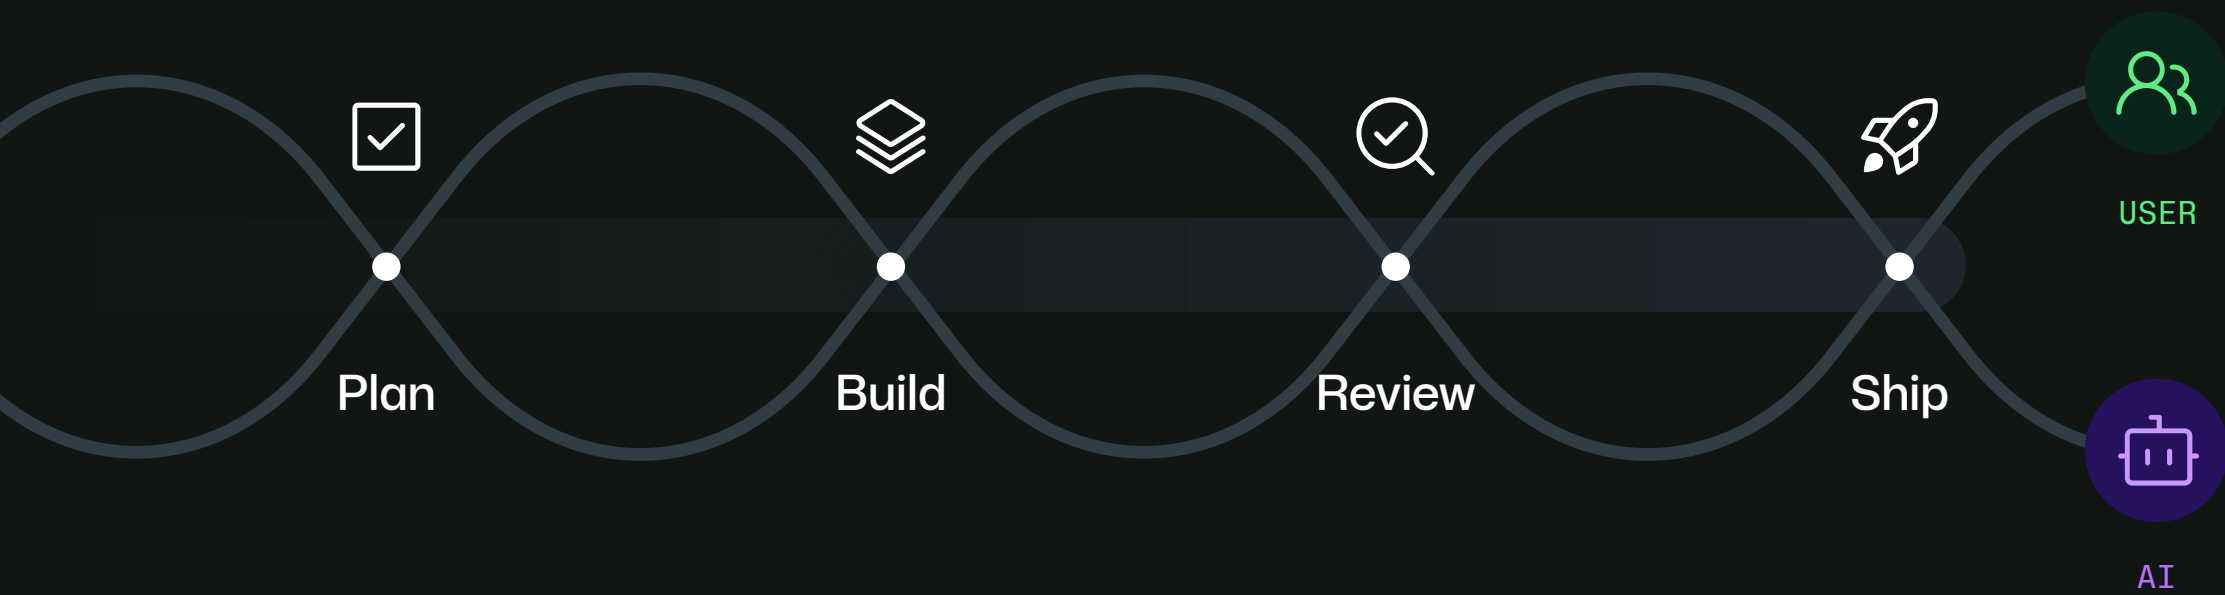



GITHUB COPILOT 

Code, command, and collaborate

AI that works where you do, whether in your editor, on the command line, or across GitHub.

4 files changed

TS `race-service.ts` `src/lib/data`

 `race-service.test.ts` `src/lib/data`

TS `+page.server.ts` `src/routes`

 `+page.svelte` `src/routes`

 Add Context...

Edit files in your workspace in agent mode

Agent ▾ Auto ▾



Go beyond one-size-fits-all

Choose from leading LLMs optimized for speed, accuracy, or cost.



Use your agents, your way

Use GitHub Copilot, your own custom agents, or the third-party ones you already rely on.




Stay in your flow


Copilot works where you do—in GitHub, your IDE, the CLI, project tools, chat apps, and custom MCP servers.

One GitHub Copilot,
everywhere you code

GitHub Copilot is available across IDEs, web, and mobile

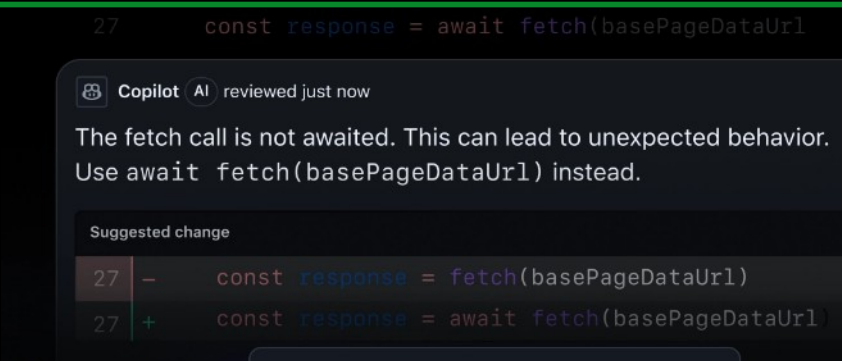

GitHub.com & GitHub mobile apps

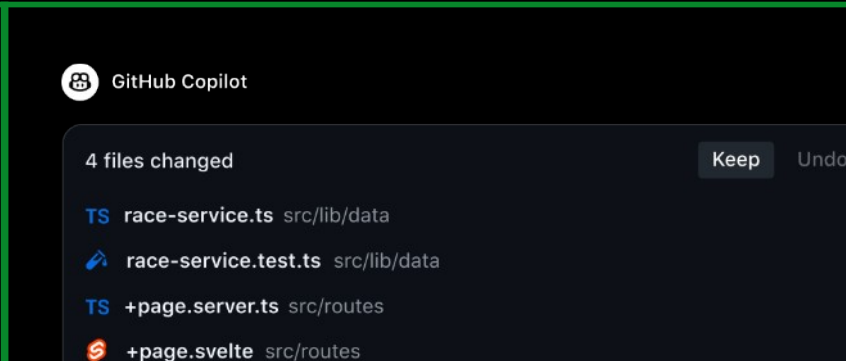


VS Code




JetBrains IDEs, Eclipse,
Vim, Visual Studio, Xcode



Terminal (Copilot CLI)

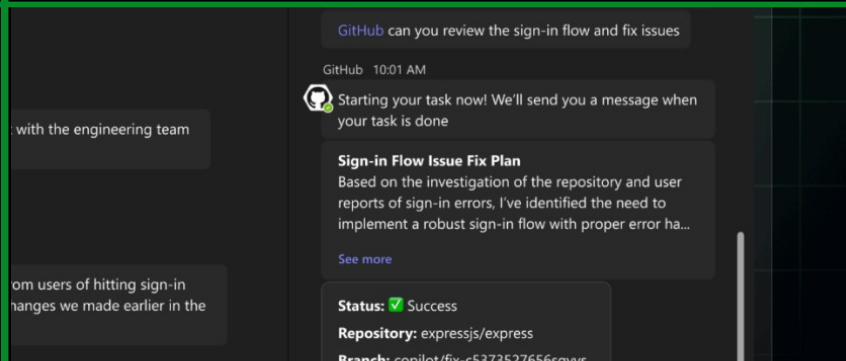


Slack & Teams

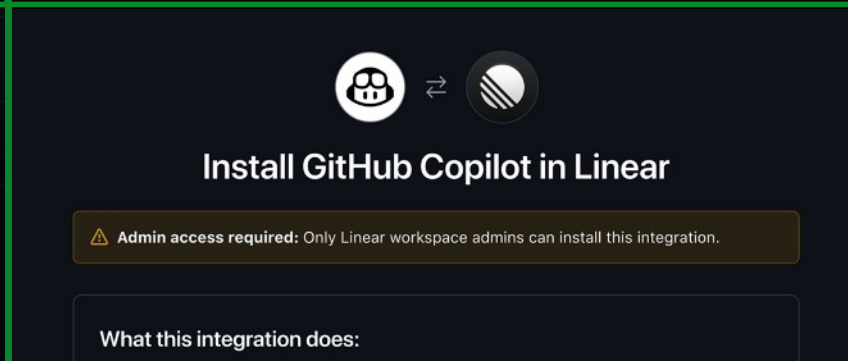

Azure DevOps Boards, Linear, Jira

So how do we bring it all together?

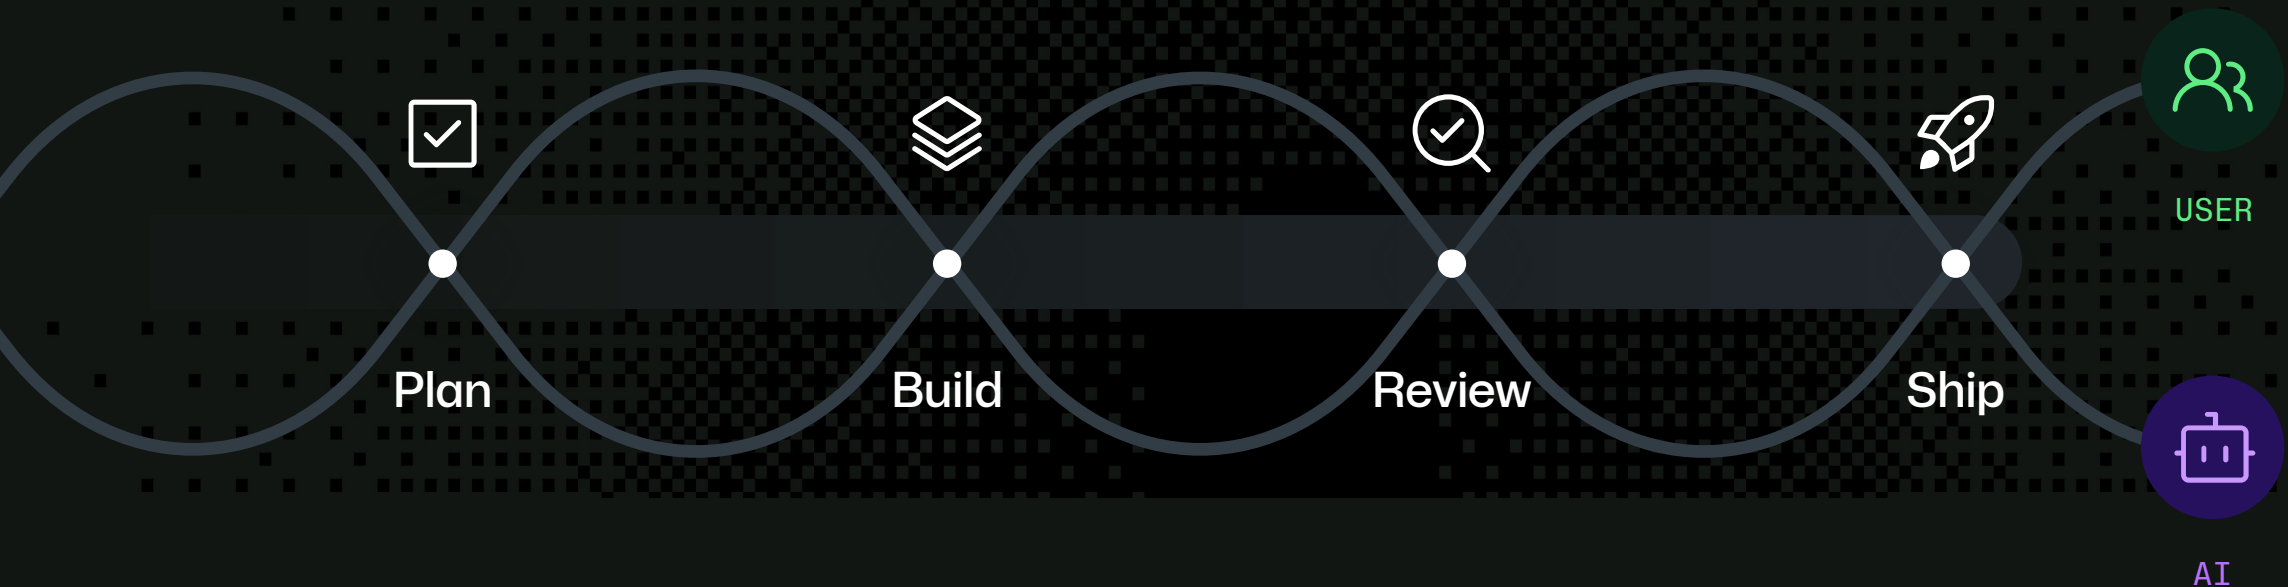


FROM ISSUE TO MERGE, IN ONE APP – GH.IO/APP

GitHub Copilot app

The screenshot displays the GitHub Copilot application interface. On the left is a sidebar with navigation options: Home, My work, Automations (highlighted with a green '2'), Search, Pinned, James Hub, Repo actions canvas, Chats, captions-converter, Build caption converter (selected), Let's analyze the repo and come, and Tiny tool submission. The main area is titled 'Build caption converter · main' and contains a chat window. The chat message reads: 'Okay, I want to create a static website that I'll deploy to GitHub Actions that all it does is convert subtitle caption files like VTT or sRT files to different file formats back and forth should be able to understand all of these. I should be able to upload a file that's locally on my machine, then should be able to convert it into the format that I want inside of it set up the entire website, scaffold the GitHub actions, and let's get it going and choose whatever framework you want. I don't even care if it's just static HTML, CSS just figure it out whatever's the best for this go'. Below the message is a status bar indicating 'Loaded skill web-artifacts-builder' and '20h ago'. To the right of the chat is a live preview of a web application running at 'http://127.0.0.1:4180/'. The application is titled 'CaptionStack' and features a 'CAPTION CONVERTER' section with the text 'Your captions. Any format.' and a description: 'Convert subtitle files in seconds. No uploads, no accounts, and nothing leaves your browser.'


START A SESSION FROM AN ISSUE, A PROMPT, OR A PR ALREADY IN FLIGHT.

Delegate to agents

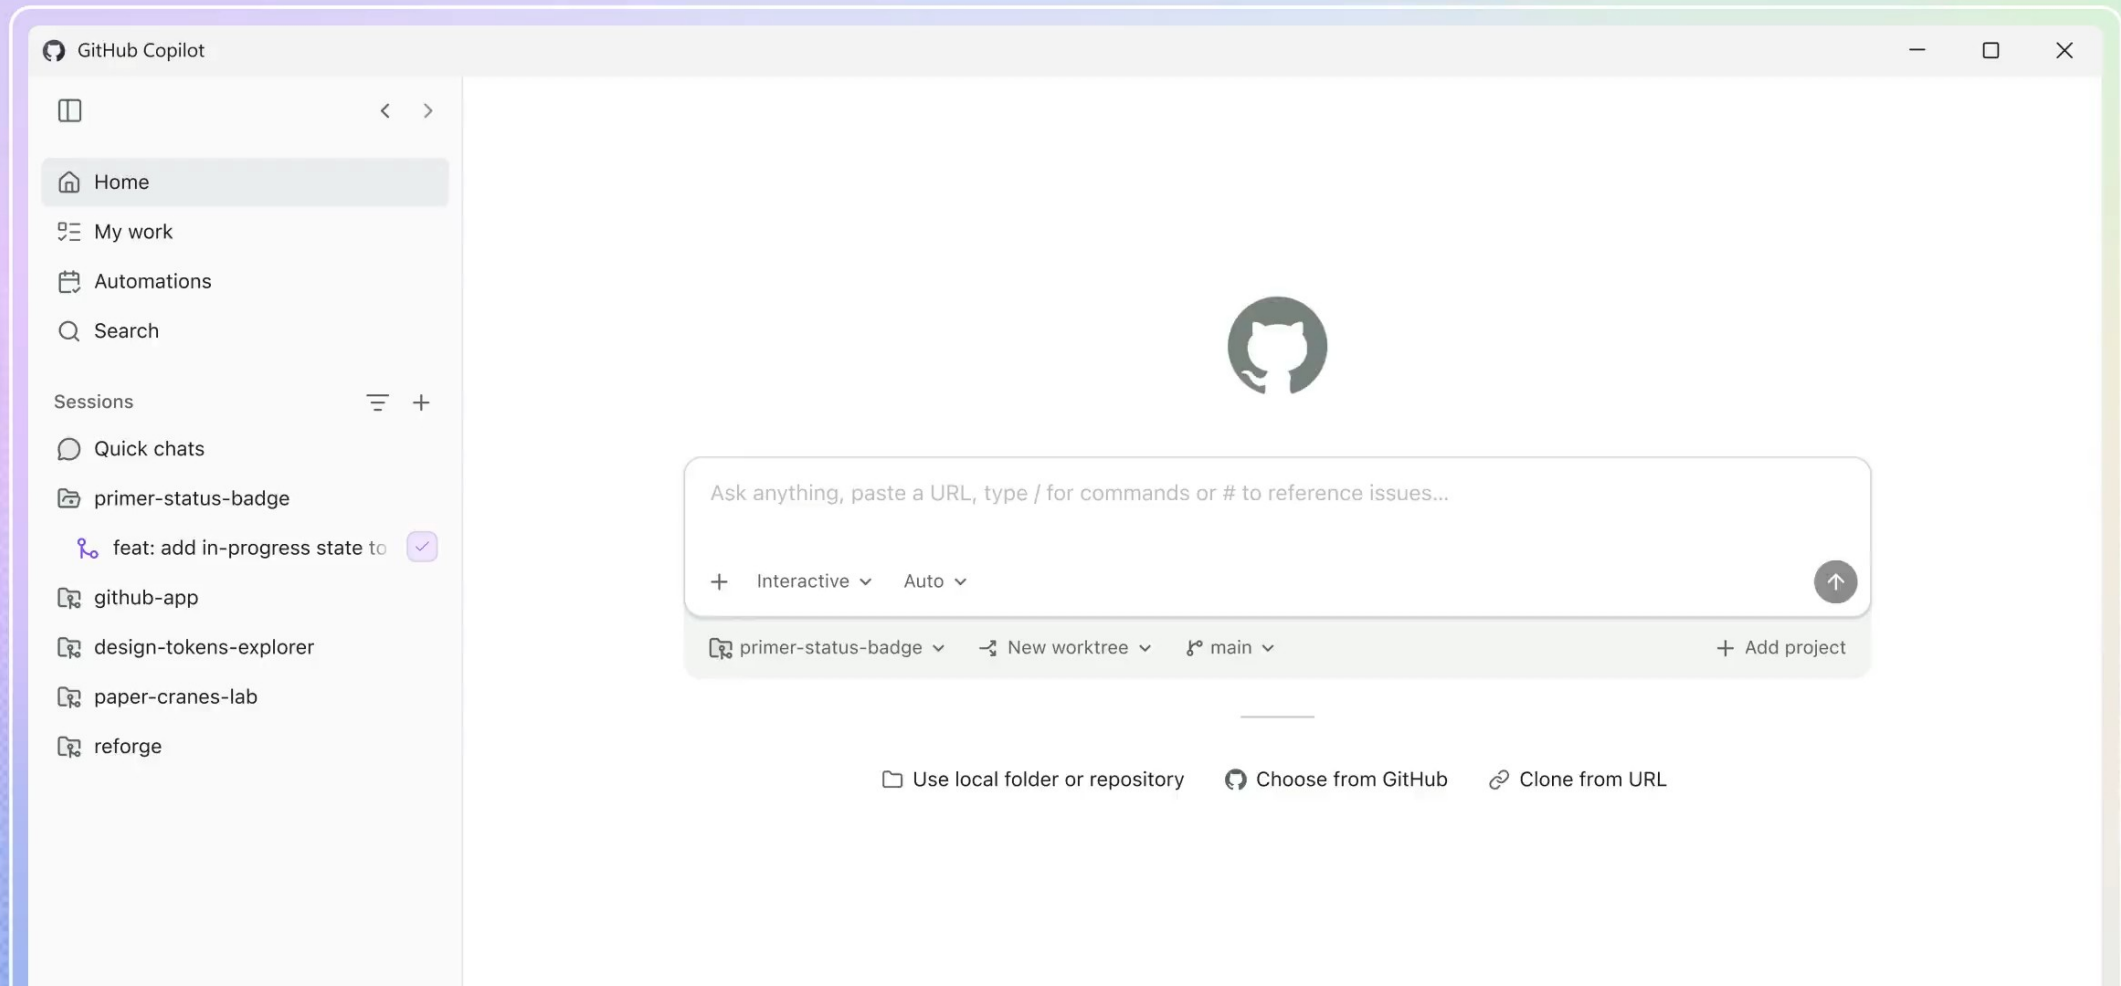


TRIAGE ISSUES AND PRS ACROSS REPOS, WITHOUT LEAVING THE APP.

Centralized inbox

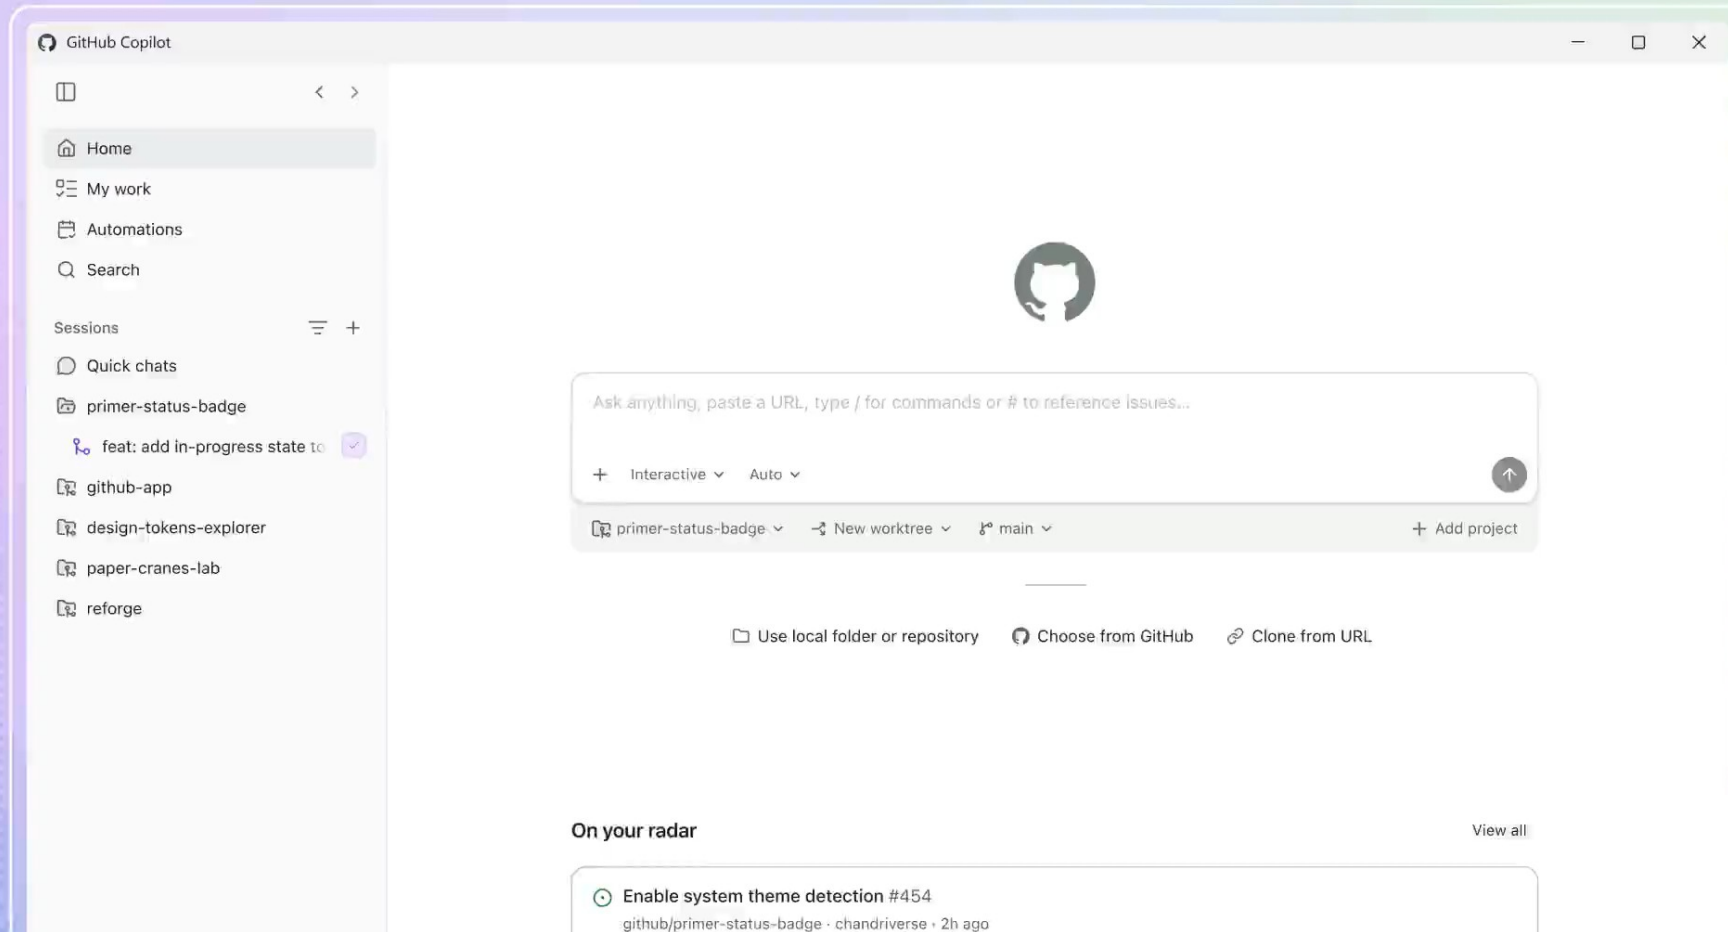

OPEN A LIVE WORK SURFACE WHERE YOU AND THE AGENT EDIT, REORDER, AND VERIFY THE SAME ARTIFACT TOGETHER.

Canvases

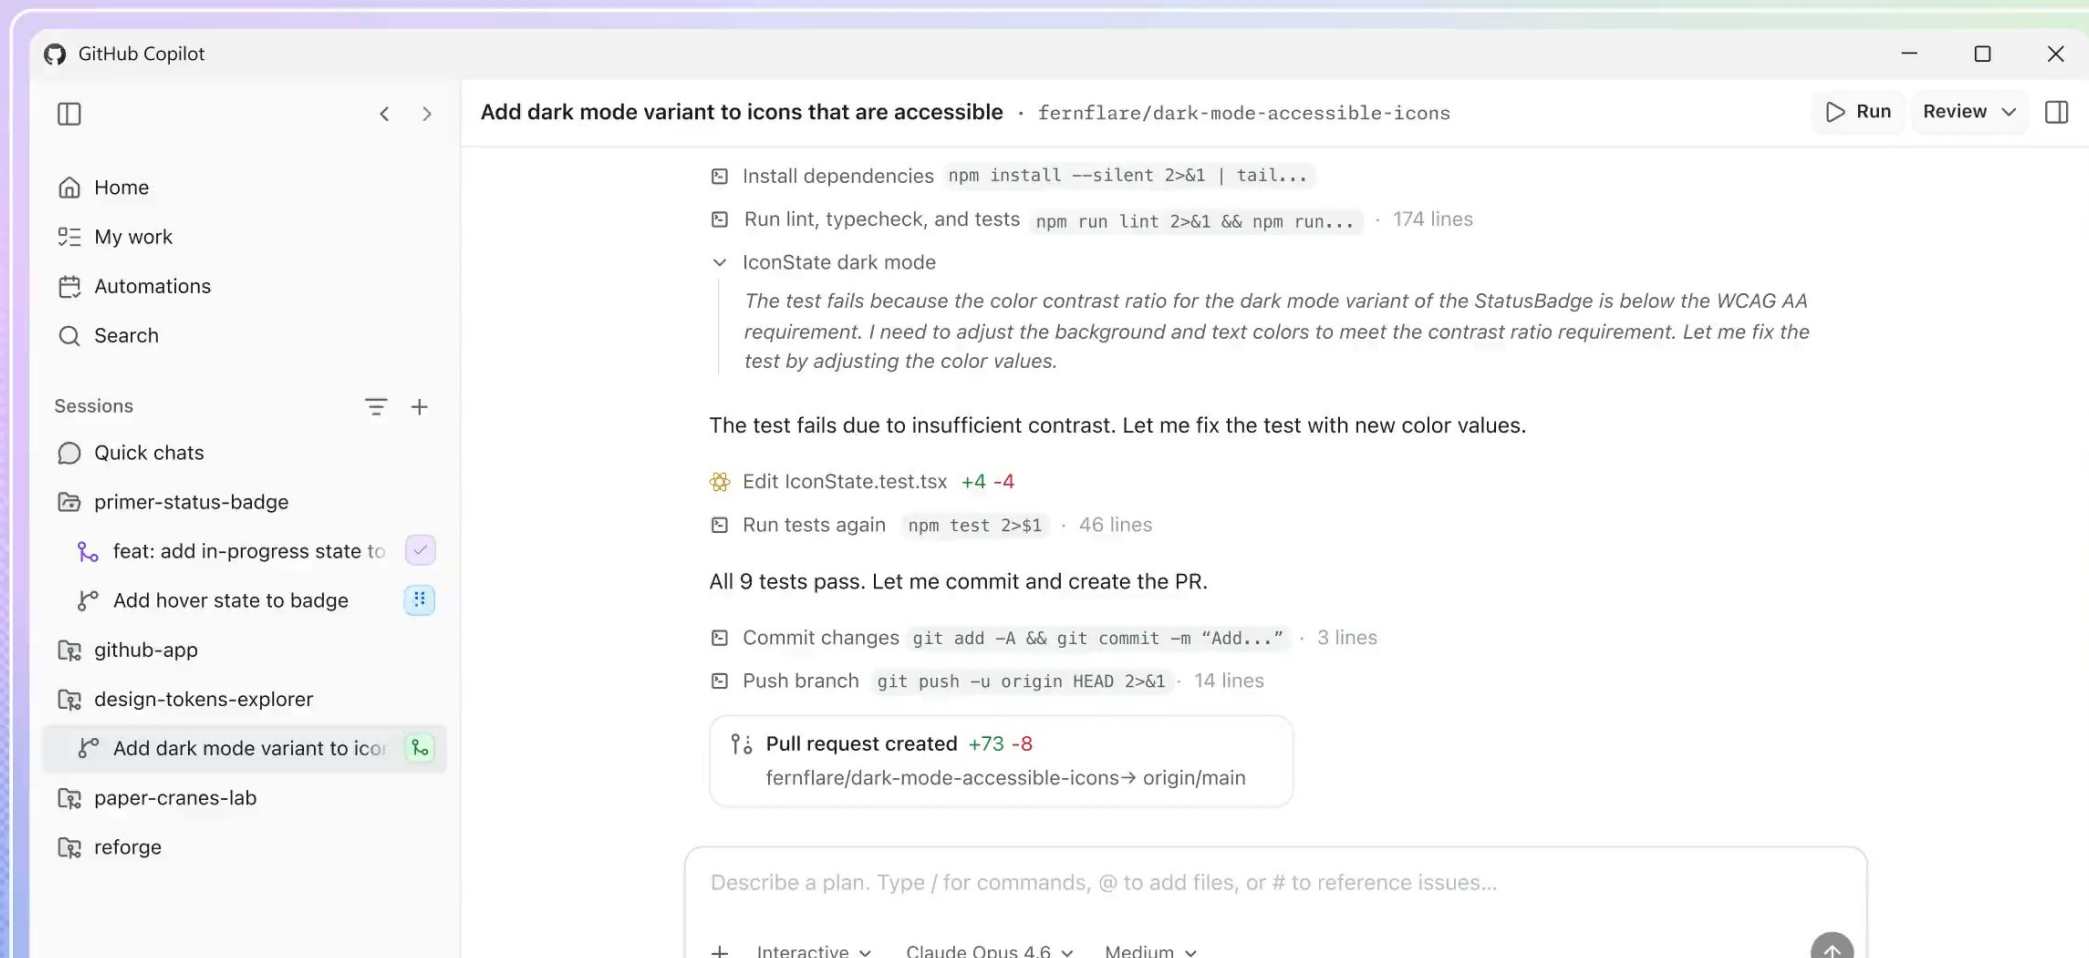

REVIEW DIFFS, CHECK CI, AND FIX FAILING CHECKS. MERGE FROM THE SAME WINDOW THE AGENT WORKS IN.

Review and merge

The screenshot displays the GitHub Copilot interface within a web browser window. The interface is divided into a left sidebar and a main content area.

Left Sidebar:

- GitHub Copilot logo and name.
- Navigation icons for Home, My work, Automations, and Search.
- A "Sessions" section with a list of recent sessions: "primer-status-badge", "feat: add in-progress state to", "Add hover state to badge" (highlighted), "github-app", "design-tokens-explorer", "paper-cranes-lab", and "reforge".

Main Content Area:

The main area shows a pull request titled "Add hover state to badge" from the repository "fernflare/issue-416-add-hover-state-to-badge-cf9722". At the top right, there are buttons for "Run" and "Review".


The pull request details include:

- A commit message: "Edit StatusBadge.test.tsx +30".
- A description of the changes: "Install dependencies npm install --silent 2>&1 | tail...", "Run lint, typecheck, and tests npm run lint 2>&1 && npm run...", and "Thought for 9s".
- A detailed explanation of the test failure: "The test fails because previous test renders with 'Interactive' text are still in the DOM. I need to use unique text or use cleanup or render within each test properly. The issue is that render from testing-library doesn't clean up between tests in this setup. Let me fix the test by using unique text labels."
- A summary of the fix: "The test fails due to duplicate 'Interactive' text across renders. Let me fix the test with unique labels."
- A commit message: "Edit StatusBadge.test.tsx +4 -4".
- A description of the tests: "Run tests again npm test 2>\$1 · 46 lines".
- A summary of the results: "All 9 tests pass. Let me commit and create the PR."
- A commit message: "Commit changes git add -A && git commit -m 'Add...'" and "Push branch git push -u origin HEAD 2>&1 · 14 lines".
- A notification: "Pull request created +56 -12 fernflare/add-hover-state-to-badge → origin/main".


At the bottom of the main area, there is a text input field with the placeholder text: "Describe a plan. Type / for commands, @ to add files, or # to reference issues..."

TURN SKILLS AND PROMPTS INTO REPEATABLE WORK THAT CAN BE RUN ON A REGULAR BASIS.

Automated workflows

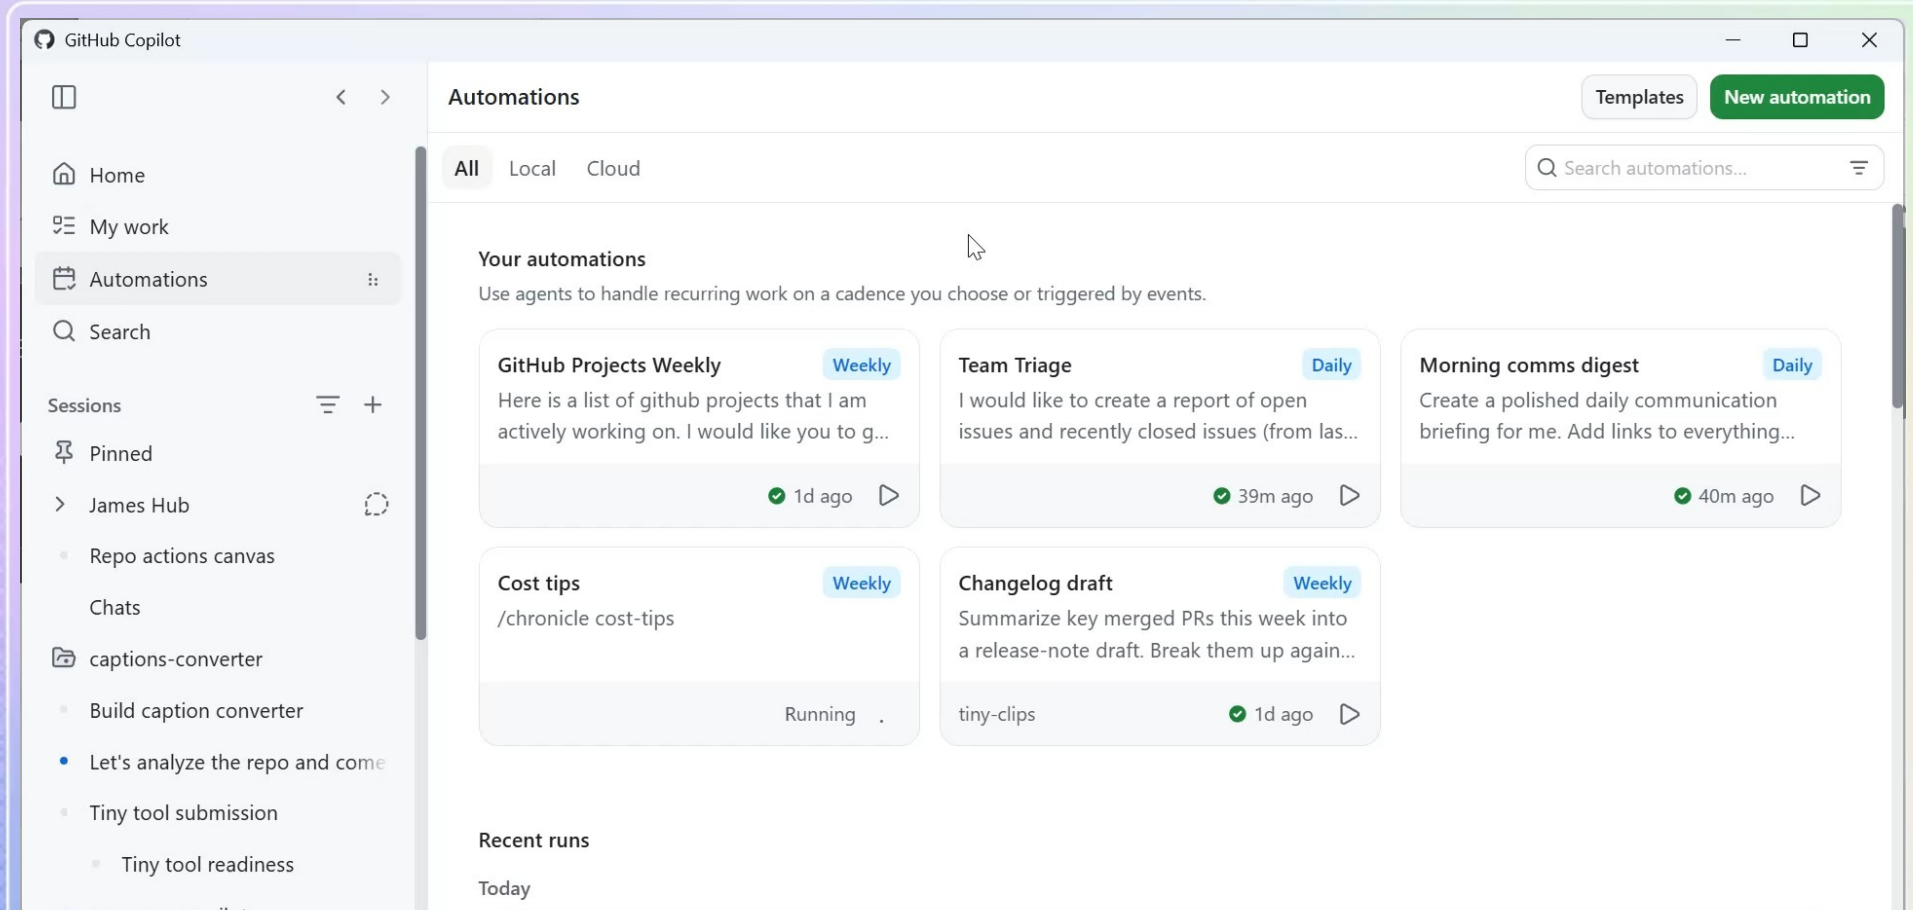


Download today: gh.io/app

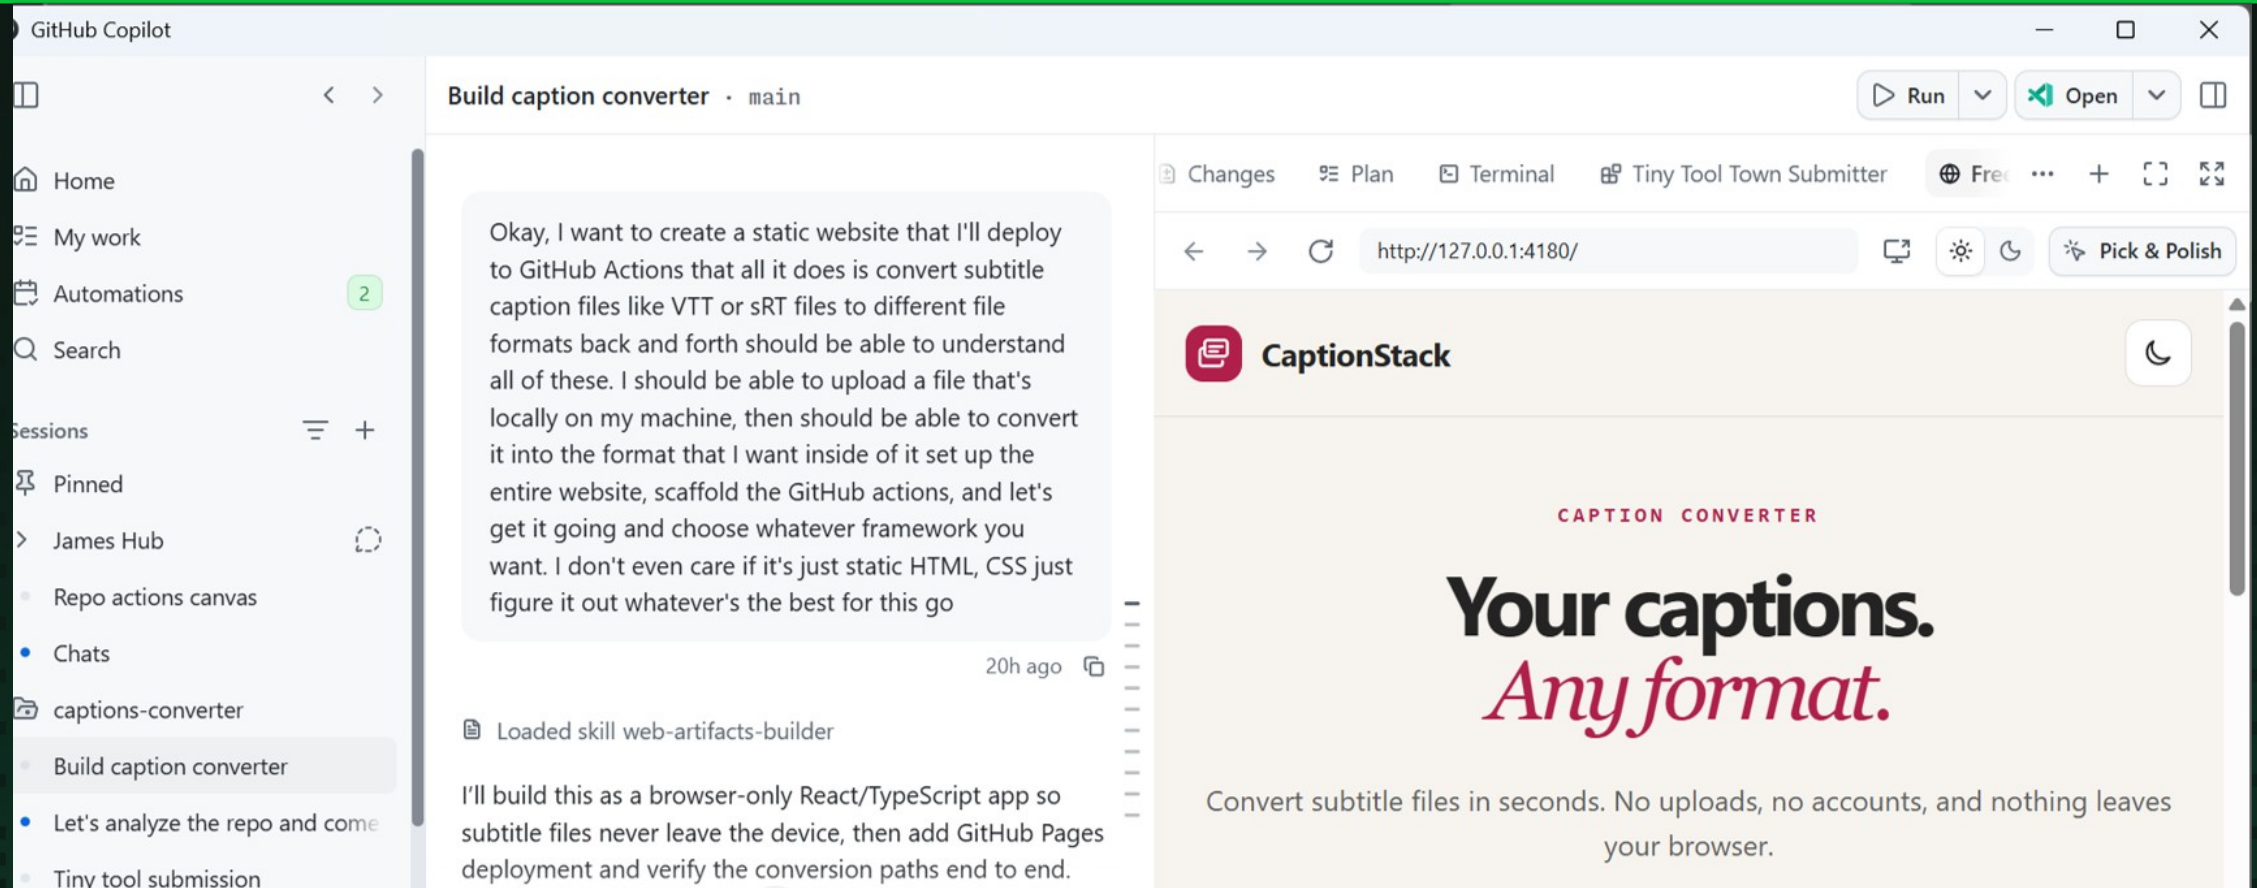

Workshop

gh.io/dev-days/workshop

GitHub Copilot app in action

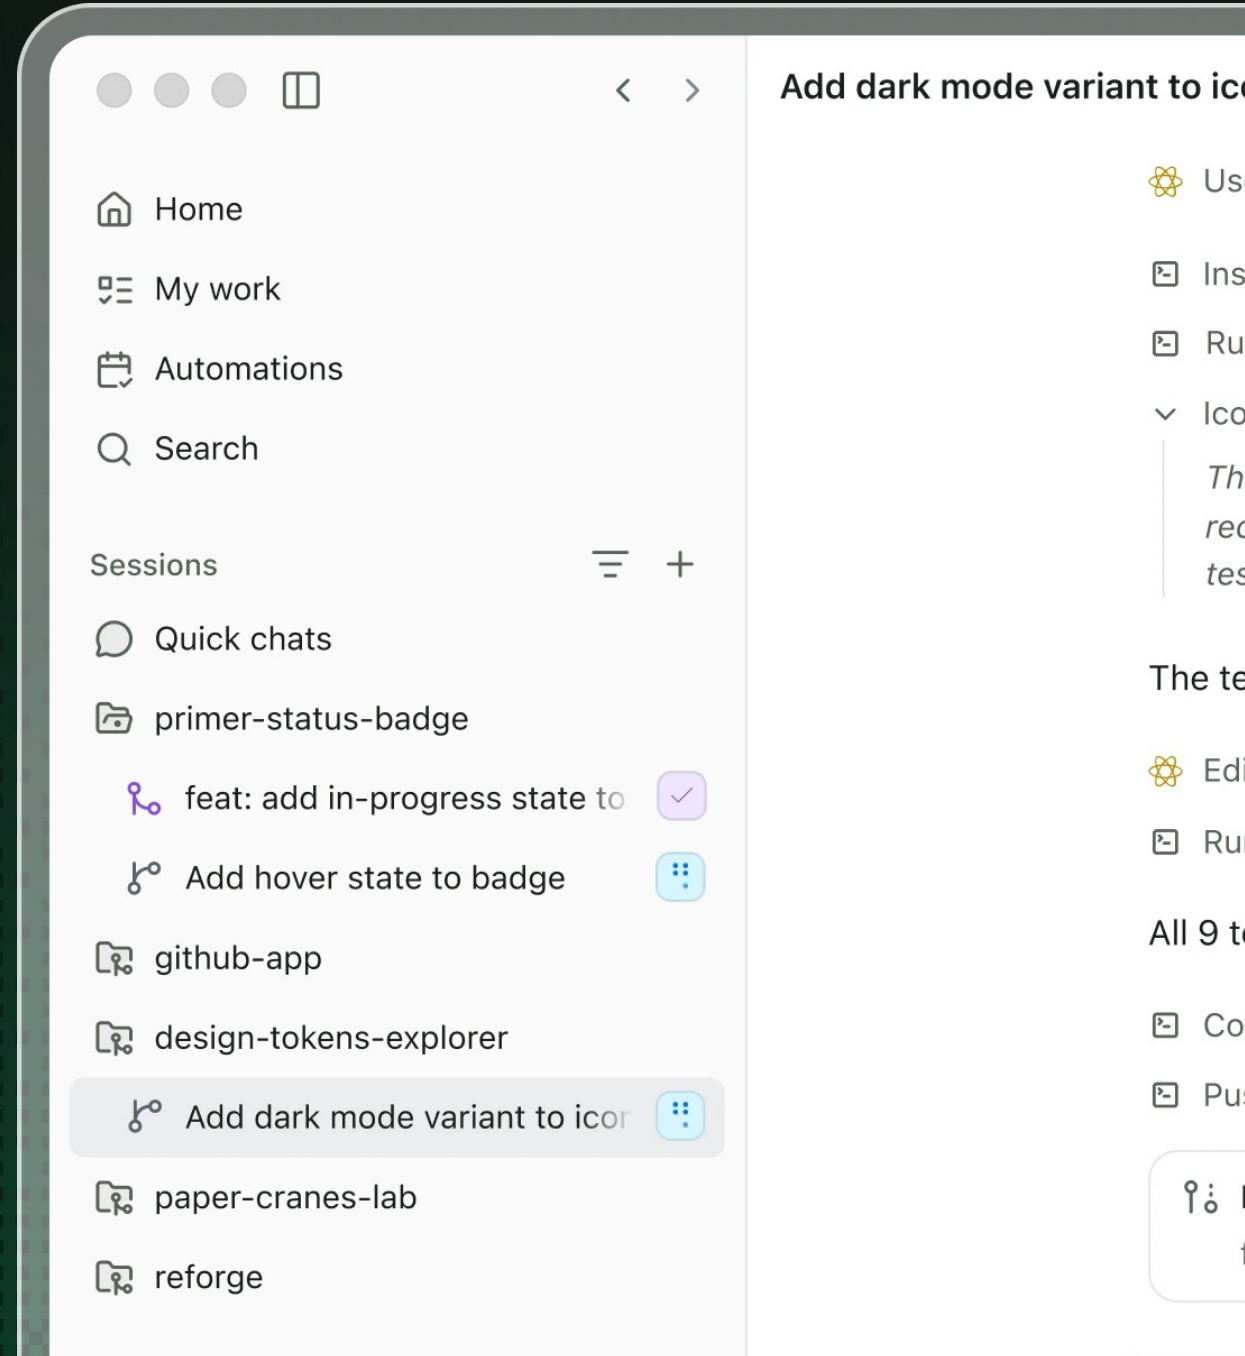

gh.io/dev-days/



As a Dev Days attendee, you're eligible for **10% off** an in-person pass to **GitHub Universe 2026** in San Francisco on October 28-29.

Use discount code **UNIV26DVDY** at registration.

