

Dev Days

The screenshot displays a development environment with three main components:

- GitHub Copilot Sidebar:** Located on the left, it shows a sidebar with navigation options: Home, My work, Automations, Search, Sessions, Pinned, James Hub, Repo actions canvas, Chats, and captions-converter. The 'Build caption converter' session is selected.
- Code Editor:** The central area shows a file named 'Build caption converter · main'. It contains a large text block with a prompt: 'Okay, I want to create a static website that I'll deploy to GitHub Actions that all it does is convert subtitle caption files like VTT or sRT files to different file formats back and forth should be able to understand all of these. I should be able to upload a file that's locally on my machine, then should be able to convert it into the format that I want inside of it set up the entire website, scaffold the GitHub actions, and let's get it going and choose whatever framework you want. I don't even care if it's just static HTML, CSS just figure it out whatever's the best for this go'. Below this, a message indicates 'Loaded skill web-artifacts-builder' and 'I'll build this as a browser-only React/TypeScript app so subtitle files never leave the device, then add GitHub Pages'.
- Web Browser:** On the right, a browser window shows a local development server at 'http://127.0.0.1:4180/'. The page features the 'CaptionStack' logo and the heading 'CAPTION CONVERTER'. The main content reads: 'Your captions. Any format.' followed by the tagline 'Convert subtitle files in seconds. No uploads, no accounts, and nothing leaves'.

Surfeando las olas

Ola 1

Ola 2

Hoy


Ola 3

Programador en
pareja



Completado de código
(2021-2023)

Más allá de los
programadores en
pareja

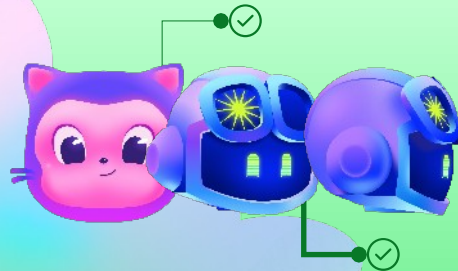


SDLC agéntico
(2024-2025)

Equipos + agentes



Equipos híbridos
(2026+)

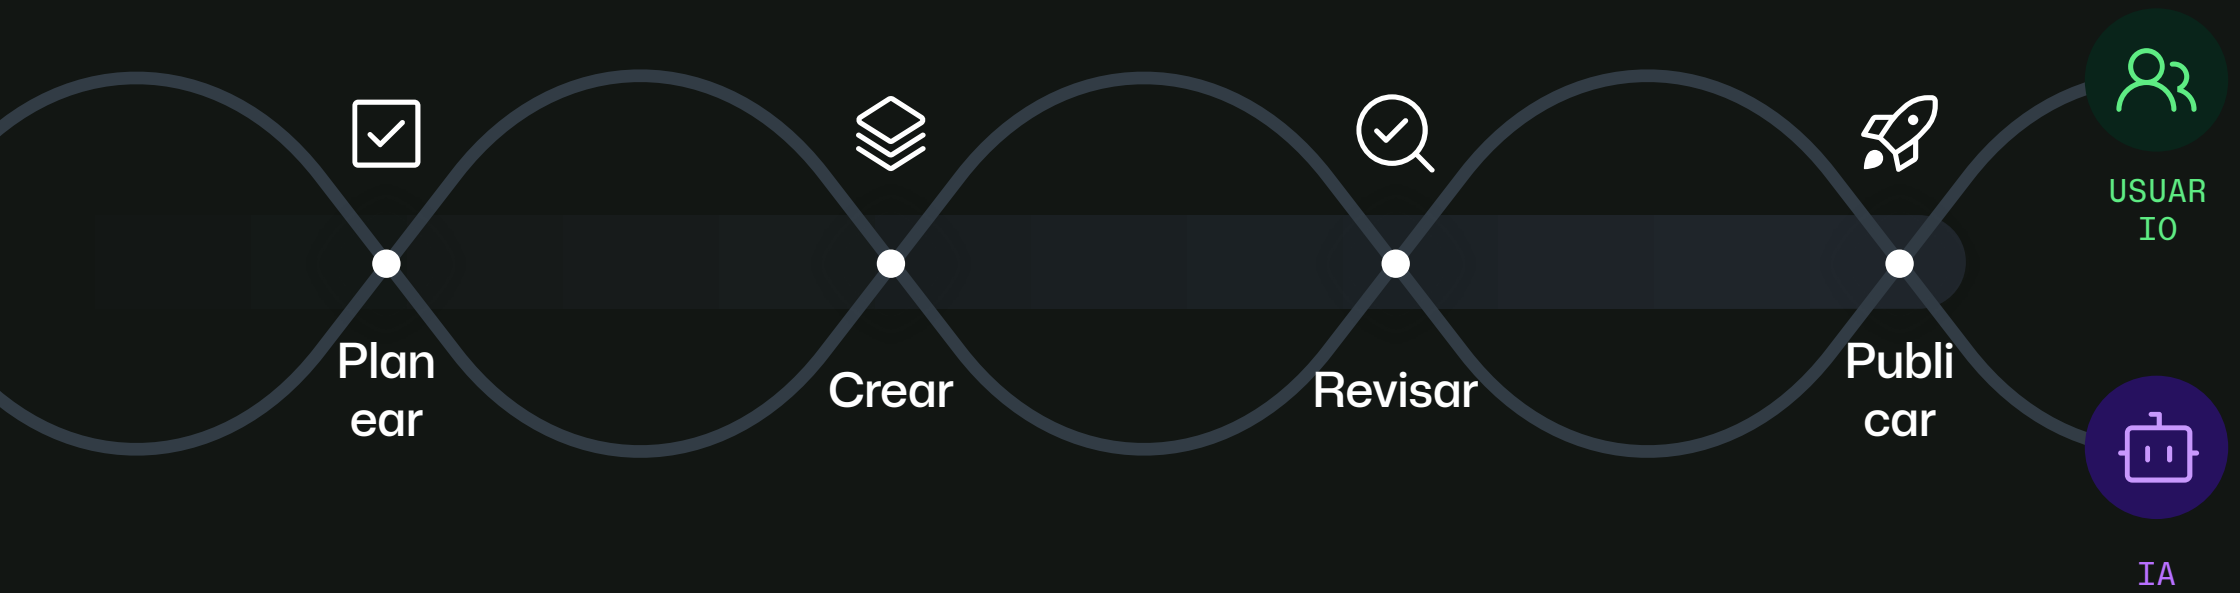



GITHUB COPILOT 

Code, command, and collaborate

AI that works where you do, whether in your editor, on the command line, or across GitHub.

4 files changed

TS `race-service.ts` `src/lib/data`

 `race-service.test.ts` `src/lib/data`

TS `+page.server.ts` `src/routes`

 `+page.svelte` `src/routes`

 Add Context...

Edit files in your workspace in agent mode

Agent ▾ Auto ▾



Go beyond one-size-fits-all

Choose from leading LLMs optimized for speed, accuracy, or cost.



Use your agents, your way

Use GitHub Copilot, your own custom agents, or the third-party ones you already rely on.




Stay in your flow


Copilot works where you do—in GitHub, your IDE, the CLI, project tools, chat apps, and custom MCP servers.

Un GitHub Copilot,
dondequiera que programes

GitHub Copilot está disponible en IDEs, la web y dispositivos móviles

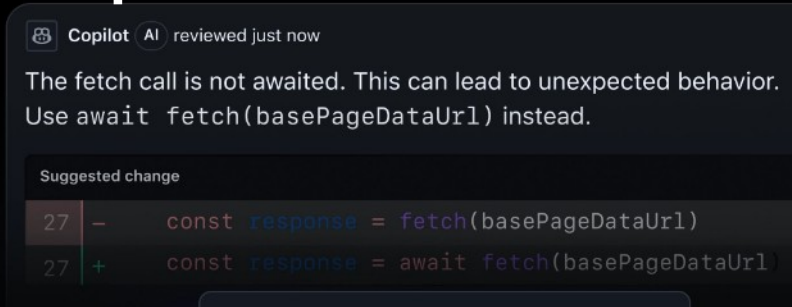

GitHub.com y aplicaciones móviles de GitHub

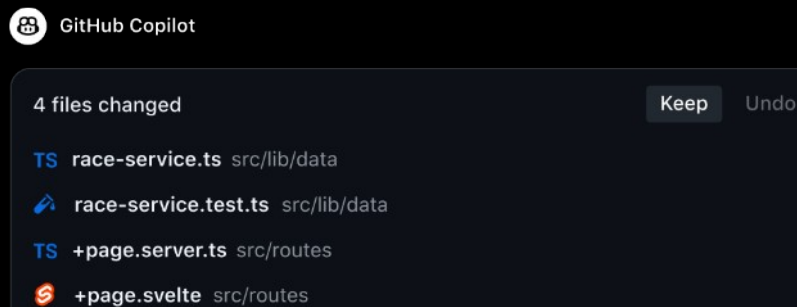


VS Code




IDEs de JetBrains, Eclipse, Vim, Visual Studio, Xcode



Terminal (Copilot CLI)

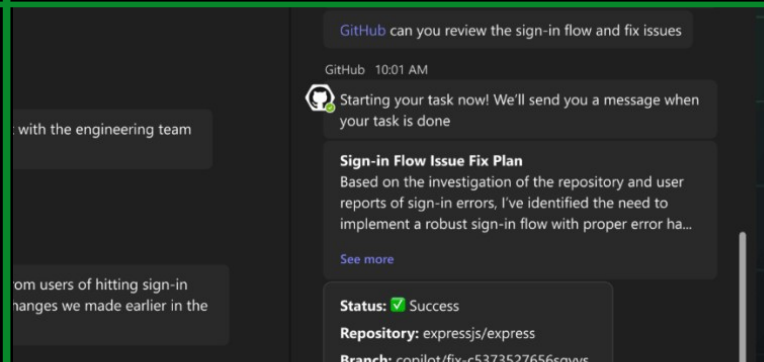


Slack y Teams

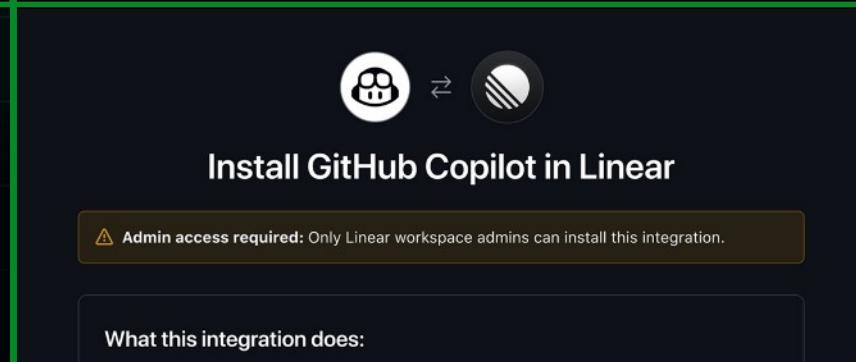

Azure DevOps Boards, Linear, Jira

Entonces, ¿cómo lo integramos todo?

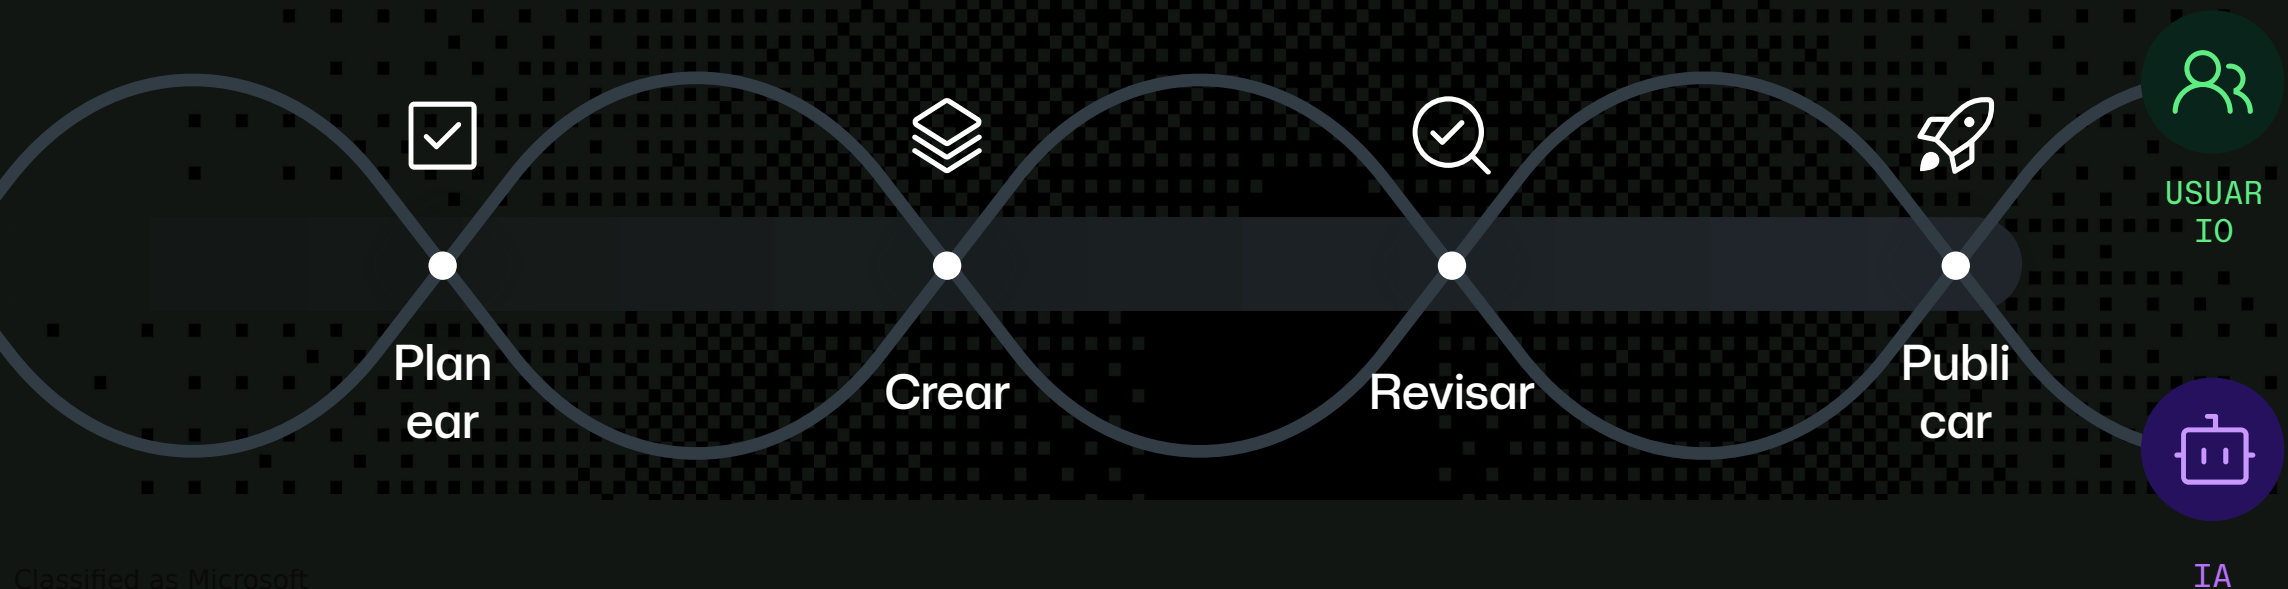


DE UN ISSUE A UN MERGE, EN UNA SOLA APLICACIÓN,
GH.IO/APP

GitHub Copilot App

The screenshot displays the GitHub Copilot App interface. On the left is a sidebar with navigation options: Home, My work, Automations, Search, Sessions, Pinned, James Hub, Repo actions canvas, Chats, and captions-converter. The main area is titled 'Build caption converter · main' and contains a chat conversation with a Copilot agent. The chat message reads: 'Okay, I want to create a static website that I'll deploy to GitHub Actions that all it does is convert subtitle caption files like VTT or SRT files to different file formats back and forth should be able to understand all of these. I should be able to upload a file that's locally on my machine, then should be able to convert it into the format that I want inside of it set up the entire website, scaffold the GitHub actions, and let's get it going and choose whatever framework you want. I don't even care if it's just static HTML, CSS just figure it out whatever's the best for this go'. Below the chat is a status bar indicating 'Loaded skill web-artifacts-builder'. On the right, a live preview of the web application is shown in a browser window. The browser address bar displays 'http://127.0.0.1:4180/'. The web application, titled 'CaptionStack', features the heading 'CAPTION CONVERTER' and the main text 'Your captions. Any format.' Below this, it states 'Convert subtitle files in seconds. No uploads, no accounts, and nothing leaves'.


INICIA UNA SESIÓN DESDE UN ISSUE, UN PROMPT O UN PR QUE YA ESTÁ EN CURSO.

Delega en agentes

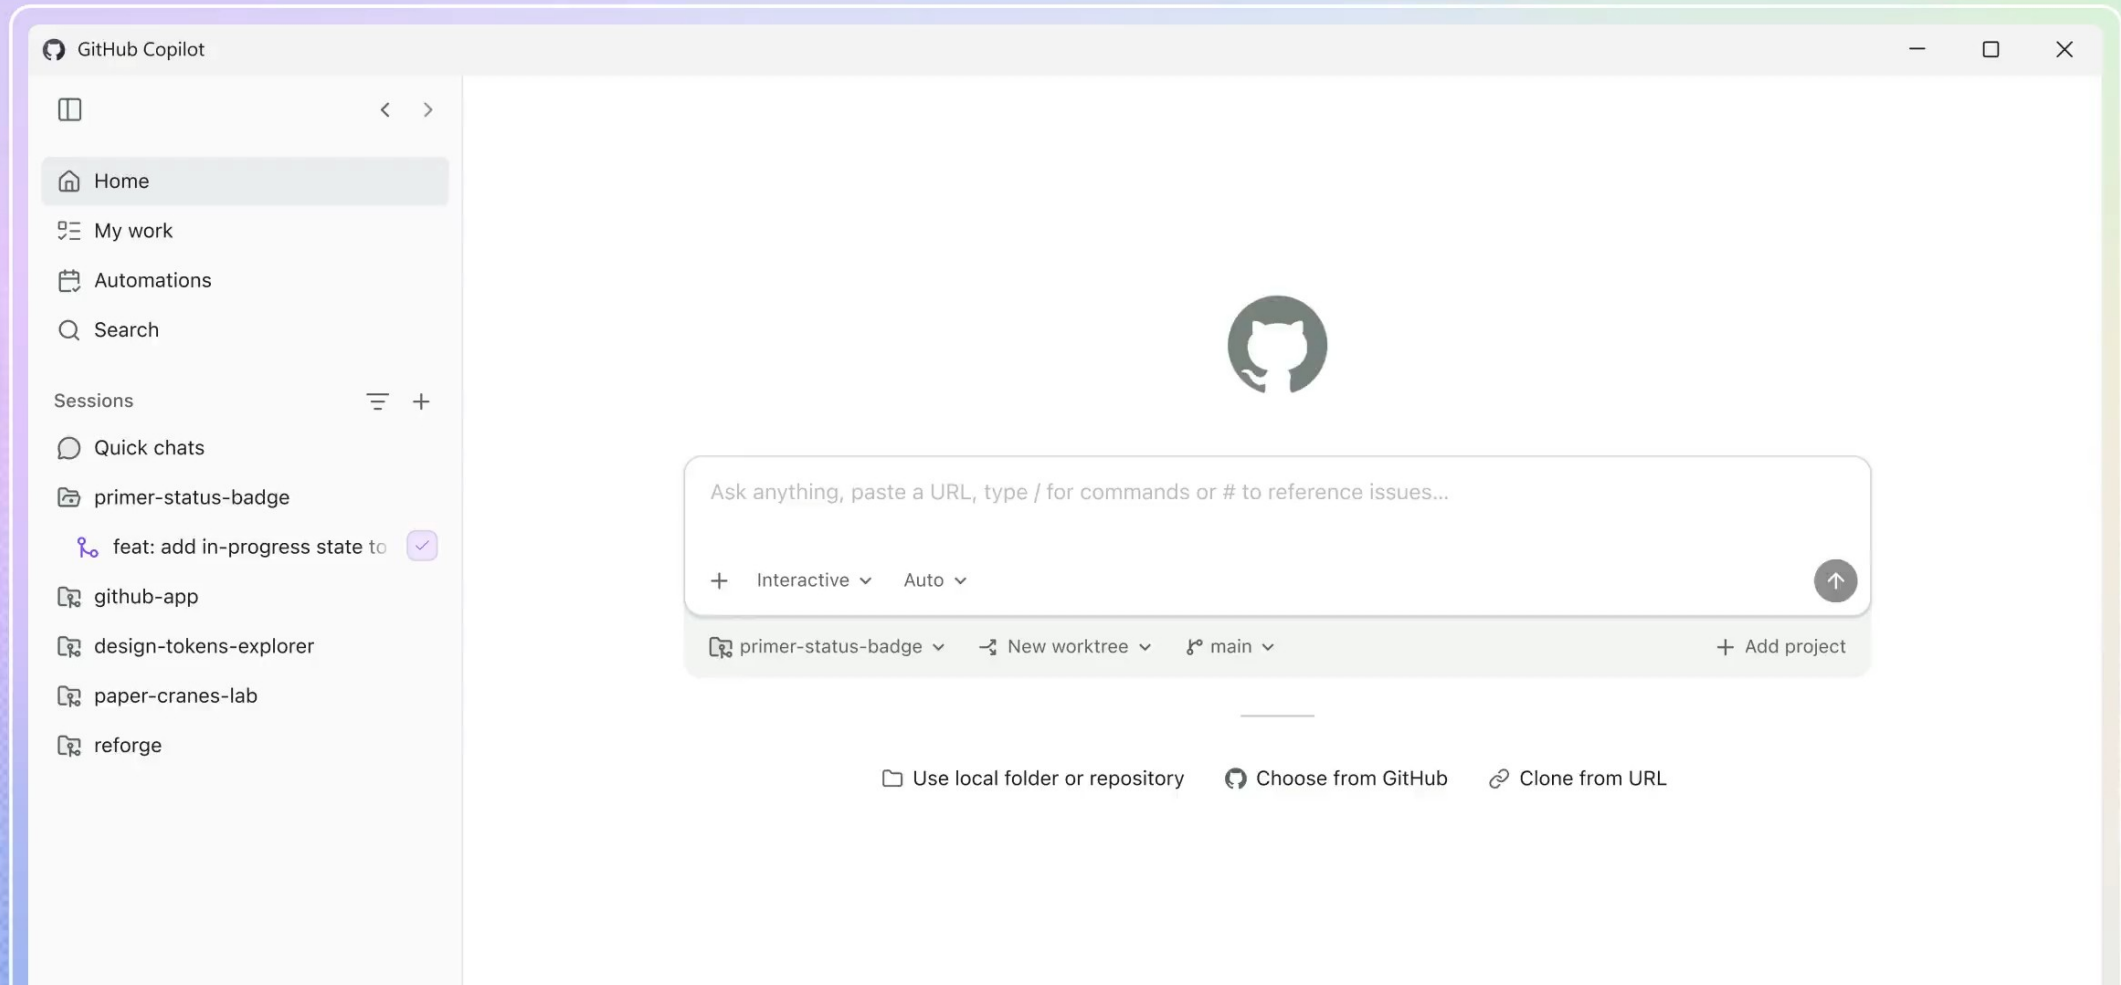


CLASIFICA ISSUES Y PRS EN DISTINTOS REPOSITORIOS SIN SALIR DE LA APLICACIÓN.

Bandeja de entrada centralizada

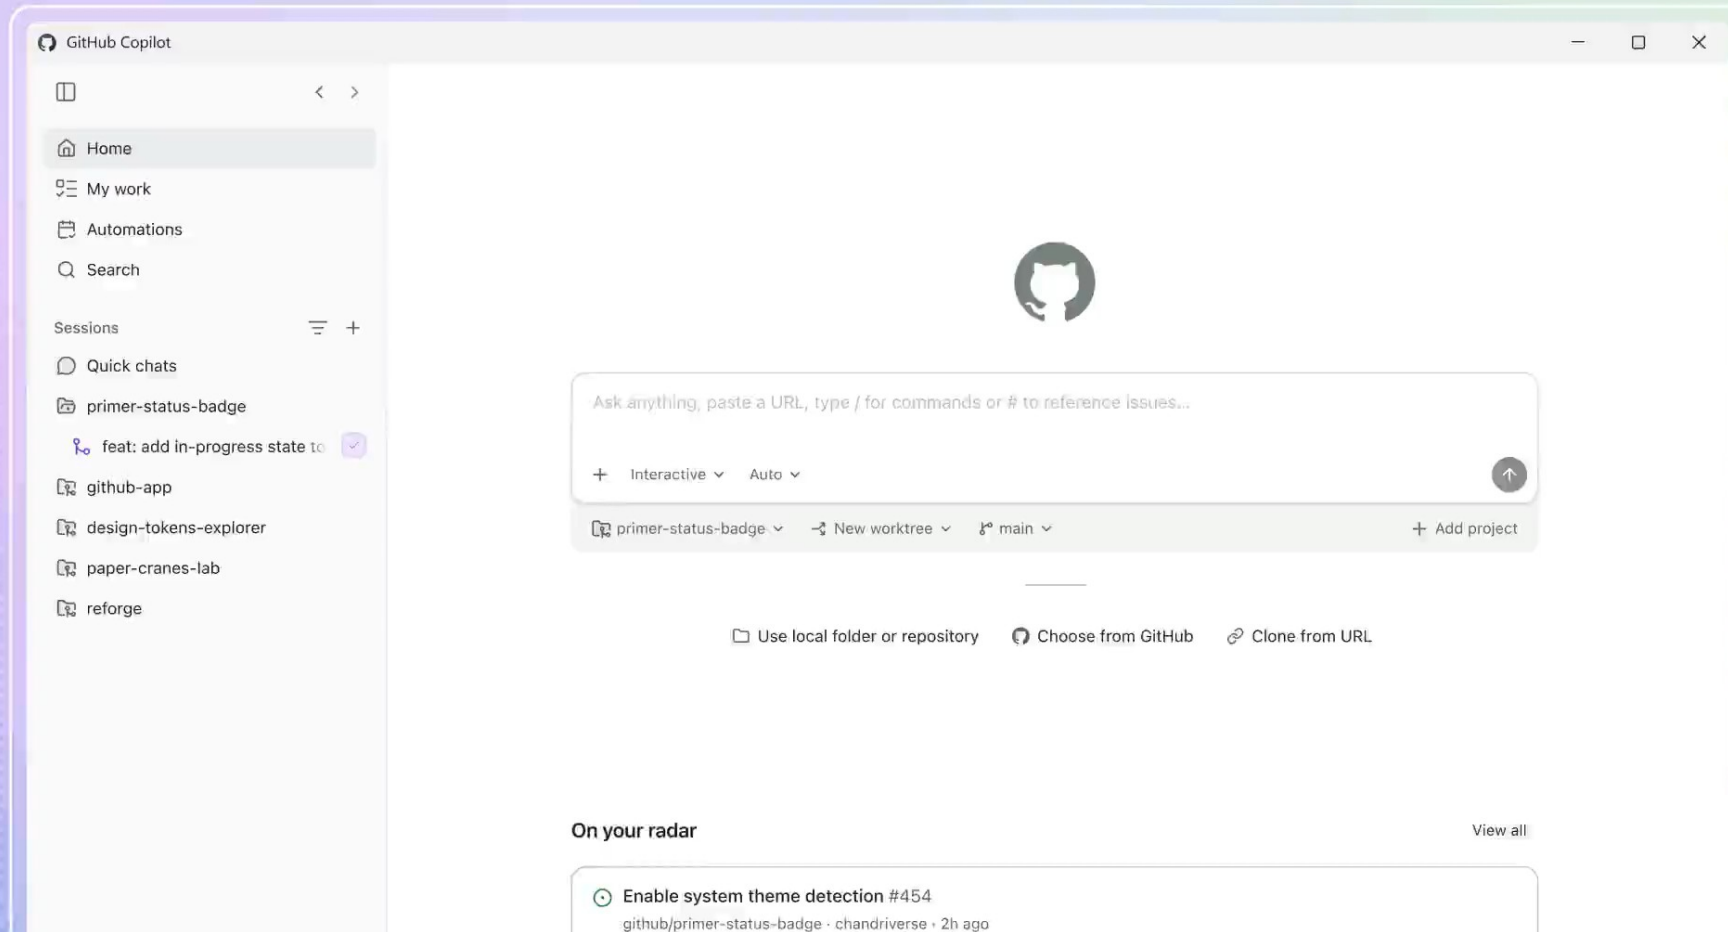

ABRE UN ESPACIO DE TRABAJO DINÁMICO DONDE TÚ Y EL AGENTE EDITAN, REORGANIZAN Y VERIFICAN JUNTOS EL MISMO ARTEFACTO.

Lienzos

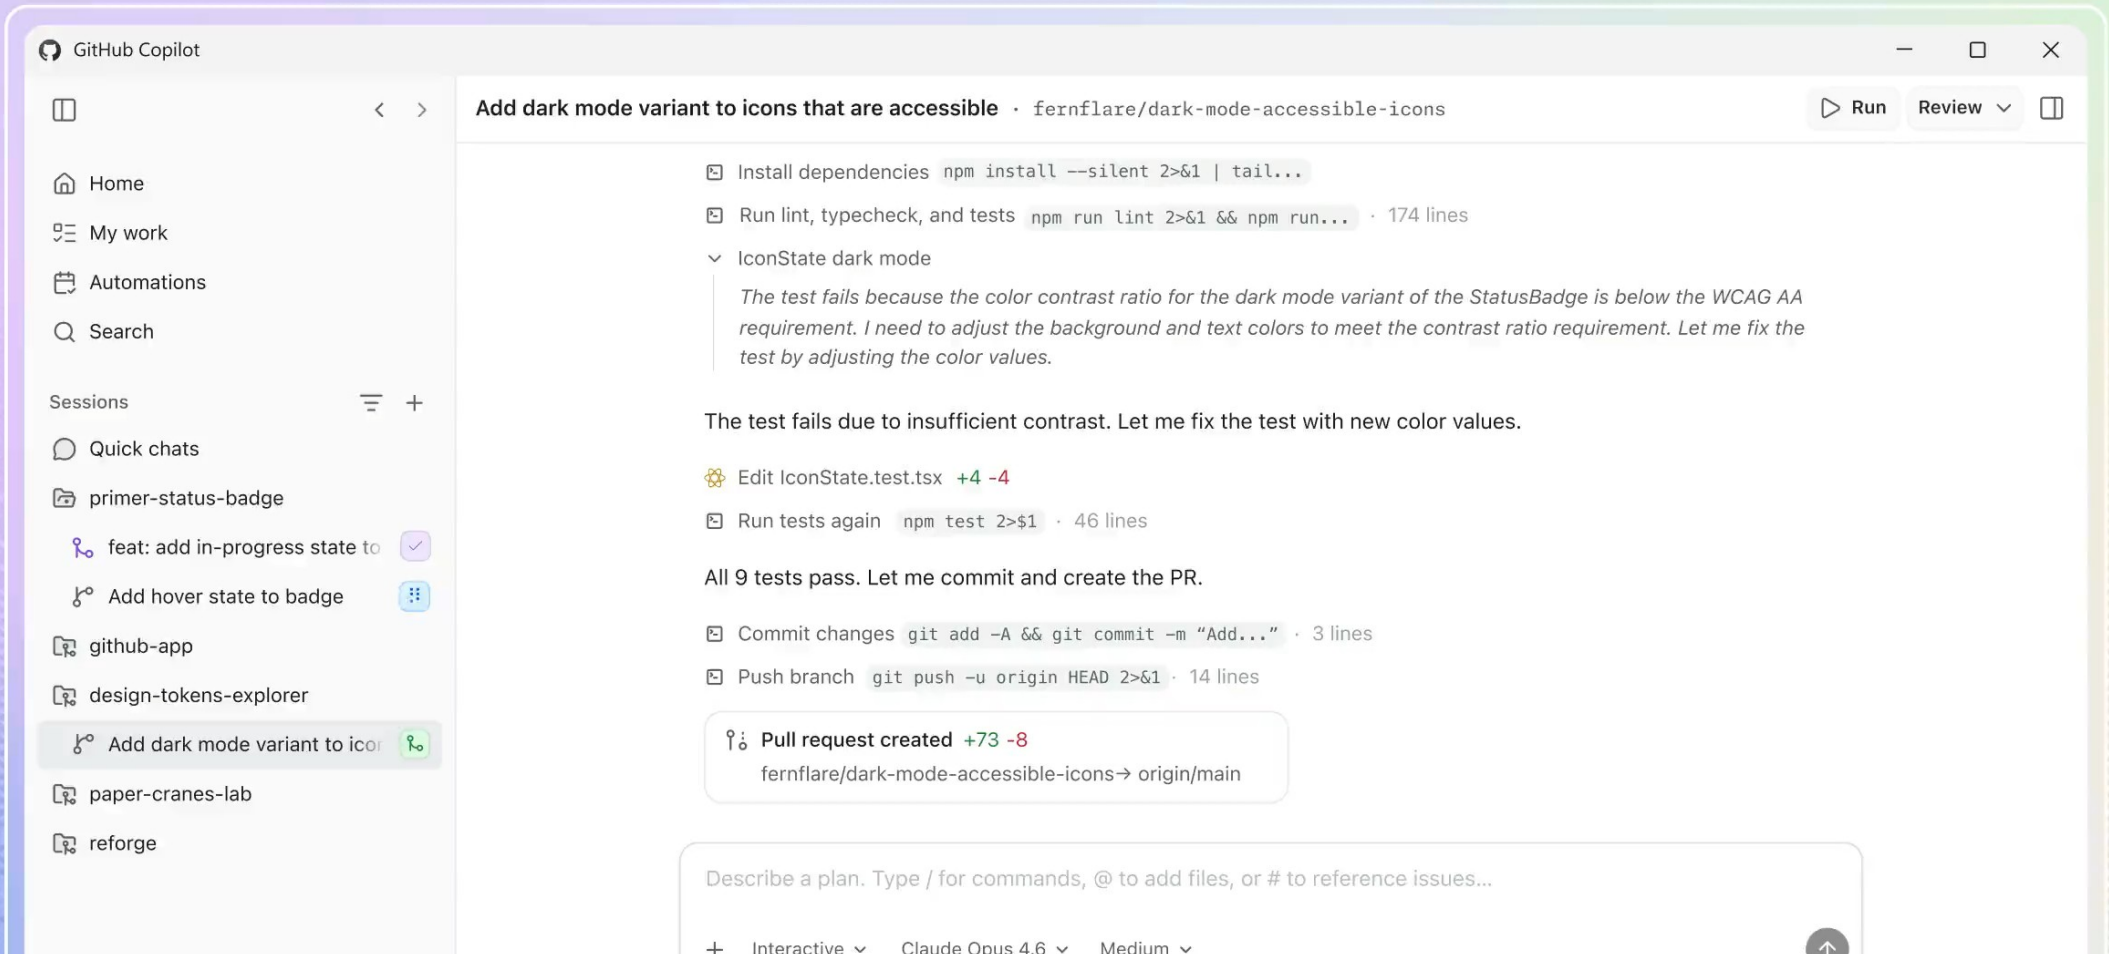

REVISA LOS DIFFS, COMPRUEBA LA CI Y CORRIGE LAS COMPROBACIONES QUE FALLEN. HAZ MERGE DESDE LA MISMA VENTANA EN LA QUE TRABAJA EL AGENTE.

Revisar y hacer merge

The screenshot displays the GitHub Copilot web interface. On the left sidebar, the 'Sessions' section is active, showing a list of recent tasks. The task 'Add hover state to badge' is selected and highlighted. The main workspace shows the details of this task, including a list of actions performed by the agent: 'Edit StatusBadge.test.tsx' (+30 lines), 'Install dependencies' (npm install --silent 2>&1 | tail...), and 'Run lint, typecheck, and tests' (npm run lint 2>&1 && npm run... 174 lines). A 'Thought for 9s' section explains that the test fails due to duplicate 'Interactive' text and suggests using unique text labels. Below this, the agent states 'The test fails due to duplicate "Interactive" text across renders. Let me fix the test with unique labels.' and shows further actions: 'Edit StatusBadge.test.tsx' (+4 -4 lines) and 'Run tests again' (npm test 2>\$1 46 lines). The agent concludes with 'All 9 tests pass. Let me commit and create the PR.' and shows the final actions: 'Commit changes' (git add -A && git commit -m "Add..." 3 lines) and 'Push branch' (git push -u origin HEAD 2>&1 14 lines). A summary box at the bottom indicates 'Pull request created +56 -12' for the branch 'fernflare/add-hover-state-to-badge' pointing to 'origin/main'. The bottom of the interface has a text input field with the placeholder 'Describe a plan. Type / for commands, @ to add files, or # to reference issues...'. The GitHub logo is visible in the bottom right corner.

GitHub Copilot

Home

My work

Automations

Search

Sessions

Quick chats

primer-status-badge

feat: add in-progress state to

Add hover state to badge

github-app

design-tokens-explorer

paper-cranes-lab

reforge

Add hover state to badge · fernflare/issue-416-add-hover-state-to-badge-cf9722

Run Review

Edit StatusBadge.test.tsx +30

Install dependencies npm install --silent 2>&1 | tail...

Run lint, typecheck, and tests npm run lint 2>&1 && npm run... · 174 lines

Thought for 9s

The test fails because previous test renders with "Interactive" text are still in the DOM. I need to use unique text or use cleanup or render within each test properly. The issue is that render from testing-library doesn't clean up between tests in this setup. Let me fix the test by using unique text labels.

The test fails due to duplicate "Interactive" text across renders. Let me fix the test with unique labels.

Edit StatusBadge.test.tsx +4 -4

Run tests again npm test 2>\$1 · 46 lines

All 9 tests pass. Let me commit and create the PR.

Commit changes git add -A && git commit -m "Add..." · 3 lines


Push branch git push -u origin HEAD 2>&1 · 14 lines

Pull request created +56 -12
fernflare/add-hover-state-to-badge → origin/main


Describe a plan. Type / for commands, @ to add files, or # to reference issues...

CONVIERTE SKILLS Y PROMPTS EN TRABAJO REPETIBLE QUE PUEDA EJECUTARSE CON REGULARIDAD.

Flujos de trabajo automatizados

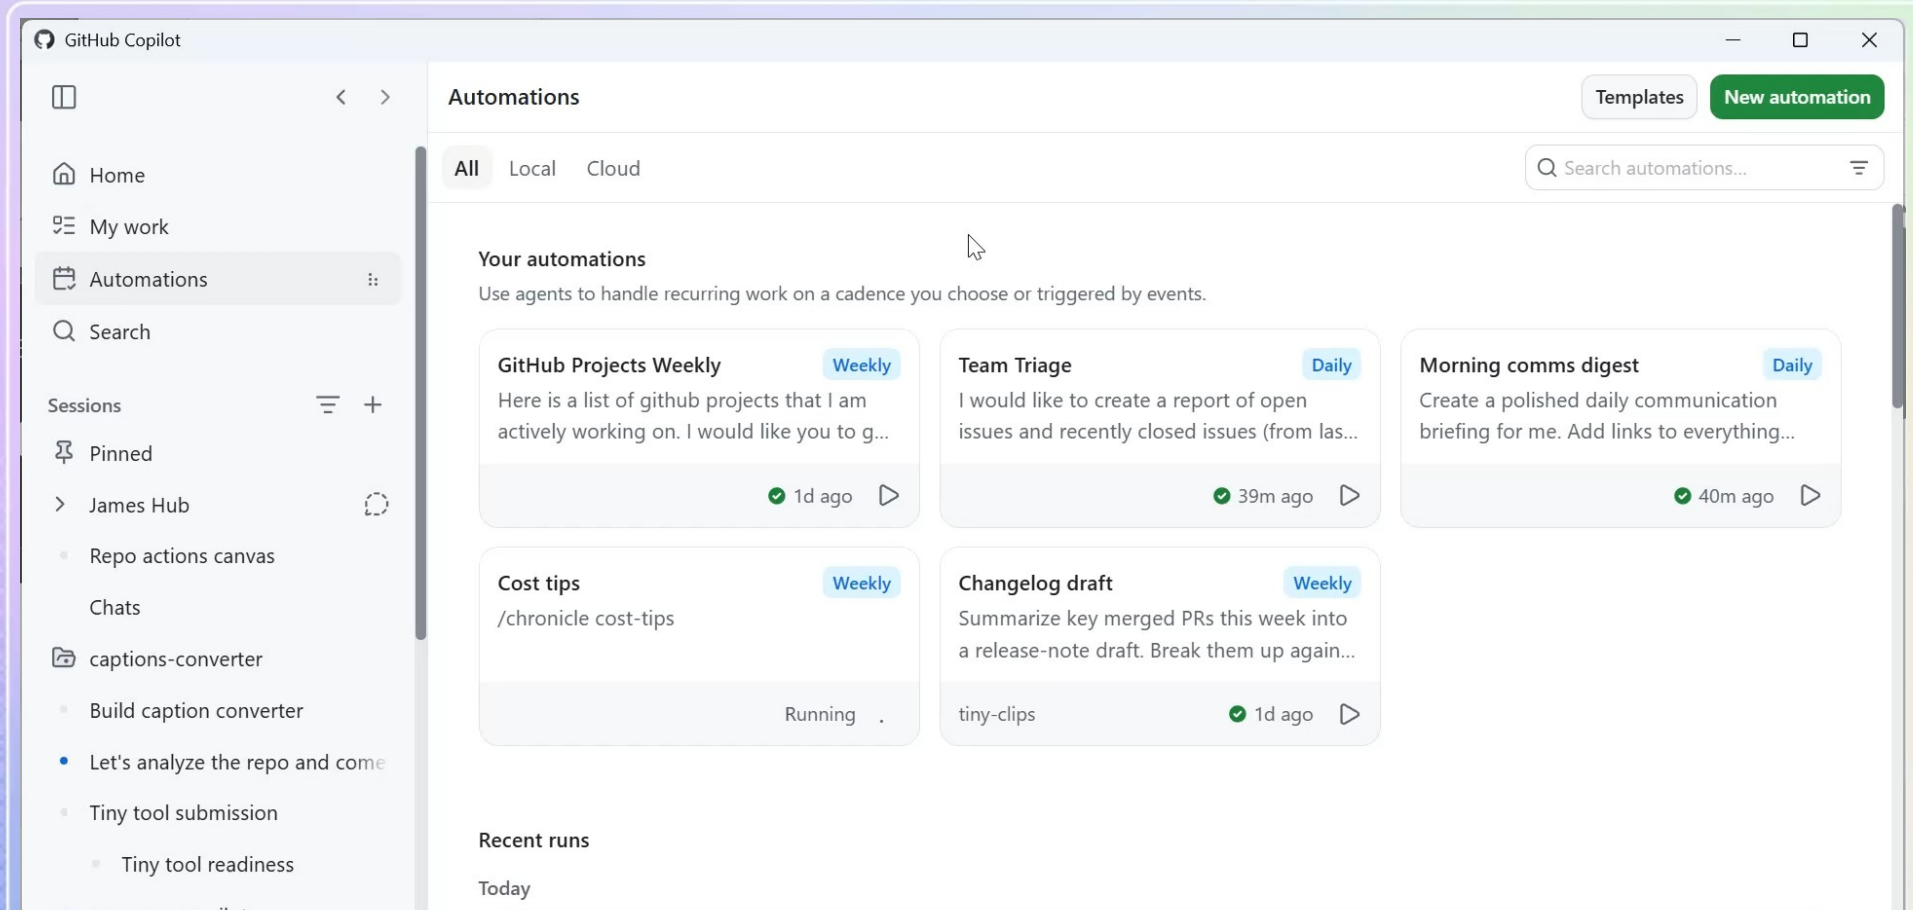


Descárgala hoy: gh.io/app

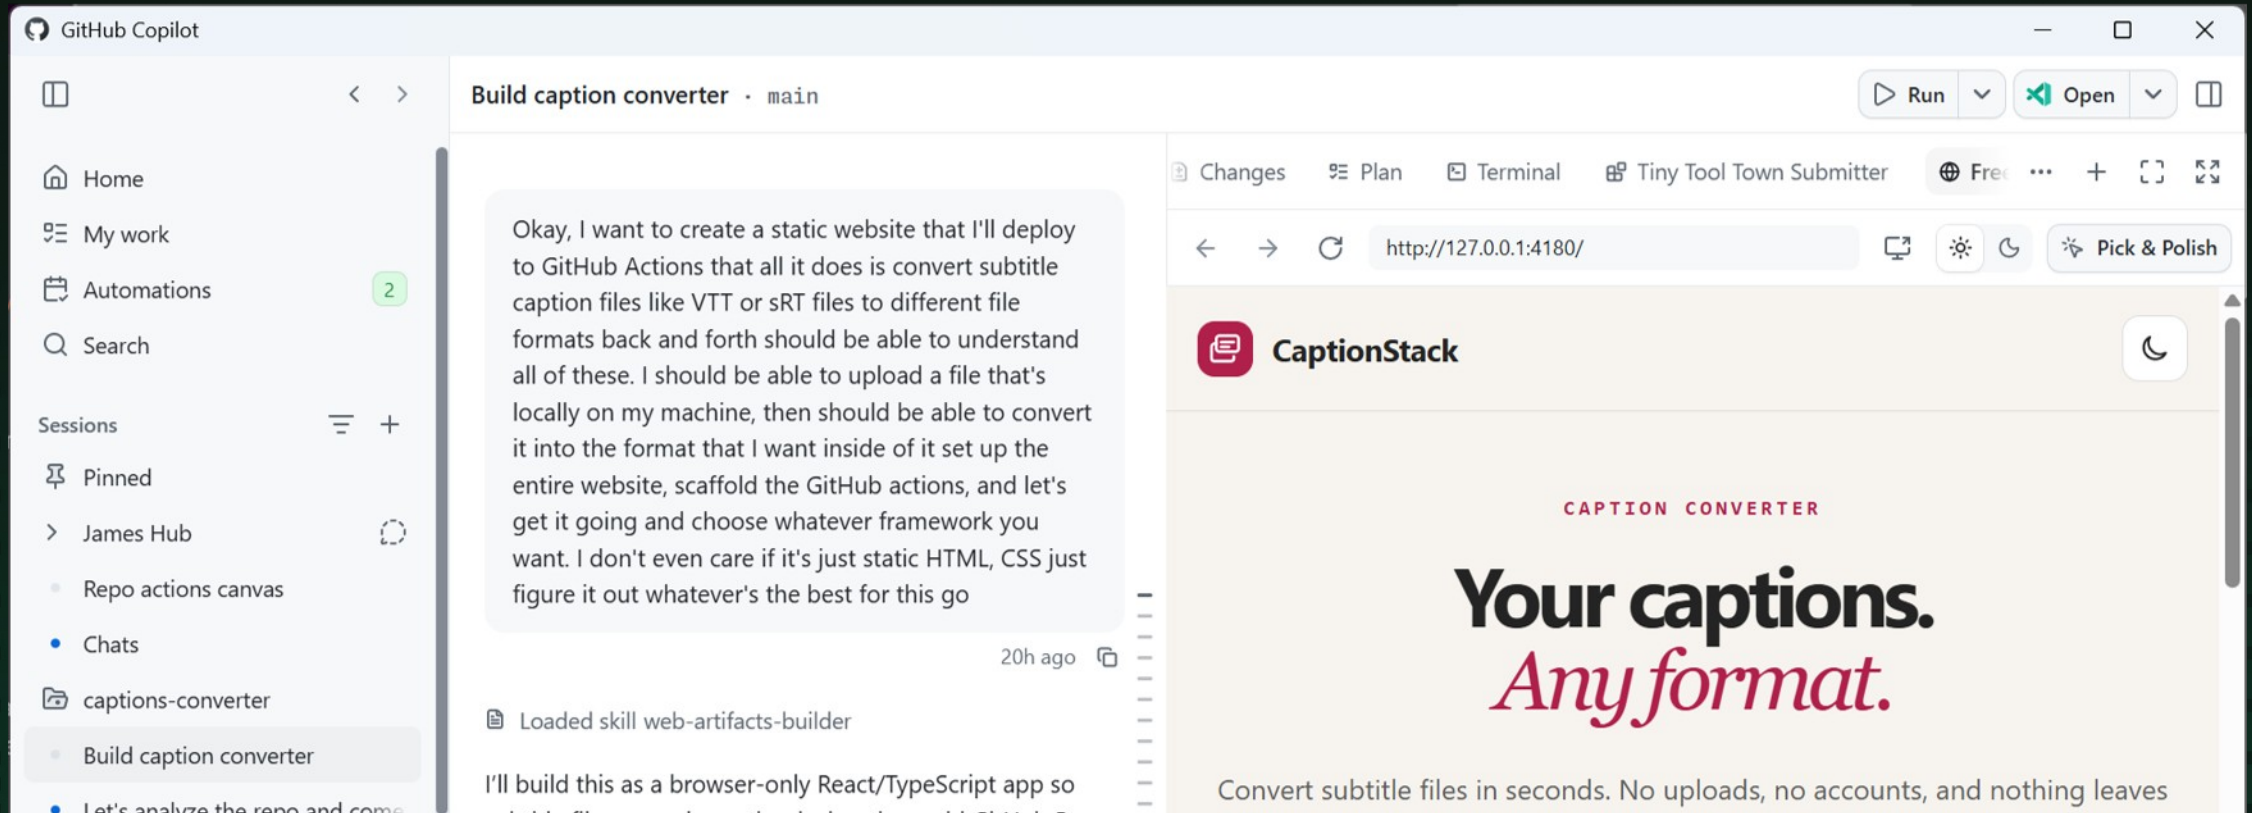

Taller

<https://gh.io/dev-days/workshop/spanish>

La aplicación de GitHub Copilot en acción

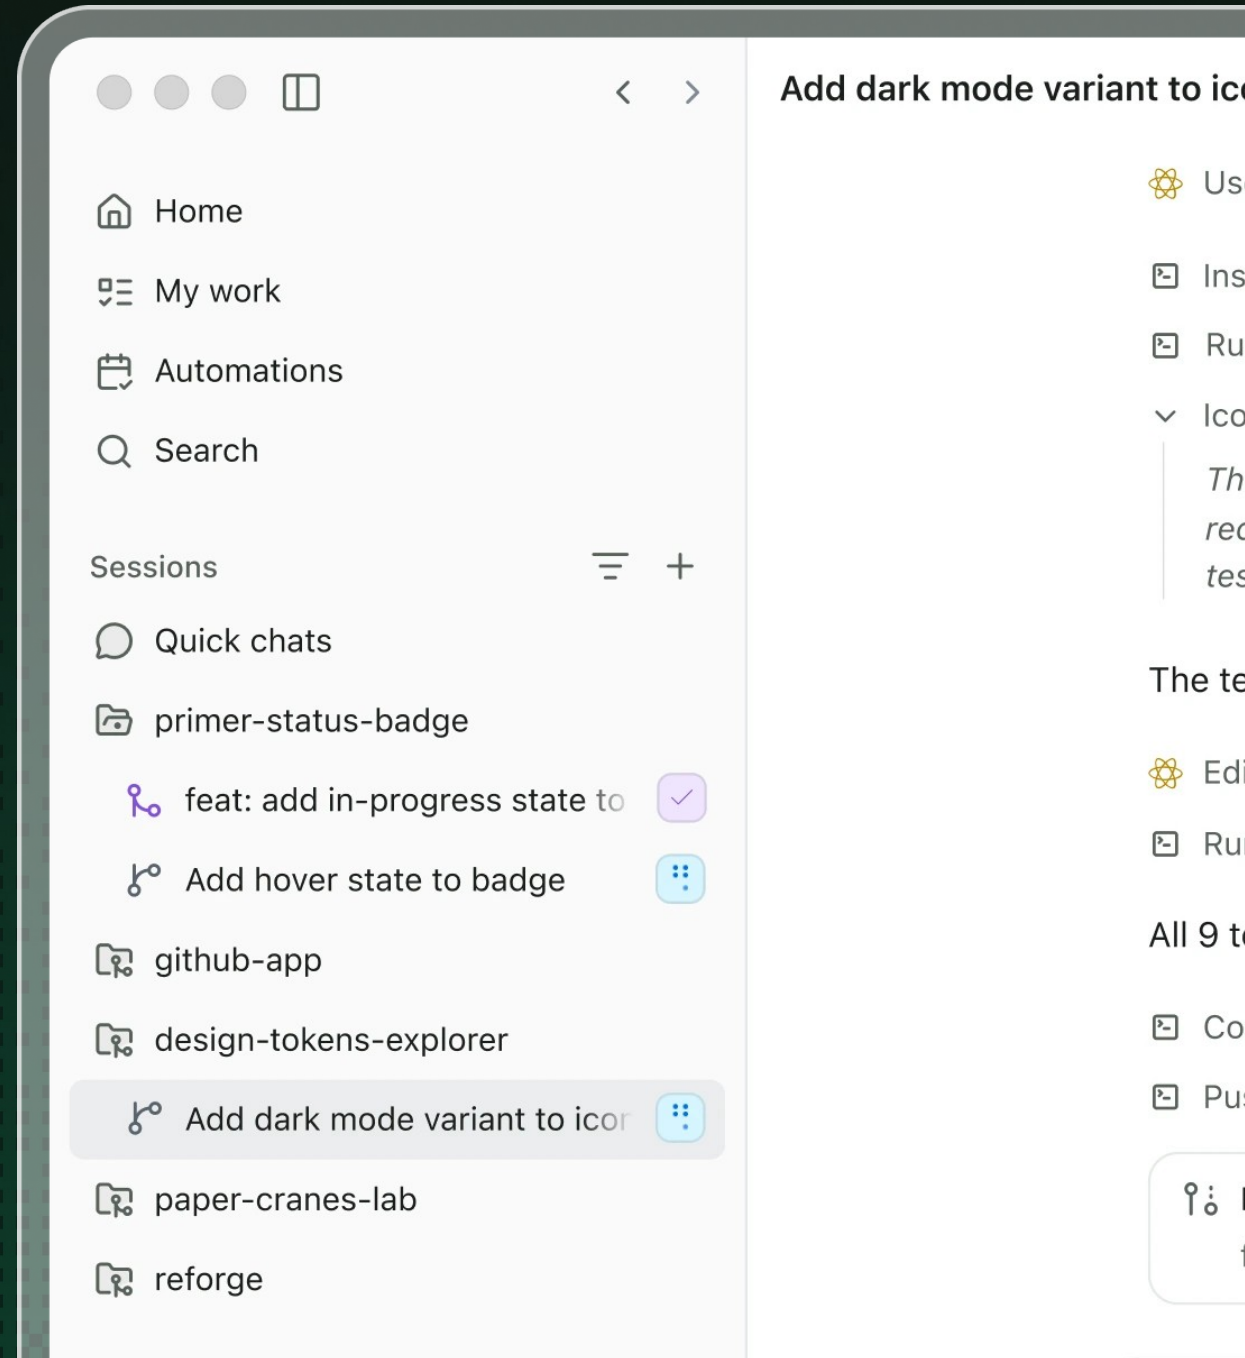

gh.io/dev-days/

