

The University of Azad Jammu and Kashmir, Muzaffarabad

Department of Software Engineering

LAB NO: 01

Name: Ghulam Hussain

Roll No: 2024 – SET –35

Course: Software Testing

Course Code: ST-2203

Semester: 5th semester

Session: 2024 –28

Lab Instructor: Engr. Fahad Nisar

Contents

Objective 3
Environment 3
Step 1: Install Node.js 3
Step 2: Verify Node.js and npm 3
Step 3: Create the Project Folder 4
Step 4: Initialize the Node.js Project 5
Step 5: Install and Initialize Playwright 5
Step 6: Inspect the Project 6
Step 7: Run the Sample Tests 7
Step 8: View the HTML Report 8

Objective

To install Node.js and npm, initialize a Node.js project, set up Playwright with JavaScript, and verify the setup by running the generated sample tests.

Environment


Operating System: Windows 10pro | Terminal: Command Prompt | Internet connection required

Step 1: Install Node.js

Downloaded the Windows Installer (.msi) for the LTS release from https://nodejs.org/en/download, accepted the license, and kept the default options (including npm and Add to PATH).

Node.js version installed: v24.22.0

Screenshot 1: Node.js installer / download page (optional)

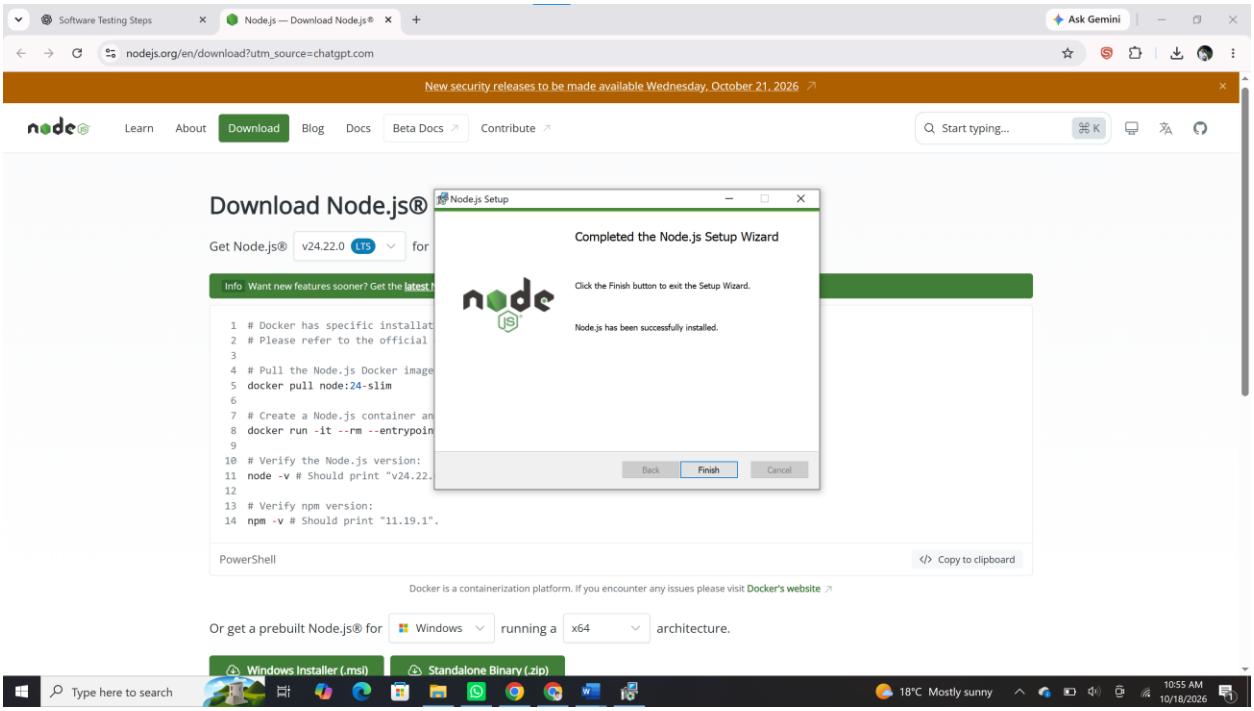


Step 2: Verify Node.js and npm

Commands run in a new Command Prompt window:

```
node --version
npm --version
```

Output: Node.js **v24.22.0** | npm: **11.19.1**


Screenshot 2: Output of node --version and npm --version

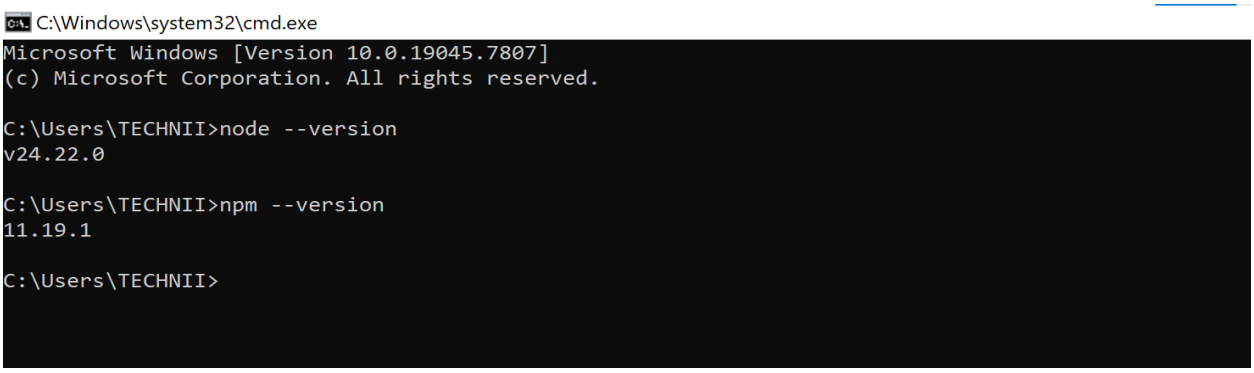

Step 3: Create the Project Folder

```
mkdir software-testing-lab
cd software-testing-lab
```

Screenshot 3: Folder created and navigated into

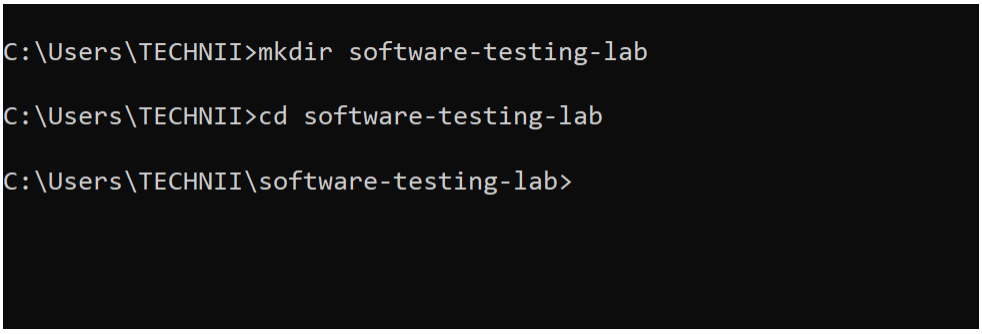


Step 4: Initialize the Node.js Project

```
npm init -y
```

Expected result: a package.json file is created. The -y option accepts the default project settings.

Screenshot 4: Output of npm init -y (showing package.json contents)

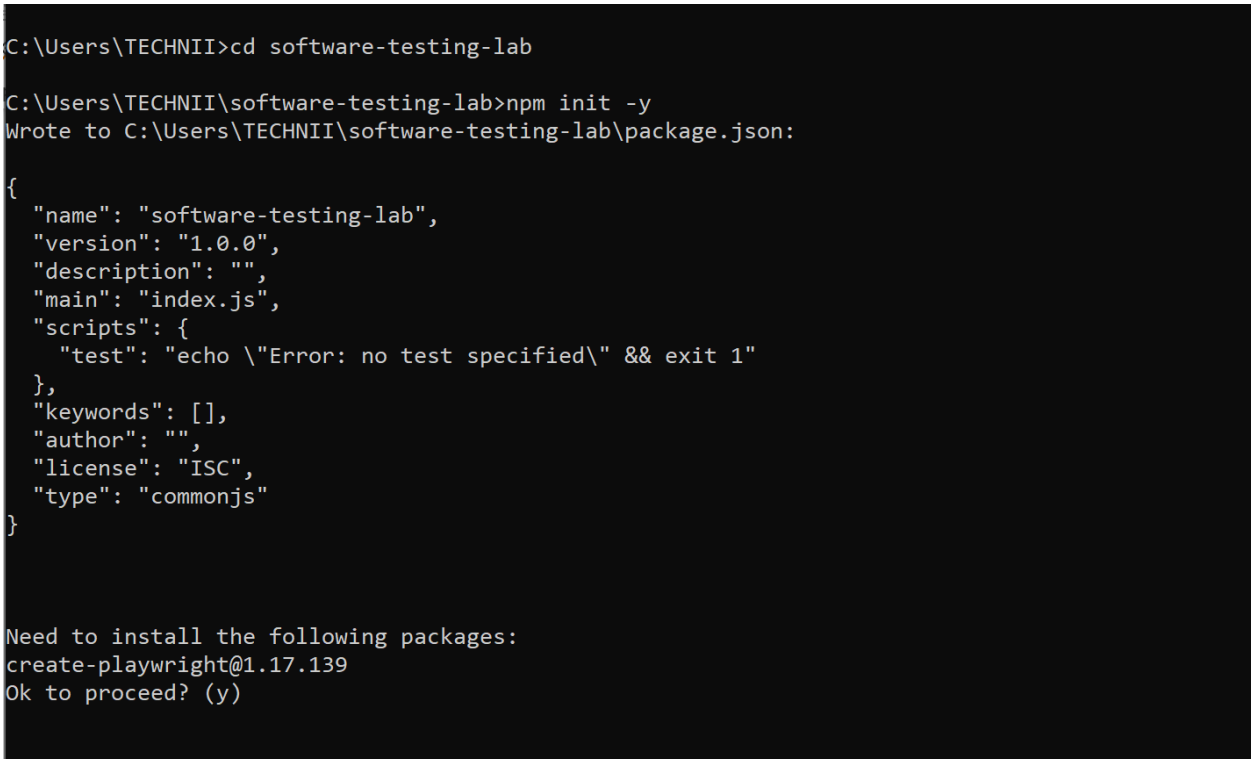


Step 5: Install and Initialize Playwright


```
npm init playwright@latest
```

Options selected: JavaScript; test folder = tests; GitHub Actions = No; install Playwright browsers = Yes.

Screenshot 5: Playwright initializer prompts and options selected

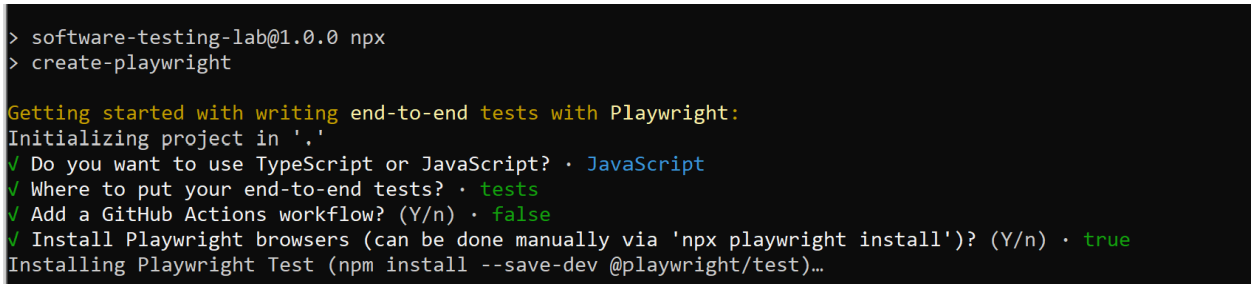


Screenshot 6: Playwright installation completed

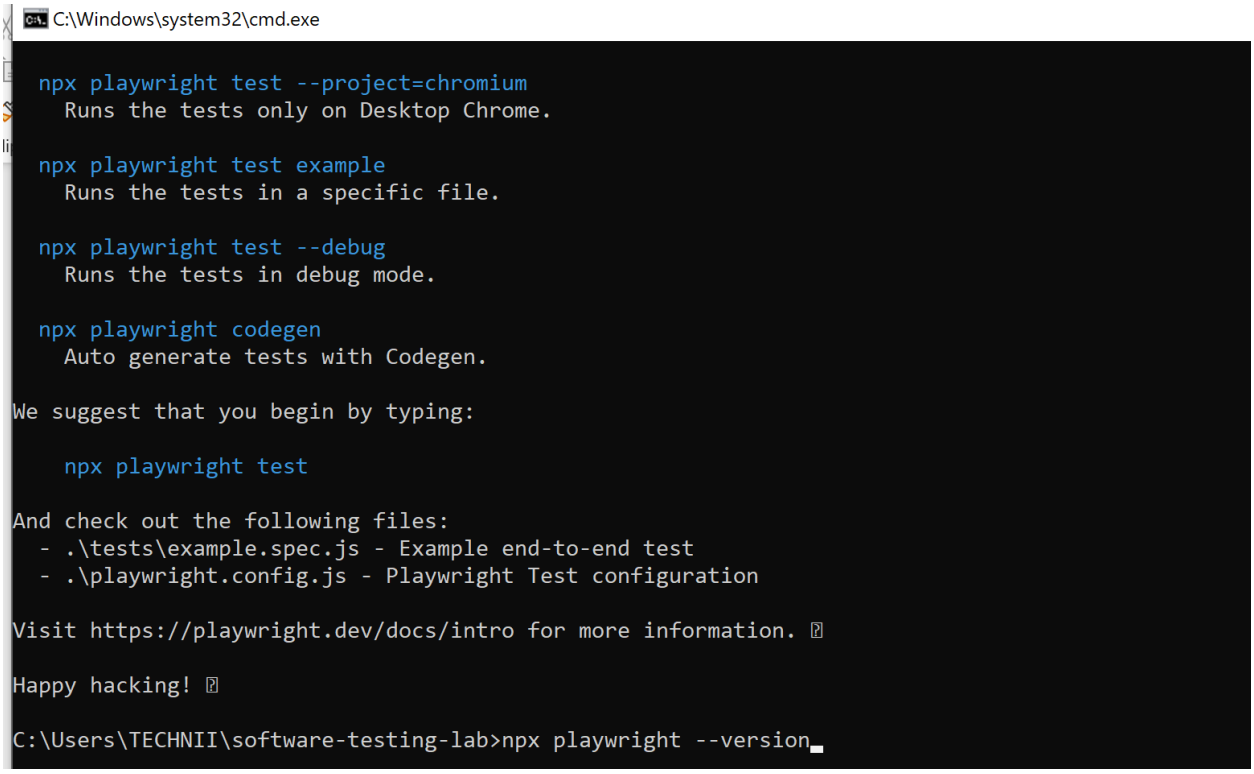

Step 6: Inspect the Project

Project files located: package.json, package-lock.json, node_modules, playwright.config.js, tests/example.spec.js.


Screenshot 7: Generated project files (File Explorer or dir command)

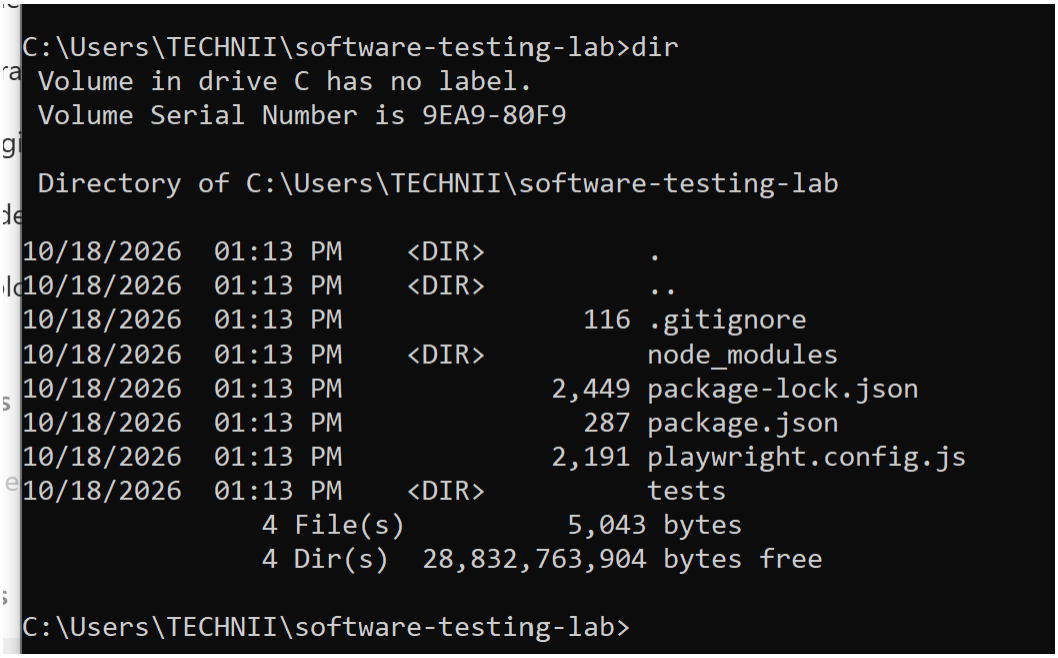

```
npx playwright --version
```

Playwright version: 1.64.1


Screenshot 8: Output of npx playwright --version

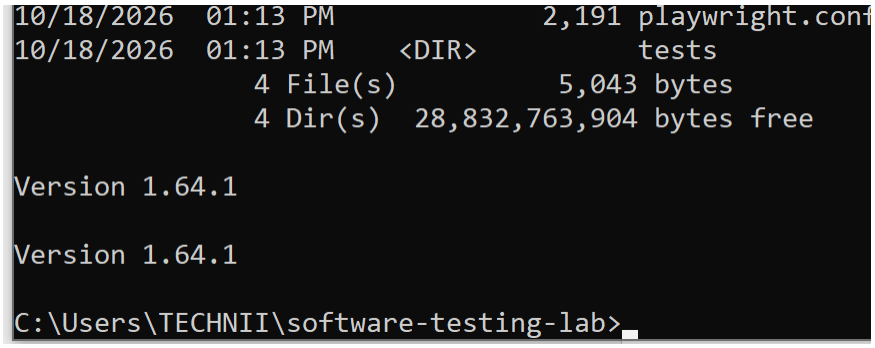

Step 7: Run the Sample Tests

```
npx playwright test
```

Screenshot 9: Full command and passing test results

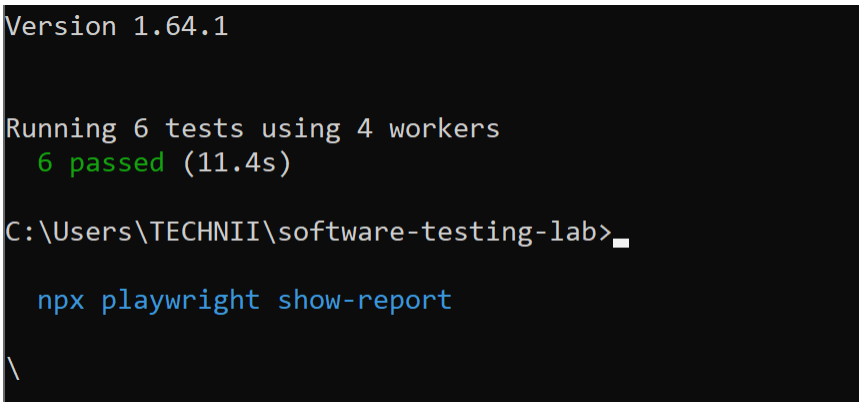

Step 8: View the HTML Report

```
npx playwright show-report
```

Press Ctrl + C in Command Prompt to stop the report server.

Screenshot 10: HTML report opened in the browser showing test results

