

# A very long title for my slides, which may span across two lines

Gianluca Baio

✉ [g.baio@ucl.ac.uk](mailto:g.baio@ucl.ac.uk)

🌐 <https://gianluca.statistica.it> | 🌐 <https://egon.stats.ucl.ac.uk/research/statistics-health-economics>

🐙 <https://github.com/giabaio> | 🐙 <https://github.com/StatisticsHealthEconomics>

📧 [@gianlubaio@mas.to](mailto:@gianlubaio@mas.to) | [in](#) [gianluca-baio](#)

9 October 2026

The name of the session

The name of the conference, Where it is

Follow our  
departmental social  
media accounts X  
[in](#) [ig](#) + magazine  
"Sample Space"

check out our  
departmental  
podcast "Random  
Talks" on  
Soundcloud! 🎧

# Disclaimer...

X

Home

Explore

Notifications

Messages

Lists

Bookmarks

Communities

Premium

Profile

More

← Post



Manuela Joore

@ManuelaJoore

Best opening sentence [#ISPOREurope](#) from Gianluca Baio:  
“statisticians should rule the world and Bayesian statisticians should rule all statisticians”



Gianluca Baio

@gianlubaio · Nov 4, 2019

Ready for our session on open source models & methods!

4:52 PM · Nov 4, 2019

2

2

16



Post your reply

Reply



Ed Wilson

🇪🇺 @EdCFWilson · Nov 4, 2019

And economists should rule the Bayesian statisticians 🤖

1

1

3



Gianluca Baio

@gianlubaio · Nov 4, 2019

Now don't get ahead of yourself... 😂😂

2

Search

Relevant people



Manuela Joore

@ManuelaJoore

Follows you

Following

Professor Health Technology Assessment [#KEMTA](#)  
[@maastrichtumc](#) [@maastrichtu](#)  
[@CAPHRI\\_UM](#), [@healthinnovNL](#) & [@NICEcomms](#)



Gianluca Baio

@gianlubaio

Dad to Kobi & Anna; Hubby to [@martablangiardo](#). Also, prof of Statistics & Health Economics [@ucl](#) & HoD [@stats\\_UCL](#). Some time to spare. [mas.to/@gianlubaio](#)

... Just so you know what you're about to get yourself into... 😏

UCL

© Gianluca Baio (UCL) | [in](#) [m](#) [g](#) [e](#) [o](#) | A short title | A shorter title of the conference | 9 Oct 2026

2 / 47

# Hello there 🖐️

This presentation will show you examples of what you can do with Quarto and **Reveal.js**, including:

- Presenting code and LaTeX equations
- Including computations in slide output
- Image, video, and iframe backgrounds
- Fancy transitions and animations
- Printing to PDF
  - Which is sometimes useful...

...and much more

# Different output

- The default output is `html` via `revealjs`. This is managed by the option

```
1 format:  
2   ucl-revealjs
```

in the `yaml` of the `.qmd` file.

- Alternatively, the slides can be produced in `pdf` directly via `beamer`. This is obtained by specifying

```
1 format:  
2   ucl-beamer
```

instead.

## ! Printing to pdf via `decktape`

This is probably the best option. Typeset and render the slides to `html`, to take full advantage of the `quarto/revealjs` features, then use `decktape` to print the `html` file to `pdf`

- `decktape` maintains the main features of the `html` and the result is very good

Here's a new slide without a title.

# No logo

Here's a slide with no logo – just add `{.no-logo}` to the title of the slide

# Embedding sites

- Can also embed websites as `iframes`, using the code

```
1 ## {background-iframe="https://gianluca.statistica.it" background-interactive="true" data-preload="true" .no-logo}
```

- This creates a title-less slide with the full space occupied by the website.
  - Use the options `background-interactive="true"` and `data-preload="true"` for best control and maximum load speed

# Fun with colours & spaces

## With a subtitle

This shows how to use colours in the slides. A bunch are pre-defined in the `.css` file and can be used simply as:

- The **predictive** distribution can be computed as follows.

More can be created by simply modifying the `.css` file to add more HEX codes.

- For example use

```
1 .uclblue {  
2   color: #002855;  
3 }
```

(though this colour is already defined)

Can add vertical space using `css` styles

```
1 ::: {style="margin-top: 40px"}  
2 Can add vertical space using `css` styles  
3 :::
```

# Some maths

We can also include maths, using standard LaTeX:

$$p(y \mid \mathcal{D}) = \int p(y \mid \boldsymbol{\theta})p(\boldsymbol{\theta} \mid \mathcal{D})d\boldsymbol{\theta}$$

To use colours with LaTeX, needs a little hack: `\class{color}{expression}`

You can define a probabilistic assumption as

$$y \mid \boldsymbol{\theta} \sim \text{Poisson}(\boldsymbol{\theta})$$

but in line it would look like this  $y \sim \text{Normal}(\mu, \sigma^2)$

These use the predefined LaTeX macros, saved in the file `latex_macros.html`. More can be (re)defined by simply adding to the file, which gets pre-loaded at the beginning of the resulting `.html` output; example: `\DIC=2345` is typeset as  $\text{DIC} = 2345$ .

For instance, the command `\dnorm` translates to the text Normal (typeset in the current font). But can also use `\txt{Some text}`, which gets rendered as Some text– it's like `\text{...}` but with the current font

# More maths

The font used to typeset numbers in maths mode can be controlled by the `ym\` option `math-numbers-font` (default to : `false`).

- When this is set to : `true`, then the numbers in maths mode inherit the main font (UCL Sans)
- This will look like

$$\int_0^{\infty} x^4 p(x \mid y_1) dx \quad \text{and} \quad \text{DIC} = 1234.$$

- NB: the font is controlled by the definition of the macro `mnum{}` in the `./assets/latex_macros.html` file

# Pretty Code

(Slide 1)

- Over 20 syntax highlighting themes available
- Default theme optimized for accessibility

```
1 # Define a server for the Shiny app
2 function(input, output) {
3
4   # Fill in the spot we created for a plot
5   output$phonePlot <- renderPlot({
6     # Render a barplot
7   })
8 }
```

## ! Controlling the font-size of code chunks

This can be done by modifying the value set in the `./css/common.css` file:

```
1 .reveal div.sourceCode {
2   margin: 0;
3   overflow: auto;
4   border-color: $link-color;
5   font-size: 1.40em;
6 }
7
8 /* This controls the font size of the output of R chunks */
9 .reveal pre:not(.sourceCode) {
10  font-size: .75em;
11 }
```

# Code Animations

(Slide 2)

- Over 20 syntax highlighting themes available
- Default theme optimized for accessibility

```
1 # Define a server for the Shiny app
2 function(input, output) {
3
4   # Fill in the spot we created for a plot
5   output$phonePlot <- renderPlot({
6     # Render a barplot
7     barplot(WorldPhones[,input$region]*1000,
8             main=input$region,
9             ylab="Number of Telephones",
10            xlab="Year")
11   })
12 }
```

[More on animation, next](#)

# Auto-animation

$$y \sim \text{Normal}(\mu, \sigma)$$

# Auto-animation

$$y \sim \text{Normal}(\mu, \sigma)$$

$$\mu = \beta_0 + \beta_1 x$$

## ! Auto-animation

When two consecutive slides both have the `{auto-animate=true}` in the title, `reveal.js` looks for elements that appear on both slides and animates each one from its position, size and style on the first slide to those on the second, instead of switching abruptly.

Going from the first slide to the second, the equation slides up into its new place and the new line fades in, so it looks like one slide growing rather than two separate slides.

Elements found on only one of the two slides fade in or out. Some useful extra options on the slide:

- `{auto-animate-duration=0.5}` sets the duration in seconds.
- `{auto-animate-easing="ease-in-out"}` sets the speed curve.
- `{auto-animate-restart=true}` breaks a chain, so that slide doesn't animate from the previous one.

# (More) Auto-animation

Auto-animate tries to automatically find the bits to match across slides. To override, see:


<https://quarto.org/docs/presentations/revealjs/advanced.html#element-matching>

Automatically animate matching elements across slides with Auto-Animate.



# (More) Auto-animation

Automatically animate matching elements across slides with Auto-Animate.

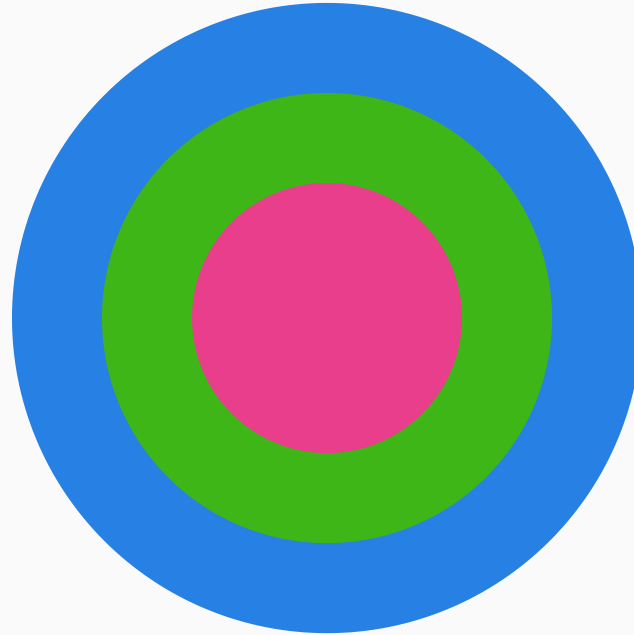

# Line Highlighting

- Highlight specific lines for emphasis
- Incrementally highlight additional lines
- This is controlled by the chunk option `code-line-numbers=""`

```
1 import numpy as np
2 import matplotlib.pyplot as plt
3
4 r = np.arange(0, 2, 0.01)
5 theta = 2 * np.pi * r
6 fig, ax = plt.subplots(subplot_kw={'projection': 'polar'})
7 ax.plot(theta, r)
8 ax.set_rticks([0.5, 1, 1.5, 2])
9 ax.grid(True)
10 plt.show()
```

# Line Highlighting

- Highlight specific lines for emphasis
- Incrementally highlight additional lines
- This is controlled by the chunk option `code-line-numbers=""`

```
1 import numpy as np
2 import matplotlib.pyplot as plt
3
4 r = np.arange(0, 2, 0.01)
5 theta = 2 * np.pi * r
6 fig, ax = plt.subplots(subplot_kw={'projection': 'polar'})
7 ax.plot(theta, r)
8 ax.set_rticks([0.5, 1, 1.5, 2])
9 ax.grid(True)
10 plt.show()
```

# Line Highlighting

- Highlight specific lines for emphasis
- Incrementally highlight additional lines
- This is controlled by the chunk option `code-line-numbers=""`

```
1 import numpy as np
2 import matplotlib.pyplot as plt
3
4 r = np.arange(0, 2, 0.01)
5 theta = 2 * np.pi * r
6 fig, ax = plt.subplots(subplot_kw={'projection': 'polar'})
7 ax.plot(theta, r)
8 ax.set_rticks([0.5, 1, 1.5, 2])
9 ax.grid(True)
10 plt.show()
```


# Text formatting

Blockquote

More quoted text


# Executable Code

```
1 library(ggplot2)
2 ggplot(mtcars, aes(hp, mpg, color = am)) +
3   geom_point() + geom_smooth(formula = y ~ x, method = "loess")
```

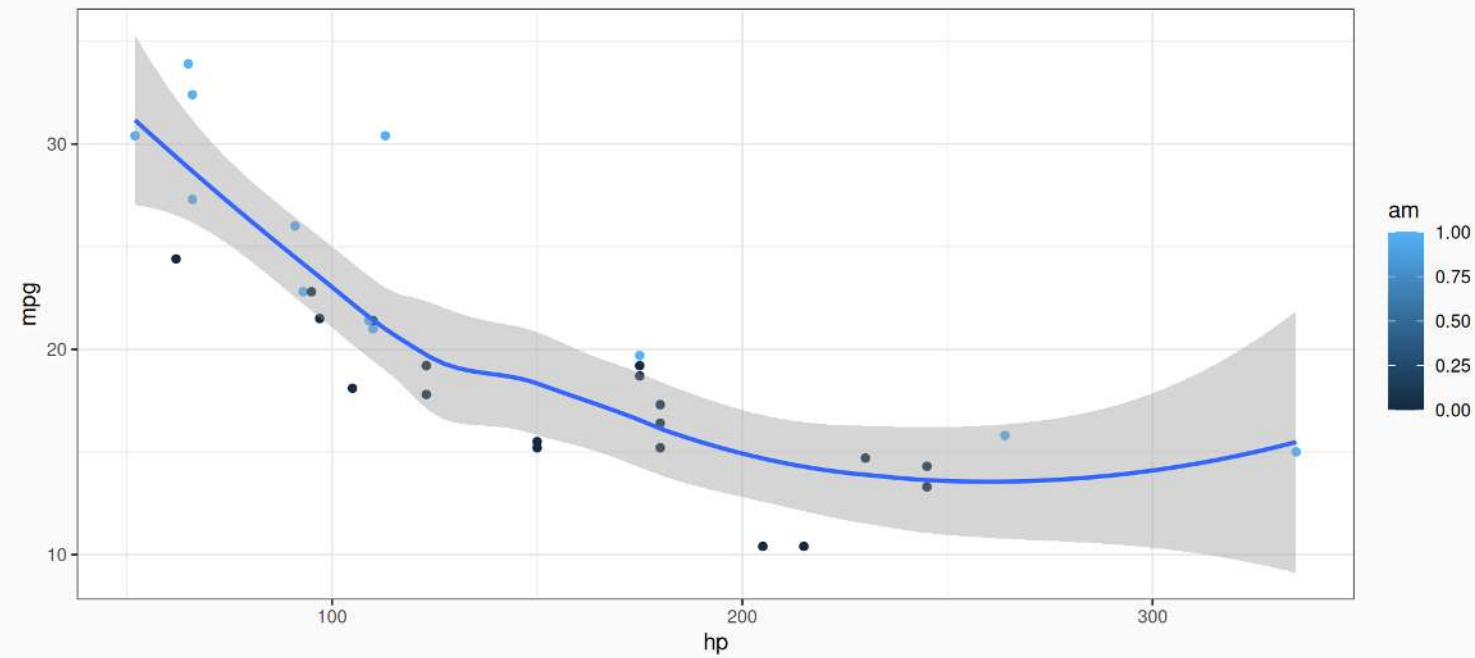

# A base plot

```
1 plot(rnorm(1000),rnorm(1000),xlab="x",ylab="y")
```

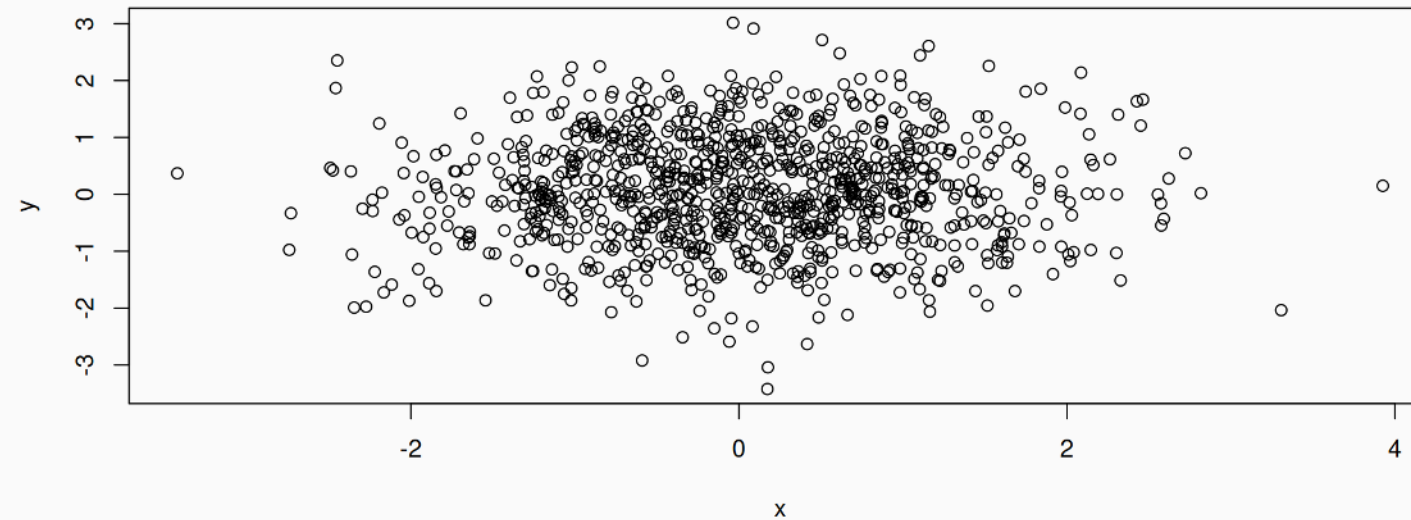

# Temporarily changing the size of code output

```
1 rnorm(1000) |> summary()
```

| Min.     | 1st Qu.  | Median   | Mean     | 3rd Qu. | Max.    |
|----------|----------|----------|----------|---------|---------|
| -3.26374 | -0.68925 | -0.05095 | -0.02577 | 0.67109 | 3.68390 |

This is achieved adding the options

```
#| attr-source: 'style="font-size: 2.0em;"'  
#| attr-output: 'style="font-size: 1.25em;"'
```

to that specific R chunk setup

# A section

Using the tag `{.divider}` makes for some nicer `css` formatting (especially under `ucl-revealjs`)

# And another

Using the tag `{.divider-bg}` gives a background in line with the UCL 2026 template

The slide looks nicer without the footer. This can be done either by adding `::: {.footer style="background-color: transparent!important; background: transparent!important"}  
:::`

to the end of the slide, to ensure that the footer doesn't interfere with the colours...

More simply, can explicitly use the tag `{.divider-bg footer="false"}`

# Section title slide

Setting the background colour to a dark colour automatically changes the colour of the text to make it visible over a dark background!

- The footer may or may not be included and its positioning/formatting can be customised

# Code chunk and output side by side

```
1 ggplot(palmerpenguins::penguins,  
2       aes(x = bill_length_mm,  
3           y = bill_depth_mm,  
4           color = species)) +  
5 geom_point() +  
6 colorblindr::scale_color_okabeIto()
```


## Note

This is controlled by the chunk option `output-location:`, which can take values `column-fragment` (code first, then output becomes visible), `column` (both visible at the same time), `fragment` (output appears on the same slide, but hidden until the next fragment), or `slide` (output pushed to a brand new slide)

Also, by default, `ggplot` uses a specialised `theme_ucl()` function (defined in `.assets/setup.R`) to format the graphs. This aligns with the background colour of the slides.

# Code chunk and output side by side

```
1 ggplot(palmerpenguins::penguins,  
2       aes(x = bill_length_mm,  
3           y = bill_depth_mm,  
4           color = species)) +  
5 geom_point() +  
6 colorblindr::scale_color_okabeIto()
```

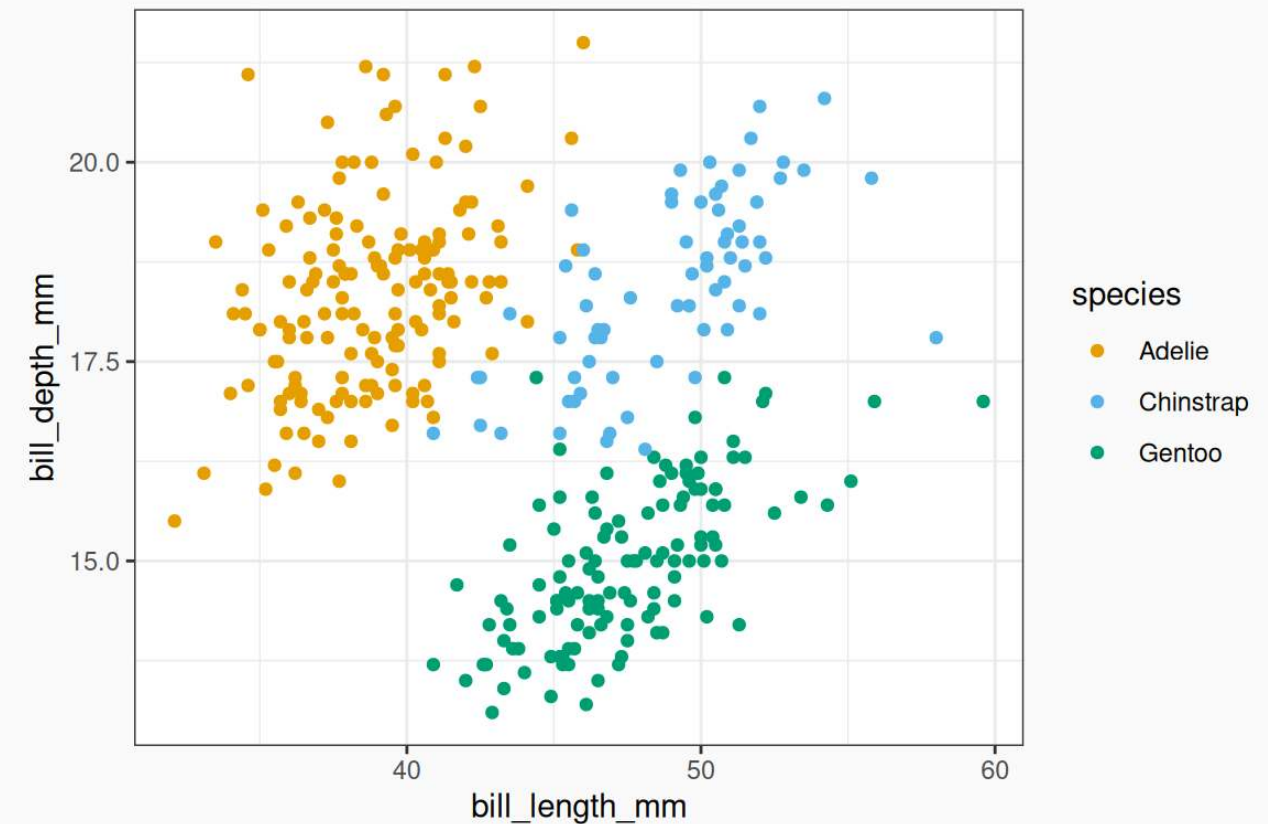


## *i* Note

This is controlled by the chunk option `output-location:`, which can take values `column-fragment` (code first, then output becomes visible), `column` (both visible at the same time), `fragment` (output appears on the same slide, but hidden until the next fragment), or `slide` (output pushed to a brand new slide)

Also, by default, `ggplot` uses a specialised `theme_ucl()` function (defined in `.assets/setup.R`) to format the graphs. This aligns with the background colour of the slides.

# Code chunk and output side by side


```
1 ggplot(palmerpenguins::penguins,  
2       aes(x = bill_length_mm,  
3           y = bill_depth_mm,  
4           color = species)) +  
5 geom_point() +  
6 theme_minimal() +  
7 colorblindr::scale_color_0kabeIto()
```

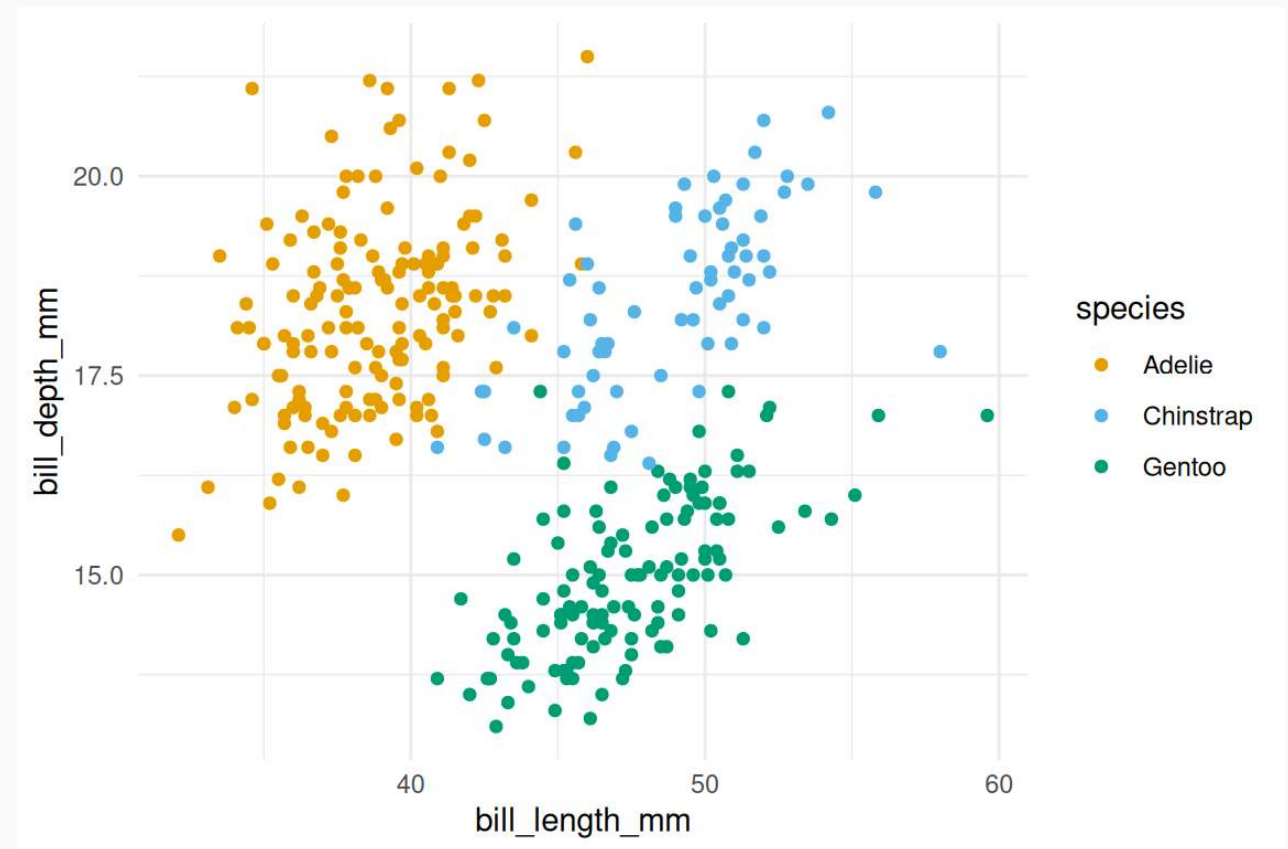

# Code chunk and output side by side

This time with hidden lines

```
1 ggplot(palmerpenguins::penguins,  
2       aes(x = bill_length_mm,  
3           y = bill_depth_mm,  
4           color = species)) +  
5 theme_minimal() +  
6 colorblindr::scale_color_okabeIto()
```

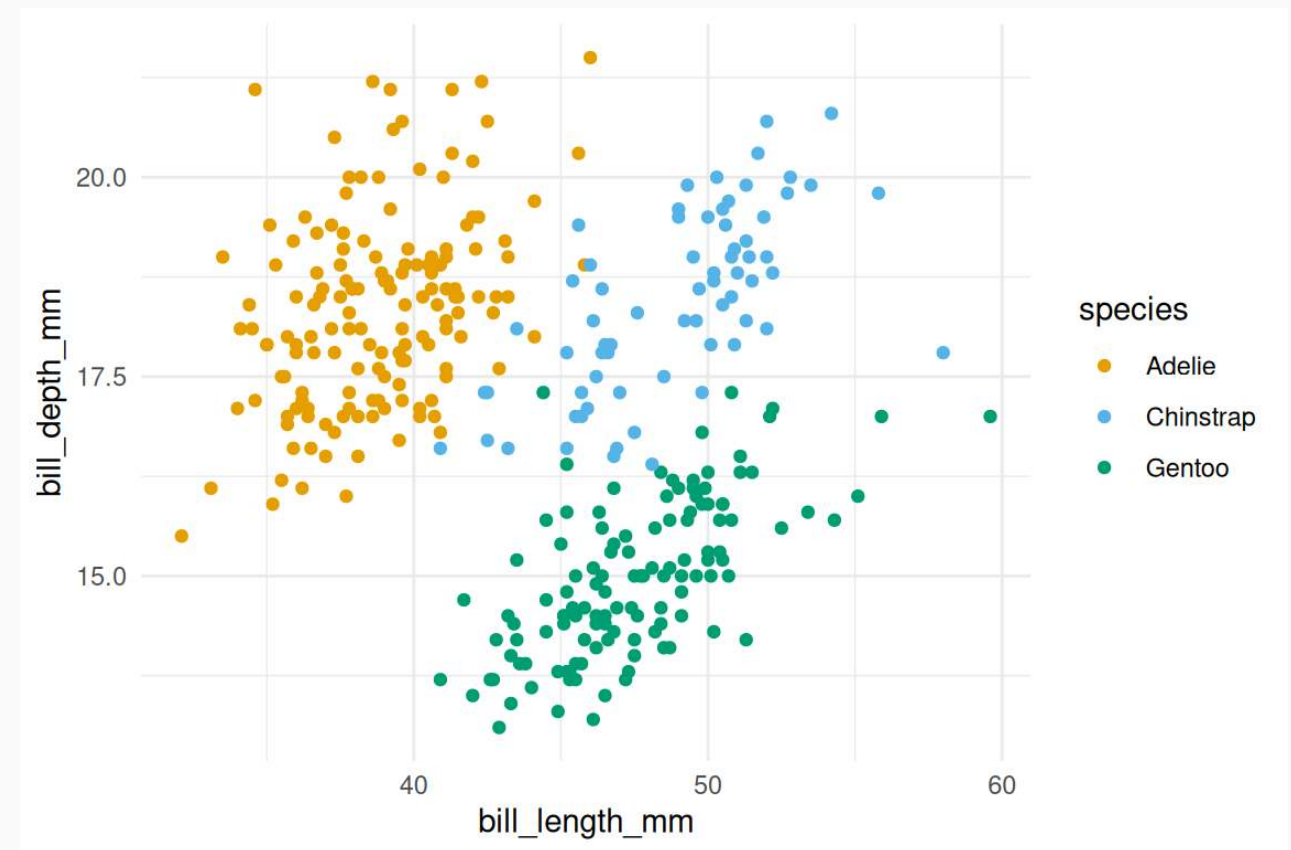

# LaTeX Equations

See code for creating columns

MathJax rendering of equations to HTML

```
1 \begin{gather*}
2 a_1=b_1+c_1\\
3 a_2=b_2+c_2-d_2+e_2
4 \end{gather*}
5
6 \begin{align}
7 a_{11}&=b_{11}&
8 a_{12}&=b_{12}\\
9 a_{21}&=b_{21}&
10 a_{22}&=b_{22}+c_{22}
11 \end{align}
```

$$\begin{aligned} a_1 &= b_1 + c_1 \\ a_2 &= b_2 + c_2 - d_2 + e_2 \end{aligned}$$

$$\begin{aligned} a_{11} &= b_{11} & a_{12} &= b_{12} \\ a_{21} &= b_{21} & a_{22} &= b_{22} + c_{22} \end{aligned}$$

# Make all the text smaller

All the text on this slide is smaller. Not entirely sure what the use case is! Maybe long quotes?

*“Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.”*

# Column Layout

Arrange content into columns of varying widths:

## Motor Trend Car Road Tests

The data were extracted from the 1974 Motor Trend US magazine and comprise fuel consumption and 10 aspects of automobile design and performance for 32 automobiles.

| mpg  | cyl | disp | hp  | wt    |
|------|-----|------|-----|-------|
| 21.0 | 6   | 160  | 110 | 2.620 |
| 21.0 | 6   | 160  | 110 | 2.875 |
| 22.8 | 4   | 108  | 93  | 2.320 |
| 21.4 | 6   | 258  | 110 | 3.215 |
| 18.7 | 8   | 360  | 175 | 3.440 |
| 18.1 | 6   | 225  | 105 | 3.460 |

**NB:** Can use the package `tinytable` to format tables in a very efficient way...

# Incremental Lists

Lists can optionally be displayed incrementally:

# Incremental Lists

Lists can optionally be displayed incrementally:

1. First item

# Incremental Lists

Lists can optionally be displayed incrementally:

1. First item
2. Second item

# Incremental Lists

Lists can optionally be displayed incrementally:

1. First item
2. Second item
3. Third item

# Incremental Lists

Lists can optionally be displayed incrementally:

1. First item
2. Second item
3. Third item

Insert pauses to make other types of content display incrementally.

# Fragments

Incremental text display and animation with fragments:

Extra fragment styling / nesting / ordering options

Highlight custom colour (defined in `scss` file or can be added on the fly)

```
1  ``{css}
2  #| echo: false
3  .reveal .slides section .fragment.highlight-itared {
4    opacity: 1;
5    visibility: inherit;
6  }
7  .reveal .slides section .fragment.highlight-itared.visible {
8    color: #ce2b37;
9  }
10 ``
11
12 ::: {.fragment .highlight-itared}
13 Text to highlight here...
14 :::
```

# Fragments

Incremental text display and animation with fragments:

Extra fragment styling / nesting / ordering options

Fade in

Highlight custom colour (defined in `scss` file or can be added on the fly)

```
1  `` `{css}
2  #| echo: false
3  .reveal .slides section .fragment.highlight-itared {
4    opacity: 1;
5    visibility: inherit;
6  }
7  .reveal .slides section .fragment.highlight-itared.visible {
8    color: #ce2b37;
9  }
10 ``
11
12 ::: {.fragment .highlight-itared}
13 Text to highlight here...
14 :::
```

# Fragments

Incremental text display and animation with fragments:

Extra fragment styling / nesting / ordering options

Fade in

Slide up while fading in

Highlight custom colour (defined in `scss` file or can be added on the fly)

```
1  ``{css}
2  #| echo: false
3  .reveal .slides section .fragment.highlight-ited {
4    opacity: 1;
5    visibility: inherit;
6  }
7  .reveal .slides section .fragment.highlight-ited.visible {
8    color: #ce2b37;
9  }
10 ``
11
12 ::: {.fragment .highlight-ited}
13 Text to highlight here...
14 :::
```

# Fragments

Incremental text display and animation with fragments:

Extra fragment styling / nesting / ordering options

Fade in

Slide up while fading in

Slide left while fading in

Highlight custom colour (defined in `scss` file or can be added on the fly)

```
1  ``{css}
2  #| echo: false
3  .reveal .slides section .fragment.highlight-ited {
4    opacity: 1;
5    visibility: inherit;
6  }
7  .reveal .slides section .fragment.highlight-ited.visible {
8    color: #ce2b37;
9  }
10 ``
11
12 ::: {.fragment .highlight-ited}
13 Text to highlight here...
14 :::
```

# Fragments

Incremental text display and animation with fragments:

Extra fragment styling / nesting / ordering options

Fade in

Slide up while fading in

Slide left while fading in

Fade in then semi out

Highlight custom colour (defined in `scss` file or can be added on the fly)

```
1  ``{css}
2  #| echo: false
3  .reveal .slides section .fragment.highlight-ited {
4    opacity: 1;
5    visibility: inherit;
6  }
7  .reveal .slides section .fragment.highlight-ited.visible {
8    color: #ce2b37;
9  }
10 ``
11
12 ::: {.fragment .highlight-ited}
13 Text to highlight here...
14 :::
```

# Fragments

Incremental text display and animation with fragments:

Extra fragment styling / nesting / ordering options

Fade in

Slide up while fading in

Slide left while fading in

Fade in then semi out

Strike

Highlight red (but green and blue are also built-in)

Highlight custom colour (defined in `scss` file or can be added on the fly)

```
1  ``{css}
2  #| echo: false
3  .reveal .slides section .fragment.highlight-itarred {
4    opacity: 1;
5    visibility: inherit;
6  }
7  .reveal .slides section .fragment.highlight-itarred.visible {
8    color: #ce2b37;
9  }
10 ``
11
12 ::: {.fragment .highlight-itarred}
13 Text to highlight here...
14 :::
```

# Fragments

Incremental text display and animation with fragments:

Extra fragment styling / nesting / ordering options

Fade in

Slide up while fading in

Slide left while fading in

Fade in then semi out

~~Strike~~

Highlight red (but green and blue are also built-in)

Highlight custom colour (defined in `scss` file or can be added on the fly)

```
1  ``{css}
2  #| echo: false
3  .reveal .slides section .fragment.highlight-itarred {
4    opacity: 1;
5    visibility: inherit;
6  }
7  .reveal .slides section .fragment.highlight-itarred.visible {
8    color: #ce2b37;
9  }
10 ``
11
12 ::: {.fragment .highlight-itarred}
13 Text to highlight here...
14 :::
```

# Fragments

Incremental text display and animation with fragments:

Extra fragment styling / nesting / ordering options

Fade in

Slide up while fading in

Slide left while fading in

Fade in then semi out

~~Strike~~

Highlight red (but green and blue are also built-in)

Highlight custom colour (defined in `scss` file or can be added on the fly)

```
1  ``{css}
2  #| echo: false
3  .reveal .slides section .fragment.highlight-itarred {
4    opacity: 1;
5    visibility: inherit;
6  }
7  .reveal .slides section .fragment.highlight-itarred.visible {
8    color: #ce2b37;
9  }
10 ``
11
12 ::: {.fragment .highlight-itarred}
13 Text to highlight here...
14 :::
```

# Frame-Controlled Fragments

- Some initial bullet point
- And another
  - Possibly nested...

# Frame-Controlled Fragments

- Some initial bullet point
- And another
  - Possibly nested...
- Some text here
  - And some other

# Frame-Controlled Fragments

- Some initial bullet point
- And another
  - Possibly nested...
- Some text here
  - And some other
- Some more text

# Frame-Controlled Fragments

- Some initial bullet point
- And another
  - Possibly nested...
- More still
- And that's it

# Frame-Controlled Fragments

- Some initial bullet point
- And another
  - Possibly nested...
- More still
- And that's it

## ! Controlling fragments

- `::: {.fragment .fade-out fragment-index=x ...}` shows the content up to fragment `x`, when it is replaced by other content and just fades out
- `::: {.fragment .fade-in fragment-index=x ...}` introduces the content in fragment `x` and leaves it there
- `::: {.fragment .current-visible fragment-index=x ...}` makes the content visible *only* in fragment `x`

- Fragments can be nested, so

```
:::: {.fragment .fade-out fragment-index=3}  
::: {.fragment .fade-in fragment-index=1}  
Content here  
:::  
::::
```


will make `Content here` appear in fragment 1 and disappear in fragment 3

# Fragments and stacks

`r-stack` can be used together with fragments to center and place multiple elements on top of each other and reveal them incrementally.


# Fragments and stacks

`r-stack` can be used together with fragments to center and place multiple elements on top of each other and reveal them incrementally.

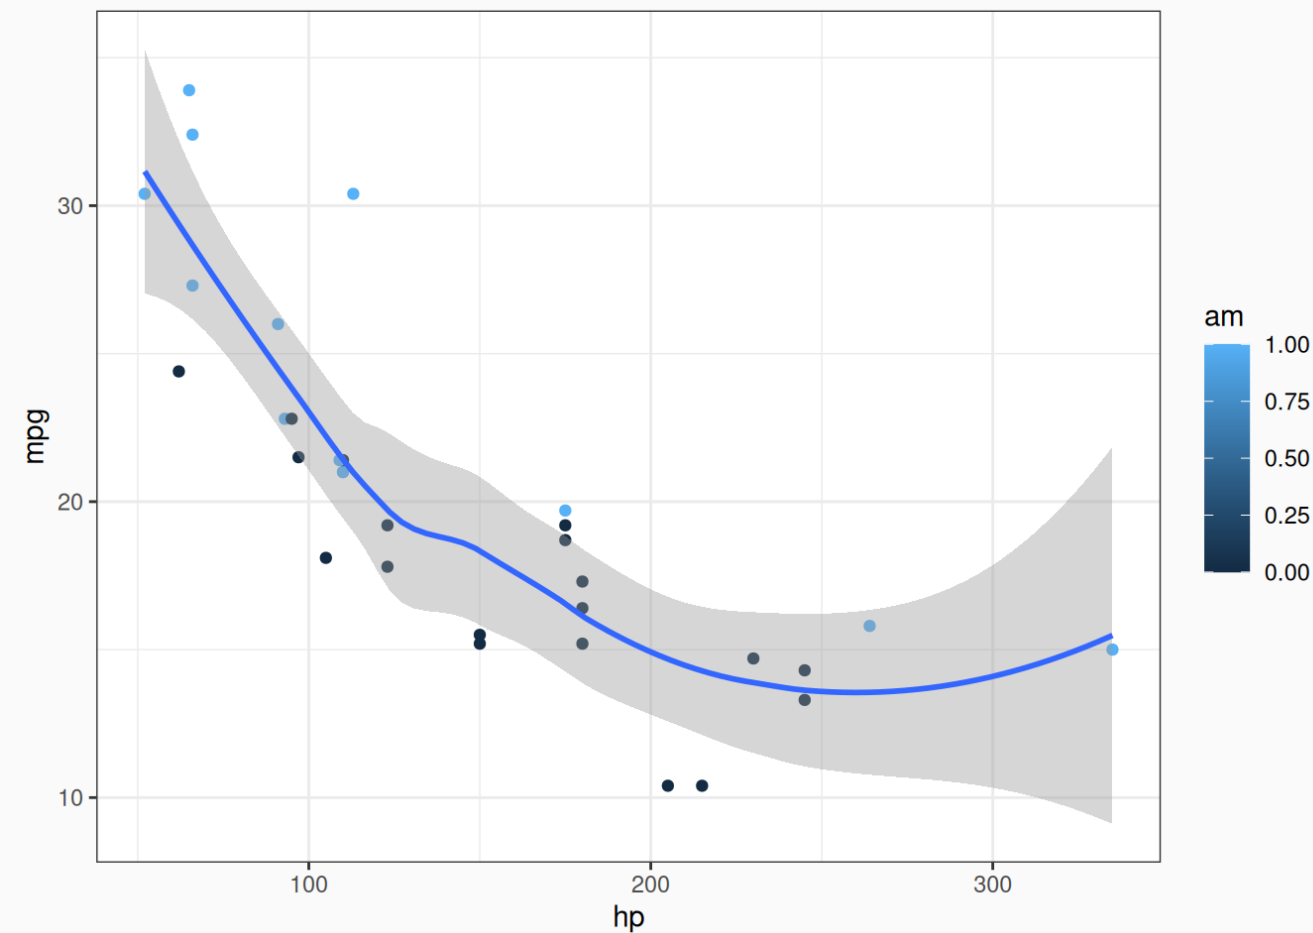

# Fragments and stacks

`r-stack` can be used together with fragments to center and place multiple elements on top of each other and reveal them incrementally.

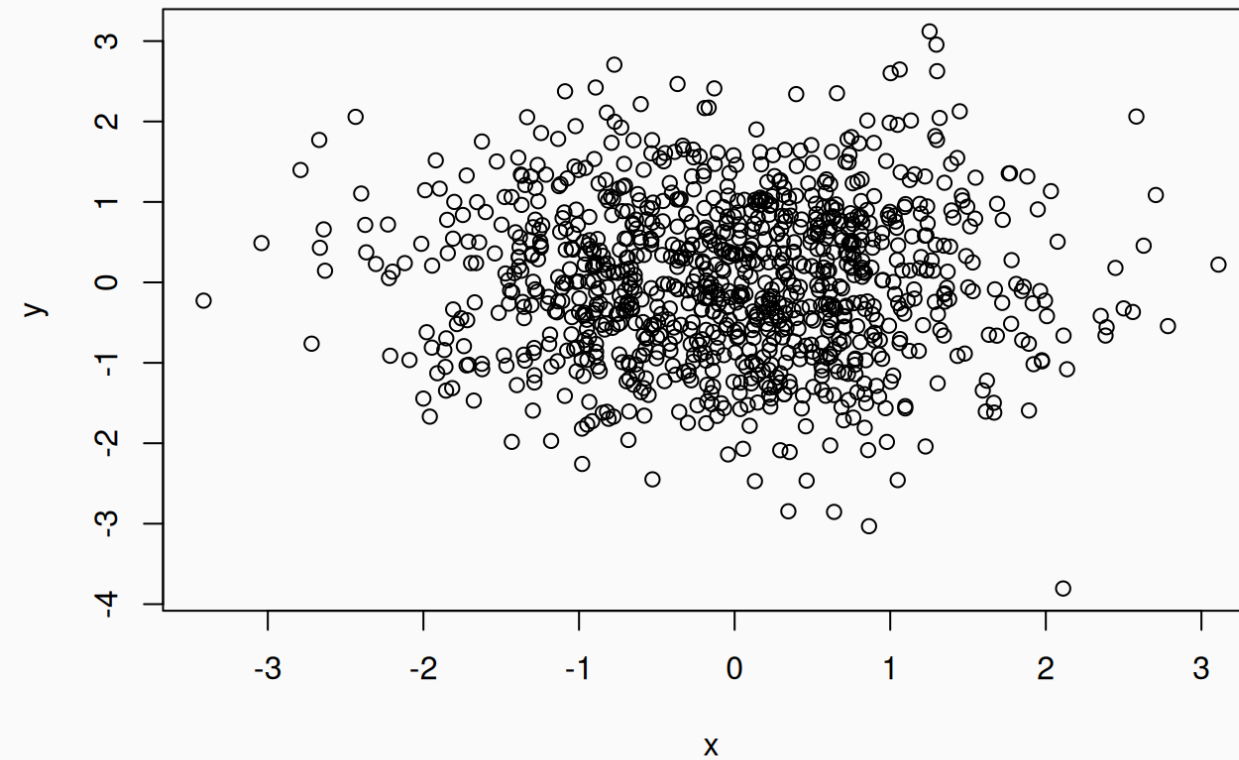

# Slide Backgrounds (only in **revealjs**)

Set the **background** attribute on a slide to change the background color (all CSS color formats are supported).

Different background transitions are available via the **background-transition** option.



gettyimages®  
Credit: Simone Arveda

# Slide Backgrounds (only in revealjs)

When the background image is light, use the `.light-bg` tag to ensure that the slide text is in the normal font-color

- If the text is not very clearly visible, can always wrap the text in something like

```
 ::: {style="background-color: rgba(250, 250, 250, 0.7); border-radius: 0.8em 0.3em; padding: 0.3em;"}  
Text  
:::
```

(here, `rgba(250, 250, 250, 0.7)` is a `#FAFAFA` background with opacity set to 0.7)



gettyimages®  
Credit: Simone Arveda

# Media Backgrounds (only in **revealjs**)

You can also use the following as a slide background:

- An image: **background-image**
- A video: **background-video**
- An iframe: **background-iframe**

**gettyimages**<sup>®</sup>  
Credit: Bob Thomas


# Slide Transitions

Possible options are the following:

| Transition           | Description                                                            |
|----------------------|------------------------------------------------------------------------|
| <code>none</code>    | No transition (default, switch instantly)                              |
| <code>fade</code>    | Cross fade                                                             |
| <code>slide</code>   | Slide horizontally                                                     |
| <code>convex</code>  | Slide at a convex angle                                                |
| <code>concave</code> | Slide at a concave angle                                               |
| <code>zoom</code>    | Scale the incoming slide so it grows in from the center of the screen. |

# Tabsets

Plot Data

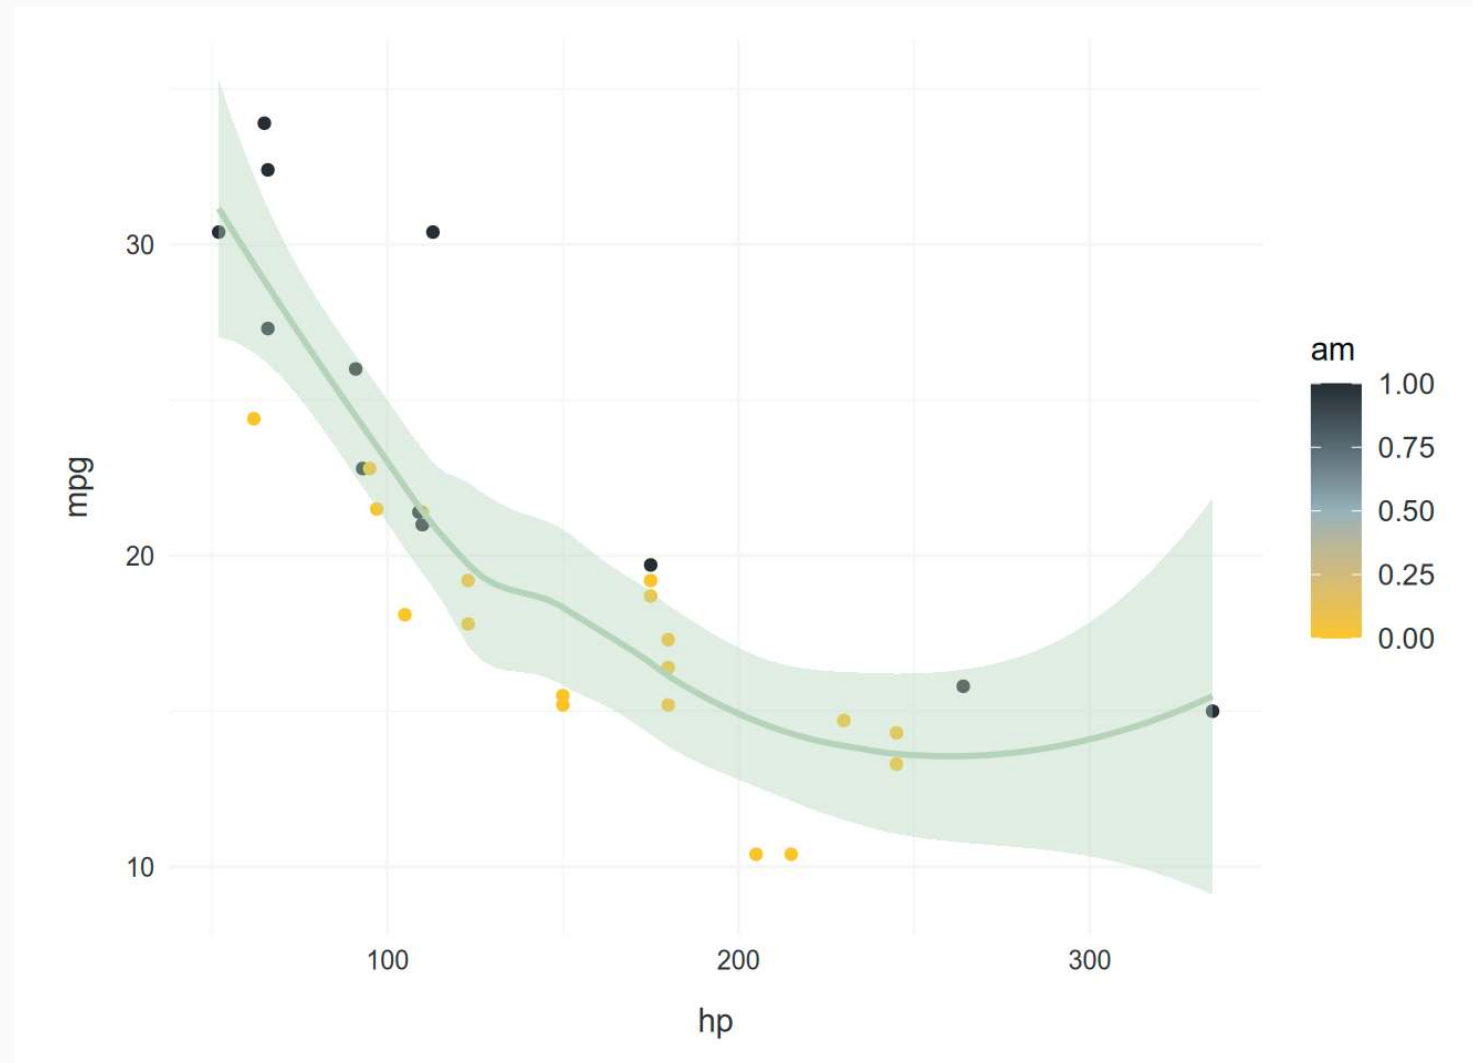

# A long, scrollable table


## Using styles...

```
1 ::: {style="height: 80%; overflow: auto; font-size: .65em;"}
2 Wrap the code to show the table here...
3 :::
```

| mpg  | cyl | disp  | hp  | drat | wt    | qsec  | vs | am | gear | carb |
|------|-----|-------|-----|------|-------|-------|----|----|------|------|
| 21.0 | 6   | 160.0 | 110 | 3.90 | 2.620 | 16.46 | 0  | 1  | 4    | 4    |
| 21.0 | 6   | 160.0 | 110 | 3.90 | 2.875 | 17.02 | 0  | 1  | 4    | 4    |
| 22.8 | 4   | 108.0 | 93  | 3.85 | 2.320 | 18.61 | 1  | 1  | 4    | 1    |
| 21.4 | 6   | 258.0 | 110 | 3.08 | 3.215 | 19.44 | 1  | 0  | 3    | 1    |
| 18.7 | 8   | 360.0 | 175 | 3.15 | 3.440 | 17.02 | 0  | 0  | 3    | 2    |
| 18.1 | 6   | 225.0 | 105 | 2.76 | 3.460 | 20.22 | 1  | 0  | 3    | 1    |
| 14.3 | 8   | 360.0 | 245 | 3.21 | 3.570 | 15.84 | 0  | 0  | 3    | 4    |
| 24.4 | 4   | 146.7 | 62  | 3.69 | 3.190 | 20.00 | 1  | 0  | 4    | 2    |
| 22.8 | 4   | 140.8 | 95  | 3.92 | 3.150 | 22.90 | 1  | 0  | 4    | 2    |
| 19.2 | 6   | 167.6 | 123 | 3.92 | 3.440 | 18.30 | 1  | 0  | 4    | 4    |
| 17.8 | 6   | 167.6 | 123 | 3.92 | 3.440 | 18.90 | 1  | 0  | 4    | 4    |
| 16.4 | 8   | 275.8 | 180 | 3.07 | 4.070 | 17.40 | 0  | 0  | 3    | 3    |
| 17.3 | 8   | 275.8 | 180 | 3.07 | 3.730 | 17.60 | 0  | 0  | 3    | 3    |
| 15.2 | 8   | 275.8 | 180 | 3.07 | 3.780 | 18.00 | 0  | 0  | 3    | 3    |
| 10.4 | 8   | 472.0 | 205 | 2.93 | 5.250 | 17.98 | 0  | 0  | 3    | 4    |
| 10.4 | 8   | 460.0 | 215 | 3.00 | 5.424 | 17.82 | 0  | 0  | 3    | 4    |
| 14.7 | 8   | 440.0 | 230 | 3.23 | 5.345 | 17.42 | 0  | 0  | 3    | 4    |

# Interactive Slides

Include Jupyter widgets and htmlwidgets in your presentations

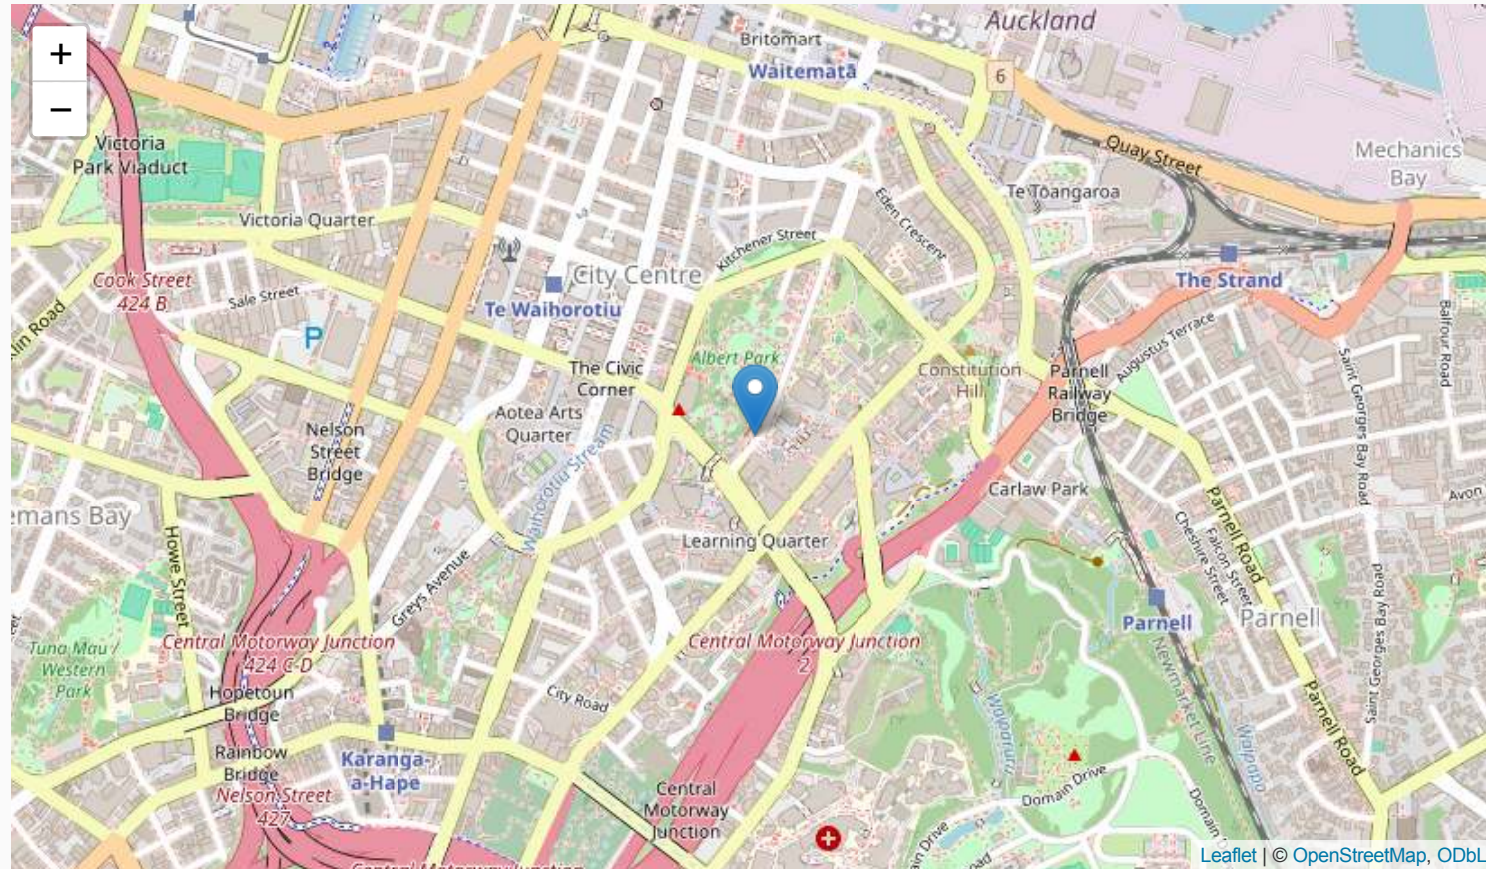

# Preview Links

Navigate to hyperlinks without disrupting the flow of your presentation.

Use the `preview-links` option to open links in an iframe on top of your slides. Try clicking the link below for a demonstration:

[Matplotlib: Visualization with Python](#)

# Easy Navigation

Quickly jump to other parts of your presentation



Toggle the slide menu with the menu button (bottom left of slide) to go to other slides and access presentation tools.

You can also press **m** to toggle the menu open and closed.

# Chalkboard

Free form drawing and slide annotations



Use the chalkboard button at the bottom left of the slide to toggle the chalkboard.




Use the notes canvas button at the bottom left of the slide to toggle drawing on top of the current slide.

You can also press **b** to toggle the chalkboard or **c** to toggle the notes canvas.

# Point of View

Press **o** to toggle overview mode:

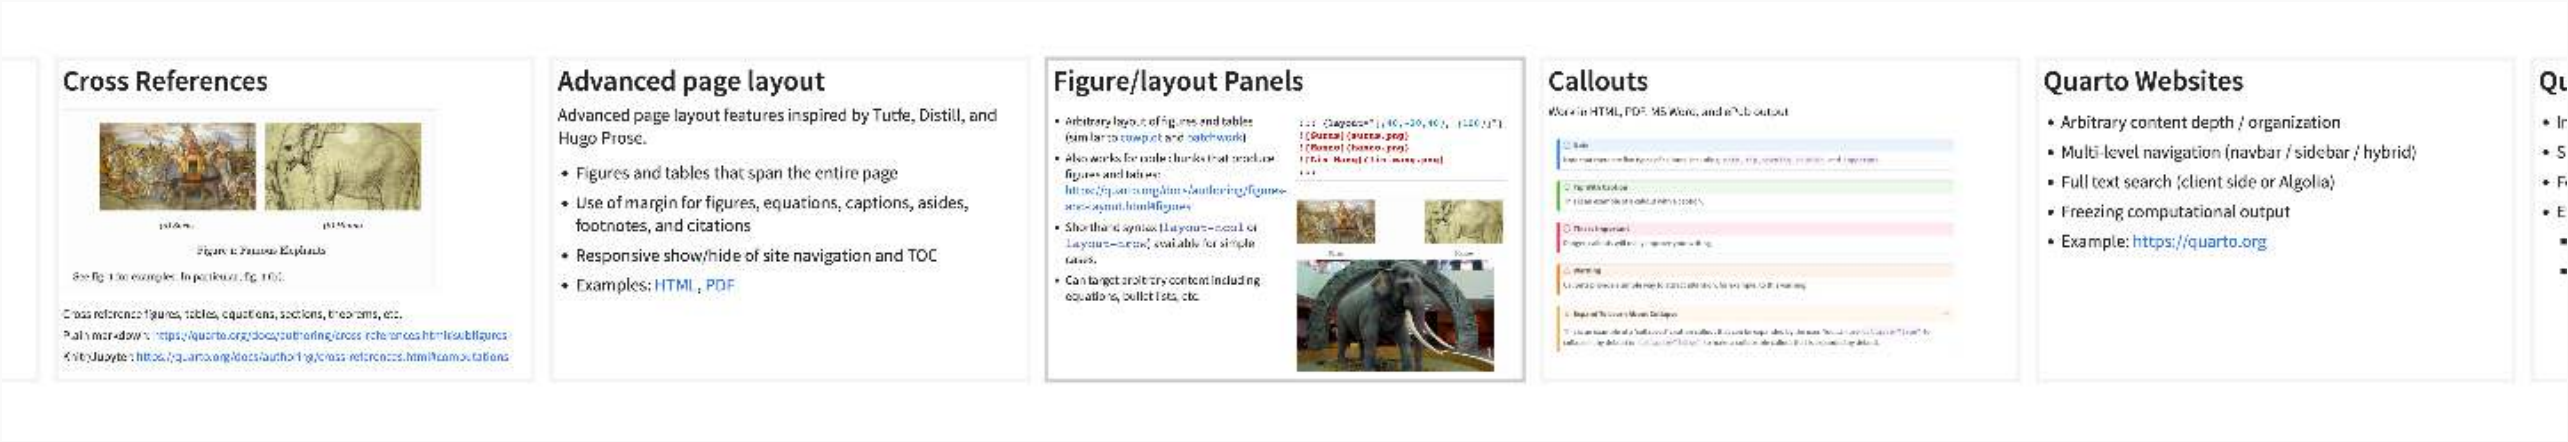

Hold down the **Alt** key (or **ctrl** in Linux) and click on any element to zoom towards it—try it now on this slide.

# Speaker View

Press **s** (or use the presentation menu) to open speaker view

The screenshot displays the Quarto Speaker View interface. The main slide area on the left contains the title "Quarto Presentations with Reveal.js" in a large, bold, black font. In the top right corner of this area, it says "1 / 23". At the bottom left is a hamburger menu icon, and at the bottom right is the URL "https://quarto.org" and the Quarto logo. A blue arrow points from the slide title towards the right-hand sidebar.

The right-hand sidebar is divided into three sections. The top section, titled "Upcoming, There", contains a paragraph about Reveal.js and a bulleted list of features: "Presenting code and LaTeX equations", "Including computations in slide output", "Image, video, and iframe backgrounds", "Fancy transitions and animations", and "Printing to PDF". It also includes a link to "Learn more: Quarto Presentations" and the Quarto logo. The middle section, titled "TIME", shows a timer at "00:01:01" and the current time "09:33 AM". The bottom section is currently empty.

# And More...

- **Touch** optimized (presentations look great on mobile, swipe to navigate slides)
- **Footer & Logo** (optionally specify custom footer per-slide)
- **Auto-Slide** (step through slides automatically, without any user input)
- **Multiplex** (allows your audience to follow the slides of the presentation you are controlling on their own phone, tablet or laptop).

# Thank you!

A woman with blonde hair, wearing a blue dress, is shown from the chest up. She has her mouth open as if speaking or singing, and her hands are raised with fingers spread, palms facing forward. The background is dark and out of focus.

**THANK YOU SO MUCH.**