nnU-Net: how it configures itself

dataset fingerprint
spacing, sizes, modality,
intensities, nr. classes

rule-based parameters
resampling, normalisation,
patch & batch size, topology

GPU
memory

fixed
U-Net, CE+Dice,
SGD, augment.

empirical (5-fold CV)
2D / 3D / cascade / ensemble?
keep largest component?

trained nnU-Net

median image shape

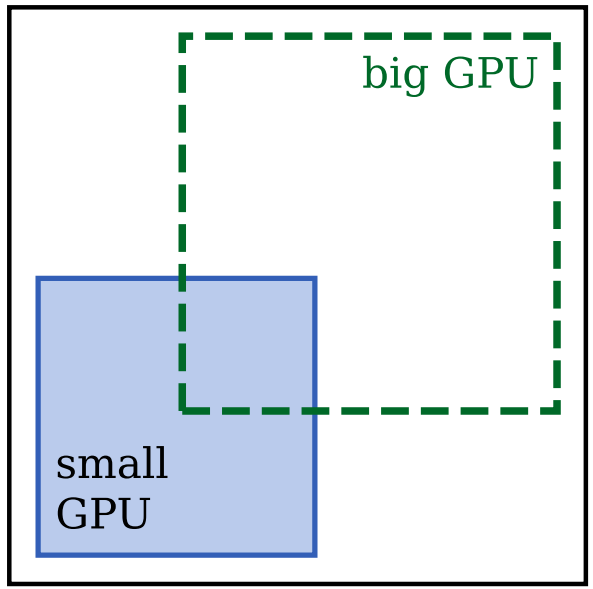

patch shrunk until a
batch of 2 fits: other
patch $\Rightarrow$ other depth
$\Rightarrow$ maybe another
'best' configuration