input

segmentation:
rotates along
(equivariant)

classification:
stays the same
(invariant)

x

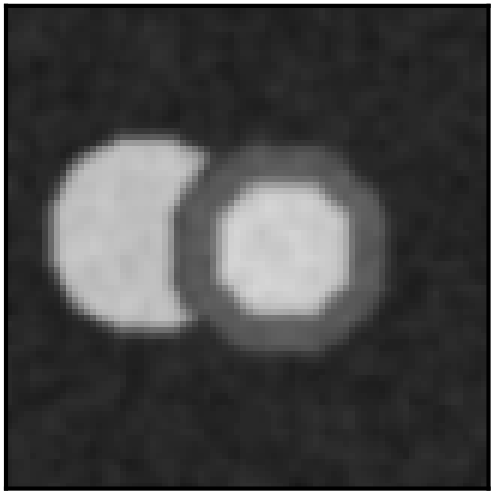

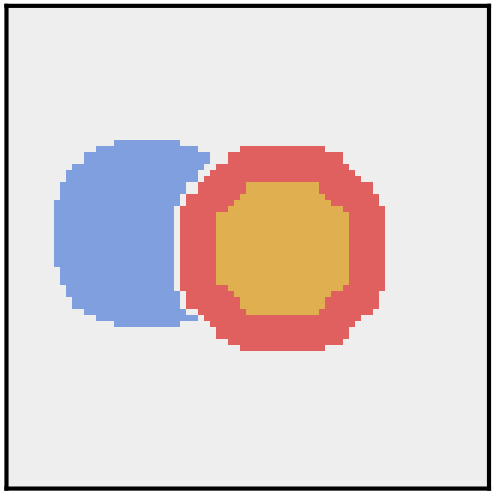

class:
"normal heart"

$g \cdot x$ (rotated)

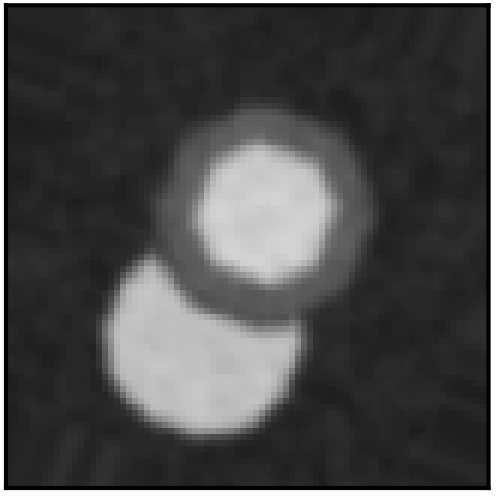

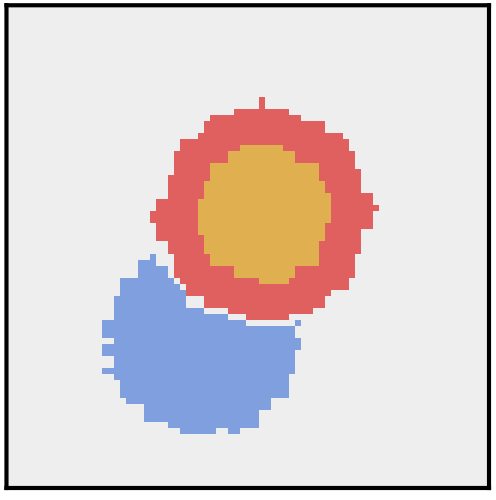

class:
"normal heart"