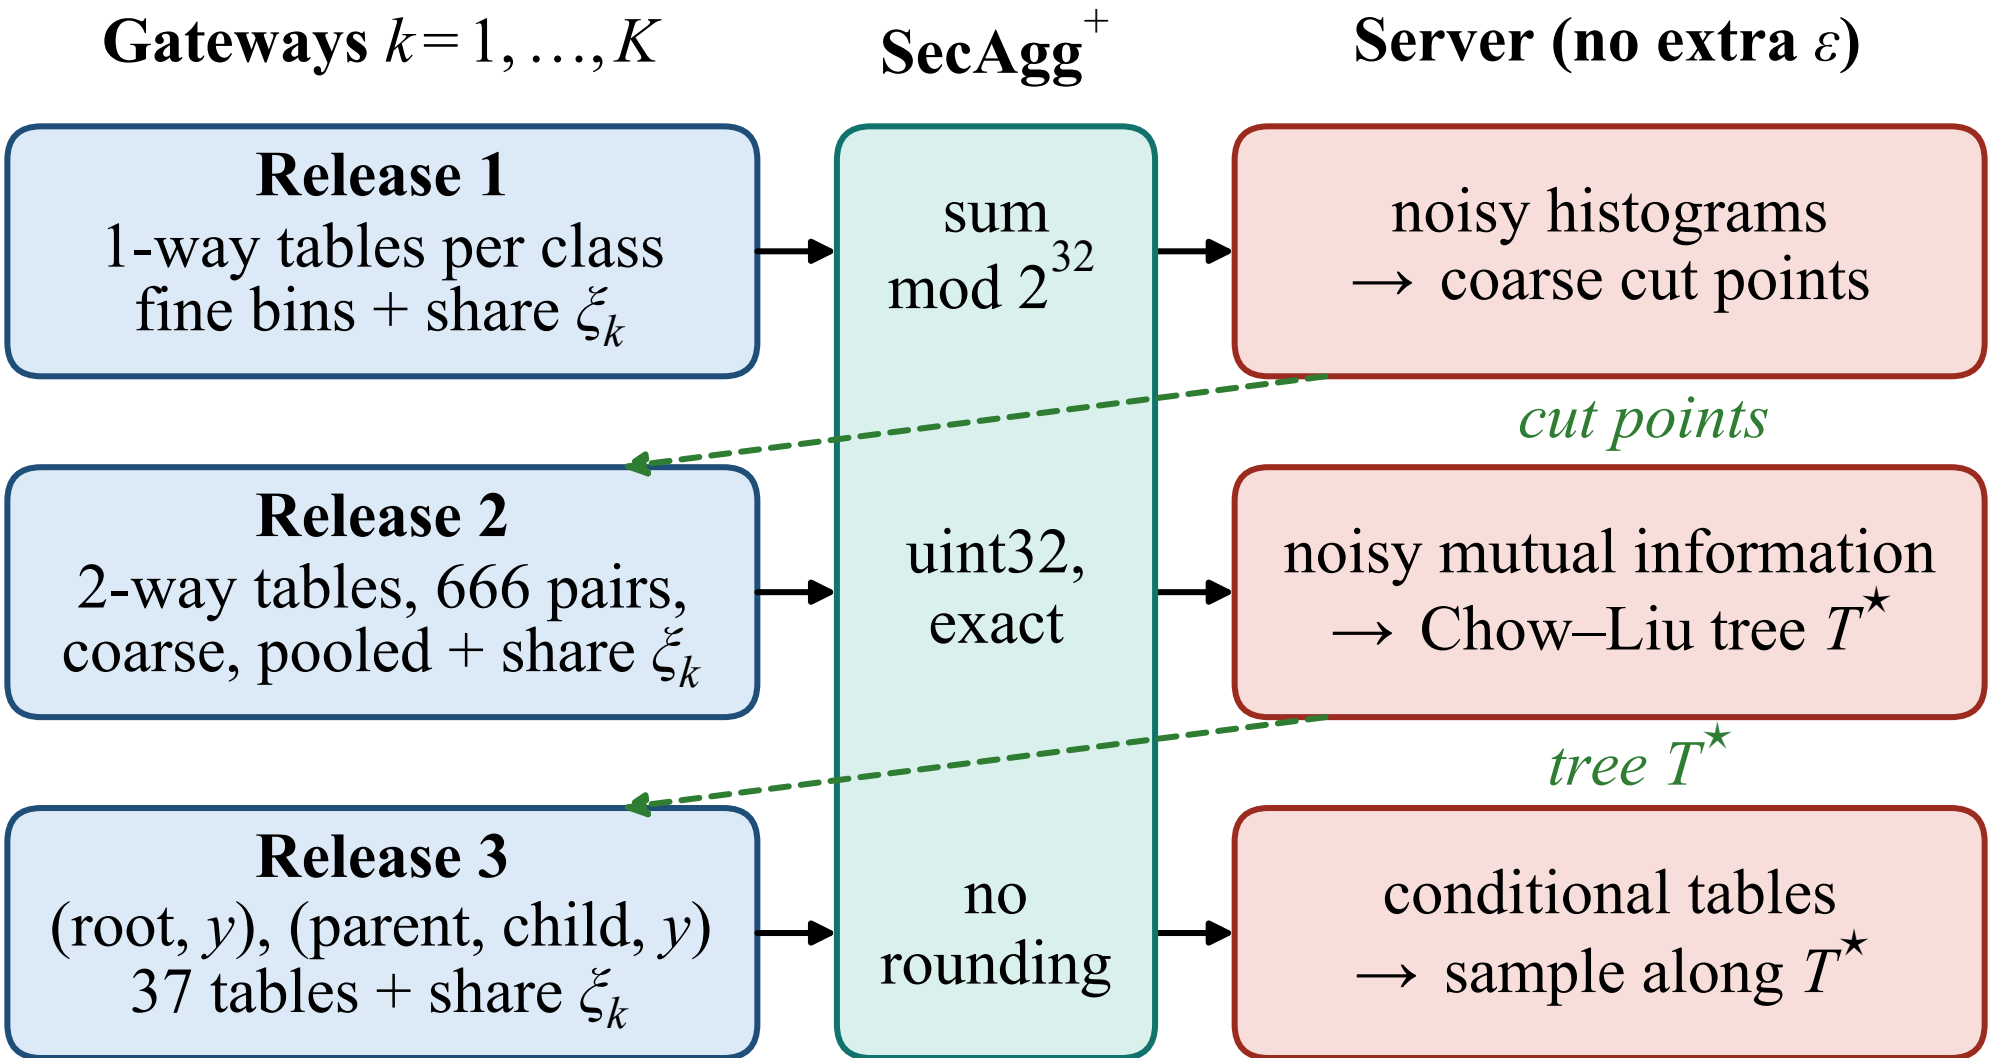

Gateways $k = 1, \ldots, K$
SecAgg^{+}
Server (no extra ε)
Release 1
1-way tables per class
fine bins + share ξ_k
sum
mod 2^{32}
noisy histograms
→ coarse cut points
cut points
Release 2
2-way tables, 666 pairs,
coarse, pooled + share ξ_k
uint32,
exact
noisy mutual information
→ Chow–Liu tree $T^{\star}$
tree $T^{\star}$
Release 3
(root, y), (parent, child, y)
37 tables + share ξ_k
no
rounding
conditional tables
→ sample along $T^{\star}$