Multi-Agent Collaboration via Evolving Orchestration

Yufan Dang*[†] Chen Qian*† Xueheng Luo* Zihao Xie* Jingru Fan* Ruijie Shi* Weize Chen* Cheng Yang Xiaoyin Che Ye Tian[♡] **Xuantang Xiong**[♡] **Lei Han**♡ Zhiyuan Liu^{⋆⊠} Maosong Sun^{⋆⊠} **★**Tsinghua University *Shanghai Jiao Tong University Beijing University of Posts and Telecommunications ♦ Siemens Tencent Robotics X dangyf21@mails.tsinghua.edu.cn gianc@sjtu.edu.cn liuzy@tsinghua.edu.cn sms@tsinghua.edu.cn

Abstract

Large language models (LLMs) have achieved remarkable results across diverse downstream tasks, but their monolithic nature restricts scalability and efficiency in complex problem-solving. While recent research explores multi-agent collaboration among LLMs, most approaches rely on static organizational structures that struggle to adapt as task complexity and agent numbers grow, resulting in coordination overhead and inefficiencies. To this end, we propose a puppeteer-style paradigm for LLM-based multi-agent collaboration, where a centralized orchestrator ("puppeteer") dynamically directs agents ("puppets") in response to evolving task states. This orchestrator is trained via reinforcement learning to adaptively sequence and prioritize agents, enabling flexible and evolvable collective reasoning. Experiments on closed- and open-domain scenarios show that this method achieves superior performance with reduced computational costs. Analyses further reveal that the key improvements consistently stem from the emergence of more compact, cyclic reasoning structures under the orchestrator's evolution.

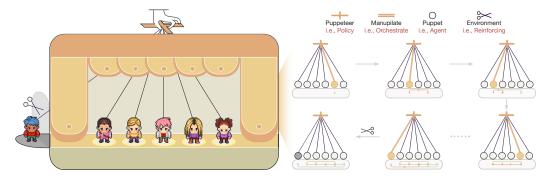


Figure 1: Overview of the proposed multi-agent collaboration framework. A central policy ("puppeteer") dynamically orchestrates which agent ("puppet") should reason at each step based on the evolving state of the task. As the task progresses, the orchestrator adaptively promotes more effective agents while removing those that are less useful, analogous to a puppeteer learning to skillfully pull or cut strings to direct a performance.

[†]Equal Contribution.

[™]Corresponding Author.

1 Introduction

Large language models (LLMs) [62, 44, 25] have achieved remarkable advances across diverse natural language processing tasks, demonstrating strong capabilities in planning [57, 52, 42], reasoning [63, 49, 30], and decision-making [28, 58, 1]. As the ambition to tackle ever more complex, multifaceted problems—such as tool-augmented inference [43, 47, 79, 51] and collaborative problem-solving [38, 26, 11] in open environments—continues to grow, the limitations of monolithic LLMs are becoming increasingly apparent [64, 7, 8].

To address these challenges, recent research has drawn inspiration from human teamwork, exploring multi-agent systems (MAS) comprising diverse LLM-based agents with specialized skills [41, 48], personalized reasoning patterns [63, 69, 39], and external tool integrations [78, 43]. However, many existing approaches rely on predefined or statically generated agent topologies [56, 40] that lack flexibility and scalability. This rigidity often leads to increased coordination overhead, degraded system performance, and inefficiencies as the variety of tasks [74, 22] and the number of agents scale [41]. Especially in large-scale scenarios, the absence of principled and dynamic coordination can further result in redundant computation [70], ineffective communication [12], and diminished collective problem-solving effectiveness [6].¹

Can dynamic² orchestration simultaneously maximize collaborative effectiveness and computational efficiency? Answering this question is crucial for building scalable, robust, and practical collective intelligence suitable for complex real-world settings. To this end, we propose a novel paradigm for constructing flexible and continually evolving multi-agent system. Drawing inspiration from puppet shows—where a central puppeteer skillfully directs multiple puppets behind the scenes—we reconceptualize multi-agent collaboration as a reasoning process orchestrated by a centralized puppeteer who dynamically selects and sequences agent activations based on evolving task states, implicitly coordinating collaboration within the group. As tasks progress, the orchestrator learns to prioritize effective agents and suppress less efficient ones, continually driving the system toward higher overall performance and efficiency.

Specifically, our framework advances multi-agent reasoning by introducing two key innovations: (i) *Dynamic Orchestration*: Moving beyond static collaboration patterns, we employ a dynamic orchestrator that routing agents at each step based on the current contexts. This process is formulated as a sequential decision problem, effectively yielding an implicit inference graph and supporting flexible, scalable agent coordination. (ii) *Adaptive Evolution*: To maximize efficiency and minimize redundancy, we employ reinforcement learning to continuously update the orchestrator's policy by leveraging feedback from completed tasks. Over time, the orchestrator learns to emphasize strong agent trajectories and prune less effective ones, enabling the system to evolve toward greater efficiency progressively.

Empirical results on both closed- and open-domain scenarios demonstrate that our approach consistently yields more effective solutions while requiring less computational overhead. Analyses further reveal that, although the evolved topologies are not fixed across different tasks, the key improvements consistently stem from the emergence of more compact, cyclic reasoning structures.

2 Method

We propose a unified framework for multi-agent reasoning that organizes diverse LLM-based agents via orchestrating their collaboration dynamically using a centralized policy, and continually optimizes their collaboration process through reinforcement learning.

A LLM-based agent can be abstracted in its minimal form as a=(m,r,t), where m denotes the foundation model, r represents the reasoning pattern or prompting strategy, and t is the set of available external tools. The agent space $\mathcal A$ enumerates all possible agents formed by combinations of these components, i.e., $\mathcal A=\{(m,r,t)\}$, encompassing both intrinsic and tool-augmented reasoning. Each agent thus represents an atomic reasoning behavior participating in task solving.

¹For example, mesh-structured multi-agent systems with 50 nodes can require up to 10 hours to develop software comprising only a few hundred lines of code.

²This paper refers to the dynamic organizational structure during real-time reasoning.

For multi-agent collaboration, following [41], a MAS is naturally formalized as a directed graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$, where each node $v \in \mathcal{V}$ corresponds to an agent $a \in \mathcal{A}$, and each directed edge $(v_i, v_j) \in \mathcal{E}$ encodes a dependency or information flow, conveying intermediate context from agent a_i to agent a_j . Typically, this graph presents a single-source, single-sink configuration: the source node represents the input task, while the sink node yields the unified task output (i.e., artifact). This formalism underlies a unified and temporal modeling framework for LLM-based reasoning systems and is analogous to a "graph-of-thought" [2] that captures the deep thinking process.

2.1 Dynamic Orchestration

Centralized Puppeteer A challenge in multi-agent reasoning is achieving efficient orchestration as task complexity and agent diversity increase. In previous approaches, each agent autonomously selects collaborators, but this incurs coordination overhead and poor scalability, particularly as agents increase or change [80, 41]. Instead, inspired by centralized coordination (*e.g.*, a puppeteer managing multiple puppets), we model the system as driven by a centralized orchestrator. This orchestrator dynamically selects which agents to activate in each step, based on the dynamic task state, and delegates reasoning to the selected agents. Such centralization decouples agent selection from internal agent behaviors, greatly enhancing adaptability and scalability without extensive parameter retraining.

Serialized Orchestration Another challenge stems from the combinatorially large space of possible collaboration topologies among agents. Exhaustive search is infeasible, thus prior work focuses only on canonical graphs (*e.g.*, chains, trees, graphs) [69, 63, 2]. Instead, we propose to serialize the collaborative reasoning process: rather than searching the entire topological space, the orchestrator "unfolds" the graph into a reasoning sequence guided by a topological traversal strategy. By maintaining a topological ordering, the reasoning steps follow the partial order implied by the problem dependencies. It is important to note that although the orchestration of agents appears to be serialized and "unfolded", when this episode is restored through folding, it can be reconstructed as a directed graph (with agents as nodes and orchestration partial order relations as edges).

Building on the two concepts above, we formalize the multi-agent collaboration as a sequential decision process governed by a centralized policy π . At each time step t, the orchestrator selects a single agent $a_t \in \mathcal{A}$ to activate, conditioned on the current global system state S_t and the task specification τ . The global state S_t consists of all relevant agent states and aggregated contextual information up to step t:

$$a_t \sim \pi(S_t, \tau) = \mathbb{P}(a \mid S_t, \tau) \tag{1}$$

where the policy π is a function mapping the observable context—such as the current state and task description—to a distribution over candidate agents [66, 67] (e.g., via neural scoring, embedding-based models, or Bradley-Terry style approaches [61]).

Upon activation, agent a_t receives its state $s_t(a_t)$ (extracted from S_t) and generates its output by a generative reasoning mapping f_{a_t} , after which the system state is updated (Φ) as:

$$o_t = f_{a_t}(s_t(a_t), S_t), \quad S_{t+1} = \Phi(S_t, o_t)$$
 (2)

The process continues iteratively: at each step, the orchestrator observes the updated system state S_{t+1} and selects the next agent a_{t+1} to activate, again using the policy π conditioned only on S_{t+1} and τ . This sequential agent selection process explicitly satisfies the Markov property [16]:

$$\mathbb{P}(a_{t+1} \mid S_0, \dots, S_{t+1}, \tau) = \mathbb{P}(a_{t+1} \mid S_{t+1}, \tau)$$
(3)

The process terminates when a stopping criterion is met (e.g.), when the selected agent is a designated terminator or when the task-solving resource is exhausted). At that point, a final aggregation function $F_{\rm agg}$ combines all agent outputs across timesteps to yield the overall solution:

$$o^* = F_{\text{agg}}(\{o_0, o_1, \dots, o_T\}) = \Phi(S_T, o_T)$$
(4)

where T denotes the total number of reasoning steps.

2.2 Adaptive Evolution

While dynamic orchestration enables flexible agents' long-chain reasoning, naive implementations may invoke redundant or unhelpful agents, resulting in unacceptable inefficiency. To address this,

thanks to the Markov property, a learnable policy is considered for continuously learning to make agent selection decisions adaptively. After each reasoning episode, the system receives feedback jointly evaluating solution quality and resource consumption, enabling the policy to learn which agent is most valuable based on real-time task states.

Practically, this facilitates dynamic pruning of agents: the orchestration process adapts to increasingly favor compact reasoning chains by reducing reliance on agents that offer little incremental gain or incur excessive cost. Over time, the orchestrator policy evolves to organize more effective agent sequences, balancing expressive collaboration with computational efficiency. Thus, the evolvable puppeteer not only orchestrates agent collaboration, but also distills the reasoning process to its most essential components, enabling robust and scalable performance.

Policy Optimization To systematically optimize both the effectiveness and efficiency of collaboration, we employ REINFORCE [55], a reinforcement learning (RL) technique, as our underlying optimization framework [36, 28, 66, 50]. By doing so, the orchestration policy learns from previous executions, adaptively refining agent selection and pruning strategies to achieve more robust and cost-efficient multi-agent reasoning.

Concretely, the optimization objective is to maximize the expected return over complete reasoning trajectories, where the return reflects both overall effectiveness and inference efficiency:

$$J(\theta) = \mathbb{E}_{\pi_{\theta}} [R(\tau)], \quad \nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{n=1}^{N} \left(\sum_{t=1}^{T} \nabla_{\theta} \log \pi_{\theta}(a_{t}|S_{t}) \right) \cdot R(\tau)$$
 (5)

with $R(\tau)$ denoting the total reward accrued for trajectory $\tau = \{S_0, a_0, o_0, S_1, \dots, S_T, a_T, o_T\}$, and o_t the output generated by agent a_t at state S_t , N is the sample size, and T is the total number of steps in one trajectory. The orchestrator's parameters θ are updated iteratively via gradient ascent: $\theta \leftarrow \theta + \alpha \nabla_{\theta} J(\theta)$, with learning rate α . Through such RL-driven optimization, the orchestrator leverages accumulated cross-task experience to refine agent selection, dynamically suppressing unhelpful or costly agents and converging toward more compact, high-performing collaboration structures.

Reward Design To effectively guide the orchestrator's optimization, we design a reward function that jointly accounts for both solution quality and computational efficiency. Upon completion of each task trajectory, a terminal reward r is assigned: for tasks with ground-truth answers, $r \in \{0,1\}$ indicates correctness; for open-ended tasks, $r \in [0,1]$ quantifies answer quality. The overall reward is defined recursively over time steps [54]. At the terminal state (t=T), the cumulative reward incorporates both solution quality and total computational cost:

$$R_t = \begin{cases} r - \lambda \cdot C_T, & \text{if } t = T \\ \gamma \cdot R_{t+1} - \lambda \cdot C_t, & \text{if } t < T \end{cases}, \quad C_t = F \cdot \log\left(1 + \frac{t}{\varphi}\right)$$
 (6)

where λ controls the trade-off between accuracy and efficiency, $\gamma \in (0,1]$ is the discount factor, and F scales the cost according to the computational resource consumption at each step; note that to encourage economical reasoning, we penalize excessive computational expenditure. Specifically, for each reasoning step t, we define the step-wise cost C_t based on FLOPs or token-level metrics [46], normalized by the maximum step budget φ . This composite reward formulation incentivizes the orchestrator to achieve correct and high-quality solutions while minimizing unnecessary computation, ultimately driving the MAS to discover reasoning structures that are both effective and cost-efficient.

3 Experiments

Datasets and Metrics To thoroughly assess our framework, we use a range of publicly available and logically demanding datasets covering both closed- and open-domain reasoning tasks:

Closed-domain Tasks: These tasks require precise, objective reasoning and unambiguous answers, making them well-suited for evaluating core inference accuracy and mathematical rigor. GSM-Hard[17] features arithmetic problems involving unusually large numbers and complex multi-step calculations, challenging models' advanced mathematical reasoning and error-free execution. MMLU-Pro[60] is a comprehensive benchmark spanning diverse subjects and difficulty levels,

using multiple-choice questions to assess both factual knowledge and logical deduction. Both benchmarks are designed to assess the model's ability in mathematical and commonsense reasoning and inference, with *accuracy* as the evaluation metric.

• Open-domain Tasks: These tasks are inherently creative and open-ended, requiring multidimensional qualitative evaluation. They rigorously assess agents' ability to integrate information, understand context, and generate novel solutions. SRDD[40] consists of real-world textual software requirements and tasks agents with building the corresponding software, demanding proficiency in requirement comprehension, system/design reasoning, code generation, and testing. Its official evaluation metric combines completeness, executability, and consistency [40], reflecting the practical demands of real-world software development workflows. CommonGen-Hard[35] challenges agents to generate coherent sentences that connect seemingly unrelated concepts, highlighting their abilities in commonsense reasoning, contextual understanding, and creative expression. Evaluation is based on an aggregate metric that incorporates grammar, relevance, logical consistency[29], as well as concept coverage [35], providing a nuanced assessment of generative quality.

Baselines To mitigate performance interference—where strong models may overshadow the contributions of weaker ones—and to evaluate our method's adaptability across agents with varying capacities, we partition the agent pool based on the parameter scale of the underlying models. Specifically, we define a **Mimas** subspace (smaller models: *Qwen-2.5-7B*, *Qwen-2.5-14B*, *LLaMA-3.1-8B*, *LLaMA-3.2-3B*, *Mistral-7B*, *Mistral-Nemo-12B*) and a **Titan** subspace (larger models: *GPT-4-Turbo*, *GPT-4o-Mini*, *Gemini-1.5-Pro*, *Gemini-1.5-Flash*, *Claude-3-Sonnet*, *Claude-3-Haiku*, *Qwen-2.5-72B*, *LLaMA-3.1-405B*), covering both closed- and open-source families. All experiments are performed under both the Titan and Mimas subspace settings. To ensure the rigor and credibility of our experimental study, we select a suite of representative and recent baselines that comprehensively span the spectrum from straightforward LLM generation to advanced agentic paradigms:

- **Pure Models**: This category evaluates foundation models in the absence of explicit agent structuring or workflow orchestration, serving as a baseline for generative inference performance. For Mimas, competitive open-source models include *LLaMA-3.1-8B*, *Mistral-Nemo-12B*, and *Qwen-2.5-14B*.³ For Titan, options such as *LLaMA-3.1-405B*, *GPT-4o-mini*, and *GPT-4-turbo* are considered.
- **Single-Agent Methods**: This category explores paradigms where reasoning is performed by a single agent using a specific reasoning pattern or workflow. *Self-refine*[35] exemplifies iterative, self-corrective reasoning within a feedback loop, whereas *AFlow*[74] enhances agent reasoning efficiency by utilizing Monte Carlo Tree Search to optimize code-represented agent workflows.
- Multi-Agent Methods: We benchmark against the latest multi-agent reasoning systems, show-casing state-of-the-art capabilities in leveraging agent heterogeneity and dynamic collaboration. *MacNet* [41] orchestrates agents within topologically static directed acyclic graphs, facilitating collective intelligence driven by one foundation model to enhance reasoning performance. *EvoA-gent* [71] adopts evolutionary algorithms to automatically generate and optimize diverse multi-agent systems, adaptively improving collaboration and performance without manual intervention.

Implementation Details Different agents are equipped with distinct reasoning patterns—such as task decomposition, reflection, refinement, critique, modification, summarization, and termination—enabling flexible problem-solving [39, 20, 75, 35]. External tools like WebViewer, WikiSearch, BingSearch, arXivSearch, Code Interpreter, and File Reader are also integrated [43]. Dynamic collaboration uses majority voting for output aggregation. The policy is initialized with a variant of Llama-3.1⁴, using default settings: episode length to 4, parallel exploration up to 3, $\lambda = 0.1$, and $\gamma = 0.99$. All baselines are rerun under identical settings.

3.1 Does Our Method Lead To Elevated Performance?

Many prior studies on multi-agent systems have employed the same base model to drive agent behavior [40, 32, 80]. To enable a more meaningful comparison and account for model heterogeneity, our method, referred to as Puppeteer, introduces two distinct configurations within each agent

³Other smaller-scale models in the same series (*e.g.*, *Qwen-2.0-7B*) have also been experimentally validated, and their performance is generally weaker than that of the larger-scale model within the same series.

⁴https://huggingface.co/nvidia/Llama-3.1-Nemotron-70B-Reward-HF

subspace: the Mono setting, wherein all agents are driven by the same model, and we use *LLaMA-3.1-405B* for Titan subspace and *LLaMA-3.1-8B* for Mimas subspace, and the default setting, wherein agents are driven by a diverse set of models. As Puppeteer undergoes online reinforcement learning, we categorize its learning process into two distinct phases: an initial phase characterized by unrefined behavior, and an evolved phase marked by reinforced performance.

Table 1: Performance comparison of different methods across various datasets in Titan and Mimas subspaces respectively. For each dataset, the highest scores are highlighted in bold and the second-highest are underlined.

Mimas	GSM-Hard		MMLU-Pro		SRDD		CommonGen-Hard		AVG.	
Llama-3.1-8B	0.0000^{\dagger}		0.5250		0.4615 [†]		0.6992 [†]		0.4214 [†]	
Mistral-Nemo-12B	0.0350^{\dagger}		0.4500^{\dagger}		0.2097^{\dagger}		0.7146^{\dagger}		0.3523^{\dagger}	
Qwen-2.5-14B	0.0450^{\dagger}		0.3800^{\dagger}		0.5891^{\dagger}		0.5747^{\dagger}		0.3972^{\dagger}	
Self-Refine _{Llama-3.1-8B}	0.4750		0.2600^{\dagger}		0.5412^{\dagger}		0.6018^{\dagger}		0.4695^{\dagger}	
AFlow _{Llama-3.1-8B}	0.2900^{\dagger}		0.5000		0.6362^{\dagger}		0.7194		0.5364^{\dagger}	
MacNet _{Llama-3.1-8B}	0.0000^{\dagger}		0.2000^{\dagger}		0.2017^{\dagger}		0.7434		0.2862^{\dagger}	
EvoAgent _{Llama-3.1-8B}	0.1250^{\dagger}		0.5000		0.2510^{\dagger}		0.7167		0.3981^{\dagger}	
	Initialized	Evolved	Initialized	Evolved	Initialized	Evolved	Initialized	Evolved	Initialized	Evolved
Puppeteer-Mono _{Llama-3.1-8B} Puppeteer	0.2467 0.5600	0.4800 0.5400	0.4500 0.5700	0.5200 0.6300	0.6983 0.6653	0.7249 0.6266	0.6323 0.7139	0.7341 0.7333	0.5068 0.6273	0.6147 0.6324
Titan	GSM-Hard		MMLU-Pro		SRDD		CommonGen-Hard		AVG.	
Llama-3.1-405B	0.1350 [†]		0.7600		0.6061^{\dagger}		0.8116^{\dagger}		0.5781 [†]	
GPT-4o-Mini	0.1050^{\dagger}		0.5950 [†]		0.6822^{\dagger}		0.6691^{\dagger}		0.5128^{\dagger}	
GPT-4-Turbo	0.2750^{\dagger}		0.6800^{\dagger}		0.6244^{\dagger}		0.7632^{\dagger}		0.5856^{\dagger}	
Self-Refine _{Llama-3.1-405B}	0.5250		0.6000^{\dagger}		0.6345^{\dagger}		0.7033^{\dagger}		0.6157^{\dagger}	
AFlow _{Llama-3.1-405B}	0.5400^{\dagger}		0.7500		0.6478^{\dagger}		0.8218		0.6899^{\dagger}	
MacNet _{Llama-3.1-405B}	0.2905^{\dagger}		0.4800^{\dagger}		0.4228^{\dagger}		$\boldsymbol{0.8817}^{\dagger}$		0.5187^{\dagger}	
EvoAgent _{Llama-3.1-405B}	0.4250^{\dagger}		0.5400^{\dagger}		0.1730^{\dagger}		0.8599		0.4994^{\dagger}	
	Initialized	Evolved	Initialized	Evolved	Initialized	Evolved	Initialized	Evolved	Initialized	Evolved

As detailed in Table 1, Puppeteer consistently achieves superior average performance during the evolved phase across all evaluated tasks, irrespective of domain type or model space size. Similarly, Puppeteer-Mono demonstrates robust performance across both large- and small-scale models. These results collectively underscore the exceptional capability of our centralized orchestrator in coordinating both heterogeneous and single-model-driven agents to form highly effective MAS, highlighting its robustness in managing diverse agent configurations.

0.7600

0.6264

0.7697

0.8111

0.8417

0.6671

Compared to various agent workflows and multi-agent baselines using the same base model, Puppeteer-Mono consistently outperforms competing methods across nearly all evaluated tasks. This result highlights the efficacy of our centralized orchestrator in coordinating single-model-driven agents with optimized reasoning strategies and strategic tool utilization, surpassing alternative frameworks. It underscores that superior performance stems from sophisticated organizational design and a context-aware, dynamically constructed multi-agent topology. Notably, despite Puppeteer-Mono leveraging near-optimal models within its respective subspaces, Puppeteer consistently achieves superior performance, likely benefiting from complementary interactions among heterogeneous agents driven by diverse models. Additionally, the expanded space in Puppeteer enables broader exploration of the solution landscape, thereby enhancing optimization opportunities.

To illustrate Puppeteer's capability in organizing effective MAS, we compare performance between the initial and evolved phases. The results show that continued optimization yields substantial gains—for example, Puppeteer in the Titan subspace improves from 0.6893 to 0.7731 on average, with a similar trend observed in the Mimas subspace. These findings highlight the critical role of continual optimization in enhancing coordination and task specialization, and further suggest promising directions for advancing beyond traditional, static agent paradigms toward more adaptive and collaborative agent systems.

3.2 Does Performance Gain Come at the Expense of Efficiency?

0.5400

Puppeteer-Mono_{Llama-3.1-405B}

0.6100

0.6910

Recent research in non-learnable multi-agent systems has highlighted a trade-off: performance gains achieved through agent collaboration are often accompanied by increased overall token consump-

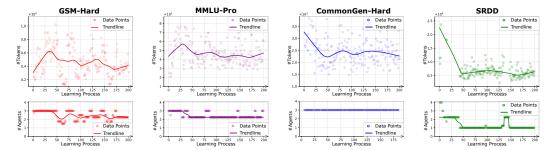


Figure 2: Evolution of token consumption and the number of orchestrated agents per task along the training process. Trends are fitted using LOWESS (Locally Weighted Scatterplot Smoothing) [13].

tion [70, 41]. To investigate whether our approach exhibits a similar pattern, we visualize the average token consumption and the number of orchestrated agents throughout the training process.

As shown in Figure 2, the token metric consistently decreases over the course of learning across almost all settings. This demonstrates that our system's performance improvements do not come at the cost of increased computational overhead; on the contrary, our approach achieves simultaneous advances in both effectiveness and efficiency. This result is primarily attributed to our reward design, which balances accuracy and efficiency via a tunable weighting factor λ , enabling adaptable trade-offs tailored to different application needs, with higher values of λ indicating a greater emphasis on minimizing cost, as shown in the Figure 3. Specifically, the reward is designed to encourage the orchestrator to: (i) prioritize agents that complete tasks with reduced token usage while preserving performance, and (ii) terminate reasoning early by invoking the Terminator agent, thereby fostering efficiency through the exclusion of redundant or low-contributing agents. This mechanism enables the orchestrator to optimize both overall performance and resource consumption. In extreme cases, if the efficiency factor is entirely omitted from the reward design, the system naturally degenerates into a traditional large-scale collaborative framework, albeit with potentially further improvements in performance.

More specifically, in the Titan setting, the number of active agents notably decreases over the course of learning, suggesting that the orchestrator progressively learns to terminate the reasoning process earlier for more efficient problem-solving. In contrast, in the Mimas setting (see Appendix for results), the number of orchestrated agents remains relatively stable, indicating the orchestrator's caution in prematurely halting the reasoning process due to the comparatively limited capabilities of the agents. In this case, reductions in token consumption are primarily achieved through the preferential selection of lower-cost agents rather than shorter reasoning chains. This contrast between Titan and Mimas arises from fundamental differences in agent capacity: Titan agents can solve tasks more efficiently, enabling earlier stopping without quality loss, whereas Mimas agents often require longer, more elaborate reasoning processes to ensure reliable completion.




Figure 3: Token consumption and agent count orchestrated in the Titan subspace for Puppeteer-Mono on MMLU-Pro.

3.3 How Does Organizational Topology Evolve During Reinforcement?

To elucidate the emergent organization of multi-agent collaboration, we systematically examine the evolution of agent interaction topologies throughout the learning process. Multi-agent reasoning can be abstractly modeled as dynamic orchestration governed by our centralized orchestrator, yet empirical evidence reveals an untrained "initialized" MAS system often results in a highly sophisticated and adaptive organizational structure. Instead of relying on a static structure, our Puppeteer dynamically constructs intricate topological motifs—such as trees, graphs, and cycles—by selecting the next agent to activate at each reasoning step based on the current reasoning state. Thus, the topology emerges incrementally during reasoning, embodying a flexible, context-aware organizational paradigm.

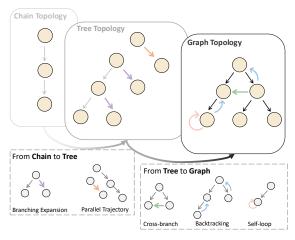


Figure 4: The organizational topology evolves as a general directed graph, shaped by the unconstrained orchestration.




Figure 5: Examples of topology evolution.

Although the simplest form of multi-agent collaboration is often represented as a chain structure [40, 63], the Puppeteer's dynamic orchestration naturally fosters tree-structured interactions by enabling the selection of one or multiple agents at each step. This mechanism supports branching behavior and parallel pathways, thereby enhancing scalability as the number of agents grows. However, despite an initial resemblance to tree-like expansion [69] driven by branching, the resulting topologies are inherently graph-structured [41, 80, 2]. This property arises from the flexible orchestration, which permits repeated agent activations, leading to cycles and feedback loops. Moreover, cross-branch connections emerge organically, underscoring the system's capacity to generate rich, expressive, and adaptive interaction patterns. Representative examples of these emergent motifs, including cycles, backtracking, and cross-branch links, are illustrated in Figure 4.

As the puppeteer evolves over time, its orchestrating behavior changes accordingly, leading to distinct behaviors in the resulting MAS. Here, we present a specific sample, selected from both the initial and evolved phases, to demonstrate the emerging optimization effects. As shown in Figure 5, the initial phase features multiple disjoint chains, reflecting exploratory organization; after evolution, paths become fewer and cycles appear, indicating more stable and coordinated interactions. Additionally, the initial phase features two-agent communication with higher overhead; as evolution progresses, the structure condenses to a single agent handling continuous reasoning, reflecting more efficient coordination and decision-making.

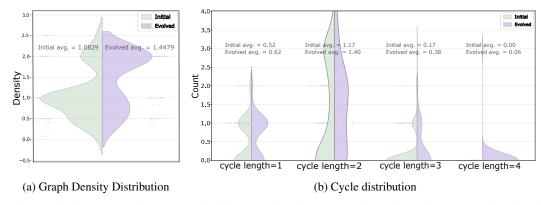


Figure 6: The compaction and cyclicality dynamics in the evolution of multi-agent organizational structures.

Empirical observation reveals that Puppeteer's dynamic orchestration—which fosters graph-structured topologies with diverse inter-agent connections—gives rise to two key structural phenomena: *compaction* and *cyclicality*. The evolving interplay between densely clustered agents and frequent communication cycles marks a significant transformation in multi-agent systems, shifting from loosely organized, exploratory interactions to tightly coordinated, specialized collectives.

- Compaction. We observe a marked trend toward structural compaction over the course of learning (Figure 6a). As optimization proceeds, graph density—quantifying the degree of inter-agent connectivity—steadily increases, with organizational structure evolving toward highly interactive and tightly coupled subnetworks. Communication becomes progressively concentrated among a subset of recurrently active 'hub' agents, forming dense subgraphs characterized by frequent and focused information exchange. This phenomenon is particularly pronounced in the Titan (large-model) subspace, where the orchestrator preferentially routes decisions through a small cohort of strong agents, thereby intensifying iterative reasoning and collaborative consensus formation. Ultimately, the system transitions from diffuse, exploratory interaction patterns to highly synergistic and focused multi-agent reasoning.
- Cyclicality. In conjunction with compaction, we document a significant rise in cycle formation as learning progresses (Figure 6b). Cyclic topologies—in which agents repeatedly revisit previous collaborators via closed-loop routes—facilitate the re-circulation of intermediate results, mutual verification, and continual refinement. Unlike strictly hierarchical or acyclic networks, this cyclical structure supports recursive critique and sustained internal debate, much like what is seen in reflexive multi-agent paradigms (e.g., Reflexion [50]). As cycles become more prevalent, the system exhibits deeper internal feedback, more efficient reuse of information, and increased resilience—hallmarks of mature, self-referential collaborative reasoning.

3.4 How to Further Use Hyperparameters to Control Performance and Efficiency?

While reward shaping provides a direct mechanism for efficiency control, the collaboration structure itself is also crucial. As the orchestrator organizes agent collaboration, upper-bound constraints on topology—specifically, chain depth and exploration width—are essential to prevent unbounded scaling and inefficiency. Depth refers to the length of orchestrated agent chains, while width captures the number of parallel explorations. As shown in Figure 7, there is a clear non-monotonic relationship: the default setting achieves the best trade-off for our purposes, whereas increasing depth or width leads to re-

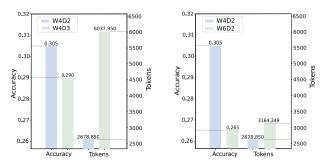


Figure 7: Impact of topology constraints on token consumption and accuracy (WxDy denotes exploration with width x and depth y; W4D2 is the default).

dundancy, higher computational costs, and possible performance degradation. In general, enhancing accuracy tends to increase token consumption, and vice versa, suggesting that carefully balancing depth and width can help maintain both efficiency and effectiveness.

4 Related Work

The rapid advancement of LLMs [62, 3, 44, 25, 28, 4] has spurred the development of autonomous LLM-based agents [64, 45, 38, 26, 65, 53], which exhibit strong capabilities in planning [59, 20, 23], memory [38, 24, 37], and tool usage [47, 43, 5, 68]. These agents demonstrate growing proficiency in addressing complex tasks [18, 73, 40, 19, 57], adapting to dynamic real-world environments [76, 34, 77], and exhibiting human-like behaviors such as collaboration and decision-making [9, 38, 48]. Given that a single LLM-based agent may struggle to handle the diverse and complex range of real-world tasks [15, 26, 58], recent research has increasingly focused on constructing LLM-based multi-agent systems [10, 40, 21, 56, 11] for software development[40, 21], social simulation[38, 24], medical treatment[56, 27], scientific discovery [72].

Early MAS designs relied on fixed, handcrafted structures, *e.g.*, mirroring software engineering paradigms like waterfall models [38, 10, 40]. These static approaches led to rigid coordination [80, 41], limited workflow flexibility [22, 74], and suboptimal agent composition [14, 38, 33, 31]. To address these issues, more adaptive orchestration methods have emerged: network-style organizations dynamically select agents (Dylan [32]) as optimizable graphs enable prompt refinement and better cooperation (GPT-Swarm [80], MacNet [41]); and code-based representations allow modeling of dynamic, task-specific processes. Recent approaches employ code-space search (ADAS [22], AFlow [74]) or train LLMs to generate MAS configurations on demand (MAS-GPT [70]).

5 Conclusion

We proposed a novel framework for adaptive multi-agent LLM collaboration inspired by puppet show orchestration, where a centralized, learnable "puppeteer" orchestrator dynamically activated agents within a directed graph-of-thoughts. Unlike previous methods with static or manually designed topologies, our approach incorporated context-sensitive orchestration and reinforcement learning-driven policy adaptation, enabling more principled and efficient collaboration. Experiments on diverse tasks showed that our method achieved superior solution quality and reduced computational cost. Analyses further revealed that the orchestrator promoted compact, cyclic reasoning structures, underpinning the performance improvements. We hope this work can constitute a valuable step toward dynamic and scalable coordination in multi-agent collaboration.

References

- [1] Michael Ahn, Anthony Brohan, Noah Brown, Yevgen Chebotar, Omar Cortes, Byron David, Chelsea Finn, Chuyuan Fu, Keerthana Gopalakrishnan, Karol Hausman, Alex Herzog, Daniel Ho, Jasmine Hsu, Julian Ibarz, Brian Ichter, Alex Irpan, Eric Jang, Rosario Jauregui Ruano, Kyle Jeffrey, Sally Jesmonth, Nikhil Joshi, Ryan Julian, Dmitry Kalashnikov, Yuheng Kuang, Kuang-Huei Lee, Sergey Levine, Yao Lu, Linda Luu, Carolina Parada, Peter Pastor, Jornell Quiambao, Kanishka Rao, Jarek Rettinghouse, Diego Reyes, Pierre Sermanet, Nicolas Sievers, Clayton Tan, Alexander Toshev, Vincent Vanhoucke, Fei Xia, Ted Xiao, Peng Xu, Sichun Xu, Mengyuan Yan, and Andy Zeng. Do as i can and not as i say: Grounding language in robotic affordances. In *arXiv:2204.01691*, 2022.
- [2] Maciej Besta, Nils Blach, Ales Kubicek, Robert Gerstenberger, Michał Podstawski, Lukas Gianinazzi, Joanna Gajda, Tomasz Lehmann, Hubert Niewiadomski, Piotr Nyczyk, and Torsten Hoefler. Graph of thoughts: solving elaborate problems with large language models. In Proceedings of the Thirty-Eighth AAAI Conference on Artificial Intelligence and Thirty-Sixth Conference on Innovative Applications of Artificial Intelligence and Fourteenth Symposium on Educational Advances in Artificial Intelligence (AAAI), 2024.
- [3] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language Models are Few-Shot Learners. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2020.
- [4] Sébastien Bubeck, Varun Chandrasekaran, Ronen Eldan, Johannes Gehrke, Eric Horvitz, Ece Kamar, Peter Lee, Yin Tat Lee, Yuanzhi Li, Scott Lundberg, Harsha Nori, Hamid Palangi, Marco Tulio Ribeiro, and Yi Zhang. Sparks of Artificial General Intelligence: Early experiments with GPT-4. In *arXiv:2303.12712*, 2023.
- [5] Tianle Cai, Xuezhi Wang, Tengyu Ma, Xinyun Chen, and Denny Zhou. Large Language Models as Tool Makers. In *The Twelfth International Conference on Learning Representations (ICLR)*, 2023.
- [6] Mert Cemri, Melissa Z. Pan, Shuyi Yang, Lakshya A. Agrawal, Bhavya Chopra, Rishabh Tiwari, Kurt Keutzer, Aditya Parameswaran, Dan Klein, Kannan Ramchandran, Matei Zaharia, Joseph E.

- Gonzalez, and Ion Stoica. Why Do Multi-Agent LLM Systems Fail? In arXiv:2503.13657, 2025.
- [7] Lingjiao Chen, Jared Quincy Davis, Boris Hanin, Peter Bailis, Ion Stoica, Matei Zaharia, and James Zou. Are More LLM Calls All You Need? Towards the Scaling Properties of Compound AI Systems. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems* (NeurIPS), 2024.
- [8] Lingjiao Chen, Jared Quincy Davis, Boris Hanin, Peter Bailis, Matei Zaharia, James Zou, and Ion Stoica. Optimizing Model Selection for Compound AI Systems. In arXiv:2502.14815, 2025.
- [9] Liting Chen, Lu Wang, Hang Dong, Yali Du, Jie Yan, Fangkai Yang, Shuang Li, Pu Zhao, Si Qin, Saravan Rajmohan, Qingwei Lin, and Dongmei Zhang. Introspective Tips: Large Language Model for In-Context Decision Making. In *arXiv:2305.11598*, 2023.
- [10] Weize Chen, Yusheng Su, Jingwei Zuo, Cheng Yang, Chenfei Yuan, Chi-Min Chan, Heyang Yu, Yaxi Lu, Yi-Hsin Hung, Chen Qian, Yujia Qin, Xin Cong, Ruobing Xie, Zhiyuan Liu, Maosong Sun, and Jie Zhou. AgentVerse: Facilitating Multi-Agent Collaboration and Exploring Emergent Behaviors. In *The Twelfth International Conference on Learning Representations* (*ICLR*), 2024.
- [11] Weize Chen, Ziming You, Ran Li, yitong guan, Chen Qian, Chenyang Zhao, Cheng Yang, Ruobing Xie, Zhiyuan Liu, and Maosong Sun. Internet of Agents: Weaving a Web of Heterogeneous Agents for Collaborative Intelligence. In *The Thirteenth International Conference on Learning Representations (ICLR)*, 2025.
- [12] Weize Chen, Jiarui Yuan, Chen Qian, Cheng Yang, Zhiyuan Liu, and Maosong Sun. Optima: Optimizing effectiveness and efficiency for llm-based multi-agent system. In arXiv:2410.08115, 2025.
- [13] William S. Cleveland. LOWESS: A Program for Smoothing Scatterplots by Robust Locally Weighted Regression. In *The American Statistician*, 1981.
- [14] Ameet Deshpande, Vishvak Murahari, Tanmay Rajpurohit, Ashwin Kalyan, and Karthik Narasimhan. Toxicity in chatgpt: Analyzing persona-assigned language models. In Houda Bouamor, Juan Pino, and Kalika Bali, editors, *Findings of the Association for Computational Linguistics (EMNLP)*, 2023.
- [15] Yilun Du, Shuang Li, Antonio Torralba, Joshua B. Tenenbaum, and Igor Mordatch. Improving Factuality and Reasoning in Language Models through Multiagent Debate. In *Proceedings of the 41st International Conference on Machine Learning (ICML)*, 2024.
- [16] S. N. Ethier and T. G. Kurtz. Markov Processes: Characterization and Convergence. In Wiley Series in Probability and Statistics, 1986.
- [17] Luyu Gao, Aman Madaan, Shuyan Zhou, Uri Alon, Pengfei Liu, Yiming Yang, Jamie Callan, and Graham Neubig. PAL: program-aided language models. In *Proceedings of the 40th International Conference on Machine Learning (ICML)*, 2023.
- [18] Yingqiang Ge, Wenyue Hua, Kai Mei, Jianchao Ji, Juntao Tan, Shuyuan Xu, Zelong Li, and Yongfeng Zhang. OpenAGI: When LLM Meets Domain Experts. In *arXiv*:2304.04370, 2023.
- [19] Paul Hager, Friederike Jungmann, Robbie Holland, Kunal Bhagat, Inga Hubrecht, Manuel Knauer, Jakob Vielhauer, Marcus Makowski, Rickmer Braren, Georgios Kaissis, and Daniel Rueckert. Evaluation and Mitigation of the Limitations of Large Language Models in Clinical Decision-making. In *Nature Medicine*, 2024.
- [20] Shibo Hao, Yi Gu, Haodi Ma, Joshua Jiahua Hong, Zhen Wang, Daisy Zhe Wang, and Zhiting Hu. Reasoning with Language Model is Planning with World Model. In *The 2023 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2023.

- [21] Sirui Hong, Mingchen Zhuge, Jonathan Chen, Xiawu Zheng, Yuheng Cheng, Jinlin Wang, Ceyao Zhang, Zili Wang, Steven Ka Shing Yau, Zijuan Lin, Liyang Zhou, Chenyu Ran, Lingfeng Xiao, Chenglin Wu, and Jürgen Schmidhuber. MetaGPT: Meta Programming for A Multi-Agent Collaborative Framework. In *The Twelfth International Conference on Learning Representations* (ICLR), 2024.
- [22] Shengran Hu, Cong Lu, and Jeff Clune. Automated Design of Agentic Systems. In *The Thirteenth International Conference on Learning Representations (ICLR)*, 2025.
- [23] Zhiyuan Hu, Chumin Liu, Xidong Feng, Yilun Zhao, See-Kiong Ng, Anh Tuan Luu, Junxian He, Pang Wei Koh, and Bryan Hooi. Uncertainty of Thoughts: Uncertainty-Aware Planning Enhances Information Seeking in LLMs. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems (NeurIPS)*, 2024.
- [24] Wenyue Hua, Lizhou Fan, Lingyao Li, Kai Mei, Jianchao Ji, Yingqiang Ge, Libby Hemphill, and Yongfeng Zhang. War and Peace (WarAgent): Large Language Model-based Multi-Agent Simulation of World Wars. In *arXiv*:2311.17227, 2023.
- [25] Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B. Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling Laws for Neural Language Models. In *arXiv*:2001.08361, 2020.
- [26] Guohao Li, Hasan Hammoud, Hani Itani, Dmitrii Khizbullin, and Bernard Ghanem. Camel: Communicative Agents for "Mind" Exploration of Large Language Model Society. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2024.
- [27] Junkai Li, Siyu Wang, Meng Zhang, Weitao Li, Yunghwei Lai, Xinhui Kang, Weizhi Ma, and Yang Liu. Agent Hospital: A Simulacrum of Hospital with Evolvable Medical Agents. In arXiv:2405.02957, 2024.
- [28] Shuang Li, Xavier Puig, Chris Paxton, Yilun Du, Clinton Wang, Linxi Fan, Tao Chen, De-An Huang, Ekin Akyürek, Anima Anandkumar, Jacob Andreas, Igor Mordatch, Antonio Torralba, and Yuke Zhu. Pre-trained Language Models for Interactive Decision-making. In *Proceedings of the 36th International Conference on Neural Information Processing Systems (NeurIPS)*, 2022.
- [29] Zhongyang Li, Xiao Ding, and Ting Liu. Generating Reasonable and Diversified Story Ending using Sequence to Sequence Model with Adversarial Training. In *International Conference on Computational Linguistics (COLING)*, 2018.
- [30] Hunter Lightman, Vineet Kosaraju, Yuri Burda, Harrison Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. Let's verify step by step. In *The Twelfth International Conference on Learning Representations (ICLR)*, 2023.
- [31] Zhiwei Liu, Weiran Yao, Jianguo Zhang, Le Xue, Shelby Heinecke, Rithesh R N, Yihao Feng, Zeyuan Chen, Juan Carlos Niebles, Devansh Arpit, Ran Xu, Phil L Mui, Huan Wang, Caiming Xiong, and Silvio Savarese. BOLAA: Benchmarking and Orchestrating LLM Autonomous Agents. In *ICLR 2024 Workshop on Large Language Model (LLM) Agents*, 2024.
- [32] Zijun Liu, Yanzhe Zhang, Peng Li, Yang Liu, and Diyi Yang. A Dynamic LLM-Powered Agent Network for Task-Oriented Agent Collaboration. In *First Conference on Language Modeling (COLM)*, 2024.
- [33] Do Xuan Long, Duong Ngoc Yen, Anh Tuan Luu, Kenji Kawaguchi, Min-Yen Kan, and Nancy F. Chen. Multi-expert Prompting Improves Reliability, Safety and Usefulness of Large Language Models. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2024.
- [34] Kaixin Ma, Hongming Zhang, Hongwei Wang, Xiaoman Pan, and Dong Yu. LASER: LLM Agent with State-Space Exploration for Web Navigation. In *NeurIPS 2023 Foundation Models for Decision Making Workshop*, 2023.

- [35] Aman Madaan, Niket Tandon, Prakhar Gupta, Skyler Hallinan, Luyu Gao, Sarah Wiegreffe, Uri Alon, Nouha Dziri, Shrimai Prabhumoye, Yiming Yang, Shashank Gupta, Bodhisattwa Prasad Majumder, Katherine Hermann, Sean Welleck, Amir Yazdanbakhsh, and Peter Clark. SELF-REFINE: iterative refinement with self-feedback. In *Proceedings of the 37th International Conference on Neural Information Processing Systems (NeurIPS)*, 2023.
- [36] Lina Mezghani, Piotr Bojanowski, Karteek Alahari, and Sainbayar Sukhbaatar. Think Before You Act: Unified Policy for Interleaving Language Reasoning with Actions. In *Workshop on Reincarnating Reinforcement Learning at ICLR*, 2023.
- [37] Ali Modarressi, Ayyoob Imani, Mohsen Fayyaz, and Hinrich Schuetze. RET-LLM: Towards a general read-write memory for large language models. In *ICLR 2024 Workshop: How Far Are We From AGI*, 2024.
- [38] Joon Sung Park, Joseph O'Brien, Carrie Jun Cai, Meredith Ringel Morris, Percy Liang, and Michael S Bernstein. Generative Agents: Interactive Simulacra of Human Behavior. In Proceedings of the 36th Annual ACM Symposium on User Interface Software and Technology (UIST), 2023.
- [39] Zhenting Qi, Mingyuan MA, Jiahang Xu, Li Lyna Zhang, Fan Yang, and Mao Yang. Mutual Reasoning Makes Smaller LLMs Stronger Problem-Solver. In *The Thirteenth International Conference on Learning Representations (ICLR)*, 2025.
- [40] Chen Qian, Wei Liu, Hongzhang Liu, Nuo Chen, Yufan Dang, Jiahao Li, Cheng Yang, Weize Chen, Yusheng Su, Xin Cong, Juyuan Xu, Dahai Li, Zhiyuan Liu, and Maosong Sun. ChatDev: Communicative Agents for Software Development. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (ACL)*, August 2024.
- [41] Chen Qian, Zihao Xie, YiFei Wang, Wei Liu, Kunlun Zhu, Hanchen Xia, Yufan Dang, Zhuoyun Du, Weize Chen, Cheng Yang, Zhiyuan Liu, and Maosong Sun. Scaling Large Language Modelbased Multi-Agent Collaboration. In *The Thirteenth International Conference on Learning Representations (ICLR)*, 2025.
- [42] Shuofei Qiao, Runnan Fang, Ningyu Zhang, Yuqi Zhu, Xiang Chen, Shumin Deng, Yong Jiang, Pengjun Xie, Fei Huang, and Huajun Chen. Agent planning with world knowledge model. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2024.
- [43] Yujia Qin, Shihao Liang, Yining Ye, Kunlun Zhu, Lan Yan, Yaxi Lu, Yankai Lin, Xin Cong, Xiangru Tang, Bill Qian, et al. ToolLLM: Facilitating Large Language Models to Master 16000+ Real-World APIs. In *The Twelfth International Conference on Learning Representations (ICLR)*, 2024.
- [44] Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. Language Models Are Unsupervised Multitask Learners. In *OpenAI blog*, 2019.
- [45] Toran Bruce Richards. AutoGPT. In https://github.com/Significant-Gravitas/AutoGPT, 2023.
- [46] Nikhil Sardana, Jacob Portes, Sasha Doubov, and Jonathan Frankle. Beyond chinchilla-optimal: accounting for inference in language model scaling laws. In *Proceedings of the 41st International Conference on Machine Learning (ICML)*, 2024.
- [47] Timo Schick, Jane Dwivedi-Yu, Roberto Dessi, Roberta Raileanu, Maria Lomeli, Eric Hambro, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. Toolformer: Language Models Can Teach Themselves to Use Tools. In *Thirty-seventh Conference on Neural Information Processing Systems (NeurIPS)*, 2023.
- [48] Murray Shanahan, Kyle McDonell, and Laria Reynolds. Role play with large language models. In *Nature*, 2023.
- [49] Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, Y. K. Li, Y. Wu, and Daya Guo. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. In *arXiv:2402.03300*, 2024.

- [50] Noah Shinn, Federico Cassano, Edward Berman, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language Agents with Verbal Reinforcement Learning. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023.
- [51] Mohit Shridhar, Jesse Thomason, Daniel Gordon, Yonatan Bisk, Winson Han, Roozbeh Mottaghi, Luke Zettlemoyer, and Dieter Fox. Alfred: A benchmark for interpreting grounded instructions for everyday tasks. In 2020 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), 2020.
- [52] Chan Hee Song, Jiaman Wu, Clayton Washington, Brian M. Sadler, Wei-Lun Chao, and Yu Su. Llm-planner: Few-shot grounded planning for embodied agents with large language models. In Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV), October 2023.
- [53] Theodore Sumers, Shunyu Yao, Karthik Narasimhan, and Thomas Griffiths. Cognitive Architectures for Language Agents. In *Transactions on Machine Learning Research (TMLR)*, 2024.
- [54] Richard S Sutton, Andrew G Barto, et al. Reinforcement learning. In Cognitive Neuroscience, 1999.
- [55] Richard S Sutton, David McAllester, Satinder Singh, and Yishay Mansour. Policy Gradient Methods for Reinforcement Learning with Function Approximation. In *Advances in Neural Information Processing Systems (NeurIPS)*, 1999.
- [56] Xiangru Tang, Anni Zou, Zhuosheng Zhang, Ziming Li, Yilun Zhao, Xingyao Zhang, Arman Cohan, and Mark Gerstein. MedAgents: Large Language Models as Collaborators for Zero-shot Medical Reasoning. In Findings of the Association for Computational Linguistics (ACL), 2024.
- [57] Karthik Valmeekam, Matthew Marquez, Sarath Sreedharan, and Subbarao Kambhampati. On the Planning Abilities of Large Language Models A Critical Investigation. In *Thirty-seventh Conference on Neural Information Processing Systems (NeurIPS)*, 2023.
- [58] Guanzhi Wang, Yuqi Xie, Yunfan Jiang, Ajay Mandlekar, Chaowei Xiao, Yuke Zhu, Linxi Fan, and Anima Anandkumar. Voyager: An Open-Ended Embodied Agent with Large Language Models. In *Transactions on Machine Learning Research (TMLR)*, 2024.
- [59] Xinyuan Wang, Chenxi Li, Zhen Wang, Fan Bai, Haotian Luo, Jiayou Zhang, Nebojsa Jojic, Eric Xing, and Zhiting Hu. PromptAgent: Strategic Planning with Language Models Enables Expert-level Prompt Optimization. In *The Twelfth International Conference on Learning Representations (ICLR)*, 2024.
- [60] Yubo Wang, Xueguang Ma, Ge Zhang, Yuansheng Ni, Abhranil Chandra, Shiguang Guo, Weiming Ren, Aaran Arulraj, Xuan He, Ziyan Jiang, Tianle Li, Max Ku, Kai Wang, Alex Zhuang, Rongqi Fan, Xiang Yue, and Wenhu Chen. MMLU-pro: A more robust and challenging multi-task language understanding benchmark. In *The Thirty-eight Conference on Neural Information Processing Systems Datasets and Benchmarks Track (NeurIPS)*, 2024.
- [61] Zhilin Wang, Alexander Bukharin, Olivier Delalleau, Daniel Egert, Gerald Shen, Jiaqi Zeng, Oleksii Kuchaiev, and Yi Dong. HelpSteer2-Preference: Complementing Ratings with Preferences. In *The Thirteenth International Conference on Learning Representations*, 2025.
- [62] Jason Wei, Yi Tay, Rishi Bommasani, Colin Raffel, Barret Zoph, Sebastian Borgeaud, Dani Yogatama, Maarten Bosma, Denny Zhou, Donald Metzler, Ed H. Chi, Tatsunori Hashimoto, Oriol Vinyals, Percy Liang, Jeff Dean, and William Fedus. Emergent Abilities of Large Language Models. In *Transactions on Machine Learning Research (TMLR)*, 2022.
- [63] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, brian ichter, Fei Xia, Ed Chi, Quoc V Le, and Denny Zhou. Chain-of-thought prompting elicits reasoning in large language models. In Advances in Neural Information Processing Systems (NeurIPS), volume 35, 2022.
- [64] Lilian Weng. LLM-powered Autonomous Agents. In lilianweng.github.io, Jun 2023.

- [65] Qingyun Wu, Gagan Bansal, Jieyu Zhang, Yiran Wu, Beibin Li, Erkang Zhu, Li Jiang, Xiaoyun Zhang, Shaokun Zhang, Jiale Liu, Ahmed Hassan Awadallah, Ryen W White, Doug Burger, and Chi Wang. AutoGen: Enabling Next-Gen LLM Applications via Multi-Agent Conversations. In *First Conference on Language Modeling (COLM)*, 2024.
- [66] Zelai Xu, Chao Yu, Fei Fang, Yu Wang, and Yi Wu. Language Agents with Reinforcement Learning for Strategic Play in the Werewolf Game. In *Proceedings of the 41st International Conference on Machine Learning (ICML)*, 2024.
- [67] Xue Yan, Yan Song, Xidong Feng, Mengyue Yang, Haifeng Zhang, Haitham Bou Ammar, and Jun Wang. Efficient reinforcement learning with large language model priors. In *arXiv:2410.07927*, 2024.
- [68] Rui Yang, Lin Song, Yanwei Li, Sijie Zhao, Yixiao Ge, Xiu Li, and Ying Shan. GPT4Tools: Teaching Large Language Model to Use Tools via Self-instruction. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023.
- [69] Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Tom Griffiths, Yuan Cao, and Karthik Narasimhan. Tree of Thoughts: Deliberate Problem Solving with Large Language Models. In Thirty-seventh Conference on Neural Information Processing Systems (NeurIPS), volume 36, 2023.
- [70] Rui Ye, Shuo Tang, Rui Ge, Yaxin Du, Zhenfei Yin, Siheng Chen, and Jing Shao. MAS-GPT: Training LLMs to Build LLM-based Multi-Agent Systems. In arXiv:2503.03686, 2025.
- [71] Siyu Yuan, Kaitao Song, Jiangjie Chen, Xu Tan, Dongsheng Li, and Deqing Yang. EvoAgent: Towards Automatic Multi-Agent Generation via Evolutionary Algorithms. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics (NAACL)*, April 2025.
- [72] Zheni Zeng, Bangchen Yin, Shipeng Wang, Jiarui Liu, Cheng Yang, Haishen Yao, Xingzhi Sun, Maosong Sun, Guotong Xie, and Zhiyuan Liu. ChatMol: Interactive Molecular Discovery with Natural Language. In *Bioinformatics*, 2024.
- [73] An Zhang, Yuxin Chen, Leheng Sheng, Xiang Wang, and Tat-Seng Chua. On Generative Agents in Recommendation. In *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR)*, 2024.
- [74] Jiayi Zhang, Jinyu Xiang, Zhaoyang Yu, Fengwei Teng, Xiong-Hui Chen, Jiaqi Chen, Mingchen Zhuge, Xin Cheng, Sirui Hong, Jinlin Wang, Bingnan Zheng, Bang Liu, Yuyu Luo, and Chenglin Wu. AFlow: Automating Agentic Workflow Generation. In *The Thirteenth International Conference on Learning Representations (ICLR)*, 2025.
- [75] Andy Zhou, Kai Yan, Michal Shlapentokh-Rothman, Haohan Wang, and Yu-Xiong Wang. Language agent tree search unifies reasoning, acting, and planning in language models. In *Proceedings of the 41st International Conference on Machine Learning (ICML)*, 2024.
- [76] Shuyan Zhou, Frank F. Xu, Hao Zhu, Xuhui Zhou, Robert Lo, Abishek Sridhar, Xianyi Cheng, Tianyue Ou, Yonatan Bisk, Daniel Fried, Uri Alon, and Graham Neubig. WebArena: A Realistic Web Environment for Building Autonomous Agents. In *arXiv:2307.13854*, 2024.
- [77] Wangchunshu Zhou, Yuchen Eleanor Jiang, Long Li, Jialong Wu, Tiannan Wang, Shi Qiu, Jintian Zhang, Jing Chen, Ruipu Wu, Shuai Wang, Shiding Zhu, Jiyu Chen, Wentao Zhang, Xiangru Tang, Ningyu Zhang, Huajun Chen, Peng Cui, and Mrinmaya Sachan. Agents: An Open-source Framework for Autonomous Language Agents. In *arXiv:2309.07870*, 2023.
- [78] Yuchen Zhuang, Xiang Chen, Tong Yu, Saayan Mitra, Victor Bursztyn, Ryan A. Rossi, Somdeb Sarkhel, and Chao Zhang. ToolChain*: Efficient Action Space Navigation in Large Language Models with A* Search. In *The Twelfth International Conference on Learning Representations* (*ICLR*), 2024.
- [79] Yuchen Zhuang, Yue Yu, Kuan Wang, Haotian Sun, and Chao Zhang. ToolQA: A Dataset for LLM Question Answering with External Tools. In *Thirty-seventh Conference on Neural Information Processing Systems Datasets and Benchmarks Track (NeurIPS)*, 2023.

[80] Mingchen Zhuge, Wenyi Wang, Louis Kirsch, Francesco Faccio, Dmitrii Khizbullin, and Jürgen Schmidhuber. GPTSwarm: Language Agents as Optimizable Graphs. In Forty-first International Conference on Machine Learning (ICML), 2024.