behavr table

id


XXX...XX


XXX...XX V

XXX...XX

machine

Metadata

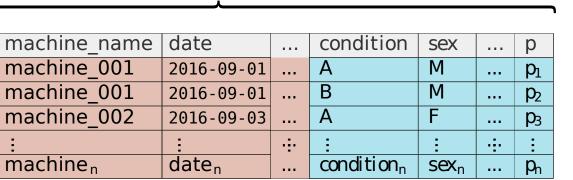

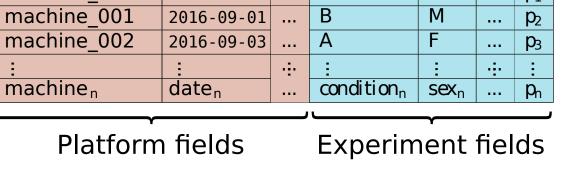

Data

. . .

...

.;.

•

.:.

•

•

•

• .:.

 $q_{1,1}$


 $q_{1,2}$

 $q_{1,3}$

 $q_{3,1}$

 $q_{3,2}$

 $q_{3,3}$



0

xxx...xx|z|2

xxx...xx|z|

XXX...XX Z