

# Human Connectomics: Visualization Techniques and Methodologies

Giorgio Conte

Creative Coding Research Group  
Department of Computer Science  
University of Illinois at Chicago

February 17, 2015

## Abstract

Studies in understanding how brain's regions are inter-connected is recently becoming more and more popular. Thanks to the advances in non-invasive neuroimaging technologies, such as functional Magnetic Resonance Imaging (fMRI) and Diffusion Tensor Imaging (DTI), large dataset can also be collected from living subjects. Thus, the need of visual analytic tools able to deal with this data is becoming a priority for neuroscientists. This work aims at surveying the main visualization techniques and methodologies already present in the academic literature as well as the new trends are taking place in this field. The main phenomena we are witnessing is a transition from stand-alone, local 2D visualization tools to more flexible and cross-platforms web-based applications which exploit 3D rendering.

## 1 Introduction

Being able to deeply understand how the brain is connected is one of the main challenges in the last years among neuroscientists. With the advent and the refinement of new technologies like *functional Magnetic Resonance Imaging* (fMRI) and *Diffusion Tensor Imaging*, also addressed as *diffusion Magnetic Resonance Imaging* (diffusion MRI), doctors are able to collect and derive data about how the regions of the brain are connected. Very frequently the map of neural connections is addressed as CONNECTOME.

Visualizing these data in an effective way would allow people to navigate and ex-

plore all the wired connections that are in the brain. Moreover, thanks to this kind of visualizations is possible to understand better what differences there are between healthy subjects and other people who suffer from a wide range of neuropsychiatric illnesses like bipolar, body dysmorphic disorder, schizophrenia, Alzheimer's disease and late-life depression.

Many visualization tools have been proposed in the academic literature, however the vast majority of them perform 2D visualizations and, since this research field is quite novel, there is still room for improvement. The aim of this work is to report and survey the visualizations tools already present in the academic literature as well as

to outline which the new trends for the near future are.

The paper is structured as follows. In section 2 there is a more detailed introduction about the human Connectome. Then, a detailed list of common tasks is presented in section 3, while in section 4 I describe accurately the most interesting tools already present in the literature. In section 5 future works and some possibly newer trends are reported. Finally, in section 6 some conclusions are drawn.

## 2 Domain

The human brain’s connectome has been always considered by neuroscientists a very interesting and challenging topic. However, it is only in the last few ten years, when more powerful and more accurate technologies took place firmly in the research area, that more detailed studies have been conducted. Moreover, thanks to new technologies it is now possible to get data from living human subject, that is why they are also addressed as *in vivo* techniques. In fact, through very advanced procedures and algorithms, experts can collect data about the functional and structural connectivity of the brain *in vivo*. As it is reported by Behrend and Sporns in [5], among all the methodologies there are two main approaches to collect data and they rely on very different principles.

On the one hand there is *diffusion tractography* that infers the path of neuronal axons as they go across the brain’s white matter by the measure of the water molecules in and around the axons, on the other hand *resting-state functional MRI* measures the fluctuation in the *blood-oxygenation-level-dependent* signal in brain’s grey matter regions. More in details, *fMRI* does not measure directly the connections, but its aim is to find patterns and it expresses connectivity as static dependencies in the grey

matter activity. Although the meanings of the dataset collected are quite different, what the neuroscientists can obtain is a parcelation of the brain into smaller sub-regions as well as the strength of the connections, whether structural or functional, that link together brain’s regions. So, going to an higher level of abstraction, the entire Connectome could be seen as a very dense and highly connected graph, where nodes correspond to neural elements (brain’s regions) and edges define their interconnections. Bullmore and Sporns in [6] were the first authors that consider the human Connectome as a graph and in turns Rubinov and Sporns in [16] described and applied many graph-based metrics to the Connectome. Since, as aforementioned, the networks obtained are highly dense, the main challenge should be addressed is the task of “creating intuitive, informative and candid images” as it is highlighted by Margulies et al. in [11]

## 3 Main Tasks

One of the worse mistake that can be done when designing a visual analytics tool is the willingness of addressing a spread set of tasks. So that is why is important to clearly understand and then state what the main tasks in a given research area are. This activity it is not as simple as it might seem at a first glance. So, in this section I am going to describe as clearly as possible the main goals neuroscientist would like to achieve using a human connectome visualization tool.

Due to the high complexity of the brain network, *exploration* is the the most important task. Although some readers may argue that the exploration task is too simple, quite obvious and too general, in my opinion, it is not so. In fact, especially when the field is quite novel and with many

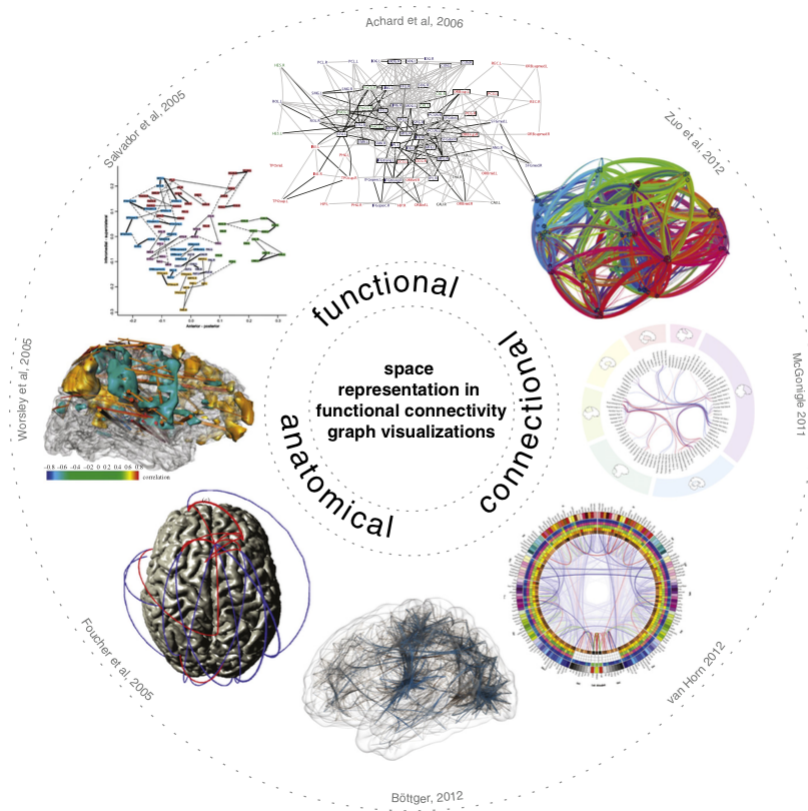


Figure 1: Images taken from [11]

uncleared aspects, as it is the one we are talking about, it is extremely relevant to allow to users a *visualization flexibility*. Flexibility should be achieved in terms of level of abstraction, perspective and data that can be visualized.

*Comparison* is the other task that should be achieved by a visual analytics tool. For example, neuroscientists are usually interested in comparing healthy and diseased subjects, so that it is possible to understand if there are different connectivity patterns in the two brain networks, which connections are missing and which are still active. For example, in studies like the one proposed by Bassett et al. in [4],

the authors show there are topological and connectivity differences in schizophrenic patients with respect to healthy subjects. Other works like [18] have shown that in Alzheimer’s disease some functional connectivity properties of healthy people are not present in diseased patients. So, having an easy-to-use visualization tool could accelerate this process and could hopefully allow more interesting discoveries in the field.

## 4 Survey

Many visualization tools have been presented in the academic literature, but, before describing them more in details, I would like to report the interesting taxon-

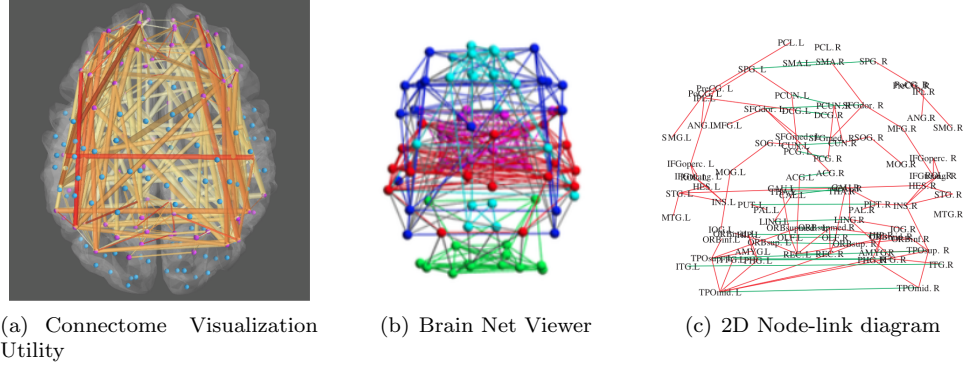


Figure 2: This figure groups the different views of node-link diagrams. In subfigure (a) there is the one provided by Connectome Visualization utility [10]. Subfigure (b) shows the visualization offered by Brain Net Viewer [20], while subfigure (c) presents the 2D flat view proposed in [17].

omy presented in [11] by Margulies et al. In fact, they identified three main categories of visualization methodologies for the human Connectome and they are as follows: *functional*, *anatomical* and *connectional*. The reasons beyond this taxonomy and its meaning are quite straightforward, especially if we also remind what has been stated in the last section about the main tasks. In fact, visualization tools are clustered according to the common task they would like to face. Figure 1 gives a clearer overview of the cited taxonomy. In the following subsections I will focus my attention only on the first two categories, namely, on connectional and functional methodologies. In these categories there are three main approaches to represent the connectome and they are as follows: *node-link diagrams*, *matrix-based diagrams* and *circle views*.

#### 4.1 Node-link diagrams

Node-link diagrams are one of the most used approach to represent graphs in general, and in particular to visualize the Connectome. The node-link diagrams could be based on 3D rendering or in a simple and

flat 2D views. Recent visualization softwares like *Connectome Visualization Utility* [10] and *Brain Net Viewer* [20] provide this kind of 3D visualization. Usually, the dimension of the nodes is binded to some graph-based metrics, like nodal strength or nodal degree, while the weight of the edges is displayed using different colors or changing diameter of the cylindrical link. Older studies on functional brain connectivity like the one proposed by Salvador et al. in [17], instead, show a plain flat 2D node-link diagrams. Moreover, in this particular case, classical circular nodes are replaced by the name of the regions they stand for.

The main advantage of this approach is that it is possible to have a good overview of the entire graph and it is quite easy to understand which nodes are indirectly connected. With the usage of 3D rendering is also possible to give a spatial information and the tools locate the nodes following the real anatomical position. However, when the graph and the number of edges increase, the cleanness of the visualization is affected and the view becomes less intuitive and less understandable. Nonetheless, despite the usage of different dimensions to display the weight of the edges, their repre-

sentation is not the most intuitive one. Figures 2(a), 2(b) and 2(c) collect the different visualizations offered by the three different tools above mentioned.

## 4.2 Matrix-based diagrams

The other well-known approach is the *matrix-based* representation.

## 4.3 Circle Views

An quite innovative representation is the one very often addressed as *circle view* or *connectograms*. This kind of view was firstly introduced by Irimia et al. in [9] in 2012. A circle view has been also re-proposed in the Connectome Visualization Utility [10] two years later. With circle view, all the regions are displayed along a circle and the interconnections are represented as edges that go from region to another inside the circle. Quite effective is the usage of transparency to represent the weight of the edges in [9]. The transparency reduce the visual disorder and attract the user attention only on strong links, while weak edges fade into the background smoothly. The connectograms, showed in figure 3(a), contains six nested circles. The outermost circle represents the cortical parcellations, while the five innermost circles are heat maps which display five different structural measures associated with the corresponding regions.

The Connectome Visualization Utility allows two ways of organizing the position of the regions. In fact, it is possible to order them according to their names (alphabetically) or according to the real position in the brain as it is shown in figure 3(b).

This approach is quite effective and clear even with the increasing of the number of edges and nodes. Still, the heat maps can be ineffective especially when the number of nodes increase. The main drawback of this technique is the static nature of the visual-

ization. At the moment I am writing, there are no implemented examples of dynamic connectograms.

## 4.4 Weighted Graph Comparison

In 2013, a very intriguing study has been introduced by Alper et al. in [3]. The problem they addressed was about to find the right visualization when comparing weighted graphs. Although this is a wide issue related to graph drawing in general, the authors focus their attention on the graphs derived from the connectome studies. To achieve the goal briefly described before, the authors proposed two main techniques and they are as follows: matrix diagram or node-link diagram. With the matrix diagram in each cell it is represent the weight of the link using a brightness encoding. Figure 7 shows better than words the prototypes proposed by the team. The other methodology is the node-link diagram in which all the edges are drawn. If an edge is present in both of the adjacency matrices, there are two edges as well and the higher weight has a bright color. When just one edge is drawn, it simply means that connections is missing in one of the two graphs. The paper reports also a very strong validation process that involved 11 participants. They measured many different metrics and the results are quite interesting. Conversely to what people may think, the matrix diagrams revealed to be more effective than node-link diagrams are. That is a very important and novel result, since it is the first comparison tool I have seen in the literature and the result is not intuitive. It would be interesting to go further in this study and try to have a study with more participants.

The most impressive design decision is that a 3D visualization has been excluded a priori since the authors claim that "the clutter and complexity of the visual encoding in these spatial/volumetric representa-

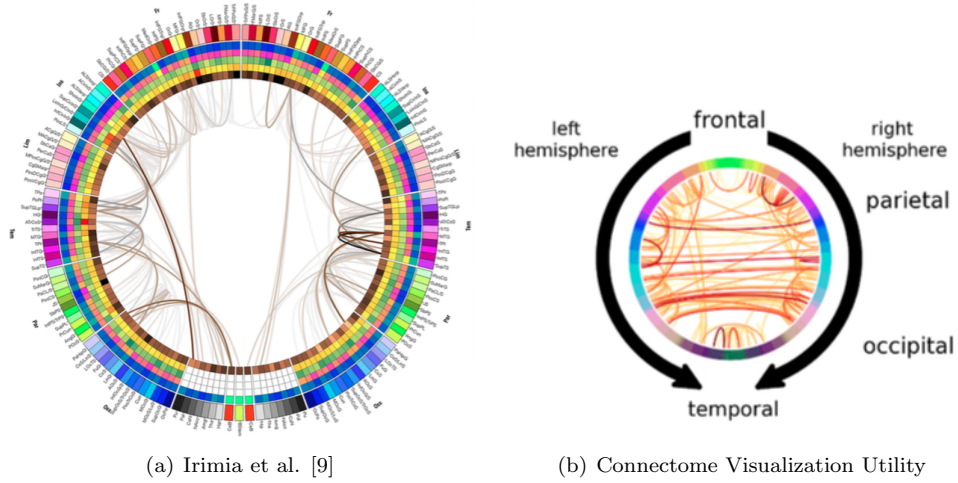


Figure 3: This figure put in comparison the two *connectograms* described in sections 4.3

tions makes it difficult to perform accurate weighted edge comparison tasks.” Moreover, writers state that the vast majority of neuroscientific task can be fulfilled using a 2D representation and that the third dimension could be misleading in the interpretation. This is a quite strong statement and follows the idea Tamara Munzner have about the third dimension presented in [13]. She claimed that the third dimension should be strongly motivated, because it is not true that having three dimensions is always better than having just two of them. Although the paper presents a strong validation process, it is not clear why the authors decided to use just synthetic data instead of real one, even if connectome data are easily available.

## 4.5 Tractography

Tractography is a technique to represent data collected from diffusion MRI, also addressed as Diffusion Tensor Imaging (DTI). DTI dataset contains measure about the motion of water molecules in brain tissues. Since the brain white matter is a fibrous structure, water molecules diffuse more in

the directions along the fibers rather than on the perpendicular dimension. This kind of movement is called *anisotropic*, in contrast with the *isotropic* diffusion of water molecules when they can freely move in the space. Thanks to this anisotropic movement it is possible to reconstruct the fiber presence and orientation. Then, using tractography is one of the most common way to go back to these informations. This reverse process is quite hard also because DTI dataset are multidimensional. In fact, when performing DTI it is possible only to see that good diffusion exists along the direction in which a gradient is applied. So if we want to know the diffusion in all directions, we should get many diffusion weighted images with gradients in different directions. In principle, “all directions” would mean every possible direction on a sphere, but in practice 12, 16, or 32 gradient directions (or more) are considered. DTI data contains by design some uncertainty, just because it is not possible to scan all the possible directions in a 3D space. However, considering all this unreliability would make a visualization quite hard. The need of a representation makes the researcher coin the word

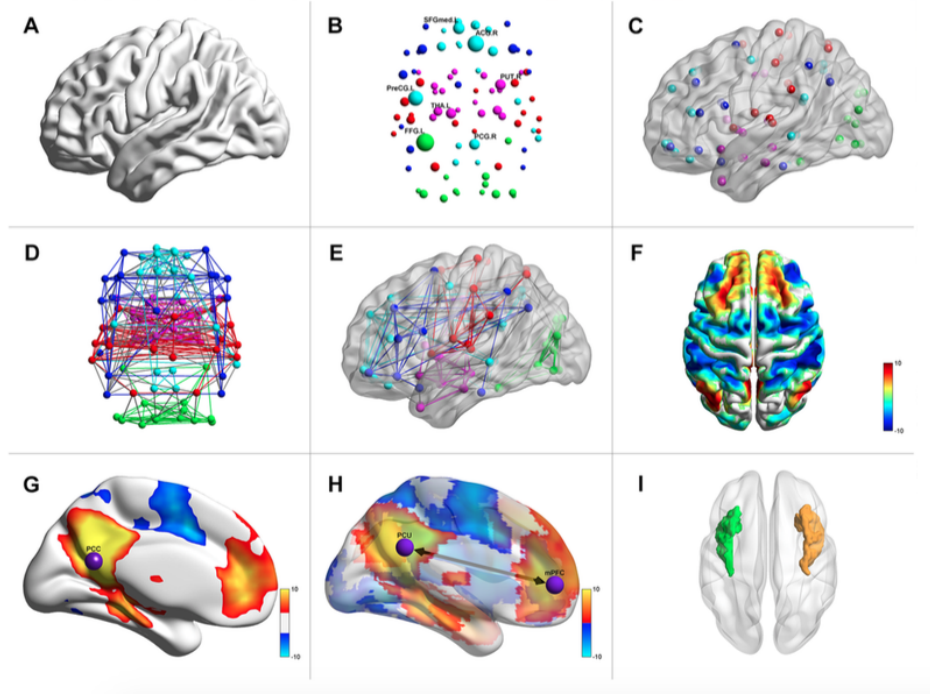


Figure 4: Some screenshots of the working tool. The combination of the three kinds of visualization make the tool very flexible.

*deterministic tractography*. Researcher just cleared any ambiguity by describing connections with a concrete tract [8], [12].

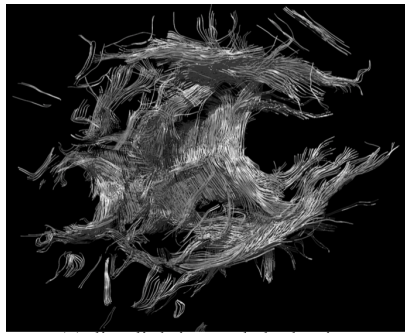


Figure 6: The hair-like structures tractography proposed by Peeters et al. in [14]

More recently with the emergence of computer graphics, new advanced method-

ologies following the same trend aforementioned came out. So, tracts have been represented with *tuboids*[15], *hair-like structures* [14] and *stylized line primitives* [19]. In 2012, a work written by Congote et al. proposed a web-based application to render tractography [7] with a real-time volume rendering technique.

As well as deterministic tractography has been the main topic in different academic works, many researchers focused their attention to find an effective way to deal with the intrinsic uncertainty embedded in DTI. Many visualizations, able to englobe the variability of the data, and error-reduction techniques have been proposed, but this topic is out of the scope of this work.






Figure 5: Images taken from [3]

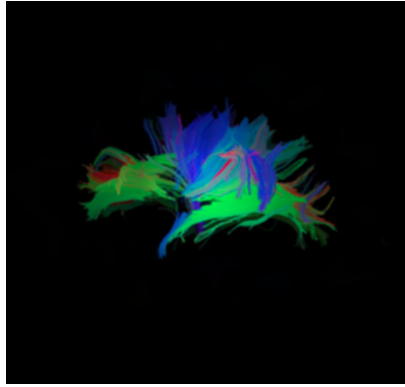


Figure 7: Tractography displayed using real time volume rendering approach proposed by Congote et al. in [7]

## 5 Future Works and New Trends

Although all the methodologies proposed are quite interesting and the results may have a very positive impact on experts exploration, still all of these visual analytic tools are affected by a lack of portability between platforms and the methods used are not usually described in a replicable manner. The applications have been written with a variety of languages that go from Matlab to Python, so they can be considered *stand-alone* and *local* applications. However, in the last few years the clear trend in computer science is to move all the services to the web. There are many reasons why we are witnessing this process. Among them I would like to remind the flexibility,

cross-platform native feature and, not least, the higher and higher computational power that newer browser can support. This field is also shyly moving towards this kind of technology and web-based application. To this regard, the javascript library *Xtoolkit* [2] has been created to drive this natural flow. XToolkit is a framework its aim is to allow Javascript web-based visualization tools and it claims to be a "lightweight and fast" WebGL framework for scientific visualization. Apart from wrapping many WebGL functions, the main contribution offered by this tool is the possibility to read and load standard neuroscience file extensions. On the top of this framework, tools like Brain Browser [1] have been created.

At the same time, the human connectomics visualization is moving from 2D space to a 3D one. Although there are no well-defined examples or complete applications that use 3D modeling, still this transition seems to be the right path to follow. In fact, the last tools I have introduced before not only are changing the technology, but also are trying to use the potentiality of 3D to render in a more effective way the human brain Connectome. Still, those example are primitive, the interaction is limited and, at the moment, can not be compared to more established and complex visual analytics tools like the ones described in section 4.



## 6 Conclusions

## References

- [1] Brain browser. <https://brainbrowser.cbrain.mcgill.ca/>.
- [2] X toolkit. <https://github.com/xtk/X>.
- [3] Basak Alper, Benjamin Bach, Nathalie Henry Riche, Tobias Isenberg, and Jean-Daniel Fekete. Weighted graph comparison techniques for brain connectivity analysis. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, pages 483–492. ACM, 2013.
- [4] Danielle S Bassett, Edward Bullmore, Beth A Verchinski, Venkata S Mattay, Daniel R Weinberger, and Andreas Meyer-Lindenberg. Hierarchical organization of human cortical networks in health and schizophrenia. *The Journal of Neuroscience*, 28(37):9239–9248, 2008.
- [5] Timothy EJ Behrens and Olaf Sporns. Human connectomics. *Current opinion in neurobiology*, 22(1):144–153, 2012.
- [6] Ed Bullmore and Olaf Sporns. Complex brain networks: graph theoretical analysis of structural and functional systems. *Nature Reviews Neuroscience*, 10(3):186–198, 2009.
- [7] John Congote, Esther Novo, Luis Kabongo, Dan Ginsburg, Stephan Gerhard, Rudolph Pienaar, and Oscar E Ruiz. Real-time volume rendering and tractography visualization on the web. 2012.
- [8] Thomas E Conturo, Nicolas F Lori, Thomas S Cull, Erbil Akbudak, Abraham Z Snyder, Joshua S Shimony, Robert C McKinstry, Harold Burton, and Marcus E Raichle. Tracking neuronal fiber pathways in the living human brain. *Proceedings of the National Academy of Sciences*, 96(18):10422–10427, 1999.
- [9] Andrei Irimia, Micah C Chambers, Carinna M Torgerson, Maria Filippou, David A Hovda, Jeffry R Alger, Guido Gerig, Arthur W Toga, Paul M Vespa, Ron Kikinis, et al. Patient-tailored connectomics visualization for the assessment of white matter atrophy in traumatic brain injury. *Frontiers in neurology*, 3, 2012.
- [10] Roan A. LaPlante, Linda Douw, Wei Tang, and Steven M. Stuffebeam. The connectome visualization utility: Software for visualization of human brain networks. *PLoS ONE*, 9(12):e113838, 12 2014.
- [11] Daniel S Margulies, Joachim Böttger, Aimi Watanabe, and Krzysztof J Gorgolewski. Visualizing the human connectome. *NeuroImage*, 80:445–461, 2013.
- [12] Susumu Mori, Barbara J Crain, VP Chacko, and Peter Van Zijl. Three-dimensional tracking of axonal projections in the brain by magnetic resonance imaging. *Annals of neurology*, 45(2):265–269, 1999.
- [13] Tamara Munzner. Process and pitfalls in writing information visualization research papers. In *Information visualization*, pages 134–153. Springer, 2008.
- [14] THJM Peeters, A Vilanova, G Strijkers, and BM ter Haar Romeny. Visualization of the fibrous structure of the heart. In *Vision, modelling and visualization*, pages 309–316, 2006.
- [15] Vid Petrovic, James Fallon, and Falko Kuester. Visualizing whole-brain dti tractography with gpu-based tuboids

- and lod management. *Visualization and Computer Graphics, IEEE Transactions on*, 13(6):1488–1495, 2007.
- [16] Mikail Rubinov and Olaf Sporns. Complex network measures of brain connectivity: uses and interpretations. *Neuroimage*, 52(3):1059–1069, 2010.
- [17] Raymond Salvador, John Suckling, Christian Schwarzbauer, and Ed Bullmore. Undirected graphs of frequency-dependent functional connectivity in whole brain networks. *Philosophical Transactions of the Royal Society B: Biological Sciences*, 360(1457):937–946, 2005.
- [18] Ernesto J Sanz-Arigita, Menno M Schoonheim, Jessica S Damoiseaux, Serge ARB Rombouts, Erik Maris, Frederik Barkhof, Philip Scheltens, and Cornelis J Stam. Loss of ‘small-world’ networks in alzheimer’s disease: graph analysis of fmri resting-state functional connectivity. *PloS one*, 5(11):e13788, 2010.
- [19] Carsten Stoll, Stefan Gumhold, and H-P Seidel. Visualization with stylized line primitives. In *Visualization, 2005. VIS 05. IEEE*, pages 695–702. IEEE, 2005.
- [20] Mingrui Xia, Jinhui Wang, and Yong He. Brainnet viewer: a network visualization tool for human brain connectomics. *PloS one*, 8(7):e68910, 2013.