



Engineering

An Intro to Git and GitHub for Beginners (Tutorial)

HubSpot Product Team

on DEC 3, 2020



New to git? Follow the steps below to get comfortable making changes to the code base, opening up a pull request (PR), and merging code into the primary branch. Any important git and GitHub terms are in bold with links to the official git reference materials.



Step 0: Install git and create a GitHub account

The first two things you'll want to do are install git and create a free GitHub account.

Follow the instructions [here](#) to install git (if it's not already installed). Note that for this tutorial we will be using git on the command line only. While there are some great git GUIs (graphical user interfaces), I think it's easier to learn git using git-specific commands first and then to try out a git GUI once you're more comfortable with the command. A note: 95% of other online git resources and discussions will also be for the command-line interface.

Once you've done that, create a GitHub account [here](#).

Git and GitHub

A quick aside: git and GitHub are **not** the same thing. Git is an open-source, version control tool created in 2005 by developers working on the Linux operating system; GitHub is a company founded in 2008 that makes tools which integrate with git. You do not need GitHub to use git, but you cannot use GitHub without using git. There are many other alternatives to GitHub, such as GitLab, BitBucket, and "host-your-own" solutions such as gogs



and gittea. All of these are referred to in git-speak as “remotes”, and all are completely optional. You do not need to use a remote to use git, but it will make sharing your code with others easier.

Step 1: Create a local git repository

When creating a new project on your local machine using git, you'll first create a new [repository](#) (or often, 'repo', for short).

To use git we'll be using the terminal. If you don't have much experience with the terminal and basic commands, [check out this tutorial](#) (If you don't want/ need a short history lesson, skip to step three.)

To begin, open up a terminal and move to where you want to place the project on your local machine using the `cd` (change directory) command. For example, if you have a 'projects' folder on your desktop, you'd do something like:

```
mnelson:Desktop mnelson$ cd ~/Desktop
mnelson:Desktop mnelson$ mkdir myproject
mnelson:Desktop mnelson$ cd myproject/
```

terminalcd.md hosted with ♥ by **GitHub**

[view raw](#)

To initialize a git repository in the root of the folder, run the [git init](#)

command:

```
mnelson:myproject mnelson$ git init
Initialized empty Git repository in /Users/mnelson/Desktop/myproject/.git/
```

gitinit.md hosted with ♥ by **GitHub**

[view raw](#)

Step 2: Add a new file to the repo

Go ahead and add a new file to the project, using any text editor you like or running a [touch](#) command. `touch newfile.txt` just creates and saves a blank file named `newfile.txt`.

Once you've added or modified files in a folder containing a git repo, git will notice that the file exists inside the repo. But, git won't track the file unless you explicitly tell it to. Git only saves/manages changes to files that it *tracks*, so we'll need to send a command to confirm that yes, we want git to track our new file.

```
mnelson:myproject mnelson$ touch mnelson.txt
mnelson:myproject mnelson$ ls
mnelson.txt
```

addfile.md hosted with ♥ by **GitHub**

[view raw](#)

After creating the new file, you can use the [git status](#) command to

see which files git knows exist.

```
mnelson:myproject mnelson$ git status
On branch master

Initial commit

Untracked files:
  (use "git add <file>..." to include in what will be committed)

    mnelson.txt

nothing added to commit but untracked files present (use "git add" to track)
```

gitstatus.md hosted with ♥ by **GitHub**

[view raw](#)

What this basically says is, "Hey, we noticed you created a new file called mnelson.txt, but unless you use the 'git add' command we aren't going to do anything with it."

An interlude: The staging environment, the commit, and you

One of the most confusing parts when you're first learning git is the concept of the staging environment and how it relates to a commit.

A **commit** is a record of what changes you have made since the last time you made a commit. Essentially, you make changes to your repo (for example, adding a file or modifying one) and then



tell git to put those changes into a commit.

Commits make up the essence of your project and allow you to jump to the state of a project at any other commit.

So, how do you tell git which files to put into a commit? This is where the [staging environment or index](#) come in. As seen in Step 2, when you make changes to your repo, git notices that a file has changed but won't do anything with it (like adding it in a commit).

To add a file to a commit, you first need to add it to the staging environment. To do this, you can use the [git add](#) <filename> command (see Step 3 below).

Once you've used the git add command to add all the files you want to the staging environment, you can then tell git to package them into a commit using the [git commit](#) command.

Note: The staging environment, also called 'staging', is the new preferred term for this, but you can also see it referred to as the 'index'.

Step 3: Add a file to the staging environment

Add a file to the staging environment using the git add command.



If you rerun the `git status` command, you'll see that git has added the file to the staging environment (notice the "Changes to be committed" line).

```
mnelson:myproject mnelson$ git status
On branch master

Initial commit

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)

    new file:   mnelson.txt
```

`addtostaging.md` hosted with ♥ by [GitHub](#)

[view raw](#)

To reiterate, the file has **not** yet been added to a commit, but it's about to be.

Step 4: Create a commit

It's time to create your first commit!

Run the command `git commit -m "Your message about the commit"`

```
mnelson:myproject mnelson$ git commit -m "This is my first commit!"
[master (root-commit) b345d9a] This is my first commit!
1 file changed, 1 insertion(+)
create mode 100644 mnelson.txt
```

commit.md hosted with ♥ by **GitHub**

[view raw](#)

The message at the end of the commit should be something related to what the commit contains - maybe it's a new feature, maybe it's a bug fix, maybe it's just fixing a typo. Don't put a message like "asdfadsf" or "foobar". That makes the other people who see your commit sad. Very, very, sad. Commits live forever in a repository (technically you *can* delete them if you really, really need to but it's messy), so if you leave a clear explanation of your changes it can be extremely helpful for future programmers (perhaps future you!) who are trying to figure out why some change was made years later.

Step 5: Create a new branch

Now that you've made a new commit, let's try something a little more advanced.

Say you want to make a new feature but are worried about making changes to the main project while developing the feature. This is where [git branches](#) come in.



Branches allow you to move back and forth between 'states' of a project. Official git docs describe branches this way: 'A branch in Git is simply a lightweight movable pointer to one of these commits.' For instance, if you want to add a new page to your website you can create a new branch just for that page without affecting the main part of the project. Once you're done with the page, you can [merge](#) your changes from your branch into the primary branch. When you create a new branch, Git keeps track of which commit your branch 'branched' off of, so it knows the history behind all the files.

Let's say you are on the primary branch and want to create a new branch to develop your web page. Here's what you'll do: Run [git checkout -b <my branch name>](#). This command will automatically create a new branch and then 'check you out' on it, meaning git will move you to that branch, off of the primary branch.

After running the above command, you can use the [git branch](#) command to confirm that your branch was created:

```
mnelson:myproject mnelson$ git branch
master
* my-new-branch
```

gitbranch.md hosted with ♥ by **GitHub**

[view raw](#)

The branch name with the asterisk next to it indicates which branch

you're on at that given time.

A note on branch names

By default, every git repository's first branch is named ``master`` (and is typically used as the primary branch in the project). As part of the tech industry's general anti-racism work, some groups have begun to use alternate names for the default branch (we are using "primary" in this tutorial, for example). In other documentation and discussions, you may see "master", or other terms, used to refer to the primary branch. Regardless of the name, just keep in mind that nearly every repository has a primary branch that can be thought of as the official version of the repository. If it's a website, then the primary branch is the version that users see. If it's an application, then the primary branch is the version that users download. This isn't *technically* necessary (git doesn't treat any branches differently from other branches), but it's how git is traditionally used in a project.

If you are curious about the decision to use different default branch names, GitHub has an explanation of *their* change here:

<https://github.com/github/renaming>

Now, if you switch back to the primary branch and make some more commits, your new branch won't see any of those changes




until you [merge](#) those changes onto your new branch.

Step 6: Create a new repository on GitHub

If you only want to keep track of your code locally, you don't need to use GitHub. But if you want to work with a team, you can use GitHub to collaboratively modify the project's code.

To create a new repo on GitHub, log in and go to the GitHub home page. You can find the “New repository” option under the “+” sign next to your profile picture, in the top right corner of the navbar:



After clicking the button, GitHub will ask you to name your repo and provide a brief description:

Create a new repository


A repository contains all project files, including the revision history. Already have a project repository elsewhere? [Import a repository.](#)

Owner * Repository name *

 dfryer1193 / newrepo 

Great repository names are short and memorable. Need inspiration? How about [jubilant-memory](#)?

Description (optional)

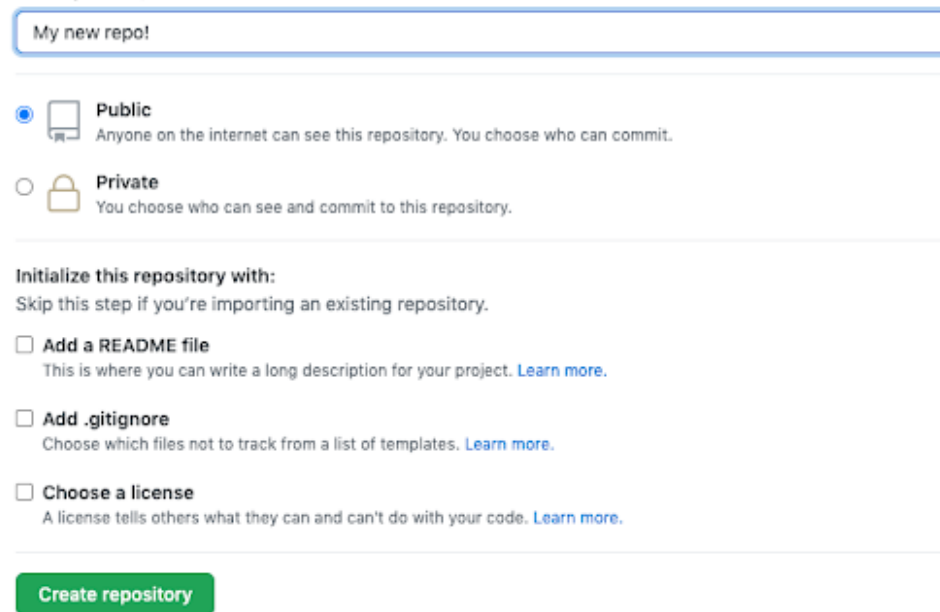

The screenshot shows the GitHub 'Create new repository' form. At the top is a text input field containing 'My new repo!'. Below this are two radio button options: 'Public' (selected) and 'Private'. The 'Public' option has a description: 'Anyone on the internet can see this repository. You choose who can commit.' The 'Private' option has a description: 'You choose who can see and commit to this repository.' Below these options is a section titled 'Initialize this repository with:' followed by the instruction 'Skip this step if you're importing an existing repository.' There are three checkboxes: 'Add a README file' (with a description and a 'Learn more' link), 'Add .gitignore' (with a description and a 'Learn more' link), and 'Choose a license' (with a description and a 'Learn more' link'). At the bottom is a green button labeled 'Create repository'.

When you're done filling out the information, press the 'Create repository' button to make your new repo.

GitHub will ask if you want to create a new repo from scratch or if you want to add a repo you have created locally. In this case, since we've already created a new repo locally, we want to push that onto GitHub so follow the '...or push an existing repository from the command line' section:

```
mnelson:myproject mnelson$ git remote add origin https://github.com/cubeton/mnelson:myproject mnelson$ git push -u origin master
Counting objects: 3, done.
Writing objects: 100% (3/3), 263 bytes | 0 bytes/s, done.
Total 3 (delta 0), reused 0 (delta 0)
To https://github.com/cubeton/mynewrepository.git
```

```
* [new branch]      master -> master  
Branch master set up to track remote branch master from origin.
```

addgithub.md hosted with ♥ by **GitHub**

[view raw](#)

(You'll want to change the URL in the first command line to what GitHub lists in this section since your GitHub username and repo name are different.)

Step 7: Push a branch to GitHub

Now we'll push the commit in your branch to your new GitHub repo. This allows other people to see the changes you've made. If they're approved by the repository's owner, the changes can then be merged into the primary branch.

To push changes onto a new branch on GitHub, you'll want to run [git push](#) origin yourbranchname. GitHub will automatically create the branch for you on the remote repository:

```
mnelson:myproject mnelson$ git push origin my-new-branch  
Counting objects: 3, done.  
Delta compression using up to 8 threads.  
Compressing objects: 100% (2/2), done.  
Writing objects: 100% (3/3), 313 bytes | 0 bytes/s, done.  
Total 3 (delta 0), reused 0 (delta 0)  
To https://github.com/cubeton/mynewrepository.git  
* [new branch]      my-new-branch -> my-new-branch
```




addnewbranchgithub.md hosted with ❤ by GitHub

[view raw](#)

You might be wondering what that "origin" word means in the command above. What happens is that when you clone a remote repository to your local machine, git creates an alias for you. In nearly all cases this alias is called "[origin](#)." It's essentially shorthand for the remote repository's URL. So, to push your changes to the remote repository, you could've used either the command: `git push git@github.com:git/git.yourbranchname` or `git push origin yourbranchname`

(If this is your first time using GitHub locally, it might prompt you to log in with your GitHub username and password.)

If you refresh the GitHub page, you'll see a note saying a branch with your name has just been pushed into the repository. You can also click the 'branches' link to see your branch listed there.



Now click the green button in the screenshot above. We're going to make a **pull request**!


Step 8: Create a pull request (PR)

A pull request (or PR) is a way to alert a repo's owners that you want to make some changes to their code. It allows them to review the code and make sure it looks good before putting your changes on the primary branch.

This is what the PR page looks like before you've submitted it:

Open a pull request

Create a new pull request by comparing changes across two branches. If you need to, you can also [compare across forks](#).

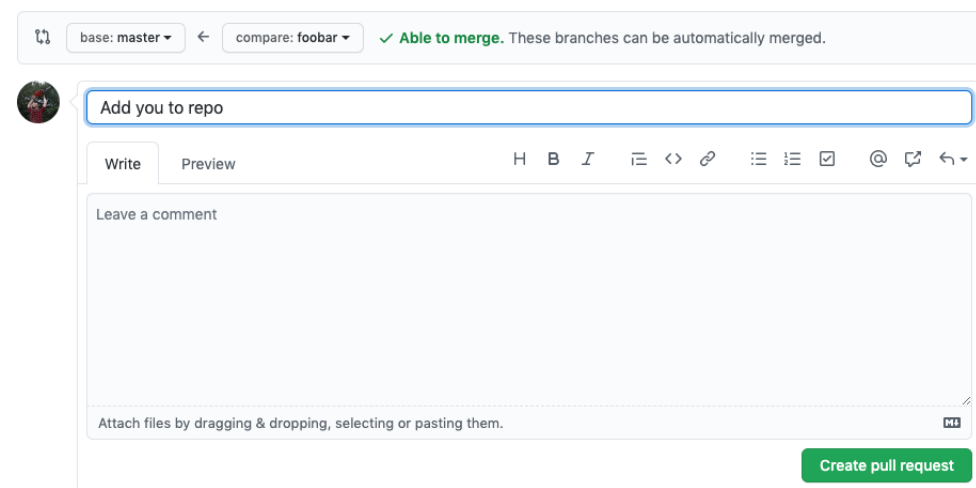


The screenshot shows the GitHub interface for creating a pull request. At the top, there are dropdown menus for 'base: master' and 'compare: foobar', followed by a green checkmark and the text 'Able to merge. These branches can be automatically merged.' Below this is a text input field labeled 'Add you to repo'. Underneath the input field are tabs for 'Write' and 'Preview', and a rich text editor toolbar with icons for bold, italic, link, etc. The main area is a large text box with the placeholder 'Leave a comment'. At the bottom right is a green button labeled 'Create pull request'.


And this is what it looks like once you've submitted the PR request:

Add you to repo #1

 Open dfryer1193 wants to merge 1 commit into `master` from `foobar` 

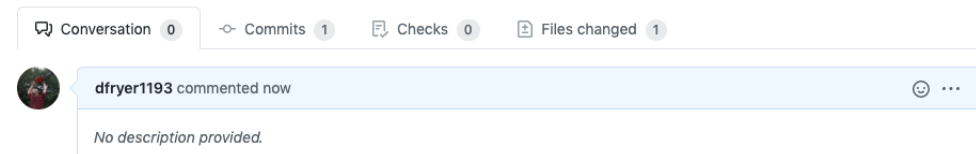

The screenshot shows the GitHub pull request page after submission. At the top, there are tabs for 'Conversation' (0), 'Commits' (1), 'Checks' (0), and 'Files changed' (1). Below the tabs is a comment box with the text 'dfryer1193 commented now' and a placeholder 'No description provided.'.

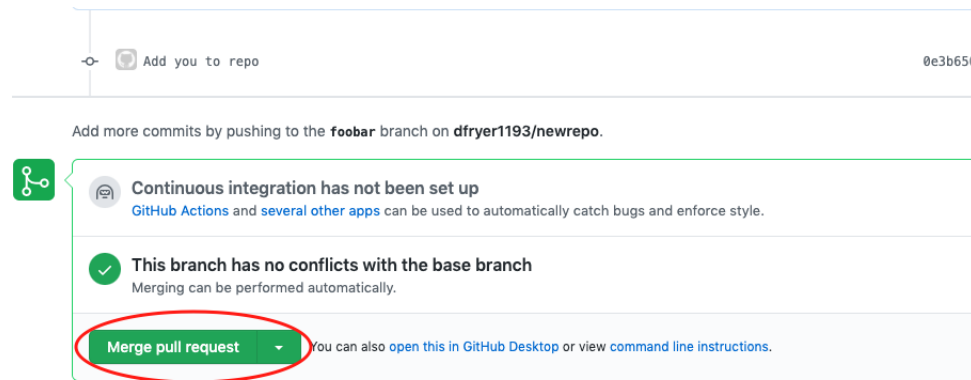

You might see a big green button at the bottom that says 'Merge pull request'. Clicking this means you'll merge your changes into the primary branch..

Sometimes you'll be a co-owner or the sole owner of a repo, in which case you may not need to create a PR to merge your changes. However, it's still a good idea to make one so you can keep a more complete history of your updates and to make sure you always create a new branch when making changes.


Step 9: Merge a PR

Go ahead and click the green 'Merge pull request' button. This will merge your changes into the primary branch.

Add you to repo #1


 Merged dfryer1193 merged 1 commit into master from foobar  now

 Conversation 0  Commits 1  Checks 0  Files changed 1

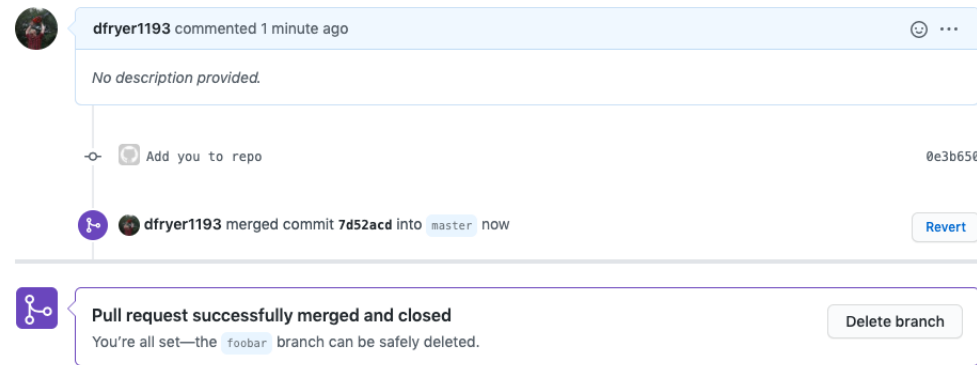



When you're done, I recommend deleting your branch (too many branches can become messy), so hit that grey 'Delete branch' button as well.

You can double check that your commits were merged by clicking on the 'Commits' link on the first page of your new repo.

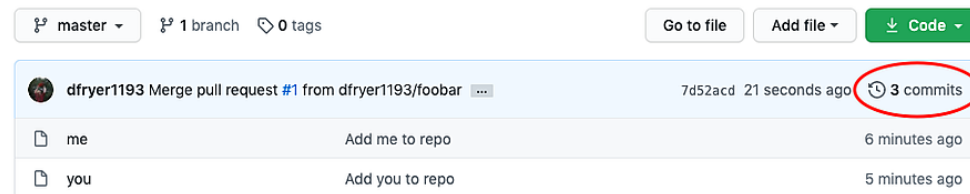

This will show you a list of all the commits in that branch. You can see the one I just merged right up top (Merge pull request #1).

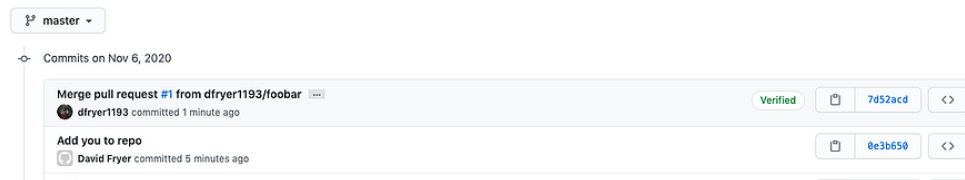

A screenshot of a GitHub commit message. It shows a commit by David Fryer, committed 7 minutes ago. The commit message is "Add me to repo".A screenshot of the GitHub commit details. It shows the commit hash "991fe69" and a link to the commit details.

You can also see the [hash code](#) of the commit on the right hand side. A hash code is a unique identifier for that specific commit. It's useful for referring to specific commits and when undoing changes (use the [git revert](#) <hash code number> command to backtrack).

Step 10: Get changes on GitHub back to your computer

Right now, the repo on GitHub looks a little different than what you have on your local machine. For example, the commit you made in your branch and merged into the primary branch doesn't exist in the primary branch on your local machine.

In order to get the most recent changes that you or others have merged on GitHub, use the `git pull origin master` command (when working on the primary branch). In most cases, this can be shortened to "git pull".

```
mnelson:myproject mnelson$ git pull origin master
remote: Counting objects: 1, done.
remote: Total 1 (delta 0), reused 0 (delta 0), pack-reused 0
Unpacking objects: 100% (1/1), done.
From https://github.com/cubeton/mynewrepository
* branch                master      -> FETCH_HEAD
   b345d9a..5381b7c      master      -> origin/master
Merge made by the 'recursive' strategy.
 mnelson.txt | 1 +
```

```
1 file changed, 1 insertion(+)
```

pulloriginmaster.md hosted with ♥ by **GitHub**

[view raw](#)

This shows you all the files that have changed and how they've changed.

Now we can use the [git log](#) command again to see all new commits.

(You may need to switch branches back to the primary branch. You can do that using the `git checkout master` command.)

```
mnelson:myproject mnelson$ git log
commit 3e270876db0e5fffd3e9bfc5edede89b64b83812c
Merge: 4f1cb17 5381b7c
Author: Meghan Nelson <mnelson@hubspot.com>
Date:   Fri Sep 11 17:48:11 2015 -0400

    Merge branch 'master' of https://github.com/cubeton/mynewrepository

commit 4f1cb1798b6e6890da797f98383e6337df577c2a
Author: Meghan Nelson <mnelson@hubspot.com>
Date:   Fri Sep 11 17:48:00 2015 -0400

    added a new file

commit 5381b7c53212ca92151c743b4ed7dde07d9be3ce
Merge: b345d9a 1e8dc08
Author: Meghan Nelson <meghan@meghan.net>
Date:   Fri Sep 11 17:43:22 2015 -0400

    Merge pull request #2 from cubeton/my-newbranch

    Added some more text to my file

commit 1e8dc0830b4db8c93efd80479ea886264768520c
Author: Meghan Nelson <mnelson@hubspot.com>
```

```
Date:    Fri Sep 11 17:06:05 2015 -0400
```

```
    Added some more text to my file
```

```
commit b345d9a25353037afdeaa9fcaf9f330effd157f1
```

```
Author: Meghan Nelson <mnelson@hubspot.com>
```

```
Date:    Thu Sep 10 17:42:15 2015 -0400
```

```
    This is my first commit!
```

gitlogaftermerge.md hosted with ♥ by **GitHub**

[view raw](#)

Step 11: Bask in your git glory

You've successfully made a PR and merged your code to the primary branch. Congratulations! If you'd like to dive deeper, check out these more advanced tutorials and resources:

- <https://training.github.com/>

Github's official git cheat sheets! Handy for remembering the everyday commands you'll use.

- <https://learngitbranching.js.org/>

Confused or intrigued by git's branch system? That just means you're human! It's one of the deepest parts of git, but also arguably the most powerful. Understanding the branch model gives you git superpowers, and this tutorial gives you a way to learn git branches in a visual, intuitive way.

- <https://git-school.github.io/visualizing-git>

Another tool for exploring git visually. This one is more of an



open-ended sandbox than learngitbranching.js.org

- <https://github.com/jlord/git-it-electron>

A desktop application that helps you learn git through challenges you have to solve. It has a series of levels, each requiring you to use git commands to arrive at a correct answer.

- <https://github.com/Gazler/githug>

If you liked git-it, Githug is another puzzle-based tutorial designed to give you a practical way of learning git.

I also recommend finding some time to work with your team on simulating a smaller group project like we did here. Have your team make a new folder with your team name, and add some files with text to it. Then, try pushing those changes to this remote repo. That way, your team can start making changes to files they didn't originally create and practice using the PR feature. And, use the git blame and git history tools on GitHub to get familiar with tracking which changes have been made in a file and who made those changes.

The more you use git, the more comfortable you'll... git with it. (I couldn't resist.)

**This post was originally published in October 2015 by Meghan Nelson, then a senior software engineer at HubSpot. It has since*



been updated by the HubSpot Product Team.

Interested in working for a product team that values autonomy and transparency? Check out our [open positions](#) and apply.

RECOMMENDED ARTICLES



Culture | Engineering

Video: What Is the HubSpot Coding Challenge?

Learn from Lorcan O'Neill (Staff Software Engineer at HubSpot Dublin), about the ins and outs of the HubSp...

HubSpot Product Team

on AUG 21, 2020

Engineering

A Beginner's Guide to Building Your First Personal Programming Project

Over six thousand. That's how many internship and co-op candidates we review every year for HubSpot's...

Nadia Atramli (She/Her)

on MAY 20, 2020

Engineering

Understanding Thread Dumps

Your application slows down suddenly or maybe it just stops doing anything. What do you do? What can you do?...

Jacob Schlather (He/Him)

on SEP 5, 2019



Join our subscribers

Sign up here and we'll keep you updated on the latest in product, UX, and engineering from HubSpot.

Subscribe to the newsletter

Careers

Our Story

Developer Blog



Copyright © 2022 HubSpot, Inc.

Legal Stuff

Privacy Policy

