

Codificación y programación



Ingeniero Giovanni Ortegón

- Doctor en tecnologías
- Coordinador de desarrollo
- Desarrollador
- Profesor universitario





Idiomas

Quien sabe más de 2 idiomas




```
h[b]); if (Pa.test(f)&&!$c.test(b)){c=h.left;if(g)
        (-sizing:border-box;bax-sizing:bord
dth="1px";Ea
                  parseFloat((m.getComputedStyle(d,
yle)Y.cssText="float:left;opacity:.5",k.opacity
on(){@amynull&&Ga()}return Ea}});d.swap=function(a,b,e
C}}}},cssNumber:{columnCount:!0,fillOpacity:!0,flexGrow
a ( | (c==null | c!==c)) {f=alammber | &&!d.cssNumber[i] | (c
  c){a=parseFloat(g);return c==true||d.isNumeric(a)
ter) | | "") ?0.01*parseFloat(RegExp.$1)+"":b?"1":"}, set:funct
function(){var a=ed();if(a!=null)if(a)delete this.get;
amy g!==void 0?d.style(a,b,g):d.css(a,b)},a,b,arguments.a
 link/><a href='/a'>a</a><input</pre>
       in b) | |b.set(this,c,"value")===void
                       $elected||h===e)&&(k.optDisabled
```

```
37
          @classmethod
          def from_settings(cls, setting
           def request_seen(self, request)s
                 if fp in self.fingerprints:
                self.fingerprints.add(fp)
                     self.file.write(fp + os.lineses)
                 if self.file:
              def request_fingerprint(self, request);
```


Idioma de las máquinas



https://www.y outube.com/ watch?v=MW SwMv5traQ

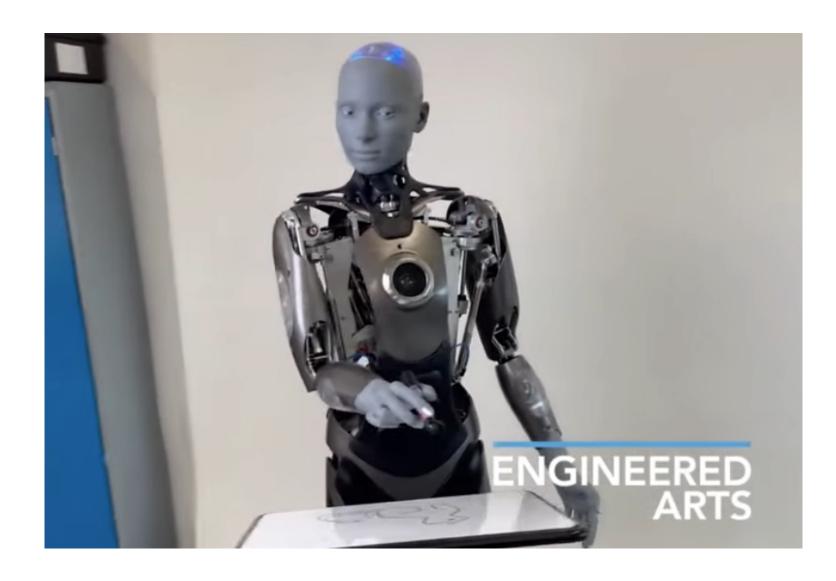


https://www.supernotariado.gov.co/





https://bard.google.com/chat

Ejemplos

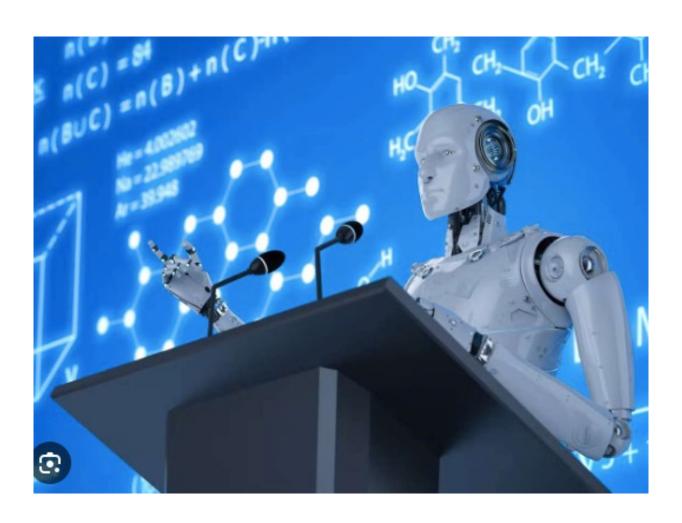

Ejemplos de codificación y programación

https://chart.googleapis.com/chart?chs=200x200&cht=qr&chco=1B1F2 3&choe=UTF-8&chld=L|0&chl=eca



https://www.w3schools.com/graphics/tryit.asp?filename=trysvg_polygon3



https://www.w3schools.com/graphics/svg_examples.asp

Ejemplos

- https://jsfiddle.net
- https://jsfiddle.net/codeandcircuit/6uoyvfs3/
- https://jsfiddle.net/216mfywx/2/
- https://jsfiddle.net/q76uzxwe/1/
- https://jsfiddle.net/ARTsinn/3cQvw/

