


REPORT PER DIRIGENTI

La vulnerability assessment sulla macchina Mesploitable con IP 192.168.26.122 ha riportato ben 14 vulnerabilità critiche.

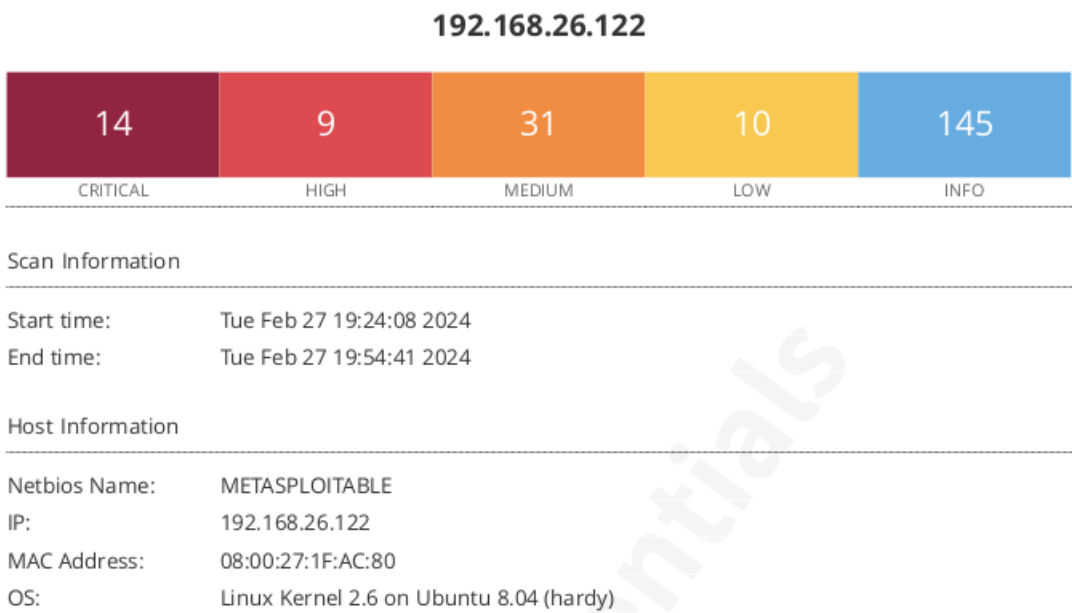

Di seguito verranno riportate soluzioni per ogni vulnerabilità critica

1 vulnerabilità

70728 - Apache PHP-CGI Remote Code Execution

Synopsis

The remote web server contains a version of PHP that allows arbitrary code execution.

Description

The PHP installation on the remote web server contains a flaw that could allow a remote attacker to pass command-line arguments as part of a query string to the PHP-CGI program. This could be abused to execute arbitrary code, reveal PHP source code, cause a system crash, etc.

Solution

Upgrade to PHP 5.3.13 / 5.4.3 or later.

Risk Factor

High

2 vulnerabilità

134862 - Apache Tomcat AJP Connector Request Injection (Ghostcat)

Synopsis

There is a vulnerable AJP connector listening on the remote host.

Description

A file read/inclusion vulnerability was found in AJP connector. A remote, unauthenticated attacker could exploit this vulnerability to read web application files from a vulnerable server. In instances where the vulnerable server allows file uploads, an attacker could upload malicious JavaServer Pages (JSP) code within a variety of file types and gain remote code execution (RCE).

Solution

Update the AJP configuration to require authorization and/or upgrade the Tomcat server to 7.0.100, 8.5.51, 9.0.31 or later.

Risk Factor

High

3 vulnerabilità

51988 - Bind Shell Backdoor Detection

Synopsis

The remote host may have been compromised.

Description

A shell is listening on the remote port without any authentication being required. An attacker may use it by connecting to the remote port and sending commands directly.

Solution

Verify if the remote host has been compromised, and reinstall the system if necessary.

Risk Factor

Critical

4 vulnerabilità

32314 - Debian OpenSSH/OpenSSL Package Random Number Generator Weakness

Synopsis

The remote SSH host keys are weak.

Description

The remote SSH host key has been generated on a Debian or Ubuntu system which contains a bug in the random number generator of its OpenSSL library.

The problem is due to a Debian packager removing nearly all sources of entropy in the remote version of OpenSSL.

An attacker can easily obtain the private part of the remote key and use this to set up decipher the remote session or set up a man in the middle attack.

Solution

Consider all cryptographic material generated on the remote host to be guessable. In particular, all SSH, SSL and OpenVPN key material should be re-generated.

Risk Factor

Critical

5 vulnerabilità

32321 - Debian OpenSSH/OpenSSL Package Random Number Generator Weakness (SSL check)

Synopsis

The remote SSL certificate uses a weak key.

Description

The remote x509 certificate on the remote SSL server has been generated on a Debian or Ubuntu system which contains a bug in the random number generator of its OpenSSL library.

The problem is due to a Debian packager removing nearly all sources of entropy in the remote version of OpenSSL.

An attacker can easily obtain the private part of the remote key and use this to decipher the remote session or set up a man in the middle attack.

Solution

Consider all cryptographic material generated on the remote host to be guessable. In particular, all SSH, SSL and OpenVPN key material should be re-generated.

Risk Factor

Critical

6 vulnerabilità

32321 - Debian OpenSSH/OpenSSL Package Random Number Generator Weakness (SSL check)

Synopsis

The remote SSL certificate uses a weak key.

Description

The remote x509 certificate on the remote SSL server has been generated on a Debian or Ubuntu system which contains a bug in the random number generator of its OpenSSL library.

The problem is due to a Debian packager removing nearly all sources of entropy in the remote version of OpenSSL.

An attacker can easily obtain the private part of the remote key and use this to decipher the remote session or set up a man in the middle attack.

Solution

Consider all cryptographic material generated on the remote host to be guessable. In particular, all SSH, SSL and OpenVPN key material should be re-generated.

Risk Factor

Critical

7 vulnerabilità

33447 - Multiple Vendor DNS Query ID Field Prediction Cache Poisoning

Synopsis

The remote name resolver (or the server it uses upstream) is affected by a DNS cache poisoning vulnerability.

Description

The remote DNS resolver does not use random ports when making queries to third-party DNS servers. An unauthenticated, remote attacker can exploit this to poison the remote DNS server, allowing the attacker to divert legitimate traffic to arbitrary sites.

Solution

Contact your DNS server vendor for a patch.

Risk Factor

High

8 vulnerabilità

11356 - NFS Exported Share Information Disclosure

Synopsis

It is possible to access NFS shares on the remote host.

Description

At least one of the NFS shares exported by the remote server could be mounted by the scanning host. An attacker may be able to leverage this to read (and possibly write) files on remote host.

Solution

Configure NFS on the remote host so that only authorized hosts can mount its remote shares.

Risk Factor

Critical

9 vulnerabilità

20007 - SSL Version 2 and 3 Protocol Detection

Synopsis

The remote service encrypts traffic using a protocol with known weaknesses.

Description

The remote service accepts connections encrypted using SSL 2.0 and/or SSL 3.0. These versions of SSL are affected by several cryptographic flaws, including:

- An insecure padding scheme with CBC ciphers.
- Insecure session renegotiation and resumption schemes.

An attacker can exploit these flaws to conduct man-in-the-middle attacks or to decrypt communications between the affected service and clients.

Although SSL/TLS has a secure means for choosing the highest supported version of the protocol (so that these versions will be used only if the client or server support nothing better), many web browsers implement this in an unsafe way that allows an attacker to downgrade a connection (such as in POODLE). Therefore, it is recommended that these protocols be disabled entirely.

NIST has determined that SSL 3.0 is no longer acceptable for secure communications. As of the date of enforcement found in PCI DSS v3.1, any version of SSL will not meet the PCI SSC's definition of 'strong cryptography'.

Solution

Consult the application's documentation to disable SSL 2.0 and 3.0.
Use TLS 1.2 (with approved cipher suites) or higher instead.

Risk Factor

Critical

10 vulnerabilità

20007 - SSL Version 2 and 3 Protocol Detection

Synopsis

The remote service encrypts traffic using a protocol with known weaknesses.

Description

The remote service accepts connections encrypted using SSL 2.0 and/or SSL 3.0. These versions of SSL are affected by several cryptographic flaws, including:

- An insecure padding scheme with CBC ciphers.
- Insecure session renegotiation and resumption schemes.

An attacker can exploit these flaws to conduct man-in-the-middle attacks or to decrypt communications between the affected service and clients.

Although SSL/TLS has a secure means for choosing the highest supported version of the protocol (so that these versions will be used only if the client or server support nothing better), many web browsers implement this in an unsafe way that allows an attacker to downgrade a connection (such as in POODLE). Therefore, it is recommended that these protocols be disabled entirely.

NIST has determined that SSL 3.0 is no longer acceptable for secure communications. As of the date of enforcement found in PCI DSS v3.1, any version of SSL will not meet the PCI SSC's definition of 'strong cryptography'.

Solution

Consult the application's documentation to disable SSL 2.0 and 3.0.

Use TLS 1.2 (with approved cipher suites) or higher instead.

Risk Factor

Critical

11 vulnerabilità

33850 - Unix Operating System Unsupported Version Detection

Synopsis

The operating system running on the remote host is no longer supported.

Description

According to its self-reported version number, the Unix operating system running on the remote host is no longer supported.

Lack of support implies that no new security patches for the product will be released by the vendor. As a result, it is likely to contain security vulnerabilities.

Solution

Upgrade to a version of the Unix operating system that is currently supported.

Risk Factor

Critical

12 vulnerabilità

46882 - UnrealIRCd Backdoor Detection

Synopsis

The remote IRC server contains a backdoor.

Description

The remote IRC server is a version of UnrealIRCd with a backdoor that allows an attacker to execute arbitrary code on the affected host.

Solution

Re-download the software, verify it using the published MD5 / SHA1 checksums, and re-install it.

Risk Factor

Critical

13 vulnerabilità

61708 - VNC Server 'password' Password

Synopsis

A VNC server running on the remote host is secured with a weak password.

Description

The VNC server running on the remote host is secured with a weak password. Nessus was able to login using VNC authentication and a password of 'password'. A remote, unauthenticated attacker could exploit this to take control of the system.

Solution

Secure the VNC service with a strong password.

Risk Factor

Critical

14 vulnerabilità

125855 - phpMyAdmin prior to 4.8.6 SQLi vulnerability (PMASA-2019-3)

Synopsis

The remote web server hosts a PHP application that is affected by SQLi vulnerability.

Description

According to its self-reported version number, the phpMyAdmin application hosted on the remote web server is prior to 4.8.6. It is, therefore, affected by a SQL injection (SQLi) vulnerability that exists in designer feature of phpMyAdmin. An unauthenticated, remote attacker can exploit this to inject or manipulate SQL queries in the back-end database, resulting in the disclosure or manipulation of arbitrary data.

Note that Nessus has not attempted to exploit these issues but has instead relied only on the application's self-reported version number.

Solution

Upgrade to phpMyAdmin version 4.8.6 or later.

Alternatively, apply the patches referenced in the vendor advisories.

Risk Factor

High