



ADA Curb Ramp New Construction Inspection Form (Parallel)

NW 317th PI	24952.54			NW North Ave
North-South Road Name	Project No.	Sheet No.	Intersection No.	East-West Road Name
Calibration Date 10/22/2024 (mm/dd/yy)				

See https://www.oregon.gov/odot/Engineering/Documents_RoadwayEng/ADA_ExhibitA.pdf for more corner styles.
Use Washington County corner numbering system.


PL
Ramp Style

*The passing value for Gutter Flow Slope (GFS) depends on the Intersection Control Type. At a Midblock (MB), GFS must be \leq Slope of the Road, at Signalized or Uncontrolled (SU), GFS must be $\leq 5.0\%$, and at Stop or Yield (SY), GFS must be $\leq 2.0\%$.

*1 If Back of Ramp Obstruction is Yes, turn space length Y must be minimum 5.0 ft.

*2 Clear Space area is the width of Ramp Run 1 and extends 4.0 ft into the roadway.

See also Standard Drawings to assess provisions not shown: (inlets, alignment, etc.)

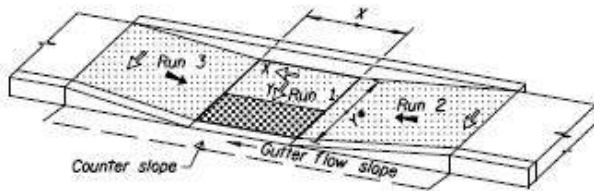

PARALLEL RAMP (PL)

PARALLEL RAMP (PL)

- Pedestrian Access Route (to measure Clear Width)
- Detectable Warning Surface
- Cross Slope (2.0% max.)
- Running Slope (8.3% max.)
- Counter Slope (5.0% max.)
- Turning Space (X & Y) (2.0% max. / 4' x 4' min.)*
* If constrained at back of walk, min. Y length is 5'.
- Gutter Flow Slope (as directed)


RAMP RUN 1	Pass	Fail
Running Slope 1	2.0 $\leq 2.0\%$ <input checked="" type="checkbox"/> $> 2.0\%$ <input type="checkbox"/>	
Cross Slope 1	2.9 $\leq 2.0\%$ <input type="checkbox"/> $> 2.0\%$ <input checked="" type="checkbox"/>	
Detectable Warning	Y Y <input checked="" type="checkbox"/> N <input type="checkbox"/>	
Lip Height	0 $\leq 1/4"$ <input checked="" type="checkbox"/> $> 1/4"$ <input type="checkbox"/>	
Gutter Flow Slope	3.9 $\leq *$ <input type="checkbox"/> $> *$ <input checked="" type="checkbox"/>	
Curb Running Slope (avg)	<input type="checkbox"/> 3.44 $\leq 8.3\%$ <input checked="" type="checkbox"/> $> 8.3\%$ <input type="checkbox"/>	
Counter Slope (+/-)*2	6 $\leq 5.0\% $ <input type="checkbox"/> $> 5.0\% $ <input type="checkbox"/>	
Det. warning full width of ramp	Y Y <input checked="" type="checkbox"/> N <input type="checkbox"/>	

RAMP RUN 2	Pass	Fail
Running Slope 2	9.6 $\leq 8.3\%$ <input type="checkbox"/> $> 8.3\%$ <input checked="" type="checkbox"/>	
Length 2	7.95	
Cross Slope 2	$\leq 2.0\%$ <input type="checkbox"/> $> 2.0\%$ <input checked="" type="checkbox"/>	

RAMP RUN 3	Pass	Fail
Running Slope 3	4.8 $\leq 8.3\%$ <input checked="" type="checkbox"/> $> 8.3\%$ <input type="checkbox"/>	
Length 3	8.4	
Cross Slope 3	1.9 $\leq 2.0\%$ <input checked="" type="checkbox"/> $> 2.0\%$ <input type="checkbox"/>	

TURN SPACE	Pass	Fail
Width X	4.7 $\geq 4.0'$ <input checked="" type="checkbox"/> $< 4.0'$ <input type="checkbox"/>	
Length Y	5.0 $\geq 4.0'^{*1}$ <input checked="" type="checkbox"/> $< 4.0'^{*1}$ <input type="checkbox"/>	
Back of Ramp Obstruction (Y/N)	N $\geq 5.0'^{*1}$ <input checked="" type="checkbox"/> $< 5.0'^{*1}$ <input type="checkbox"/>	
Slope X (Cross Slope 1)	2.9 $\leq 2.0\%$ <input type="checkbox"/> $> 2.0\%$ <input checked="" type="checkbox"/>	
Slope Y (Running Slope 1)	2.0 $\leq 2.0\%$ <input checked="" type="checkbox"/> $> 2.0\%$ <input type="checkbox"/>	

MISCELLANEOUS	Pass	Fail
Clear Width (feet)	$\geq 4.0'$ <input type="checkbox"/> $< 4.0'$ <input type="checkbox"/>	
Intersection Control Type	SY Slope of Rd. 2.8	
Horizontal Gaps	0 $\leq 1/2"$ <input type="checkbox"/> $> 1/2"$ <input type="checkbox"/>	

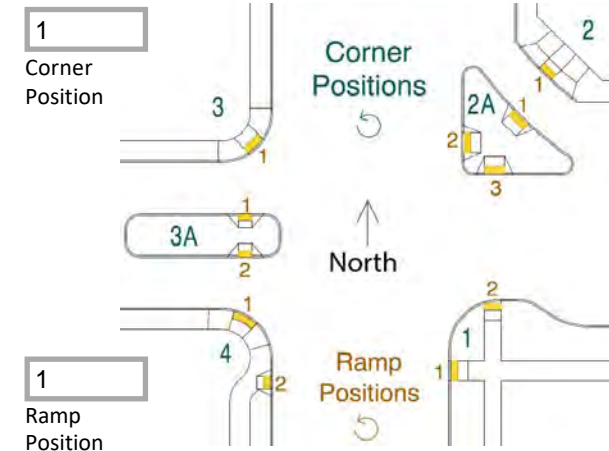

PE Stamp (required for private development)

Comments:
IITD

Inspector's Signature	Date (mm/dd/yy)
Darrell Wyant	52638.0
Print name clearly	Certification No.
3J Consulting	
Company/Agency	

Reset Entire Form

Keep Intersection, Reset Fields

ADA Curb Ramp Images

Attached photos must be in .pdf format in order to be placed

