

### Introduction to Go

Kevin W. Gisi

Twin Cities Code Camp 8—April 10, 2010

### Summary

Go is a brand-spanking-new systems language that Google released in November, 2009. Every wonder how awesome C would be if it was garbage-collected, concurrent, and didn't take a few weeks to compile? Wake up; it's here! We'll take a look at this new language that steals some of the dynamic flexibility of Python and Ruby, the performance of C, and a compile time that you'll miss if you blink.

### Hello, world

```
package main

import "fmt"

func () {
  fmt.Printf("Hello, world\n")
}
```

code/hello\_world.go

### Why Go?

- It's a systems language
- It's fun, like dynamic languages

# We Already Have a Systems Language!


Like C

code/c.c


# We Already Have Fun Languages!

code/ruby.rb

## Fun Languages are Slow at Runtime

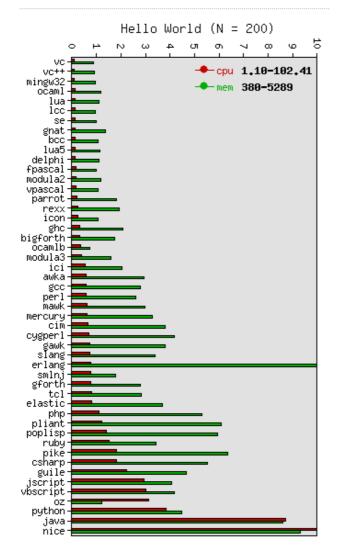

## Fast Languages are Slow to Compile



### Alternative: Go


Go is slow at runtime AND at compile time!

- 1/2-1/3 LOC for C++ benchmarks
- 1-1/16 of the speed (libraries?)

#### Priorities:

- Compile time
- Performance
- Readability

#### It Runs on Linux

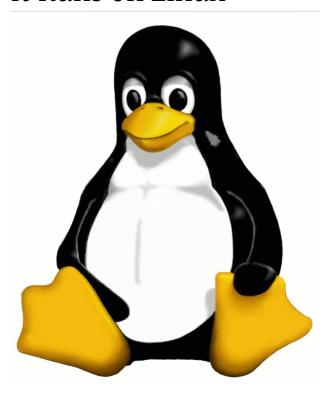

#### It Runs on OS X!



## It Runs on Virtual Machines!



### Specifications

- Compiled
- Imperative, structured
- Concurrent
- Strongly typed (explicit or inferred)

### Variables & Types

- int, float
- int8, int32, float64
- uint, ufloat
- string
- struct

# Variables: Pointers and Arrays

#### Pointers

- Use them for reference
- DON'T manipulate them!

#### Arrays

var arrayOfInt [10]int

code/variables.go

# Variables: Slices and Maps

#### Slices

- "Pointers" for arrays
- Contains pointers to each object in a range of the array
- Used for passing array values by reference Maps

```
var m map = map[string] int{}
m["price"] = 5
```

code/variables.go

### Variable Declaration

```
// Declare a variable
var s string = "";

// Go infers the type
var s2 = "";

// Syntactic shorthand -
initializing declaration
s3 := "";
```

code/variables.go

### Variable Allocation

#### new()

- allocates heap space
- · zero-initializes the space
- returns the address

#### make()

- allocates heap space
- creates the object (and underlying data structure)
- returns the value

#### $Go \neq C$

- Semicolons optional (implied)
- Curly braces MUST start on the same line
- No parentheses in ifs and fors
- · Garbage collected
- Arrays aren't pointers

#### **Functions**

- · CamelCase public
- camelCase package-level
- Pass by value
- Multiple return values

## What? Multiple Return Values?!

```
func () (int, string) {
  return 5, "thanks for asking!"
}
```

code/functions.go
How do we access them?

```
x, message := gimmeFive()
```

code/functions.go

## Why Multiple Return Values?

```
if text, err :=
readFile('foo.txt'); err == nil
{
    // Read the file
} else {
    // Handle the error
}

for key, value := range
my_map {
    }

    // ...or
    for _, value := range my_map
{     // Discard the first returned
value
}
```

code/functions.go

#### Named Results

```
func
string) {
   // value and err are set to
nil
   value = 5
   return // implicitly returns
5, nil
}
```

code/functions.go

#### Methods

Write functions that operate on particular data

code/functions.go

#### Interfaces

- Similar to Java
- Definition of acceptable types
- Types don't "implement" anything

#### Interfaces

code/interfaces.go

### Interface Embedding

code/interfaces.go

### Struct Embedding

```
type Spider struct {
   CreateWebs()
}

type Man struct {
   MissUncleBen()
}

type SpiderMan struct {
   Spider
   Man
}

func (m Man) () {} //
Can pass a Man or a SpiderMan
```

code/interfaces.go

#### Concurrency



#### Goroutines

- NOT threads
- Independent code
- Communication over shared memory

#### Threads

- Exist
- Span across multiple cores
- Go load-balances them
- Don't worry about it

### Goroutine Example

```
go gimmeFive()

go func() {
   time.Sleep(5)
   fmt.Println("Computer over.

Virus = very yes")
}()
```

code/concurrency.go

- No access to spawned goroutines
- · No thread.join equivalent

### Channels



- Like Unix pipes
- Communicate across goroutines
- Optionally blocking/non-blocking

## Channel Example: Communication

```
func () {
  output := make(chan string)
  go log(output)
  for true {
    output <- "Hey. Hey. Listen"
  }
}

func ( ) {
  for true {
    data := <- input
    fmt.Println(data)
  }
}</pre>
```

code/concurrency.go

# Channel Example: Asynchronous

code/concurrency.go

# Channel Example: Semaphore

code/concurrency.go

## Channel Example: Thread.join

code/concurrency.go

### Packages and Libraries


- 05
- websocket
- math
- strings
- encoding
- json
- testing
- regexp

## What Should You Use It For?

- Not yet ready for production use
- Systems work
- High performance
- Fun!


Help develop libraries you want to see!

#### Additional Information



- http://golang.org
- Go Wiki
- Google Tech Talk

## Questions? Comments?



Thank you!

Kevin W. Gisi

<kevin@kevingisi.com>