
Dictionarul bazei de date

1) Structura dictionarului bazei de date:

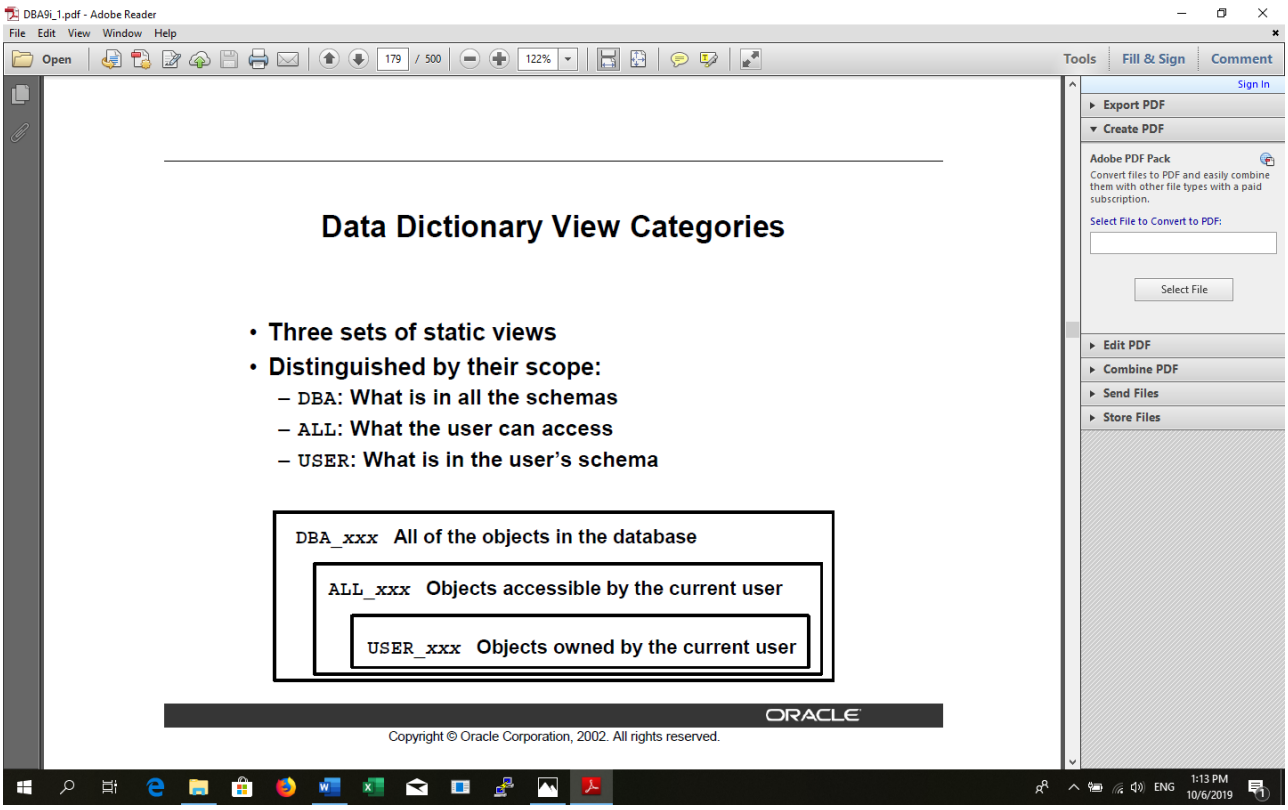

SQL> desc dictionary

Name	Null?	Type
TABLE_NAME		VARCHAR2(30)
COMMENTS		VARCHAR2(4000)

A. Obiecte din baza de date de tip USER%

SQL> select table_name from dictionary where table_name like 'USER%';

TABLE_NAME

USER_INDEXES
USER_IND_COLUMNS
USER_IND_EXPRESSIONS
USER_JOIN_IND_COLUMNS
USER_OBJECTS
USER_PROCEDURES
USER_STORED_SETTINGS

USER_PLSQL_OBJECT_SETTINGS
USER_ARGUMENTS
USER_ROLE_PRIVS
USER_SYS_PRIVS
USER_SEQUENCES
USER_SYNONYMS
USER_TABLES
USER_OBJECT_TABLES
USER_ALL_TABLES
USER_TAB_COLS
USER_TAB_COLUMNS
USER_NESTED_TABLE_COLS
USER_TAB_COL_STATISTICS
USER_TAB_HISTOGRAMS
USER_TAB_COMMENTS
USER_TAB_PRIVS
USER_TAB_PRIVS_MADE
USER_TAB_PRIVS_RECD
USER_USERS
USER_PROXIES
USER_VIEWS
USER_CONSTRAINTS

2) Vizualizare tabelele din userul current:

SQL> desc user_tables

Name	Null?	Type
TABLE_NAME	NOT NULL	VARCHAR2(30)
TABLESPACE_NAME		VARCHAR2(30)
CLUSTER_NAME		VARCHAR2(30)
IOT_NAME		VARCHAR2(30)
PCT_FREE		NUMBER
PCT_USED		NUMBER
INI_TRANS		NUMBER
MAX_TRANS		NUMBER
INITIAL_EXTENT		NUMBER
NEXT_EXTENT		NUMBER
MIN_EXTENTS		NUMBER
MAX_EXTENTS		NUMBER
PCT_INCREASE		NUMBER
FREELISTS		NUMBER
FREELIST_GROUPS		NUMBER
LOGGING		VARCHAR2(3)
BACKED_UP		VARCHAR2(1)
NUM_ROWS		NUMBER
BLOCKS		NUMBER

EMPTY_BLOCKS	NUMBER
AVG_SPACE	NUMBER
CHAIN_CNT	NUMBER
AVG_ROW_LEN	NUMBER
AVG_SPACE_FREELIST_BLOCKS	NUMBER
NUM_FREELIST_BLOCKS	NUMBER
DEGREE	VARCHAR2(10)
INSTANCES	VARCHAR2(10)
CACHE	VARCHAR2(5)
TABLE_LOCK	VARCHAR2(8)
SAMPLE_SIZE	NUMBER
LAST_ANALYZED	DATE
PARTITIONED	VARCHAR2(3)
IOT_TYPE	VARCHAR2(12)
TEMPORARY	VARCHAR2(1)
SECONDARY	VARCHAR2(1)
NESTED	VARCHAR2(3)
BUFFER_POOL	VARCHAR2(7)
ROW_MOVEMENT	VARCHAR2(8)
GLOBAL_STATS	VARCHAR2(3)
USER_STATS	VARCHAR2(3)
DURATION	VARCHAR2(15)
SKIP_CORRUPT	VARCHAR2(8)
MONITORING	VARCHAR2(3)
CLUSTER_OWNER	VARCHAR2(30)
DEPENDENCIES	VARCHAR2(8)

SQL> select table_name from user_tables;

```
TABLE_NAME
------------------------------
BONUS
DEPT
EMP
SALGRADE
```

3) Vizualizare toate obiectele create de un user:

SQL> desc user_objects

Name	Null?	Type
OBJECT_NAME		VARCHAR2(128)
SUBOBJECT_NAME		VARCHAR2(30)
OBJECT_ID		NUMBER
DATA_OBJECT_ID		NUMBER
OBJECT_TYPE		VARCHAR2(18)
CREATED		DATE

LAST_DDL_TIME	DATE
TIMESTAMP	VARCHAR2(19)
STATUS	VARCHAR2(7)
TEMPORARY	VARCHAR2(1)
GENERATED	VARCHAR2(1)
SECONDARY	VARCHAR2(1)

SQL> select object_name from user_objects;

OBJECT_NAME

BONUS
DEPT
EMP
SALGRADE

4) Adaugarea unei constrangeri de integritate pe o tabela:

SQL> alter table dept add constraint deptno_pk primary key (deptno);

Table altered.

SQL> alter table emp add constraint emp_fk foreign key (deptno) references dept(deptno);

Table altered.

SQL> select object_name, object_type from user_objects;

OBJECT_NAME	OBJECT_NAME
BONUS	TABLE
DEPT	TABLE
DEPTNO_PK	INDEX
EMP	TABLE
SALGRADE	TABLE
V_SAL	VIEW

5) Vizualizare toate constrangerile de integritate create de userul curent

SQL> desc user_constraints

Name	Null?	Type
OWNER	NOT NULL	VARCHAR2(30)
CONSTRAINT_NAME	NOT NULL	VARCHAR2(30)
CONSTRAINT_TYPE		VARCHAR2(1)
TABLE_NAME	NOT NULL	VARCHAR2(30)

SEARCH_CONDITION	LONG
R_OWNER	VARCHAR2(30)
R_CONSTRAINT_NAME	VARCHAR2(30)
DELETE_RULE	VARCHAR2(9)
STATUS	VARCHAR2(8)
DEFERRABLE	VARCHAR2(14)
DEFERRED	VARCHAR2(9)
VALIDATED	VARCHAR2(13)
GENERATED	VARCHAR2(14)
BAD	VARCHAR2(3)
RELY	VARCHAR2(4)
LAST_CHANGE	DATE
INDEX_OWNER	VARCHAR2(30)
INDEX_NAME	VARCHAR2(30)
INVALID	VARCHAR2(7)
VIEW_RELATED	VARCHAR2(14)

SQL> select owner,constraint_name,constraint_type, table_name from user_constraints;

OWNER	CONSTRAINT_NAME	C	TABLE_NAME
UBD1	DEPTNO_PK	P	DEPT
UBD1	EMP_FK	R	EMP

6) Vizualizare structura tabelara:

SQL> desc user_tab_columns

Name	Null?	Type
TABLE_NAME	NOT NULL	VARCHAR2(30)
COLUMN_NAME	NOT NULL	VARCHAR2(30)
DATA_TYPE		VARCHAR2(106)
DATA_TYPE_MOD		VARCHAR2(3)
DATA_TYPE_OWNER		VARCHAR2(30)
DATA_LENGTH	NOT NULL	NUMBER
DATA_PRECISION		NUMBER
DATA_SCALE		NUMBER
NULLABLE		VARCHAR2(1)
COLUMN_ID		NUMBER
DEFAULT_LENGTH		NUMBER
DATA_DEFAULT		LONG
NUM_DISTINCT		NUMBER
LOW_VALUE		RAW(32)
HIGH_VALUE		RAW(32)

```
DENSITY                                                  NUMBER
NUM_NULLS                                                NUMBER
NUM_BUCKETS                                              NUMBER
LAST_ANALYZED                                            DATE
SAMPLE_SIZE                                              NUMBER
CHARACTER_SET_NAME                                       VARCHAR2(44)
CHAR_COL_DECL_LENGTH                                     NUMBER
GLOBAL_STATS                                             VARCHAR2(3)
USER_STATS                                               VARCHAR2(3)
AVG_COL_LEN                                              NUMBER
CHAR_LENGTH                                              NUMBER
CHAR_USED                                                VARCHAR2(1)
V80_FMT_IMAGE                                            VARCHAR2(3)
DATA_UPGRADED                                            VARCHAR2(3)
```

```
SQL>  select  table_name,column_name,data_type from user_tab_columns
          where table_name='EMP';
```

```
TABLE_NAME       COLUMN_NAME              DATA_TYPE
------------------------------ ------------------------------ ------------------------------
EMP                    EMPNO                    NUMBER
EMP                    ENAME                    VARCHAR2
EMP                    JOB                      VARCHAR2
EMP                    MGR                      NUMBER
EMP                    HIREDATE                 DATE
EMP                    SAL                      NUMBER
EMP                    COMM                     NUMBER
EMP                    DEPTNO                   NUMBER
```

B. Obiecte din baza de date de tip ALL%

7) Tabele din dictionar care contin informatii despre obiectele proprii sau create de alti useri, la care are acces userul curent:

```
SQL> select table_name from dictionary where table_name like 'ALL%';

TABLE_NAME
------------------------------
ALL_XML_SCHEMAS
ALL_XML_SCHEMAS2
ALL_CATALOG
ALL_CLUSTERS
ALL_COL_COMMENTS
ALL_COL_PRIVS
ALL_COL_PRIVS_MADE
```

ALL_COL_PRIVS_RECD
ALL_ENCRYPTED_COLUMNS
ALL_DB_LINKS
ALL_INDEXES
ALL_IND_COLUMNS
ALL_IND_EXPRESSIONS
ALL_JOIN_IND_COLUMNS
ALL_OBJECTS
ALL_PROCEDURES
ALL_ERRORS

8) Vizualizare obiecte proprii sau create de alti useri la care are acces userul curent:

```
SQL> desc all_objects
 Name                                                                      Null?    Type
 ------------------------------------------------------------------------- -------- ------------
 OWNER                                                                     NOT NULL VARCHAR2(30)
 OBJECT_NAME                                                               NOT NULL VARCHAR2(30)
 SUBOBJECT_NAME                                                                     VARCHAR2(30)
 OBJECT_ID                                                                 NOT NULL NUMBER
 DATA_OBJECT_ID                                                                     NUMBER
 OBJECT_TYPE                                                                        VARCHAR2(18)
 CREATED                                                                   NOT NULL DATE
 LAST_DDL_TIME                                                             NOT NULL DATE
 TIMESTAMP                                                                          VARCHAR2(19)
 STATUS                                                                             VARCHAR2(7)
 TEMPORARY                                                                          VARCHAR2(1)
 GENERATED                                                                          VARCHAR2(1)
 SECONDARY                                                                          VARCHAR2(1)
```

```
SQL> select owner,object_name,object_type from all_objects where owner='SCOTT';

OWNER                          OBJECT_NAME                    OBJECT_TYPE
------------------------------ ------------------------------ -----------------
SCOTT                          BONUS                          TABLE
SCOTT                          DEPT                           TABLE
SCOTT                          EMP                            TABLE
SCOTT                          PK_DEPT                        INDEX
SCOTT                          PK_EMP                         INDEX
SCOTT                          SALGRADE                       TABLE
SCOTT                          V_SAL                          VIEW
```

C. Obiecte din baza de date de tip DBA%

9) Vizualizare toate tabelele din dictionar :

```
SQL> select table_name from dictionary where table_name like 'DBA%';
```

10) Vizualizare informatii despre userii creati pe baza de date:

```
SQL> desc dba_users
 Name                                                                                    Null?         Type
 ----------------------------------------------------------------------------------------------------- ---------
 USERNAME                                                                                NOT NULL VARCHAR2(30)
 USER_ID                                                                                 NOT NULL  NUMBER
 PASSWORD                                                                                          VARCHAR2(30)
 ACCOUNT_STATUS                                                                          NOT NULL VARCHAR2(32)
 LOCK_DATE                                                                                         DATE
 EXPIRY_DATE                                                                                       DATE
 DEFAULT_TABLESPACE                                                                      NOT NULL VARCHAR2(30)
 TEMPORARY_TABLESPACE                                                                    NOT NULL  VARCHAR2(30)
 CREATED                                                                                 NOT NULL  DATE
 PROFILE                                                                                 NOT NULL  VARCHAR2(30)
 INITIAL_RSRC_CONSUMER_GROUP                                                                       VARCHAR2(30)
 EXTERNAL_NAME                                                                                    VARCHAR2(4000)
```

```
SQL> select username,password from dba_users;

USERNAME                       PASSWORD
------------------------------ --------------------
OE
SCOTT
OJVMSYS
XS$NULL
BI
PM
GSMCATUSER
SYSBACKUP
APEX_PUBLIC_USER
SPATIAL_CSW_ADMIN_USR
AUDSYS
ORACLE_OCM
SYSKM
MDDATA
IX
SH
DIP
```

SYSDG
HR
SYSTEM
SYS
52 rows selected.

11) Vizualizare informatii despre tablespace-uri create pe baza de date:

```
SQL> desc dba_tablespaces
 Name                                      Null?    Type
 ----------------------------------------- -------- ----------------
 TABLESPACE_NAME                           NOT NULL VARCHAR2(30)
 BLOCK_SIZE                                NOT NULL NUMBER
 INITIAL_EXTENT                                     NUMBER
 NEXT_EXTENT                                        NUMBER
 MIN_EXTENTS                               NOT NULL NUMBER
 MAX_EXTENTS                                        NUMBER
 PCT_INCREASE                                       NUMBER
 MIN_EXTLEN                                         NUMBER
 STATUS                                             VARCHAR2(9)
 CONTENTS                                           VARCHAR2(9)
 LOGGING                                            VARCHAR2(9)
 FORCE_LOGGING                                      VARCHAR2(3)
 EXTENT_MANAGEMENT                                  VARCHAR2(10)
 ALLOCATION_TYPE                                    VARCHAR2(9)
 PLUGGED_IN                                         VARCHAR2(3)
 SEGMENT_SPACE_MANAGEMENT                           VARCHAR2(6)
 DEF_TAB_COMPRESSION                                VARCHAR2(8)
 RETENTION                                          VARCHAR2(11)
 BIGFILE                                            VARCHAR2(3)

SQL> select tablespace_name,block_size,max_extents,status from dba_tablespaces;

TABLESPACE_NAME                BLOCK_SIZE MAX_EXTENTS STATUS
------------------------------ ---------- ---------- ---------
SYSTEM                               8192 2147483645 ONLINE
UNDOTBS1                             8192 2147483645 ONLINE
SYSAUX                               8192 2147483645 ONLINE
TEMP                                 8192            ONLINE
USERS                                8192 2147483645 ONLINE
EXAMPLE                              8192 2147483645 ONLINE
BD_DATA                              8192 2147483645 ONLINE
BD_TEMP                              8192            ONLINE

8 rows selected.
```

12) Vizualizare informatii despre indecsi creati pe baza de date:

```
SQL> desc dba_indexes
 Name                                      Null?    Type
 ----------------------------------------- -------- --------------------
 OWNER                                     NOT NULL VARCHAR2(30)
 INDEX_NAME                                NOT NULL VARCHAR2(30)
 INDEX_TYPE                                         VARCHAR2(27)
 TABLE_OWNER                               NOT NULL VARCHAR2(30)
 TABLE_NAME                                NOT NULL VARCHAR2(30)
 TABLE_TYPE                                         VARCHAR2(11)
 UNIQUENESS                                         VARCHAR2(9)
 COMPRESSION                                        VARCHAR2(8)
 PREFIX_LENGTH                                      NUMBER
 TABLESPACE_NAME                                    VARCHAR2(30)
 INI_TRANS                                          NUMBER
 MAX_TRANS                                          NUMBER
 INITIAL_EXTENT                                     NUMBER
 NEXT_EXTENT                                        NUMBER
 MIN_EXTENTS                                        NUMBER
 MAX_EXTENTS                                        NUMBER
 PCT_INCREASE                                       NUMBER
 PCT_THRESHOLD                                      NUMBER
 INCLUDE_COLUMN                                     NUMBER
 FREELISTS                                          NUMBER
 FREELIST_GROUPS                                    NUMBER
 PCT_FREE                                           NUMBER
 LOGGING                                            VARCHAR2(3)
 BLEVEL                                             NUMBER
 LEAF_BLOCKS                                        NUMBER
 DISTINCT_KEYS                                      NUMBER
 AVG_LEAF_BLOCKS_PER_KEY                             NUMBER
 AVG_DATA_BLOCKS_PER_KEY                            NUMBER
 CLUSTERING_FACTOR                                  NUMBER
 STATUS                                             VARCHAR2(8)
 NUM_ROWS                                           NUMBER
 SAMPLE_SIZE                                        NUMBER
 LAST_ANALYZED                                      DATE
 DEGREE                                             VARCHAR2(40)
 INSTANCES                                          VARCHAR2(40)
 PARTITIONED                                        VARCHAR2(3)
 TEMPORARY                                          VARCHAR2(1)
 GENERATED                                          VARCHAR2(1)
 SECONDARY                                          VARCHAR2(1)
 BUFFER_POOL                                        VARCHAR2(7)
 USER_STATS                                         VARCHAR2(3)
```

DURATION	VARCHAR2(15)
PCT_DIRECT_ACCESS	NUMBER
ITYP_OWNER	VARCHAR2(30)
ITYP_NAME	VARCHAR2(30)
PARAMETERS	VARCHAR2(1000)
GLOBAL_STATS	VARCHAR2(3)
DOMIDX_STATUS	VARCHAR2(12)
DOMIDX_OPSTATUS	VARCHAR2(6)
FUNCIDX_STATUS	VARCHAR2(8)
JOIN_INDEX	VARCHAR2(3)
IOT_REDUNDANT_PKEY_ELIM	VARCHAR2(3)
DROPPED	VARCHAR2(3)

```
SQL>  select owner,index_name,index_type,table_name from dba_indexes
        where owner in ('SCOTT');
```

OWNER	INDEX_NAME	INDEX_TYPE	TABLE_NAME
SCOTT	STI_PK	NORMAL	STUDENTI
SCOTT	CAG_PK	NORMAL	CATALOG
SCOTT	DIE_PK	NORMAL	DISCIPLINE
SCOTT	PK_DEPT	NORMAL	DEPT
SCOTT	PK_EMP	NORMAL	EMP

D. Vizualizare informatii utilizand view-uri dinamice V$%

13) Lista view-uri dinamice

```
SQL> select table_name from dictionary where table_name like 'V$%';

V$AQ_CROSS_INSTANCE_JOBS
V$AQ_JOB_COORDINATOR
V$AQ_MESSAGE_CACHE
V$AQ_MSGBM
V$AQ_NONDUR_REGISTRATIONS
V$AQ_NONDUR_SUBSCRIBER
V$AQ_NONDUR_SUBSCRIBER_LWM
V$AQ_NOTIFICATION_CLIENTS
V$AQ_SERVER_POOL
V$AQ_SUBSCRIBER_LOAD
V$ARCHIVE
V$ARCHIVED_LOG
V$ARCHIVE_DEST
V$ARCHIVE_DEST_STATUS
V$ARCHIVE_GAP
V$ARCHIVE_PROCESSES
```

767 rows selected.

Cateva exemple de view-uri mai utilizate:
- V$DATABASE
- V$DATAFILE
- V$CONTROLFILE
- V$INSTANCE
- V$SESSION
- V$SPPARAMETER
- V$PARAMETER

14) Vizualizare informatii despre baza de date:

```
SQL> desc v$database
Name                                      Null?    Type
----------------------------------------- -------- ----------------------------------------------
DBID                                               NUMBER
NAME                                               VARCHAR2(9)
CREATED                                            DATE
RESETLOGS_CHANGE#                                  NUMBER
RESETLOGS_TIME                                     DATE
PRIOR_RESETLOGS_CHANGE#                            NUMBER
PRIOR_RESETLOGS_TIME                               DATE
LOG_MODE                                           VARCHAR2(12)
CHECKPOINT_CHANGE#                                 NUMBER
ARCHIVE_CHANGE#                                    NUMBER
CONTROLFILE_TYPE                                   VARCHAR2(7)
CONTROLFILE_CREATED                                DATE
CONTROLFILE_SEQUENCE#                              NUMBER
CONTROLFILE_CHANGE#                                NUMBER
CONTROLFILE_TIME                                   DATE
OPEN_RESETLOGS                                     VARCHAR2(11)
VERSION_TIME                                       DATE
OPEN_MODE                                          VARCHAR2(20)
PROTECTION_MODE                                    VARCHAR2(20)
PROTECTION_LEVEL                                   VARCHAR2(20)
REMOTE_ARCHIVE                                     VARCHAR2(8)
ACTIVATION#                                        NUMBER
SWITCHOVER#                                        NUMBER
DATABASE_ROLE                                      VARCHAR2(16)
ARCHIVELOG_CHANGE#                                 NUMBER
ARCHIVELOG_COMPRESSION                             VARCHAR2(8)
SWITCHOVER_STATUS                                  VARCHAR2(20)
DATAGUARD_BROKER                                   VARCHAR2(8)
GUARD_STATUS                                       VARCHAR2(7)
SUPPLEMENTAL_LOG_DATA_MIN                          VARCHAR2(8)
SUPPLEMENTAL_LOG_DATA_PK                           VARCHAR2(3)
SUPPLEMENTAL_LOG_DATA_UI                           VARCHAR2(3)
FORCE_LOGGING                                      VARCHAR2(39)
PLATFORM_ID                                        NUMBER
PLATFORM_NAME                                      VARCHAR2(101)
RECOVERY_TARGET_INCARNATION#                       NUMBER
```

LAST_OPEN_INCARNATION#	NUMBER
CURRENT_SCN	NUMBER
FLASHBACK_ON	VARCHAR2(18)
SUPPLEMENTAL_LOG_DATA_FK	VARCHAR2(3)
SUPPLEMENTAL_LOG_DATA_ALL	VARCHAR2(3)
DB_UNIQUE_NAME	VARCHAR2(30)
STANDBY_BECAME_PRIMARY_SCN	NUMBER
FS_FAILOVER_STATUS	VARCHAR2(22)
FS_FAILOVER_CURRENT_TARGET	VARCHAR2(30)
FS_FAILOVER_THRESHOLD	NUMBER
FS_FAILOVER_OBSERVER_PRESENT	VARCHAR2(7)
FS_FAILOVER_OBSERVER_HOST	VARCHAR2(512)
CONTROLFILE_CONVERTED	VARCHAR2(3)
PRIMARY_DB_UNIQUE_NAME	VARCHAR2(30)
SUPPLEMENTAL_LOG_DATA_PL	VARCHAR2(3)
MIN_REQUIRED_CAPTURE_CHANGE#	NUMBER
CDB	VARCHAR2(3)
CON_ID	NUMBER
PENDING_ROLE_CHANGE_TASKS	VARCHAR2(512)
CON_DBID	NUMBER
FORCE_FULL_DB_CACHING	VARCHAR2(3)

SQL> select dbid, name, created, log_mode, open_mode from v$database;

DBID	NAME	CREATED	LOG_MODE	OPEN_MODE
1981261066	BD	08-MAY-19	NOARCHIVELOG	READ WRITE

15) Vizualizare informatii despre fisirele de date:

SQL> desc v$datafile

Name	Null?	Type
FILE#		NUMBER
CREATION_CHANGE#		NUMBER
CREATION_TIME		DATE
TS#		NUMBER
RFILE#		NUMBER
STATUS		VARCHAR2(7)
ENABLED		VARCHAR2(10)
CHECKPOINT_CHANGE#		NUMBER
CHECKPOINT_TIME		DATE
UNRECOVERABLE_CHANGE#		NUMBER
UNRECOVERABLE_TIME		DATE
LAST_CHANGE#		NUMBER
LAST_TIME		DATE
OFFLINE_CHANGE#		NUMBER
ONLINE_CHANGE#		NUMBER
ONLINE_TIME		DATE
BYTES		NUMBER

BLOCKS	NUMBER
CREATE_BYTES	NUMBER
BLOCK_SIZE	NUMBER
NAME	VARCHAR2(513)
PLUGGED_IN	NUMBER
BLOCK1_OFFSET	NUMBER
AUX_NAME	VARCHAR2(513)
FIRST_NONLOGGED_SCN	NUMBER
FIRST_NONLOGGED_TIME	DATE
FOREIGN_DBID	NUMBER
FOREIGN_CREATION_CHANGE#	NUMBER
FOREIGN_CREATION_TIME	DATE
PLUGGED_READONLY	VARCHAR2(3)
PLUGIN_CHANGE#	NUMBER
PLUGIN_RESETLOGS_CHANGE#	NUMBER
PLUGIN_RESETLOGS_TIME	DATE
CON_ID	NUMBER

SQL> select file#, name, creation_time, status from v$datafile ;

```
 FILE#
----------
NAME
--------------------------------------------------------------
CREATION_TIME    STATUS
---------------------      -------
       1
D:\ORACLE12C_DB\ORADATA\BD\SYSTEM01.DBF
11-SEP-14              SYSTEM

       3
D:\ORACLE12C_DB\ORADATA\BD\SYSAUX01.DBF
11-SEP-14              ONLINE
```

16) Vizualizare informatii despre fisierele de control:

SQL> desc v$controlfile

Name	Null?	Type
STATUS		VARCHAR2(7)
NAME		VARCHAR2(513)
IS_RECOVERY_DEST_FILE		VARCHAR2(3)
BLOCK_SIZE		NUMBER
FILE_SIZE_BLKS		NUMBER
CON_ID		NUMBER

SQL> select name, block_size from v$controlfile;

NAME	BLOCK_SIZE
C:\ORACLE_12C\ORADATA\BD\CONTROL01.CTL	16384
C:\ORACLE_12C\ORADATA\BD\CONTROL02.CTL	16384

17) Vizualizare informatii despre instanta:

SQL> desc v$instance

Name	Null?	Type
INSTANCE_NUMBER		NUMBER
INSTANCE_NAME		VARCHAR2(16)
HOST_NAME		VARCHAR2(64)
VERSION		VARCHAR2(17)
STARTUP_TIME		DATE
STATUS		VARCHAR2(12)
PARALLEL		VARCHAR2(3)
THREAD#		NUMBER
ARCHIVER		VARCHAR2(7)
LOG_SWITCH_WAIT		VARCHAR2(15)
LOGINS		VARCHAR2(10)
SHUTDOWN_PENDING		VARCHAR2(3)
DATABASE_STATUS		VARCHAR2(17)
INSTANCE_ROLE		VARCHAR2(18)
ACTIVE_STATE		VARCHAR2(9)
BLOCKED		VARCHAR2(3)
CON_ID		NUMBER
INSTANCE_MODE		VARCHAR2(11)
EDITION		VARCHAR2(7)
FAMILY		VARCHAR2(80)

SQL> select instance_name, host_name, startup_time, status, instance_mode from v$instance;

INSTANCE_NAME	HOST_NAME	STARTUP_T	STATUS	INSTANCE_MO
bd	DESKTOP-CIE1D46	28-SEP-19	OPEN	REGULAR

18) Vizualizare informatii despre sesiuni:

SQL> desc v$session

Name	Null?	Type
SADDR		RAW(8)
SID		NUMBER
SERIAL#		NUMBER
AUDSID		NUMBER
PADDR		RAW(8)

USER#	NUMBER
USERNAME	VARCHAR2(30)
COMMAND	NUMBER
OWNERID	NUMBER
TADDR	VARCHAR2(16)
LOCKWAIT	VARCHAR2(16)
STATUS	VARCHAR2(8)
SERVER	VARCHAR2(9)
SCHEMA#	NUMBER
SCHEMANAME	VARCHAR2(30)
OSUSER	VARCHAR2(30)
PROCESS	VARCHAR2(24)
MACHINE	VARCHAR2(64)
PORT	NUMBER
TERMINAL	VARCHAR2(16)
PROGRAM	VARCHAR2(64)
TYPE	VARCHAR2(10)

SQL> select saddr, sid, user#, username from v$session;

SADDR	SID	USER#	USERNAME
00007FFCC1D1F780	1	0	
00007FFCC1D1D6B0	2	0	
00007FFCC1D1B5E0	3	0	
00007FFCC1D19510	4	0	
00007FFCC1D17440	5	0	
00007FFCC1D15370	6	0	
00007FFCC1D132A0	7	0	
00007FFCC1D111D0	8	0	
00007FFCC1D0F100	9	0	
00007FFCC1F01670	238	0	
00007FFCC1EFF5A0	239	0	
00007FFCC1EFD4D0	240	0	
00007FFCC1EFB400	241	0	
00007FFCC1EE4B10	252	110	SCOTT

27 rows selected.

19) Vizualizare informatii despre parametrii din fisierul SPFILE:

SQL> desc v$spparameter

Name	Null?	Type
FAMILY		VARCHAR2(80)
SID		VARCHAR2(80)
NAME		VARCHAR2(80)
TYPE		VARCHAR2(11)
VALUE		VARCHAR2(255)
DISPLAY_VALUE		VARCHAR2(255)
ISSPECIFIED		VARCHAR2(6)
ORDINAL		NUMBER
UPDATE_COMMENT		VARCHAR2(255)
CON_ID		NUMBER

SQL> select name, value from v$spparameter where value is not null;

NAME

VALUE
----
processes
300

memory_target
1702887424

control_files
c:\Oracle_12c\oradata\BD\control01.ctl

control_files
c:\Oracle_12c\oradata\BD\control02.ctl

db_block_size
8192

compatible
12.1.0.2.0

undo_tablespace
UNDOTBS1

remote_login_passwordfile
EXCLUSIVE

dispatchers
(PROTOCOL=TCP) (SERVICE=BDXDB)

local_listener
LISTENER_BD

audit_file_dest
c:\Oracle_12c\admin\BD\adump

audit_trail
db

db_name
BD

open_cursors

diagnostic_dest
c:\Oracle_12c

20) Vizualizare informatii despre parametrii de sistem:

```
SQL> desc  v$parameter

Name                                      Null?    Type
 ----------------------------------------- --------  ----------------
 NUM                                                 NUMBER
 NAME                                                VARCHAR2(80)
 TYPE                                                NUMBER
 VALUE                                               VARCHAR2(4000)
 DISPLAY_VALUE                                       VARCHAR2(4000)
 DEFAULT_VALUE                                       VARCHAR2(255)
 ISDEFAULT                                           VARCHAR2(9)
 ISSES_MODIFIABLE                                    VARCHAR2(5)
 ISSYS_MODIFIABLE                                    VARCHAR2(9)
 ISPDB_MODIFIABLE                                    VARCHAR2(5)
 ISINSTANCE_MODIFIABLE                               VARCHAR2(5)
 ISMODIFIED                                          VARCHAR2(10)
 ISADJUSTED                                          VARCHAR2(5)
 ISDEPRECATED                                        VARCHAR2(5)
 ISBASIC                                             VARCHAR2(5)
 DESCRIPTION                                         VARCHAR2(255)
 UPDATE_COMMENT                                      VARCHAR2(255)
 HASH                                                NUMBER
 CON_ID                                              NUMBER

SQL> select name,value from v$parameter where name like '%file%';

NAME
--------------------------------------------------------------------
VALUE
--------------------------------------------------------------------
spfile
D:\ORACLE12C_DB\PRODUCT\12.1.0\DBHOME_1\DATABASE\SPFILEBD.ORA

control_files
D:\ORACLE12C_DB\ORADATA\BD\CONTROL01.CTL,
D:\ORACLE12C_DB\ORADATA\BD\CONTROL02.CTL
```

21) Vizualizare informatii despre parametrii de sistem folosind comanda SHOW:

```
SQL> show parameters
NAME                           TYPE        VALUE
------------------------------ ----------- ------------------------------
service_names                  string      BD
session_max_open_files         integer     10
sessions                       integer     472
sga_max_size                   big integer 1648M
skip_unusable_indexes          boolean     TRUE
sort_area_retained_size        integer     0
sort_area_size                 integer     65536
spatial_vector_acceleration    boolean     FALSE
spfile                         string      D:\ORACLE12C_DB\PRODUCT\12.1.0
                                           \DBHOME_1\DATABASE\SPFILEBD.ORA
```