

Tablespace-uri si fisiere de date

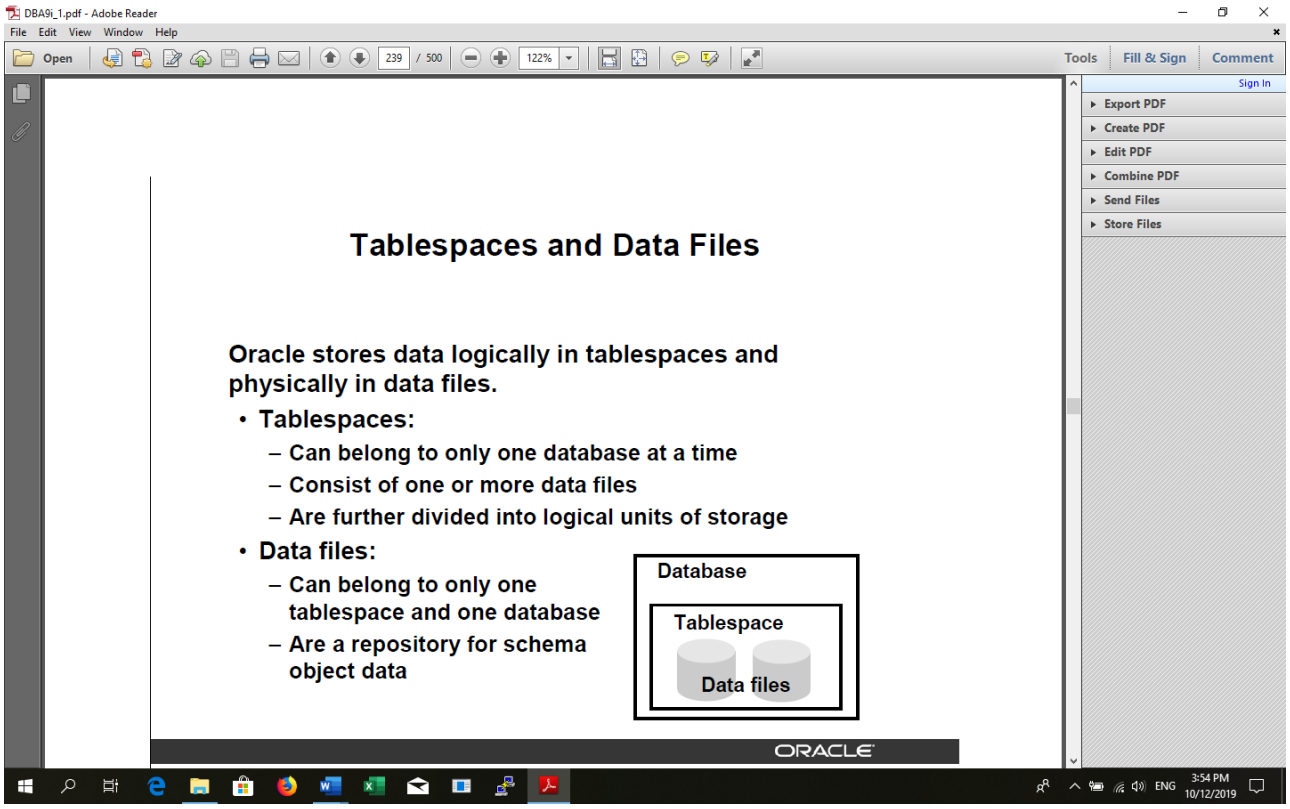

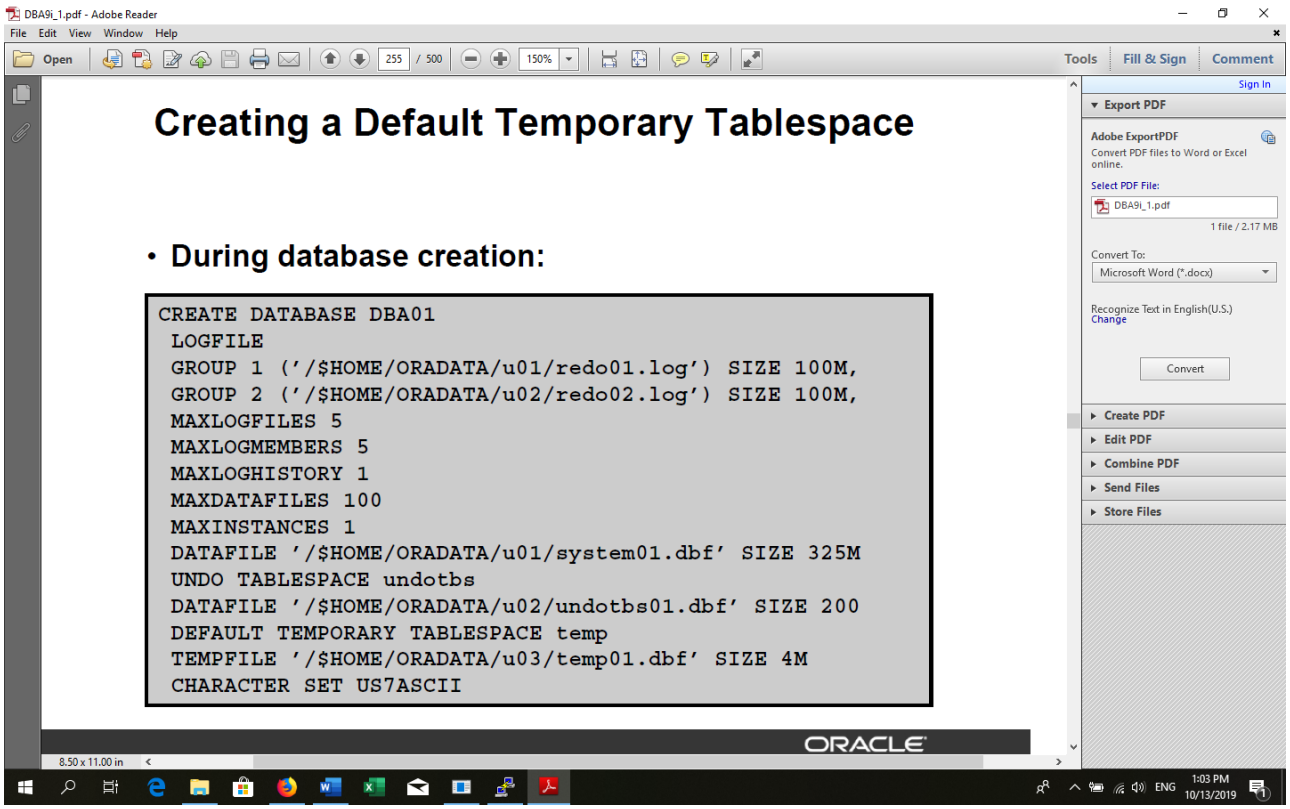

DBA9i_1.pdf - Adobe Reader

Obtaining Tablespace Information

Obtaining tablespace and data file information can be obtained by querying the following:

- **Tablespace information:**
  - DBA_TABLESPACES
  - V$TABLESPACE
- **Data file information:**
  - DBA_DATA_FILES
  - V$DATAFILE
- **Temp file information:**
  - DBA_TEMP_FILES
  - V$TEMPFILE

ORACLE

Copyright © Oracle Corporation, 2000. All rights reserved.


CREATE TABLESPACE

https://docs.oracle.com/database/121/SQLRF/statements_7003.htm

This Book This Release

Table of Contents


- Oracle Database SQL Language Reference
  - Preface
  - Changes in This Release for Oracle Database SQL Language Reference
  - Introduction to Oracle SQL
  - Basic Elements of Oracle SQL
  - Pseudocolumns
  - Operators
  - Expressions
  - Conditions
  - Functions
  - Common SQL DDL Clauses
  - SQL Queries and Subqueries
  - SQL Statements: ADMINISTER KEY MANAGEMENT to ALTER JAVA
  - SQL Statements: ALTER LIBRARY to ALTER SYSTEM
  - SQL Statements: ALTER TABLE to ALTER TABLESPACE
  - SQL Statements: ALTER TRIGGER to COMMIT
  - SQL Statements: CREATE AUDIT POLICY to CREATE JAVA
  - SQL Statements: CREATE LIBRARY to CREATE SPFILE
  - **SQL Statements: CREATE SYNONYM to CREATE TRIGGER**
  - SQL Statements: CREATE TYPE to DROP ROLLBACK SEGMENT
  - SQL Statements: DROP SEQUENCE to ROLLBACK




Description of the illustration "create_tablespace.gif"

(*permanent_tablespace_clause*::=, *temporary_tablespace_clause*::=, *undo_tablespace_clause*::=)

***permanent_tablespace_clause*::=**



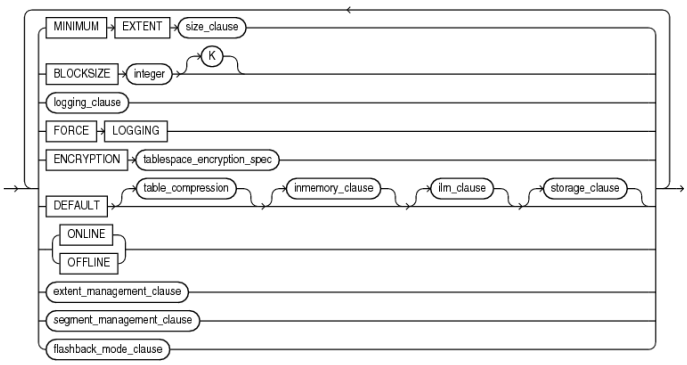

Description of the illustration "permanent_tablespace_clause.gif"

1) Crearea unui tablespace permanent cu un fisier de date asignat de 1 Mb, cu sau fara extensie :

a) cu specificarea tipului si dimensiunea extensiei:

```
SQL> create tablespace ubd_data1 datafile 'e:/temp/ubd_data1.dbf' size 10m
        extent management local uniform size 128k;
Tablespace created.
```

b) fara specificarea extensiei (implicit AUTOALLOCATE):

```
SQL >create tablespace ubd_data2
        datafile 'e:/temp/ubd_data2.dbf' size 10M;
Tablespace created.
```

2) Extinderea spatiului alocat unui tablespace:

a) extinderea spatiului prin autoextensie:

```
SQL> alter database datafile 'e:/temp/ubd_data1.dbf'
        autoextend on next 2M;
Database altered.
```

b) extinderea spatiului cu marime fixa:

```
SQL> alter database datafile 'e:/temp/ubd_data1.dbf' resize 5M;
Database altered.
```

3) Adaugarea unui nou fisier de date la un tablespace:

```
SQL> alter tablespace ubd_data1
        add datafile 'e:/temp/ubd_data11.dbf' size 10M;
Tablespace altered.
```

4) Informatii despre tablespace-uri create pe baza de date:

```
SQL> desc dba_tablespaces
 Name                                      Null?    Type
 ----------------------------------------- -------- ----------------------
TABLESPACE_NAME                           NOT NULL VARCHAR2(30)
 BLOCK_SIZE                                NOT NULL NUMBER
 INITIAL_EXTENT                                     NUMBER
 NEXT_EXTENT                                        NUMBER
 MIN_EXTENTS                               NOT NULL NUMBER
 MAX_EXTENTS                                        NUMBER
 MAX_SIZE                                           NUMBER
 PCT_INCREASE                                       NUMBER
 MIN_EXTLEN                                         NUMBER
 STATUS                                             VARCHAR2(9)
```

CONTENTS	VARCHAR2(9)
LOGGING	VARCHAR2(9)
FORCE_LOGGING	VARCHAR2(3)
EXTENT_MANAGEMENT	VARCHAR2(10)
ALLOCATION_TYPE	VARCHAR2(9)
PLUGGED_IN	VARCHAR2(3)
SEGMENT_SPACE_MANAGEMENT	VARCHAR2(6)
DEF_TAB_COMPRESSION	VARCHAR2(8)
RETENTION	VARCHAR2(11)
BIGFILE	VARCHAR2(3)
PREDICATE_EVALUATION	VARCHAR2(7)
ENCRYPTED	VARCHAR2(3)
COMPRESS_FOR	VARCHAR2(30)
DEF_INMEMORY	VARCHAR2(8)
DEF_INMEMORY_PRIORITY	VARCHAR2(8)
DEF_INMEMORY_DISTRIBUTE	VARCHAR2(15)
DEF_INMEMORY_COMPRESSION	VARCHAR2(17)
DEF_INMEMORY_DUPLICATE	VARCHAR2(13)

SQL> select tablespace_name,block_size,status from dba_tablespaces;

TABLESPACE_NAME	BLOCK_SIZE	STATUS
SYSTEM	8192	ONLINE
SYSAUX	8192	ONLINE
UNDOTBS1	8192	ONLINE
TEMP	8192	ONLINE
USERS	8192	ONLINE
EXAMPLE	8192	ONLINE
BI_IAS_OPSS	8192	ONLINE
BI_IAS_TEMP	8192	ONLINE
BI_IAS_UMS	8192	ONLINE
BI_MDS	8192	ONLINE
BI_IAU	8192	ONLINE
BI_BIPLATFORM	8192	ONLINE
BI_WLS	8192	ONLINE
BI_STB	8192	ONLINE
UBD_DATA1	8192	ONLINE
UBD_DATA2	8192	ONLINE

16 rows selected.

1) Informatii despre tablespace-uri create pe baza de date(preluate din view):

SQL> desc v$tablespace

Name	Null?	Type

TS#		NUMBER
NAME		VARCHAR2(30)
INCLUDED_IN_DATABASE_BACKUP		VARCHAR2(3)
BIGFILE		VARCHAR2(3)
FLASHBACK_ON		VARCHAR2(3)
ENCRYPT_IN_BACKUP		VARCHAR2(3)
CON_ID		NUMBER

SQL> select * from v$tablespace;

TS#	NAME	INC	BIG	FLA	ENC	CON_ID
1	SYSAUX	YES	NO	YES		0
0	SYSTEM	YES	NO	YES		0
2	UNDOTBS1	YES	NO	YES		0
4	USERS	YES	NO	YES		0
3	TEMP	NO	NO	YES		0
5	EXAMPLE	YES	NO	YES		0
6	BI_IAS_OPSS	YES	NO	YES		0
7	BI_IAS_TEMP	NO	NO	YES		0
8	BI_IAS_UMS	YES	NO	YES		0
9	BI_MDS	YES	NO	YES		0
10	BI_IAU	YES	NO	YES		0
11	BI_BIPLATFORM	YES	NO	YES		0
12	BI_WLS	YES	NO	YES		0
13	BI_STB	YES	NO	YES		0
16	UBD_DATA1	YES	NO	YES		0
17	UBD_DATA2	YES	NO	YES		0

16 rows selected.

2) Informatii despre tablespace-uri si fiserele de date asignate (la nivelul bazei de date):

SQL> desc dba_data_files;

Name	Null?	Type
FILE_NAME		VARCHAR2(513)
FILE_ID		NUMBER
TABLESPACE_NAME		VARCHAR2(30)
BYTES		NUMBER
BLOCKS		NUMBER
STATUS		VARCHAR2(9)
RELATIVE_FNO		NUMBER
AUTOEXTENSIBLE		VARCHAR2(3)

MAXBYTES	NUMBER
MAXBLOCKS	NUMBER
INCREMENT_BY	NUMBER
USER_BYTES	NUMBER
USER_BLOCKS	NUMBER
ONLINE_STATUS	VARCHAR2(7)

SQL> select tablespace_name,file_name,status from dba_data_files;

TABLESPACE_NAME	FILE_NAME	STATUS
SYSTEM	C:\ORACLE_12C\ORADATA\BD\SYSTEM01.DBF	AVAILABLE
SYSAUX	C:\ORACLE_12C\ORADATA\BD\SYSAUX01.DBF	AVAILABLE
UNDOTBS1	C:\ORACLE_12C\ORADATA\BD\UNDOTBS01.DBF	AVAILABLE
USERS	C:\ORACLE_12C\ORADATA\BD\USERS01.DBF	AVAILABLE
EXAMPLE	C:\ORACLE_12C\ORADATA\BD\EXAMPLE01.DBF	AVAILABLE
BI_IAS_OPSS	C:\ORACLE_12C\ORADATA\BD\BI_IAS_OPSS.DBF	AVAILABLE
BI_IAS_UMS	C:\ORACLE_12C\ORADATA\BD\BI_UMS.DBF	AVAILABLE
BI_MDS	C:\ORACLE_12C\ORADATA\BD\BI_MDS.DBF	AVAILABLE
BI_IAU	C:\ORACLE_12C\ORADATA\BD\BI_IAU.DBF	AVAILABLE
BI_BIPLATFORM	C:\ORACLE_12C\ORADATA\BD\BI_BIPLATFORM.DBF	AVAILABLE
BI_WLS	C:\ORACLE_12C\ORADATA\BD\BI_WLSSERVICES.DBF	AVAILABLE
BI_STB	C:\ORACLE_12C\ORADATA\BD\BI_SVCTBL.DBF	AVAILABLE
UBD_DATA1	E:\TEMP\UBD_DATA1.DBF	AVAILABLE
UBD_DATA2	E:\TEMP\UBD_DATA2.DBF	AVAILABLE
UBD_DATA1	E:\TEMP\UBD_DATA11.DBF	AVAILABLE

15 rows selected.

3) Informatii despre fisierele de date asignate bazei de date:

SQL> desc v$datafile

Name	Null?	Type
FILE#		NUMBER
CREATION_CHANGE#		NUMBER
CREATION_TIME		DATE
TS#		NUMBER
RFILE#		NUMBER
STATUS		VARCHAR2(7)
ENABLED		VARCHAR2(10)
CHECKPOINT_CHANGE#		NUMBER
CHECKPOINT_TIME		DATE
UNRECOVERABLE_CHANGE#		NUMBER
UNRECOVERABLE_TIME		DATE
LAST_CHANGE#		NUMBER
LAST_TIME		DATE
OFFLINE_CHANGE#		NUMBER
ONLINE_CHANGE#		NUMBER
ONLINE_TIME		DATE
BYTES		NUMBER
BLOCKS		NUMBER

CREATE_BYTES	NUMBER
BLOCK_SIZE	NUMBER
NAME	VARCHAR2(513)
PLUGGED_IN	NUMBER
BLOCK1_OFFSET	NUMBER
AUX_NAME	VARCHAR2(513)
FIRST_NONLOGGED_SCN	NUMBER
FIRST_NONLOGGED_TIME	DATE
FOREIGN_DBID	NUMBER
FOREIGN_CREATION_CHANGE#	NUMBER
FOREIGN_CREATION_TIME	DATE
PLUGGED_READONLY	VARCHAR2(3)
PLUGIN_CHANGE#	NUMBER
PLUGIN_RESETLOGS_CHANGE#	NUMBER
PLUGIN_RESETLOGS_TIME	DATE
CON_ID	NUMBER

SQL> select file#, name, creation_time,status, enabled from v$datafile;

FILE#	NAME	CREATION_	STATUS	ENABLED
1	C:\ORACLE_12C\ORADATA\BD\SYSTEM01.DBF	11-SEP-14	SYSTEM	READ WRITE
3	C:\ORACLE_12C\ORADATA\BD\SYSAUX01.DBF	11-SEP-14	ONLINE	READ WRITE
5	C:\ORACLE_12C\ORADATA\BD\UNDOTBS01.DBF	11-SEP-14	ONLINE	READ WRITE
6	C:\ORACLE_12C\ORADATA\BD\USERS01.DBF	11-SEP-14	ONLINE	READ WRITE
7	C:\ORACLE_12C\ORADATA\BD\EXAMPLE01.DBF	08-MAY-19	ONLINE	READ WRITE
8	C:\ORACLE_12C\ORADATA\BD\BI_IAS_OPSS.DBF	02-AUG-19	ONLINE	READ WRITE
9	C:\ORACLE_12C\ORADATA\BD\BI_UMS.DBF	02-AUG-19	ONLINE	READ WRITE
10	C:\ORACLE_12C\ORADATA\BD\BI_MDS.DBF	02-AUG-19	ONLINE	READ WRITE
11	C:\ORACLE_12C\ORADATA\BD\BI_IAU.DBF	02-AUG-19	ONLINE	READ WRITE
12	C:\ORACLE_12C\ORADATA\BD\BI_BIPLATFORM.DBF	02-AUG-19	ONLINE	READ WRITE
13	C:\ORACLE_12C\ORADATA\BD\BI_WLSSERVICES.DBF	02-AUG-19	ONLINE	READ WRITE
14	C:\ORACLE_12C\ORADATA\BD\BI_SVCTBL.DBF	02-AUG-19	ONLINE	READ WRITE
15	E:\TEMP\UBD_DATA1.DBF	13-OCT-19	ONLINE	READ WRITE
16	E:\TEMP\UBD_DATA2.DBF	13-OCT-19	ONLINE	READ WRITE
17	E:\TEMP\UBD_DATA11.DBF	13-OCT-19	ONLINE	READ WRITE

15 rows selected.

4) Informatii despre fisierele de date temporare create pe baza de date:

SQL> desc dba_temp_files

Name	Null?	Type
FILE_NAME		VARCHAR2(513)
FILE_ID		NUMBER
TABLESPACE_NAME	NOT NULL	VARCHAR2(30)
BYTES		NUMBER
BLOCKS		NUMBER
STATUS		CHAR(9)
RELATIVE_FNO		NUMBER
AUTOEXTENSIBLE		VARCHAR2(3)

```
MAXBYTES                                                  NUMBER
MAXBLOCKS                                                 NUMBER
INCREMENT_BY                                              NUMBER
USER_BYTES                                                NUMBER
USER_BLOCKS                                               NUMBER
```

```
SQL> select file_name,tablespace_name, status from dba_temp_files;

FILE_NAME                                          TABLESPACE_NAME           STATUS
-------------------------------------------------- ------------------------------ -------
C:\ORACLE_12C\ORADATA\BD\TEMP01.DBF                TEMP                      ONLINE
C:\ORACLE_12C\ORADATA\BD\BI_IASTEMP.DBF            BI_IAS_TEMP               ONLINE
```

5) Informatii despre fisierele temporare create pe baza de date (preluate din view):

```
SQL> desc v$tempfile
Name                                                                                  Null?    Type
 ------------------------------------------------------------------------------------ -------- -----
 FILE#                                                                                         NUMBER
 CREATION_CHANGE#                                                                              NUMBER
 CREATION_TIME                                                                                 DATE
 TS#                                                                                           NUMBER
 RFILE#                                                                                        NUMBER
 STATUS                                                                                        VARCHAR2(7)
 ENABLED                                                                                       VARCHAR2(10)
 BYTES                                                                                         NUMBER
 BLOCKS                                                                                        NUMBER
 CREATE_BYTES                                                                                  NUMBER
 BLOCK_SIZE                                                                                    NUMBER
 NAME                                                                                          VARCHAR2(513)
 CON_ID                                                                                        NUMBER
```

```
SQL> select file#,name, creation_time, status from v$tempfile;

    FILE# NAME                                               CREATION_ STATUS
---------- -------------------------------------------------- --------- -------
         1 C:\ORACLE_12C\ORADATA\BD\TEMP01.DBF                08-MAY-19 ONLINE
         2 C:\ORACLE_12C\ORADATA\BD\BI_IASTEMP.DBF            02-AUG-19 ONLINE
```

6) Informatii despre parametrii bazei de date:

```
SQL> desc database_properties;
Name                                                                                  Null?    Type
 ------------------------------------------------------------------------------------ -------- ------
PROPERTY_NAME                                                                         NOT NULL VARCHAR2(30)
PROPERTY_VALUE                                                                                 VARCHAR2(4000)
DESCRIPTION                                                                                    VARCHAR2(4000)
```

SQL> select * from database_properties;

PROPERTY_NAME	PROPERTY_VALUE	DESCRIPTION
DICT.BASE	2	dictionary base tables version #
DEFAULT_TEMP_TABLESPACE	TEMP	Name of default temporary tablespace
DEFAULT_PERMANENT_TABLESPACE	USERS	Name of default permanent tablespace
DEFAULT_EDITION	ORA$BASE	Name of the database default edition
Flashback Timestamp TimeZone	GMT	Flashback timestamp created in GMT
TDE_MASTER_KEY_ID		
DEFAULT_TBS_TYPE	SMALLFILE	Default tablespace type
GLOBAL_DB_NAME	BD	Global database name
NLS_RDBMS_VERSION	12.1.0.2.0	RDBMS version for NLS parameters
NLS_NCHAR_CHARACTERSET	AL16UTF16	NCHAR Character set
NLS_NCHAR_CONV_EXCP	FALSE	NLS conversion exception
NLS_LENGTH_SEMANTICS	BYTE	NLS length semantics
NLS_COMP	BINARY	NLS comparison
NLS_DUAL_CURRENCY	$	Dual currency symbol
NLS_TIMESTAMP_TZ_FORMAT	DD-MON-RR HH.MI.SSXFF AM TZR	Timestamp with timezone format
NLS_TIME_TZ_FORMAT	HH.MI.SSXFF AM TZR	Time with timezone format
NLS_TIMESTAMP_FORMAT	DD-MON-RR HH.MI.SSXFF AM	Time stamp format
NLS_TIME_FORMAT	HH.MI.SSXFF AM	Time format
NLS_SORT	BINARY	Linguistic definition
NLS_DATE_LANGUAGE	AMERICAN	Date language
NLS_DATE_FORMAT	DD-MON-RR	Date format
NLS_CALENDAR	GREGORIAN	Calendar system
NLS_CHARACTERSET	WE8MSWIN1252	Character set
NLS_NUMERIC_CHARACTERS	.,	Numeric characters
NLS_ISO_CURRENCY	AMERICA	ISO currency
NLS_CURRENCY	$	Local currency
NLS_TERRITORY	AMERICA	Territory
NLS_LANGUAGE	AMERICAN	Language
DST_SECONDARY_TT_VERSION	0	Version of secondary timezone data file
DST_PRIMARY_TT_VERSION	18	Version of primary timezone data file
DST_UPGRADE_STATE	NONE	State of Day Light Saving Time Upgrade
MAX_STRING_SIZE	STANDARD_MAX_STRING_SIZE	paramter used for dictionary metadata
EXPORT_VIEWS_VERSION	8	Export views revision #
WORKLOAD_CAPTURE_MODE		CAPTURE implies workload capture is in progress
WORKLOAD_REPLAY_MODE		PREPARE implies external replay clients can connect; REPLAY implies workload replay is in progress
NO_USERID_VERIFIER_SALT		79F6374D9E33A4DF86E3D6BEE0F376EF
OLS_OID_STATUS	0	OLS OID Status used for Label Security
DBTIMEZONE	00:00	DB time zone

38 rows selected.

7) Informatii despre tablespace-urile alocate userilor creati pe baza de date:

SQL> desc dba_users

Name	Null?	Type
USERNAME	NOT NULL	VARCHAR2(128)
USER_ID	NOT NULL	NUMBER
PASSWORD		VARCHAR2(4000)

ACCOUNT_STATUS	NOT NULL	VARCHAR2(32)
LOCK_DATE		DATE
EXPIRY_DATE		DATE
DEFAULT_TABLESPACE	NOT NULL	VARCHAR2(30)
TEMPORARY_TABLESPACE	NOT NULL	VARCHAR2(30)
CREATED	NOT NULL	DATE
PROFILE	NOT NULL	VARCHAR2(128)
INITIAL_RSRC_CONSUMER_GROUP		VARCHAR2(128)
EXTERNAL_NAME		VARCHAR2(4000)
PASSWORD_VERSIONS		VARCHAR2(12)
EDITIONS_ENABLED		VARCHAR2(1)
AUTHENTICATION_TYPE		VARCHAR2(8)
PROXY_ONLY_CONNECT		VARCHAR2(1)
COMMON		VARCHAR2(3)
LAST_LOGIN		TIMESTAMP(9) WITH TIME ZONE
ORACLE_MAINTAINED		VARCHAR2(1)

SQL> select username, default_tablespace, temporary_tablespace from dba_users;

USERNAME	DEFAULT_TABLESPACE	TEMPORARY_TABLESPACE
SCOTT	USERS	TEMP
BI	USERS	TEMP
SH	USERS	TEMP
OE	USERS	TEMP
HR	USERS	TEMP
TEST	BD_DATA	BD_TEMP
UBD1	BD_DATA	BD_TEMP

8) Informatiilor despre spatiul alocat si spatiul utilizat de catre useri in tablespace-urile de sistem:

SQL> desc dba_ts_quotas

Name	Null?	Type
TABLESPACE_NAME	NOT NULL	VARCHAR2(30)
USERNAME	NOT NULL	VARCHAR2(30)
BYTES		NUMBER
MAX_BYTES		NUMBER
BLOCKS		NUMBER
MAX_BLOCKS		NUMBER
DROPPED		VARCHAR2(3)

SQL> select tablespace_name, username, max_bytes, bytes from dba_ts_quotas;

TABLESPACE_NAME	USERNAME	MAX_BYTES	BYTES
BI_WLS	BI_WLS_RUNTIME	-1	131072
BI_WLS	BI_WLS	-1	131072
SYSAUX	AUDSYS	-1	1572864
BI_IAS_OPSS	BI_OPSS	-1	58720256
SYSAUX	GSMADMIN_INTERNAL	104857600	1441792
EXAMPLE	OE	-1	10420224
BI_MDS	BI_MDS	-1	17498112
SYSAUX	FLOWS_FILES	-1	0
SYSAUX	APPQOSSYS	-1	0
BI_STB	BI_STB	-1	917504
BI_IAS_UMS	BI_UMS	-1	7471104
SYSAUX	OLAPSYS	-1	0

9) Informatii despre userul curent:

SQL> desc user_users

Name	Null?	Type
USERNAME	NOT NULL	VARCHAR2(128)
USER_ID	NOT NULL	NUMBER
ACCOUNT_STATUS	NOT NULL	VARCHAR2(32)
LOCK_DATE		DATE
EXPIRY_DATE		DATE
DEFAULT_TABLESPACE	NOT NULL	VARCHAR2(30)
TEMPORARY_TABLESPACE	NOT NULL	VARCHAR2(30)
CREATED	NOT NULL	DATE
INITIAL_RSRC_CONSUMER_GROUP		VARCHAR2(128)
EXTERNAL_NAME		VARCHAR2(4000)
PROXY_ONLY_CONNECT		VARCHAR2(1)
COMMON		VARCHAR2(3)
ORACLE_MAINTAINED		VARCHAR2

SQL> select user_id, username, created, lock_date from user_users;

USER_ID	USERNAME	CREATED	LOCK_DATE
110	SCOTT	08-MAY-19	

10) Crearea unui tablespace temporar:

SQL> create temporary tablespace ubd_temp tempfile ’e:\temp\ubd_temp1.dbf’ size 10m extent management local uniform size 2M;
Tablespace created.

11) Setare tablespace temporar ca default:

SQL> alter database default temporary tablespace ubd_temp;
Database altered.

12) Verificare in dictionar ce tablespace temporar este setat ca default:

SQL> select * from database_properties where property_name =
'DEFAULT_TEMP_TABLESPACE' ;

PROPERTY_NAME	PROPERTY_VALUE	DESCRIPTION
DEFAULT_TEMP_TABLESPACE	UBD_TEMP	Name of default temporary tablespace

13) Schimbare stare tablespace permanent ca READ ONLY:

SQL> alter tablespace ubd_data1 read only;
Tablespace altered.

14) Schimbare stare tablespace permanent ca READ WRITE:

SQL> alter tablespace ubd_data1 read write;
Tablespace altered.

Verificare:
SQL> select tablespace_name,block_size,status from DBA_TABLESPACES where tablespace_name ='UBD_DATA1';

TABLESPACE_NAME	BLOCK_	SIZE STATUS
UBD_DATA1	8192	ONLINE

15) Verificare in dictionar starea unui tablespace:

SQL> select tablespace_name, status from dba_tablespaces where tablespace_name =
'UBD_DATA1';

TABLESPACE_NAME	STATUS
UBD_DATA1	READ ONLY

16) Schimbare stare tablespace permanent ca OFFLINE/ONLINE:

SQL> alter tablespace ubd_data1 offline;
Tablespace altered.

Verificare:

SQL> select tablespace_name, status from dba_tablespaces where tablespace_name='UBD_DATA1';

TABLESPACE_NAME	STATUS
UBD_DATA1	OFFLINE

Obs. In starea offline se trece numai din starea online(nu din read only).

SQL> alter tablespace ubd_data1 online;
Tablespace altered.

17) Mutare tablespace permanent dintr-un fisier in altul:

SQL> alter tablespace ubd_data1 rename datafile ’e:\temp\ubd_data11.dbf’ to
’e:\temp\ubd_data22.dbf’;
Tablespace altered.

- Obs. Fisierul destinatie trebuie sa existe fizic, altfel se genereaza o eroare:

ERROR at line 1:
ORA-01525: error in renaming data files
ORA-01141: error renaming data file 16 - new file 'e:\temp\ubd_data11.dbf' not found
ORA-01110: data file 16: 'E:\TEMP\UBD_DATA1.DBF'
ORA-27041: unable to open file
OSD-04002: unable to open file
O/S-Error: (OS 2) The system cannot find the file specified.

18) Mutare database dintr-un fisier in altul:

SQL> ALTER DATABASE RENAME FILE ’e:\temp\ubd_data11.dbf’ TO
’e:\temp\ubd_data22.dbf’;
Obs:

- Baza de date trebuie sa fie in starea MOUNT;
- Fisierul destinatie trebuie sa existe fizic.

19) Crearea unui tablespace de tip undo:

SQL> create undo tablespace ubd_undo1 datafile ’e:\temp\ubd_undo1.dbf’ size 10M;
Tablespace created.

20) Stergerea din dictionar a unui fisier de date asignat unui tablespace:

SQL> alter tablespace ubd_data drop datafile ’e:\temp\ubd_data1.dbf’

21) Stergerea din dictionar a unui fisier temporar asignat unui tablespace:

SQL> alter tablespace ubd_temp drop tempfile ’e:\temp\ubd_temp1.dbf’

22) Stergerea din dictionar a unui fisier temporar asignat unui database:

SQL> alter database tempfile ’e:\temp\ubd_temp1.dbf’ drop including datafiles;

Database altered.

23) Stergerea din dictionar a unui tablespace(inclusiv fisierele de date asignate):

SQL> drop tablespace ubd_data1 including contents and datafiles;
Tablespace dropped.