
Structuri de stocare a datelor

A. Segmente si blocuri de date

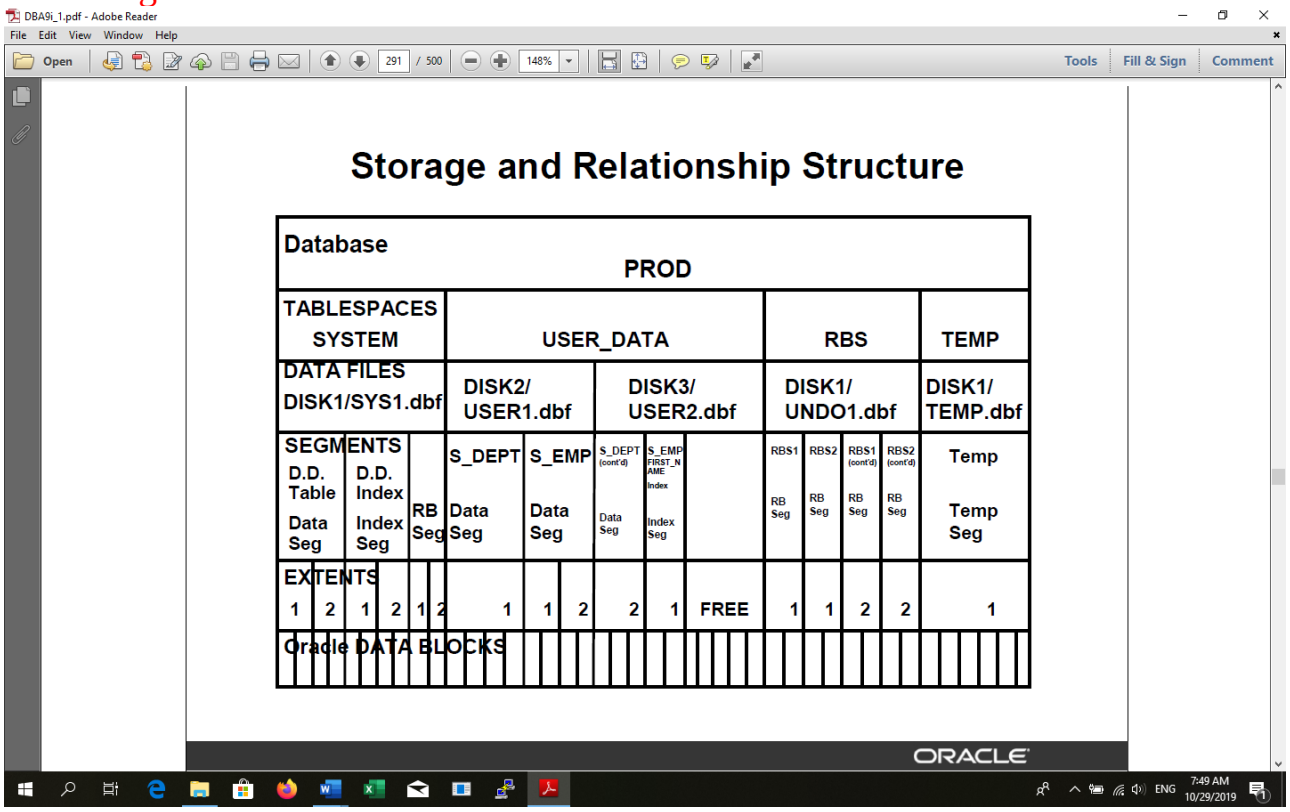


DBA9i_1.pdf - Adobe Reader

File Edit View Window Help

Open 292 / 500 132% Tools Fill & Sign Comment

Types of Segments



Table





Table partition



Cluster



Index

ORACLE


ENG 7:51 AM 10/29/2019

DBA9i_1.pdf - Adobe Reader


File Edit View Window Help

Open 294 / 500 148% Tools Fill & Sign Comment


Types of Segments




Index-organized table



Index partition



Undo segment



Temporary segment

ORACLE


ENG 7:52 AM 10/29/2019

DBA9i_1.pdf - Adobe Reader

File Edit View Window Help

Open | 295 / 500 | 148% | Tools | Fill & Sign | Comment


Types of Segments



LOB segment



Nested table



Bootstrap segment

ORACLE

7:52 AM 10/29/2019


DBA9i_1.pdf - Adobe Reader

File Edit View Window Help

Open | 298 / 500 | 148% | Tools | Fill & Sign | Comment

Used and Free Extents

Data file

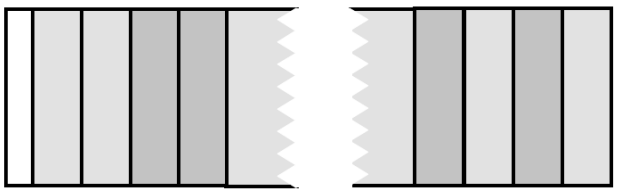

File header Used extent Free extent

ORACLE


7:53 AM 10/29/2019

DBA9i_1.pdf - Adobe Reader

File Edit View Window Help

Open 308 / 500 152% Tools Fill & Sign Comment

Database Block Contents

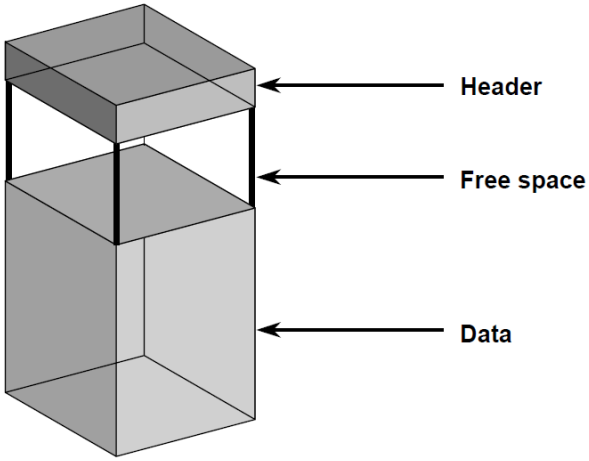

ORACLE

8.50 x 11.00 in


ENG 7:55 AM 10/29/2019

DBA9i_1.pdf - Adobe Reader

File Edit View Window Help

Open 309 / 500 152% Tools Fill & Sign Comment

Block Space Utilization Parameters

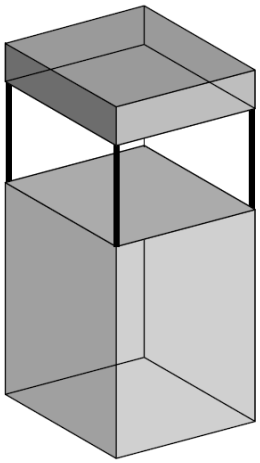

INITRANS

MAXTRANS


PCTFREE


PCTUSED

ORACLE

8.50 x 11.00 in

ENG 7:55 AM 10/29/2019

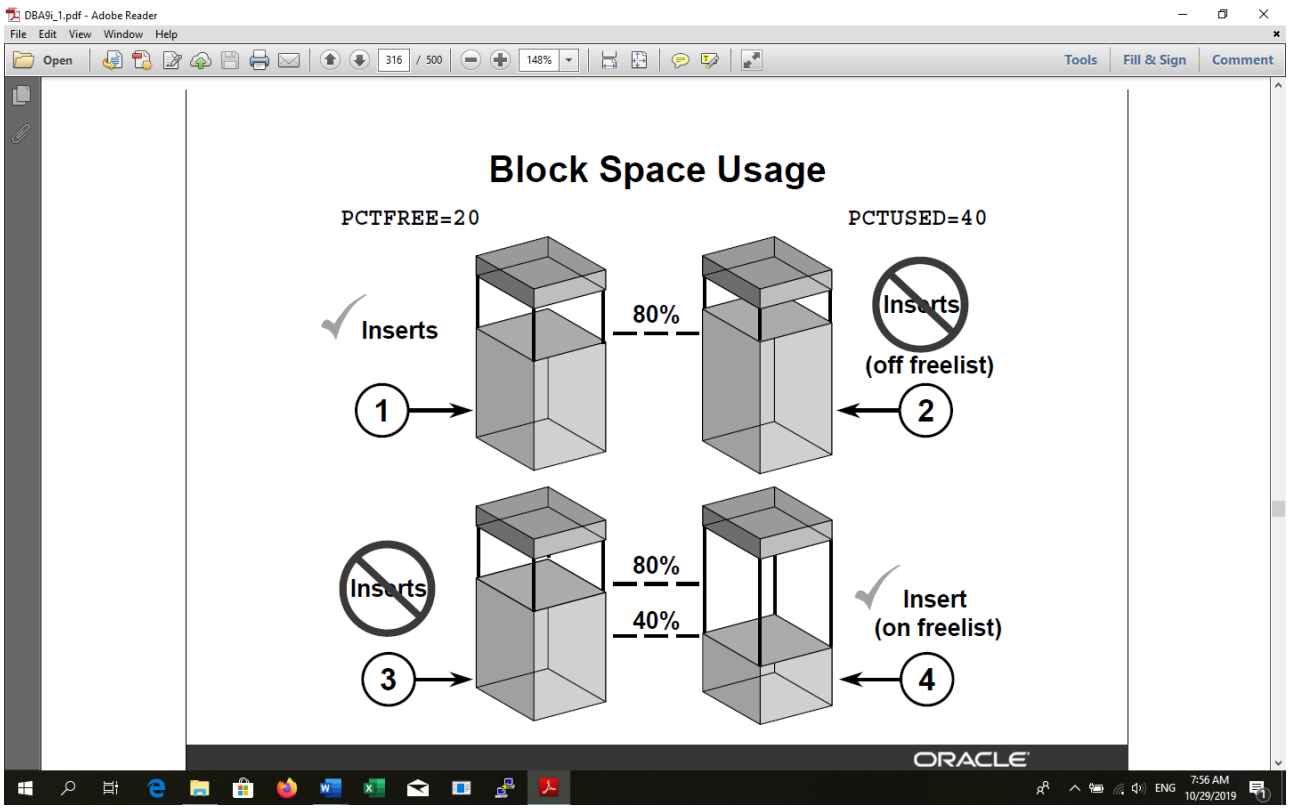

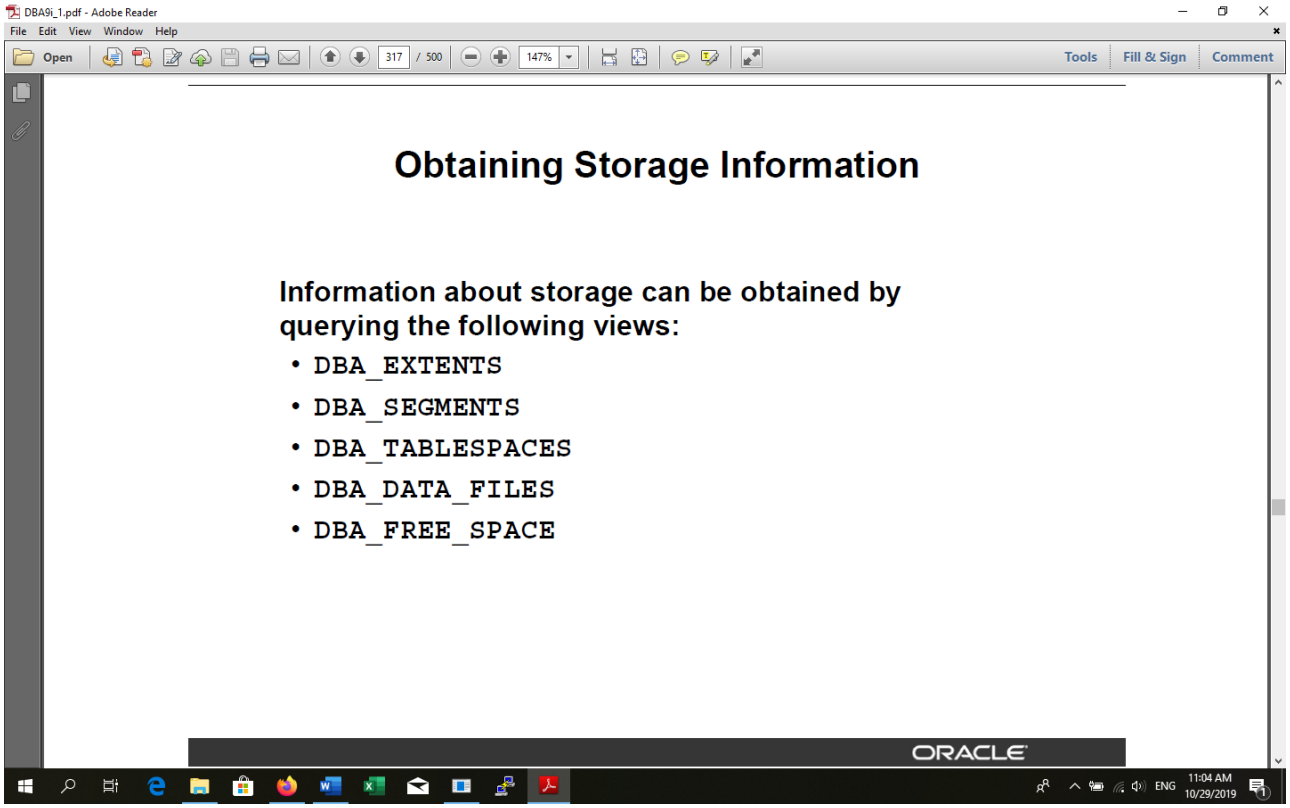

1) Informatii despre starea unui tablespace si parametrii specifici blocurilor de date:

SQL> desc dba_tablespaces

Name	Null?	Type
TABLESPACE_NAME	NOT NULL	VARCHAR2(30)
BLOCK_SIZE	NOT NULL	NUMBER
INITIAL_EXTENT		NUMBER
NEXT_EXTENT		NUMBER
MIN_EXTENTS	NOT NULL	NUMBER
MAX_EXTENTS		NUMBER
MAX_SIZE		NUMBER
PCT_INCREASE		NUMBER
MIN_EXTLEN		NUMBER
STATUS		VARCHAR2(9)
CONTENTS		VARCHAR2(9)
LOGGING		VARCHAR2(9)
FORCE_LOGGING		VARCHAR2(3)
EXTENT_MANAGEMENT		VARCHAR2(10)
ALLOCATION_TYPE		VARCHAR2(9)
PLUGGED_IN		VARCHAR2(3)
SEGMENT_SPACE_MANAGEMENT		VARCHAR2(6)
DEF_TAB_COMPRESSION		VARCHAR2(8)
RETENTION		VARCHAR2(11)
BIGFILE		VARCHAR2(3)
PREDICATE_EVALUATION		VARCHAR2(7)
ENCRYPTED		VARCHAR2(3)
COMPRESS_FOR		VARCHAR2(30)
DEF_INMEMORY		VARCHAR2(8)
DEF_INMEMORY_PRIORITY		VARCHAR2(8)
DEF_INMEMORY_DISTRIBUTE		VARCHAR2(15)
DEF_INMEMORY_COMPRESSION		VARCHAR2(17)
DEF_INMEMORY_DUPLICATE		VARCHAR2(13)

SQL> select tablespace_name,block_size,initial_extent,min_extents, max_extents, status
from dba_tablespaces where tablespace_name='USERS';

TABLESPACE_NAME	BLOCK_SIZE	INITIAL_EXTENT	MIN_EXTENTS	MAX_EXTENTS	STATUS
USERS	8192	65536	1	2147483645	ONLINE

2) Informatii despre un tablespace, fisierul de date alocat, numarul total de blocuri si dimensiunea lor:

SQL> select tablespace_name, file_id, file_name, blocks, bytes from dba_data_files
where tablespace_name='USERS';

```
TABLESPACE_NAME         FILE_ID          FILE_NAME                                    BLOCKS          BYTES
------------------------------  ----------  ------------------------------------------------------------  ----------  ----------
USERS                           6       C:\ORACLE_12C\ORADATA\BD\USERS01.DBF     640          5242880
```

3) Informatii despre segmentele de tip tabela create intr-un tablespace :

```
SQL> select owner,segment_name,segment_type, tablespace_name, blocks, extents
        from dba_segments where owner='SCOTT'and segment_type='TABLE';

OWNER      SEGMENT_NA SEGMENT_TYPE      TABLESPACE     BLOCKS    EXTENTS
----------  ----------  ------------------  ----------  ----------  ----------
SCOTT       DEPT            TABLE           USERS          8           1
SCOTT       EMP             TABLE           USERS          8           1
SCOTT       SALGRADE        TABLE           USERS          8           1
```

4) Informatii despre dimensiunea extensiilor alocate unui segment:

```
SQL> desc dba_extents

 Name                            Null?           Type
 -------------------------------  --------        ----
 OWNER                                           VARCHAR2(30)
 SEGMENT_NAME                                    VARCHAR2(81)
 PARTITION_NAME                                  VARCHAR2(30)
 SEGMENT_TYPE                                    VARCHAR2(18)
 TABLESPACE_NAME                                 VARCHAR2(30)
 EXTENT_ID                                       NUMBER
 FILE_ID                                         NUMBER
 BLOCK_ID                                        NUMBER
 BYTES                                           NUMBER
 BLOCKS                                          NUMBER
 RELATIVE_FNO                                    NUMBER
```

```
SQL> select owner, segment_name, segment_type, tablespace_name, bytes, blocks from
        dba_extents where owner='SCOTT' and segment_name='EMP';

OWNER                          SEGMENT_NAME      SEGMENT_TYPE       TABLESPACE_NAME          BYTES    BLOCKS
------------------------------  ------------  ------------------  ------------------------------  --------  ----------
SCOTT                          EMP               TABLE              USERS                    65536       8
```

```
SQL>select  segment_name, extent_id, file_id, block_id, blocks from dba_extents
       where owner='SCOTT' and segment_name='EMP' ;

SEGMENT_NAME                                                EXTENT_ID    FILE_ID     BLOCK_ID    BLOCKS
------------------------------------------------------------  ----------  ---------  ----------  ----------
EMP                                                         0          6          192         8
```

5) Informatii despre tablespace, fisierul de date alocat, numarul de blocuri si spatiul liber in fiecare bloc :

```
SQL> desc dba_free_space

 Name                          Null?    Type
 ----------------------------- -------- ----
 TABLESPACE_NAME                        VARCHAR2(30)
 FILE_ID                                NUMBER
 BLOCK_ID                               NUMBER
 BYTES                                  NUMBER
 BLOCKS                                 NUMBER
 RELATIVE_FNO                           NUMBER

SQL> select * from dba_free_space where tablespace_name='USERS' ;

TABLESPACE  FILE_ID  BLOCK_ID  BYTES    BLOCKS  RELATIVE_FNO
----------  -------  --------  -------  ------  ------------
USERS             6       216  3473408     424             6

SQL> select tablespace_name, count(*), max(blocks), sum(blocks) from dba_free_space
     group by tablespace_name;

TABLESPACE_NAME                COUNT(*)  MAX(BLOCKS)  SUM(BLOCKS)
------------------------------ --------  -----------  -----------
BI_IAS_OPSS                           1          384          384
SYSAUX                              140         5104         9632
UNDOTBS1                             12        76544        78416
BI_IAU                                1         7488         7488
BI_STB                                1         1040         1040
USERS                                 1          424          424
SYSTEM                                3          128          304
EXAMPLE                               2         5200         5328
BI_BIPLATFORM                         1        14744        14744
BI_WLS                                1         7520         7520
BI_IAS_UMS                            1        11760        11760
BI_MDS                                2        10496        10536

SQL> select tablespace_name, blocks from dba_free_space where
     tablespace_name='SYSTEM';

TABLESPACE_NAME                BLOCKS
------------------------------ ------
SYSTEM                             64
SYSTEM                            112
SYSTEM                            128
```

6) Unificarea spatiilor contigue dintr-un tablespace(defragmentare):


```
SQL> desc dba_free_space_coalesced
 Name                                      Null?    Type
 ----------------------------------------- -------- ------------
 TABLESPACE_NAME                                    VARCHAR2(30)
 TOTAL_EXTENTS                                      NUMBER
 EXTENTS_COALESCED                                  NUMBER
 PERCENT_EXTENTS_COALESCED                          NUMBER
 TOTAL_BYTES                                        NUMBER
 BYTES_COALESCED                                    NUMBER
 TOTAL_BLOCKS                                       NUMBER
 BLOCKS_COALESCED                                   NUMBER
 PERCENT_BLOCKS_COALESCED                           NUMBER


SQL> ALTER TABLESPACE  BD COALESCE ;

SQL> select tablespace_name,total_extents, percent_extents_coalesced from
        dba_free_space_coalesced;

TABLESPACE_NAME                TOTAL_EXTENTS          PERCENT_EXTENTS_COALESCED
------------------------------ --------------------   ---------------------------------
        SYSAUX                         144                    100
        BI_IAS_OPSS                    1                      100
        BI_BIPLATF                     1                      100
        BI_STB                         1                      100
        UNDOTBS1                       10                     100
        USERS                          1                      100
        EXAMPLE                        2                      100
        BI_IAS_UMS                     1                      100
        SYSTEM                         3                      100
        BI_MDS                         2                      100
        BI_IAU                         1                      100
        BI_WLS                         1                      100
```

B. Segmente de undo si sortare

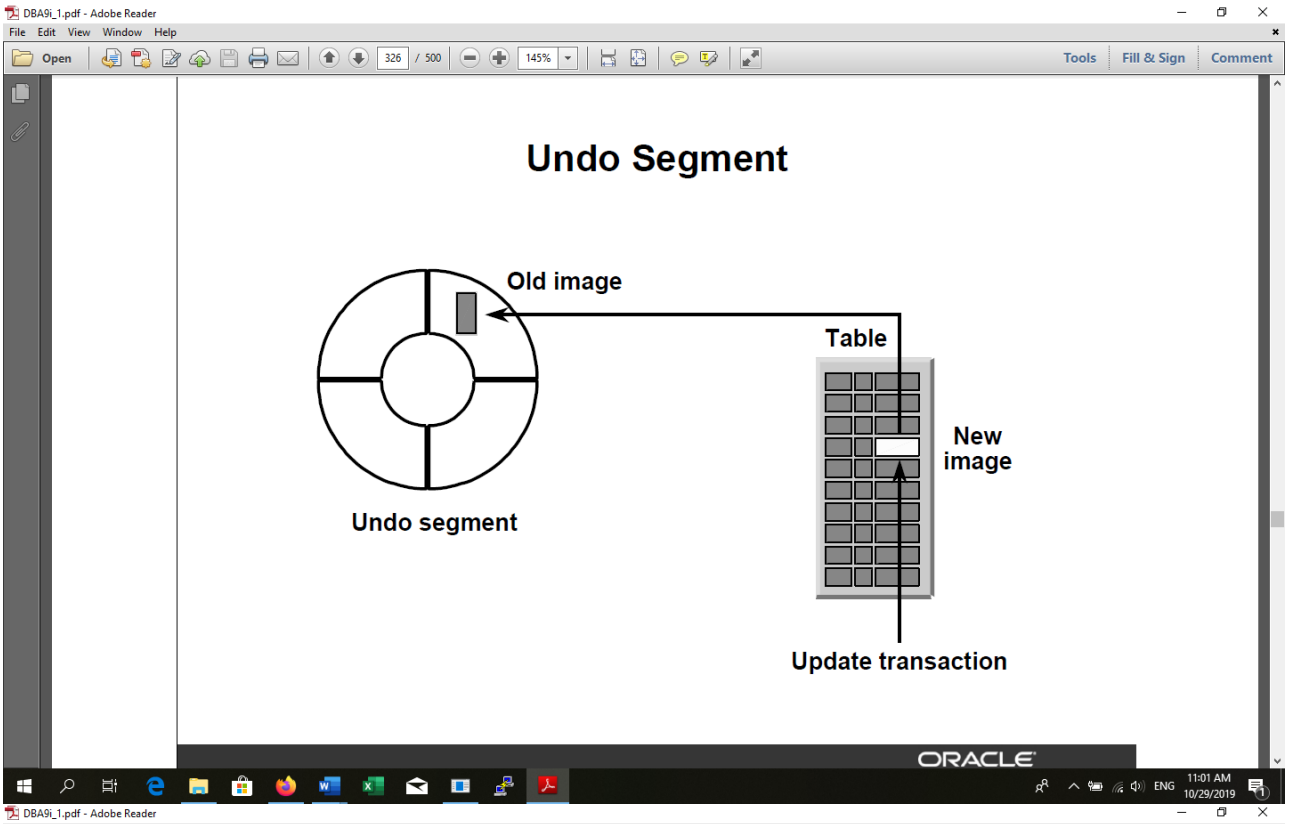

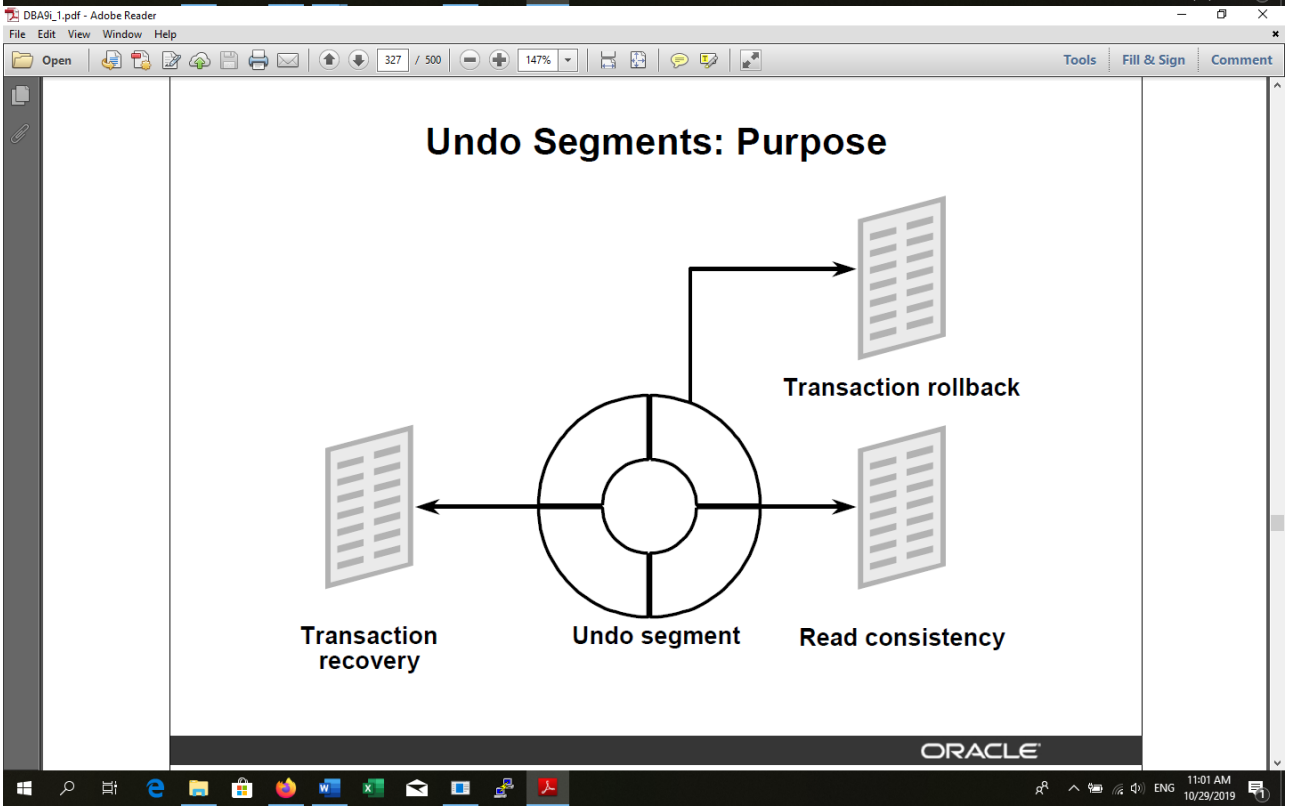


DBA9i_1.pdf - Adobe Reader

File Edit View Window Help

Open 328 / 500 147% Tools Fill & Sign Comment

Read Consistency

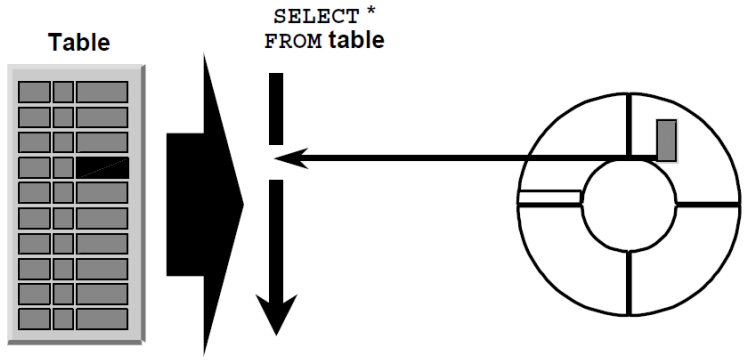

New image

Image at start of statement

ORACLE

DBA9i_1.pdf - Adobe Reader

File Edit View Window Help

Open 349 / 500 147% Tools Fill & Sign Comment

Obtaining Undo Segment Information

- Information about undo segments can be obtained by querying the following views:
  - DBA_ROLLBACK_SEGS
- Dynamic Performance Views
  - V$ROLLNAME
  - V$ROLLSTAT
  - V$UNDOSTAT
  - V$SESSION
  - V$TRANSACTION

ORACLE

7) Crearea unui tablespace de undo:

SQL> create undo tablespace BD_UNDO datafile 'e:\temp\undo_db01.dbf' size 2M;

Tablespace created.

8) Crearea unui segment de undo in tablespace-ul de undo:

SQL> create rollback segment UBD_UNDO tablespace BD_UNDO
storage (initial 100k next 100k optimal 4M minextents 20 maxextents 100);

Rollback segment created.

Obs. Daca la startarea bazei de date parametrul UNDO_MANAGEMENT= AUTO atunci segmentul nu poate fi utilizat online.

9) Informatii din dictionar privind segmentele de undo:

SQL> desc dba_rollback_segs

Name	Null?	Type
SEGMENT_NAME	NOT NULL	VARCHAR2(30)
OWNER		VARCHAR2(6)
TABLESPACE_NAME	NOT NULL	VARCHAR2(30)
SEGMENT_ID	NOT NULL	NUMBER
FILE_ID	NOT NULL	NUMBER
BLOCK_ID	NOT NULL	NUMBER
INITIAL_EXTENT	NUMBER	
NEXT_EXTENT	NUMBER	
MIN_EXTENTS	NOT NULL	NUMBER
MAX_EXTENTS	NOT NULL	NUMBER
PCT_INCREASE		NUMBER
STATUS		VARCHAR2(16)
INSTANCE_NUM		VARCHAR2(40)
RELATIVE_FNO	NOT NULL	NUMBER

SQL> select segment_name,tablespace_name,owner,status from dba_rollback_segs;

SEGMENT_NAME	TABLESPACE	OWNER	STATUS
SYSTEM	SYSTEM	SYS	ONLINE
_SYSSMU11_1204745426$	UNDOTBS1	PUBLIC	OFFLINE
_SYSSMU10_3901898544$	UNDOTBS1	PUBLIC	ONLINE
_SYSSMU9_889291946$	UNDOTBS1	PUBLIC	ONLINE
_SYSSMU8_153572397$	UNDOTBS1	PUBLIC	ONLINE

_SYSSMU7_233526786$	UNDOTBS1	PUBLIC	ONLINE
_SYSSMU6_3822221795$	UNDOTBS1	PUBLIC	ONLINE
_SYSSMU5_3484600714$	UNDOTBS1	PUBLIC	ONLINE
_SYSSMU4_910366693$	UNDOTBS1	PUBLIC	ONLINE
_SYSSMU3_2165878102$	UNDOTBS1	PUBLIC	ONLINE
_SYSSMU2_3197760948$	UNDOTBS1	PUBLIC	ONLINE
_SYSSMU1_1607784644$	UNDOTBS1	PUBLIC	ONLINE
_SYSSMU19_2088400043$	BD_UNDO	PUBLIC	OFFLINE
_SYSSMU18_1275962030$	BD_UNDO	PUBLIC	OFFLINE
_SYSSMU17_46852941$	BD_UNDO	PUBLIC	OFFLINE
_SYSSMU16_2926588256$	BD_UNDO	PUBLIC	OFFLINE
_SYSSMU15_3531944707$	BD_UNDO	PUBLIC	OFFLINE
_SYSSMU14_3622294764$	BD_UNDO	PUBLIC	OFFLINE
_SYSSMU13_3677523389$	BD_UNDO	PUBLIC	OFFLINE
_SYSSMU12_4129524475$	BD_UNDO	PUBLIC	OFFLINE

10) Segmentele de undo folosite de instanta curenta:

```
SQL> desc v$rollname
 Name                      Null?    Type
 ------------------------- -------- ------------
 USN                                NUMBER
 NAME                      NOT NULL VARCHAR2(30)
CON_ID                              NUMBER
```

```
SQL> select * from v$rollname;
```

USN	NAME	CON_ID
0	SYSTEM	0
1	_SYSSMU1_1607784644$	0
2	_SYSSMU2_3197760948$	0
3	_SYSSMU3_2165878102$	0
4	_SYSSMU4_910366693$	0
5	_SYSSMU5_3484600714$	0
6	_SYSSMU6_3822221795$	0
7	_SYSSMU7_233526786$	0
8	_SYSSMU8_153572397$	0
9	_SYSSMU9_889291946$	0
10	_SYSSMU10_3901898544$	0

11) Statistici despre segmentele de undo:

```
SQL> desc v$rollstat
 Name                          Null?    Type
 ----------------------------- -------- ---
 USN                                    NUMBER
 LATCH                                  NUMBER
 EXTENTS                                NUMBER
 RSSIZE                                 NUMBER
 WRITES                                 NUMBER
 XACTS                                  NUMBER
 GETS                                   NUMBER
 WAITS                                  NUMBER
 OPTSIZE                                NUMBER
 HWMSIZE                                NUMBER
 SHRINKS                                NUMBER
 WRAPS                                  NUMBER
 EXTENDS                                NUMBER
 AVESHRINK                              NUMBER
 AVEACTIVE                              NUMBER
 STATUS                                 VARCHAR2(15)
 CUREXT                                 NUMBER
 CURBLK                                 NUMBER
 CON_ID                                 NUMBER
```

```
SQL> select usn, rssize, extents, status from v$rollstat;

       USN    RSSIZE   EXTENTS      STATUS
---------- ---------- ---------- ---------------
         0     385024          6 ONLINE
         1    1171456          3 ONLINE
         2    1171456          3 ONLINE
         3    1171456          3 ONLINE
         4    1171456          3 ONLINE
         5    1171456          3 ONLINE
         6    1171456          3 ONLINE
         7    1171456          3 ONLINE
         8     385024          6 ONLINE
         9    1171456          3 ONLINE
        10    1171456          3 ONLINE
```

12) Informatii despre useri si sesiuni:

SQL> desc v$session

Name	Null?	Type
SADDR		RAW(4)
SID		NUMBER
SERIAL#		NUMBER
AUDSID		NUMBER
PADDR		RAW(4)
USER#		NUMBER
USERNAME		VARCHAR2(30)
COMMAND		NUMBER
OWNERID		NUMBER
TADDR		VARCHAR2(8)
LOCKWAIT		VARCHAR2(8)
STATUS		VARCHAR2(8)
SERVER		VARCHAR2(9)
SCHEMA#		NUMBER
SCHEMANAME		VARCHAR2(30)
OSUSER		VARCHAR2(30)
PROCESS		VARCHAR2(12)
MACHINE		VARCHAR2(64)
TERMINAL		VARCHAR2(16)
PROGRAM		VARCHAR2(64)
TYPE		VARCHAR2(10)
SQL_ADDRESS		RAW(4)
SQL_HASH_VALUE		NUMBER
PREV_SQL_ADDR		RAW(4)
PREV_HASH_VALUE		NUMBER
MODULE		VARCHAR2(48)
MODULE_HASH		NUMBER
ACTION		VARCHAR2(32)
ACTION_HASH		NUMBER
CLIENT_INFO		VARCHAR2(64)
FIXED_TABLE_SEQUENCE		NUMBER
ROW_WAIT_OBJ#		NUMBER
ROW_WAIT_FILE#		NUMBER
ROW_WAIT_BLOCK#		NUMBER
ROW_WAIT_ROW#		NUMBER
LOGON_TIME		DATE
LAST_CALL_ET		NUMBER
PDML_ENABLED		VARCHAR2(3)
FAILOVER_TYPE		VARCHAR2(13)
FAILOVER_METHOD		VARCHAR2(10)

```
FAILED_OVER                    VARCHAR2(3)
RESOURCE_CONSUMER_GROUP VARCHAR2(32)
PDML_STATUS                    VARCHAR2(8)
PDDL_STATUS                    VARCHAR2(8)
PQ_STATUS                      VARCHAR2(8)
CURRENT_QUEUE_DURATION  NUMBER
CLIENT_IDENTIFIER              VARCHAR2(64)
…..
SERVICE_NAME                   VARCHAR2(64)
SQL_TRACE                      VARCHAR2(8)
SQL_TRACE_WAITS                VARCHAR2(5)
SQL_TRACE_BINDS                VARCHAR2(5)
SQL_TRACE_PLAN_STATS           VARCHAR2(10)
SESSION_EDITION_ID             NUMBER
CREATOR_ADDR                   RAW(8)
CREATOR_SERIAL#                NUMBER
ECID                           VARCHAR2(64)
SQL_TRANSLATION_PROFILE_ID  NUMBER
PGA_TUNABLE_MEM                NUMBER
CON_ID                         NUMBER
EXTERNAL_NAME                  VARCHAR2(1024)
```

SQL> select username, sid, saddr, service_name from v$session;

USERNAME	SID	SADDR	SERVICE_NAME
	1	00007FFC6DD1F780	SYS$BACKGROUND
	2	00007FFC6DD1D6B0	SYS$BACKGROUND
	3	00007FFC6DD1B5E0	SYS$BACKGROUND
	4	00007FFC6DD19510	SYS$BACKGROUND
	5	00007FFC6DD17440	SYS$BACKGROUND
	6	00007FFC6DD15370	SYS$BACKGROUND
	7	00007FFC6DD132A0	SYS$BACKGROUND
	8	00007FFC6DD111D0	SYS$BACKGROUND
	9	00007FFC6DD0F100	SYS$BACKGROUND
	10	00007FFC6DD0D030	SYS$BACKGROUND
	13	00007FFC6DD06DC0	SYS$BACKGROUND
	14	00007FFC6DD04CF0	SYS$BACKGROUND
SCOTT	16	00007FFC6DD00B50	SYS$USERS
	40	00007FFC6DCCF7D0	SYS$BACKGROUND

13) Informatii despre tranzactii(adresele tranzactiilor pot fi relationate cu sesiunile prin ses_addr):

SQL> desc v$transaction

```
Name                           Null?    Type
------------------------------ -------- ---------
ADDR                                    RAW(4)
XIDUSN                                  NUMBER
```

XIDSLOT	NUMBER
XIDSQN	NUMBER
UBAFIL	NUMBER
UBABLK	NUMBER
UBASQN	NUMBER
UBAREC	NUMBER
STATUS	VARCHAR2(16)
START_TIME	VARCHAR2(20)
START_SCNB	NUMBER
START_SCNW	NUMBER
START_UEXT	NUMBER
START_UBAFIL	NUMBER
START_UBABLK	NUMBER
START_UBASQN	NUMBER
START_UBAREC	NUMBER
SES_ADDR	RAW(4)
FLAG	NUMBER
SPACE	VARCHAR2(3)
RECURSIVE	VARCHAR2(3)
NOUNDO	VARCHAR2(3)
PTX	VARCHAR2(3)
NAME	VARCHAR2(256)
PRV_XIDUSN	NUMBER
PRV_XIDSLT	NUMBER
PRV_XIDSQN	NUMBER
PTX_XIDUSN	NUMBER
PTX_XIDSLT	NUMBER
PTX_XIDSQN	NUMBER
DSCN-B	NUMBER
DSCN-W	NUMBER
USED_UBLK	NUMBER
USED_UREC	NUMBER
LOG_IO	NUMBER
PHY_IO	NUMBER
CR_GET	NUMBER
CR_CHANGE	NUMBER
START_DATE	DATE
DSCN_BASE	NUMBER
DSCN_WRAP	NUMBER
START_SCN	NUMBER
DEPENDENT_SCN	NUMBER
XID	RAW(8)
PRV_XID	RAW(8)
PTX_XID	RAW(8)
CON_ID	NUMBER

SQL> insert into emp values (999, 'TEST','TRANZACT',1111,sysdate, 100,0,10)
1 row created.

SQL> select addr, xidusn, used_ublk,start_uext, start_ubafil from v$transaction

ADDR	XIDUSN	USED_UBLK	START_UEXT	START_UBAFIL
00007FFC695843D8	2	1	2	5

ADDR – adresa sesiunii
XIDUSN – nr. segmentului de undo
USED_UBLK – nr. de blocuri de undo generate de tranzactie
START_UEXT- extensia segmentului de undo pentru care tranzactia a inceput scrierea
START_UBAFIL – fisierul de undo in care tranzactia curenta a inceput scrierea

14) Informatii despre blocurile de undo folosite de tranzactia curenta:

SQL> SELECT s.username, t.xidusn, t.ubafil, t.ubablk, t.used_ublk FROM v$session s,
v$transaction t WHERE s.saddr = t.ses_addr;

USERNAME	XIDUSN	UBAFIL	UBABLK	USED_UBLK
SCOTT	2	5	441	1

15) Statistici despre dimensiunea spatiului de undo:

SQL> desc v$undostat

Name	Null?	Type
BEGIN_TIME		DATE
END_TIME		DATE
UNDOTSN		NUMBER
UNDOBLKS		NUMBER
TXNCOUNT		NUMBER
MAXQUERYLEN		NUMBER
MAXQUERYID		VARCHAR2(13)
MAXCONCURRENCY		NUMBER
UNXPSTEALCNT		NUMBER
UNXPBLKRELCNT		NUMBER
UNXPBLKREUCNT		NUMBER
EXPSTEALCNT		NUMBER
EXPBLKRELCNT		NUMBER
EXPBLKREUCNT		NUMBER
SSOLDERRCNT		NUMBER

NOSPACEERRCNT	NUMBER
ACTIVEBLKS	NUMBER
UNEXPIREDBLKS	NUMBER
EXPIREDBLKS	NUMBER
TUNED_UNDORETENTION	NUMBER
CON_ID	NUMBER

SQL> SELECT to_char(begin_time, ’dd-mm-yyyy hh:mi:ss’) start_time, to_char(end_time,’dd-mm-yyyy hh:mi:ss’) end_time, ((end_time-begin_time)* 24)*60 minute, undoblks FROM v$undostat;

START_TIME	END_TIME	MINUTE	UNDOBLKS
29-10-2019 11:53:53	29-10-2019 12:01:36	7.71666667	171
29-10-2019 11:43:53	29-10-2019 11:53:53	10	7
29-10-2019 11:33:53	29-10-2019 11:43:53	10	1
29-10-2019 11:23:53	29-10-2019 11:33:53	10	4
29-10-2019 11:13:53	29-10-2019 11:23:53	10	3
29-10-2019 11:03:53	29-10-2019 11:13:53	10	7
29-10-2019 10:53:53	29-10-2019 11:03:53	10	174
29-10-2019 10:43:53	29-10-2019 10:53:53	10	1

SQL> SELECT (SUM(undoblks) / SUM ((end_time - begin_time) * 24*60*60)) nr_med_blocuri_undo_sec FROM v$undostat;

NR_MED_BLOCURI_UNDO_SEC
0 .114826753

16) Reducerea spatiului alocat unui segment de undo:

SQL> alter rollback segment ubd shrink to 4M;
Rollback segment altered.

17) Stergerea din dictionar a unui segment de undo:

SQL> drop rollback segment ubd;
Rollback segment dropped.

18) Informatii despre segmentele temporare de sortare (folosite in comenzile SQL de sortare):

SQL> desc v$sort_segment

Name	Null?	Type
TABLESPACE_NAME		VARCHAR2(31)
SEGMENT_FILE		NUMBER

SEGMENT_BLOCK	NUMBER
EXTENT_SIZE	NUMBER
CURRENT_USERS	NUMBER
TOTAL_EXTENTS	NUMBER
TOTAL_BLOCKS	NUMBER
USED_EXTENTS	NUMBER
USED_BLOCKS	NUMBER
FREE_EXTENTS	NUMBER
FREE_BLOCKS	NUMBER
ADDED_EXTENTS	NUMBER
EXTENT_HITS	NUMBER
FREED_EXTENTS	NUMBER
FREE_REQUESTS	NUMBER
MAX_SIZE	NUMBER
MAX_BLOCKS	NUMBER
MAX_USED_SIZE	NUMBER
MAX_USED_BLOCKS	NUMBER
MAX_SORT_SIZE	NUMBER
MAX_SORT_BLOCKS	NUMBER
RELATIVE_FNO	NUMBER
TS#	NUMBER
CON_ID	NUMBER

SQL> select tablespace_name,max_sort_size,extent_size,max_sort_blocks from v$sort_segment;

TABLESPACE_NAME	MAX_SORT_SIZE	EXTENT_SIZE	MAX_SORT_BLOCKS
TEMP	1	128	128
UBD_TEMP	1	512	512

19) Informatii despre sesiuni si tablespace-ul in care se afla segmentele temporare de sortare folosite in sesiunea curenta:

SQL> desc v$sort_usage

Name	Null?	Type
USERNAME		VARCHAR2(30)
USER		VARCHAR2(30)
SESSION_ADDR		RAW(4)
SESSION_NUM		NUMBER
SQLADDR		RAW(4)
SQLHASH		NUMBER
TABLESPACE		VARCHAR2(31)
CONTENTS		VARCHAR2(9)
SEGTYPE		VARCHAR2(9)
SEGFILE#		NUMBER

SEGBLK#	NUMBER
EXTENTS	NUMBER
BLOCKS	NUMBER
SEGRFNO#	NUMBER
TS#	NUMBER
CON_ID	NUMBER
SQL_ID_TEMPSEG	VARCHAR2(13)

SQL> select username,user,tablespace,contents,extents,blocks from v$sort_usage;

USERNAME	USER	TABLESPACE	CONTENTS	EXTENTS	BLOCKS
SYS	SCOTT	TEMP	TEMPORARY	1	128

20) Setarea zonei de memorie utilizata pentru sortare in sesiunea curenta la 10K.

SQL> alter system set sort_area_size=10240 deferred;