Administrarea userilor
(Cap. 15)

1) Creare user cu parola de conexiune la baza de date

SQL> connect abd1

SQL> create user test identified by test
default tablespace bd_data
temporary tablespace bd_temp
quota 1M on bd_data
quota 1M on users;

Obs. Daca instalarea/crearea bazei de date s-a facut cu optiunea *Create Container* atunci in userul SYS trebuie acordat urmatorul privilegiu userului C##ABD1 (chiar daca are privilegiul de DBA) :

SQL> grant create user to C##ABD1 container=all ;

SQL> grant create session to test;

Obs. **Daca instalarea/crearea bazei de date s-a facut cu optiunea *Create Container* se poate crea userul si fara prefixul C## dar numai din userul SYS si daca se face setarea:**

SQL> alter session set "_ORACLE_SCRIPT"=TRUE;

2) Creare privilegiu pentru conectare

SQL> grant create session to test;

3) Creare privilegiu pentru conectare cu ADMIN OPTION

SQL> grant create session to test with admin option;

4) Crearea unei copii pentru o tabela din userul curent in userul TEST

SQL> connect abd1@ubd /abd1
SQL> grant create table to test;
SQL> grant select on emp to test;

SQL> connect test@ubd /test
SQL> create table emp_copy as select * from abd1.emp;

5) Dealocate spatiu in tablespace-urile permanente BD_DATA si USERS

SQL> connect abd1@ubd /abd1

SQL> alter user test quota 0 on users;
SQL> alter user test quota 0 on bd_data;

SQL> connect test@ubd /test
SQL> select table_name from user_tables;

TABLE_NAME

EMP_COPY

SQL> insert into emp_copy values (1111,'Test','Student',7902,sysdate, 1000, 200, 10);
1 row created.

SQL> create table emp2 as select * from emp_copy;
**   ***
ERROR at line 1:
ORA-01536: space quota exceeded for tablespace 'BD_DATA'

Obs. Obiectele deja create nu sunt sterse din dictionar, pot fi extinse, dar nu mai pot fi create alte obiecte deoarece nu mai este spatiu alocat.

6) Alocate spatiu suplimentar in tablespace-ul permanent BD_DATA pentru userul test

SQL> connect abd1@ubd /abd1
SQL> alter user test quota 10 M on ubd_data;

SQL> connect test@ubd /test
SQL> create table emp2 as select * from emp_copy;

Table created.

7) Schimbarea parolei unui user

SQL> alter user test identified by test_new;

User altered.

8) Locarea (blocarea) unui user

SQL> connect abd1@ubd /abd1
SQL> alter user test account lock;

User altered.

SQL> conn test
Enter password: ****
ERROR:
ORA-28000: the account is locked

Warning: You are no longer connected to ORACLE.

9) Delocarea (deblocarea) unui user

```
SQL> connect abd1@ubd /abd1
SQL> alter user test account unlock;

User altered.
```

```
SQL> conn test
Enter password: ****
Connected.
```

10) Revocarea unui privilegiu

```
SQL> connect abd1@ubd /abd1
SQL> revoke select on emp from test;
```

Revoke succeeded.

```
SQL> connect test@ubd /test
SQL> select * from scott.emp;
select * from scott.emp
              *
```


ERROR at line 1:
ORA-01031: insufficient privileges


11) Listarea din dictionar a informatiilor despre userii creati pe baza de date


```
SQL> desc DBA_USERS
```

Name	Null?	Type
USERNAME	NOT NULL	VARCHAR2(30)
USER_ID	NOT NULL	NUMBER
PASSWORD		VARCHAR2(30)
ACCOUNT_STATUS	NOT NULL	VARCHAR2(32)
LOCK_DATE		DATE
EXPIRY_DATE		DATE
DEFAULT_TABLESPACE	NOT NULL	VARCHAR2(30)
TEMPORARY_TABLESPACE	NOT NULL	VARCHAR2(30)
CREATED	NOT NULL	DATE
PROFILE	NOT NULL	VARCHAR2(30)
INITIAL_RSRC_CONSUMER_GROUP		VARCHAR2(30)
EXTERNAL_NAME		VARCHAR2(4000)
PASSWORD_VERSIONS		VARCHAR2(12)
EDITIONS_ENABLED		VARCHAR2(1)
AUTHENTICATION_TYPE		VARCHAR2(8)

PROXY_ONLY_CONNECT	VARCHAR2(1)
COMMON	VARCHAR2(3)
LAST_LOGIN	TIMESTAMP(9) WITH TIME ZONE
ORACLE_MAINTAINED	VARCHAR2(1)

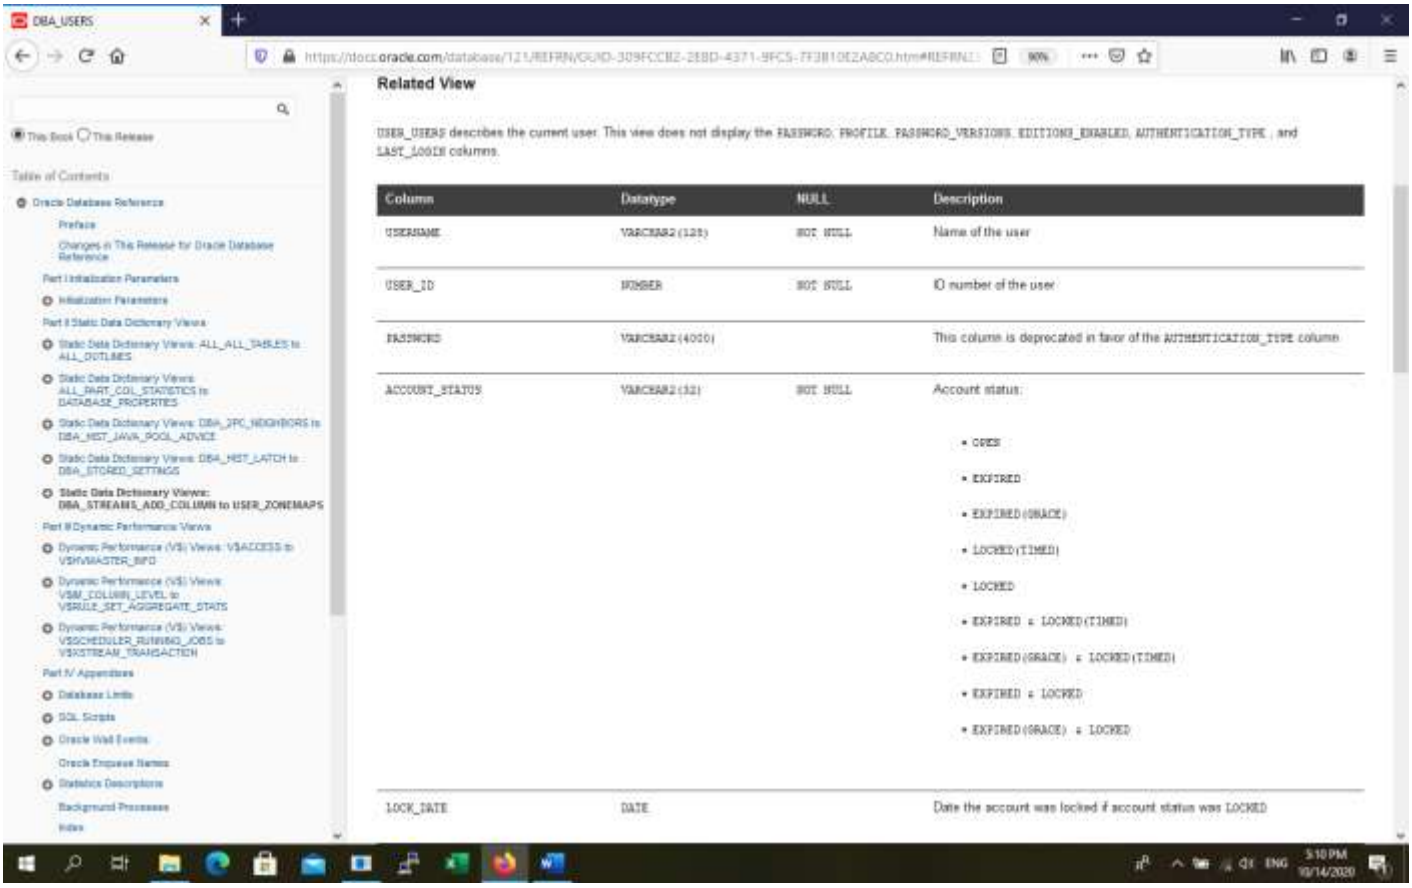

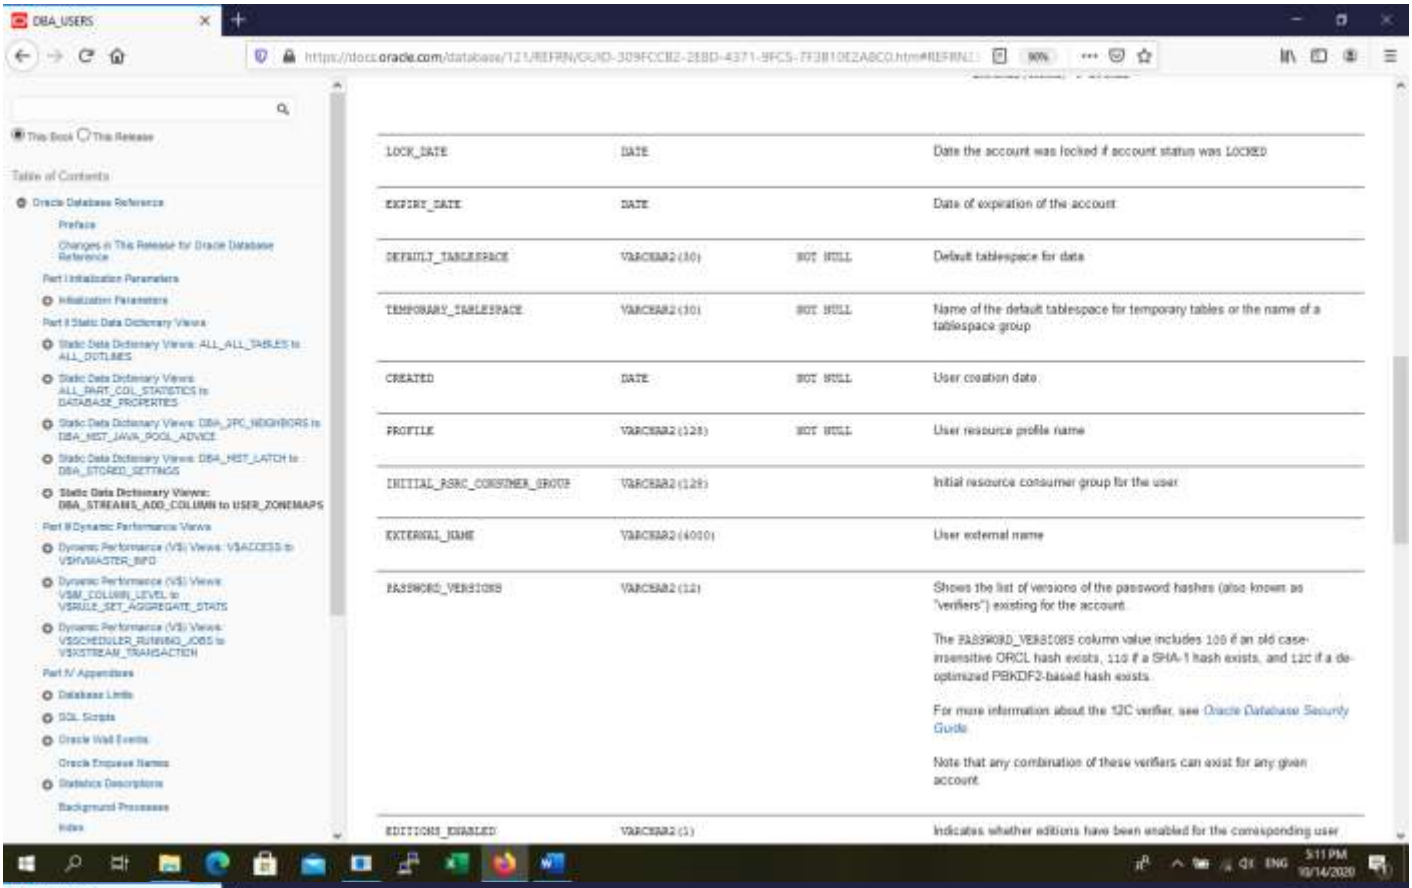
DBA_USERS
LOCK_DATE
DATE
Date the account was locked if account status was LOCKED
EXPIRY_DATE
DATE
Date of expiration of the account
DEFAULT_TABLESPACE
VARCHAR2(30)
NOT NULL
Default tablespace for data
TEMPORARY_TABLESPACE
VARCHAR2(30)
NOT NULL
Name of the default tablespace for temporary tables or the name of a tablespace group
CREATED
DATE
NOT NULL
User creation date
PROFILE
VARCHAR2(128)
NOT NULL
User resource profile name
INITIAL_RSRC_CONSUMER_GROUP
VARCHAR2(128)
Initial resource consumer group for the user
EXTERNAL_NAME
VARCHAR2(4000)
User external name
PASSWORD_VERSIONS
VARCHAR2(12)
Shows the list of versions of the password hashes (also known as "verifiers") existing for the account.
The PASSWORD_VERSIONS column value includes 10G if an old case-insensitive ORCL hash exists, 11G if a SHA-1 hash exists, and 12C if a de-optimized PBKDF2-based hash exists.
For more information about the 12C verifier, see Oracle Database Security Guide.
Note that any combination of these verifiers can exist for any given account.
EDITIONS_ENABLED
VARCHAR2(1)
Indicates whether editions have been enabled for the corresponding user

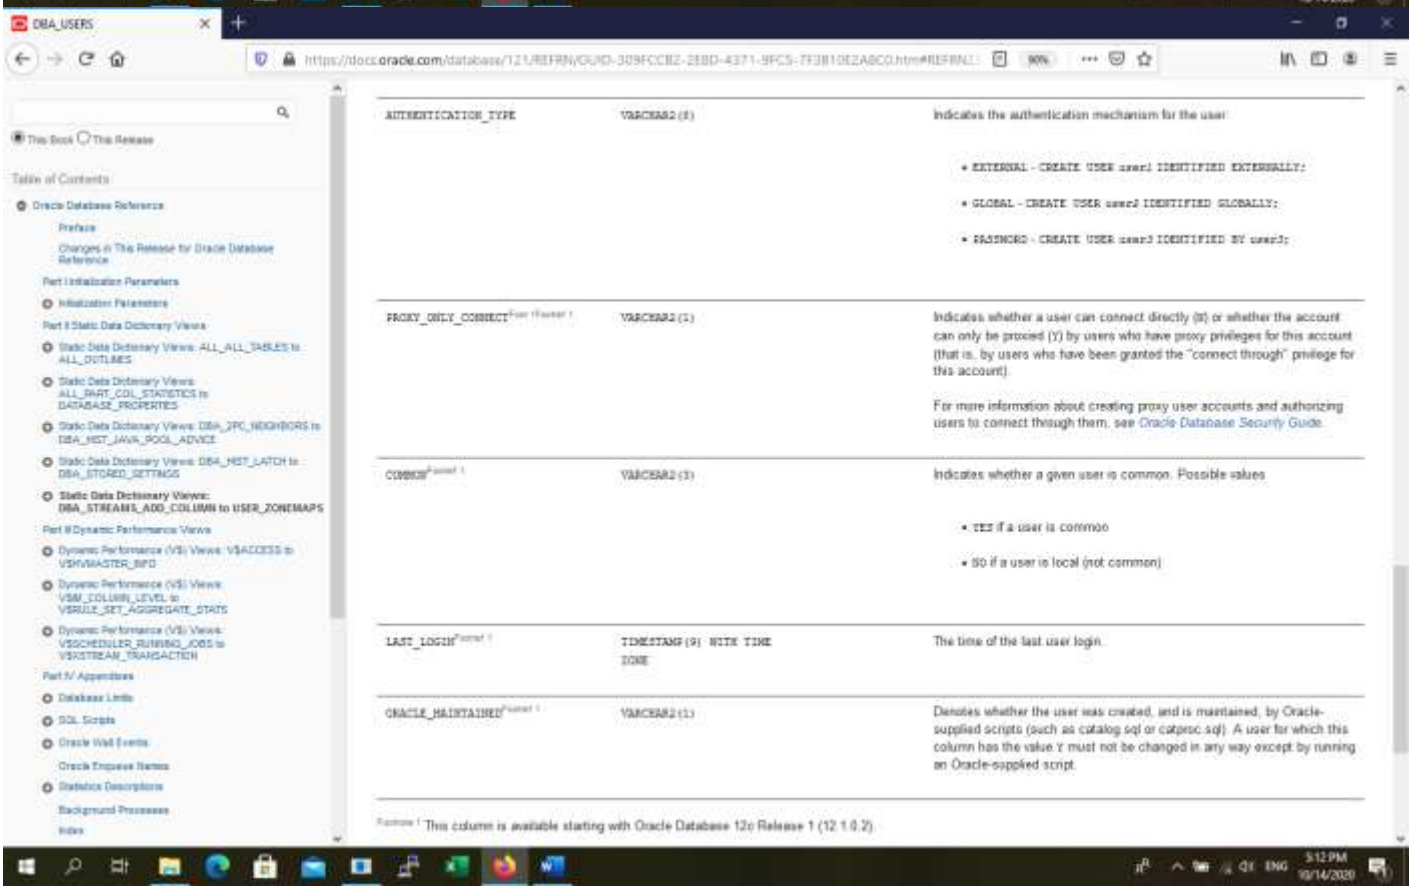
DBA_USERS
AUTHENTICATION_TYPE
VARCHAR2(8)
Indicates the authentication mechanism for the user
EXTERNAL - CREATE USER user1 IDENTIFIED EXTERNALLY;
GLOBAL - CREATE USER user2 IDENTIFIED GLOBALLY;
PASSWORD - CREATE USER user3 IDENTIFIED BY user3;
PROXY_ONLY_CONNECT
VARCHAR2(1)
Indicates whether a user can connect directly (N) or whether the account can only be proxied (Y) by users who have proxy privileges for this account (that is, by users who have been granted the "connect through" privilege for this account)
For more information about creating proxy user accounts and authorizing users to connect through them, see Oracle Database Security Guide.
COMMON
VARCHAR2(3)
Indicates whether a given user is common. Possible values:
YES if a user is common
NO if a user is local (not common)
LAST_LOGIN
TIMESTAMP(9) WITH TIME ZONE
The time of the last user login
ORACLE_MAINTAINED
VARCHAR2(1)
Denotes whether the user was created, and is maintained, by Oracle-supplied scripts (such as catalog.sql or catproc.sql). A user for which this column has the value Y must not be changed in any way except by running an Oracle-supplied script.
This column is available starting with Oracle Database 12c Release 1 (12.1.0.2).


SQL> select username, default_tablespace, temporary_tablespace from dba_users;

USERNAME	DEFAULT_TABLESPACE	TEMPORARY_TABLESPACE
SCOTT	USERS	TEMP
BI	USERS	TEMP
SH	USERS	TEMP
OE	USERS	TEMP
HR	USERS	TEMP
TEST	UBD_DATA	UBD_TEMP
UBD1	UBD_DATA	UBD_TEMP

12) Listarea din dictionar a informatiilor despre spatiul alocat si spatiul utilizat de catre userii creati pe baza de date

SQL> desc DBA_TS_QUOTAS

Name	Null?	Type
TABLESPACE_NAME	NOT NULL	VARCHAR2(30)
USERNAME	NOT NULL	VARCHAR2(30)
BYTES		NUMBER
MAX_BYTES		NUMBER
BLOCKS		NUMBER
MAX_BLOCKS		NUMBER
DROPPED		VARCHAR2(3)

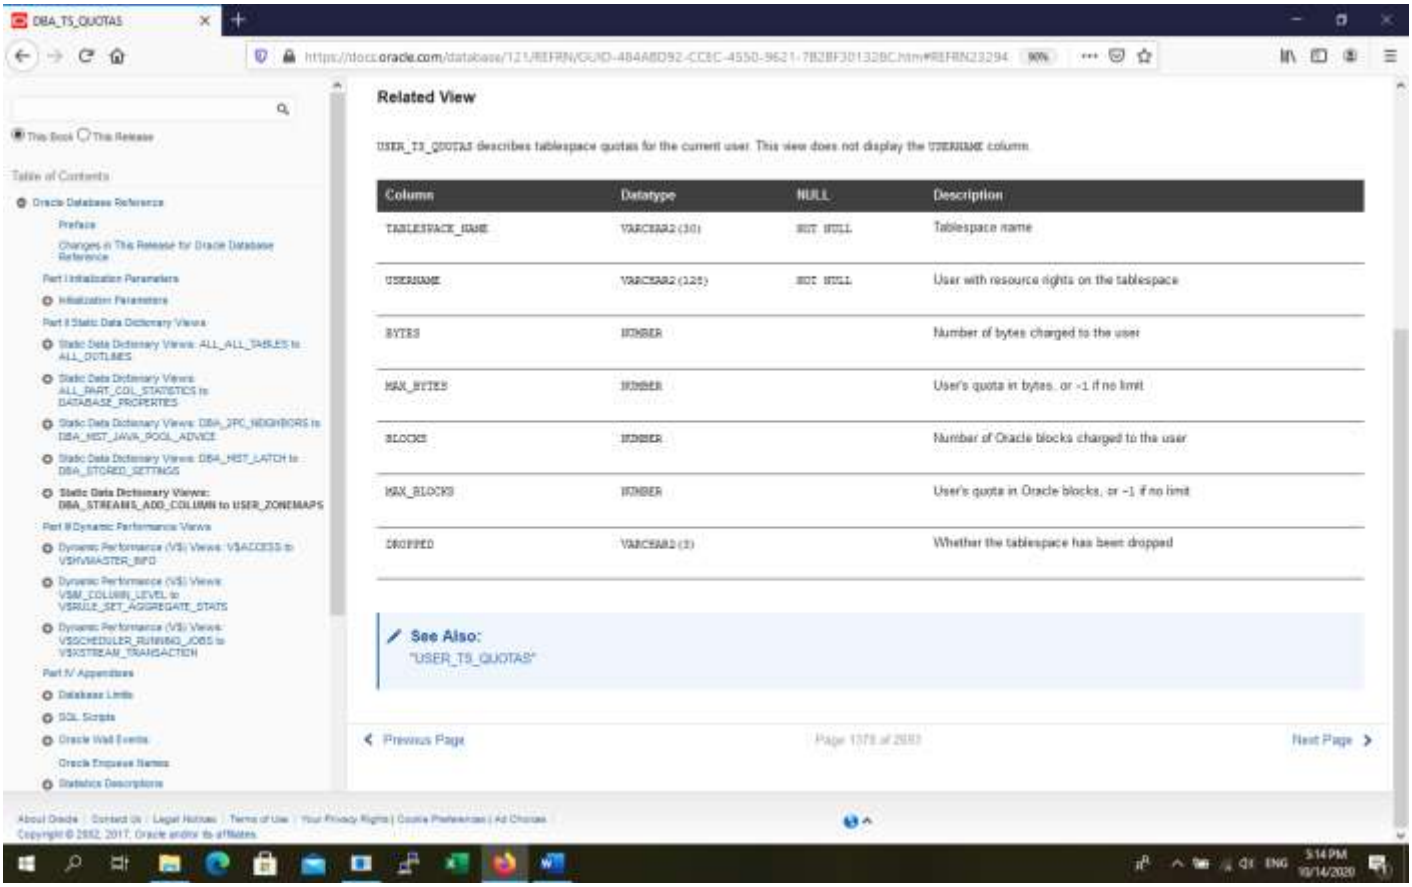

SQL> select username, tablespace_name, max_bytes, bytes from dba_ts_quotas;


USERNAME	TABLESPACE_NAME	MAX_BYTES	BYTES
DMSYS	SYSAUX	209715200	262144
SYSMAN	SYSAUX	-1	62521344
TEST	UPB_DATA	1048576	65536
OLAPSYS	SYSAUX	-1	16318464
DMUSER	USERS	10485760	7143424


13) Listarea din dictionar a informatiilor despre userul curent

SQL> desc user_users

Name	Null?	Type
USERNAME	NOT NULL	VARCHAR2(30)
USER_ID	NOT NULL	NUMBER
ACCOUNT_STATUS	NOT NULL	VARCHAR2(32)
LOCK_DATE		DATE
EXPIRY_DATE		DATE
DEFAULT_TABLESPACE	NOT NULL	VARCHAR2(30)
TEMPORARY_TABLESPACE	NOT NULL	VARCHAR2(30)
CREATED	NOT NULL	DATE

INITIAL_RSRC_CONSUMER_GROUP	VARCHAR2(30)
EXTERNAL_NAME	VARCHAR2(4000)
PROXY_ONLY_CONNECT	VARCHAR2(1)
COMMON	VARCHAR2(3)
ORACLE_MAINTAINED	VARCHAR2(1)

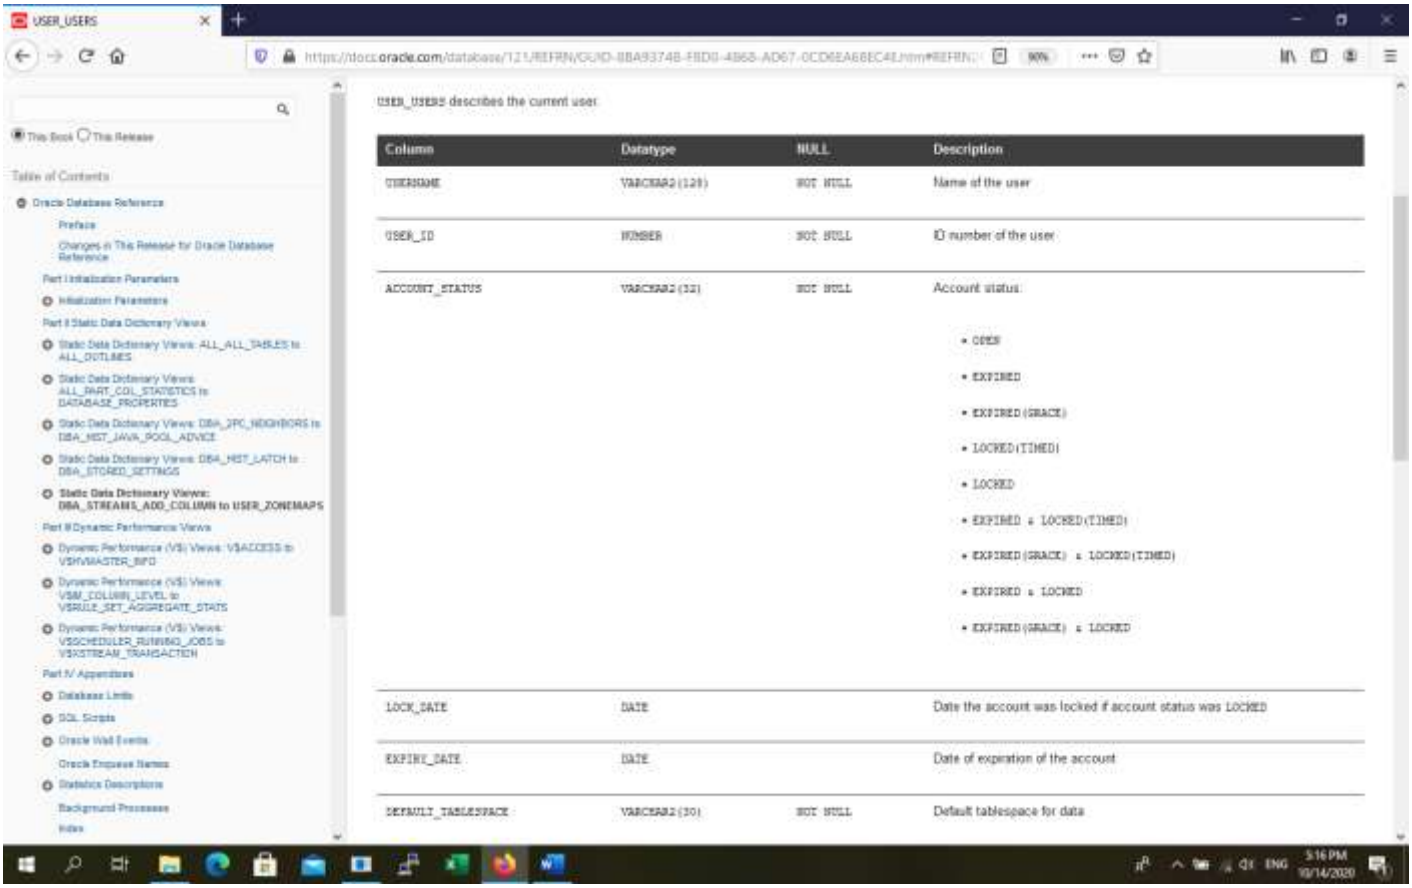

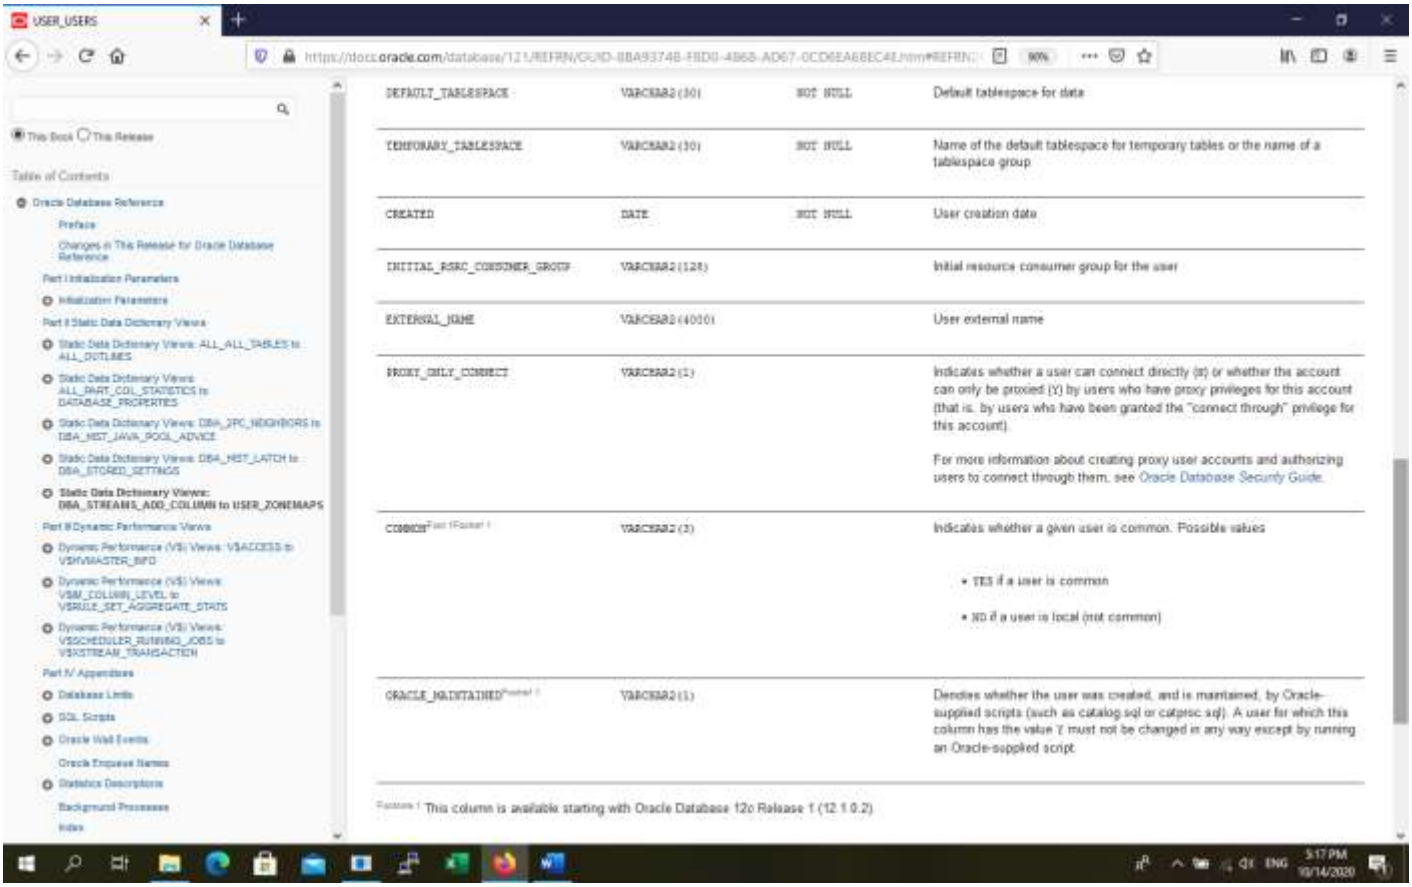

SQL> select user_id, username, created, lock_date from user_users;

USER_ID	USERNAME	CREATED	LOCK_DATE
54	ABD1	15-OCT-20	

14) Stergerea unui user din dictionar

SQL> connect abd1@ubd /abd1
SQL> drop user test;
drop user test
*
ERROR at line 1:
ORA-01922: CASCADE must be specified to drop 'TEST'

Obs. Daca userul are obiecte create trebuie folosita optiunea CASCADE pentru a sterge mai intai obiectele create de user.

SQL> drop user test cascade; -- sterge mai intai obiectele create, apoi userul

User dropped.