Segmente de undo si segmente de sortare
(Cap. 10)

1) Crearea unui tablespace de undo:

SQL> create undo tablespace BD_UNDO datafile ’e:\temp\undo_db01.dbf’ size 2M;

Tablespace created.

2) Crearea unui segment de undo in tablespace-ul de undo:

SQL> create rollback segment UBD_UNDO tablespace BD_UNDO
storage (initial 100k next 100k optimal 4M minextents 20 maxextents 100);


Rollback segment created.

Obs. Daca la startarea bazei de date parametrul UNDO_MANAGEMENT= AUTO atunci segmentul nu poate fi utilizat online.

3) Informatii din dictionar privind segmentele de undo:

SQL> desc dba_rollback_segs

Name	Null?	Type
SEGMENT_NAME	NOT NULL	VARCHAR2(30)
OWNER		VARCHAR2(6)
TABLESPACE_NAME	NOT NULL	VARCHAR2(30)
SEGMENT_ID	NOT NULL	NUMBER
FILE_ID	NOT NULL	NUMBER
BLOCK_ID	NOT NULL	NUMBER
INITIAL_EXTENT	NUMBER	
NEXT_EXTENT	NUMBER	
MIN_EXTENTS	NOT NULL	NUMBER
MAX_EXTENTS	NOT NULL	NUMBER
PCT_INCREASE		NUMBER
STATUS		VARCHAR2(16)
INSTANCE_NUM		VARCHAR2(40)
RELATIVE_FNO	NOT NULL	NUMBER

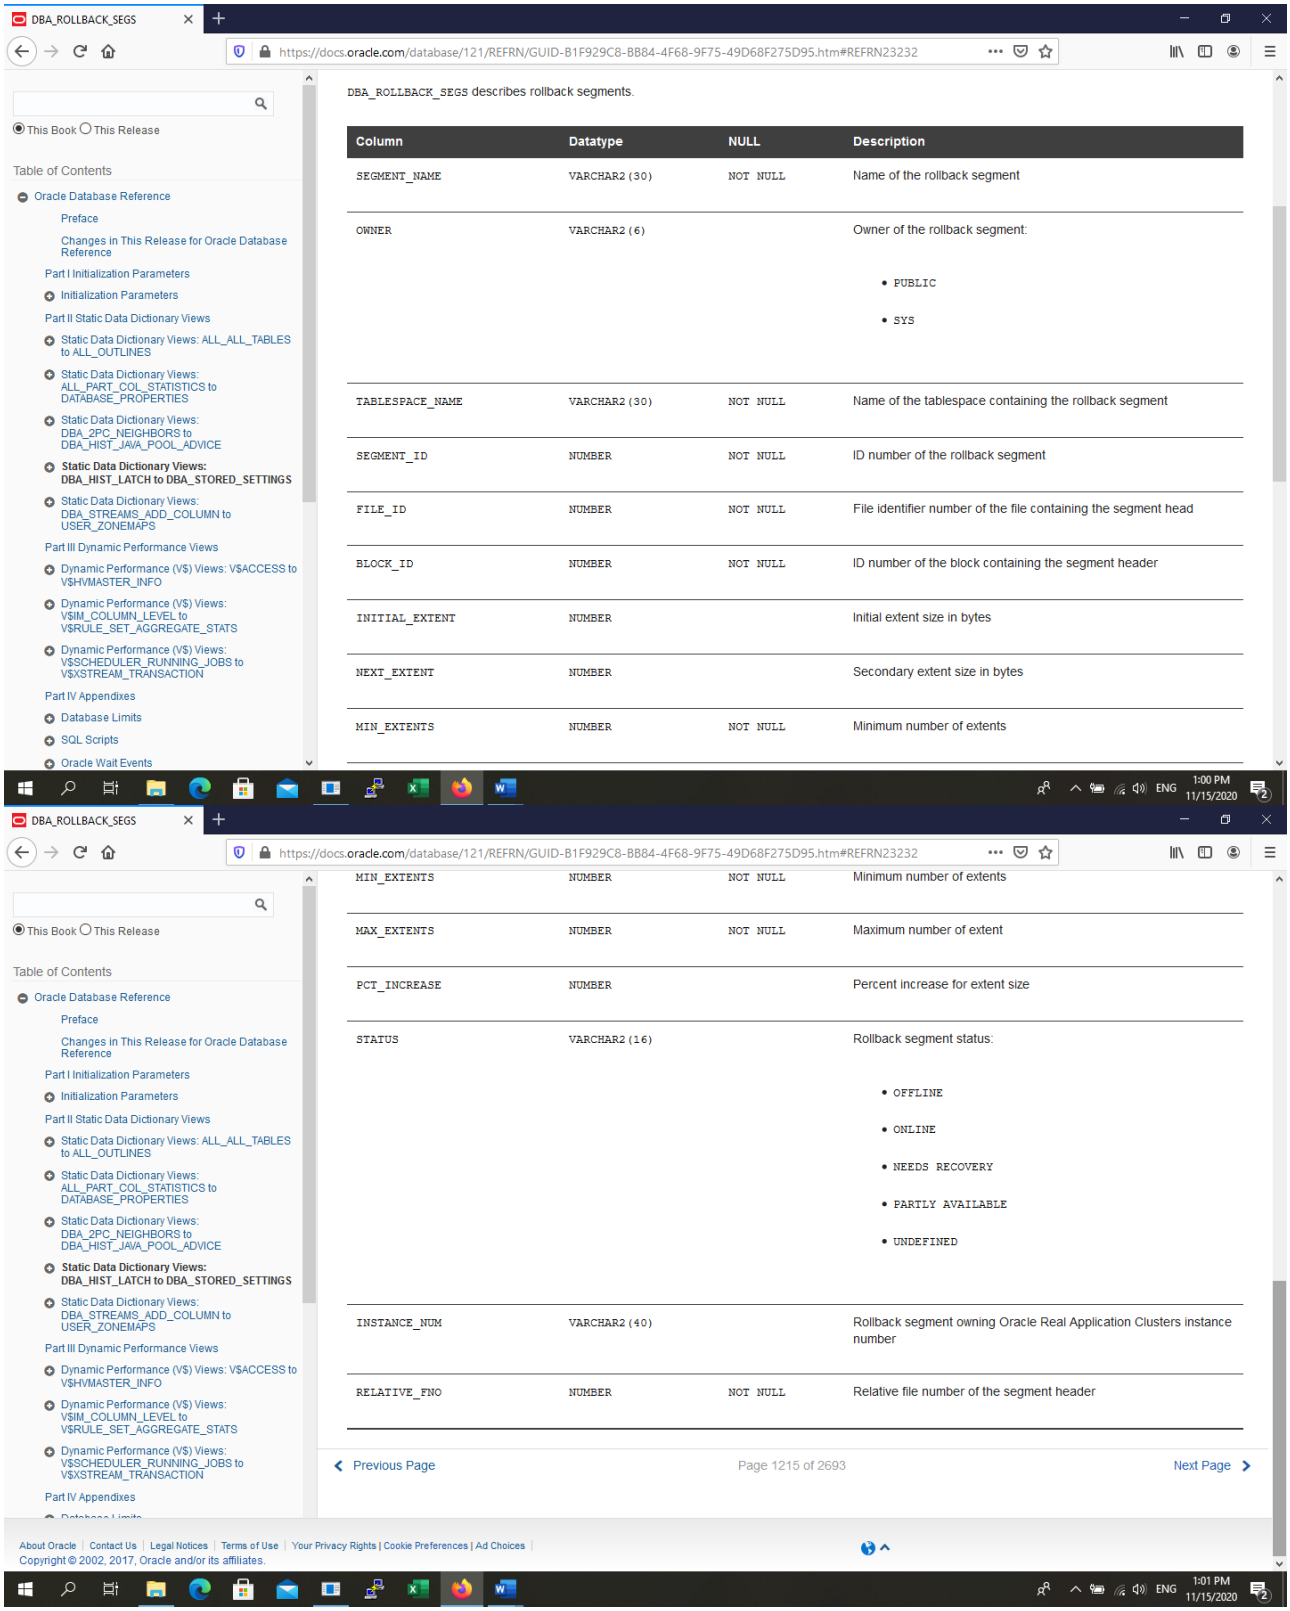

SQL> select segment_name,tablespace_name,owner,status from dba_rollback_segs;


SEGMENT_NAME	TABLESPACE	OWNER	STATUS
SYSTEM	SYSTEM	SYS	ONLINE
_SYSSMU11_1204745426$	UNDOTBS1	PUBLIC	OFFLINE
_SYSSMU10_3901898544$	UNDOTBS1	PUBLIC	ONLINE
_SYSSMU9_889291946$	UNDOTBS1	PUBLIC	ONLINE

_SYSSMU8_153572397$	UNDOTBS1	PUBLIC	ONLINE
_SYSSMU7_233526786$	UNDOTBS1	PUBLIC	ONLINE
_SYSSMU6_3822221795$	UNDOTBS1	PUBLIC	ONLINE
_SYSSMU5_3484600714$	UNDOTBS1	PUBLIC	ONLINE
_SYSSMU4_910366693$	UNDOTBS1	PUBLIC	ONLINE
_SYSSMU3_2165878102$	UNDOTBS1	PUBLIC	ONLINE
_SYSSMU2_3197760948$	UNDOTBS1	PUBLIC	ONLINE
_SYSSMU1_1607784644$	UNDOTBS1	PUBLIC	ONLINE
_SYSSMU19_2088400043$	BD_UNDO	PUBLIC	OFFLINE
_SYSSMU18_1275962030$	BD_UNDO	PUBLIC	OFFLINE
_SYSSMU17_46852941$	BD_UNDO	PUBLIC	OFFLINE
_SYSSMU16_2926588256$	BD_UNDO	PUBLIC	OFFLINE
_SYSSMU15_3531944707$	BD_UNDO	PUBLIC	OFFLINE
_SYSSMU14_3622294764$	BD_UNDO	PUBLIC	OFFLINE
_SYSSMU13_3677523389$	BD_UNDO	PUBLIC	OFFLINE
_SYSSMU12_4129524475$	BD_UNDO	PUBLIC	OFFLINE

4) Segmentele de undo folosite de instanta curenta:

SQL> desc v$rollname

Name	Null?	Type
USN		NUMBER
NAME	NOT NULL	VARCHAR2(30)
CON_ID		NUMBER

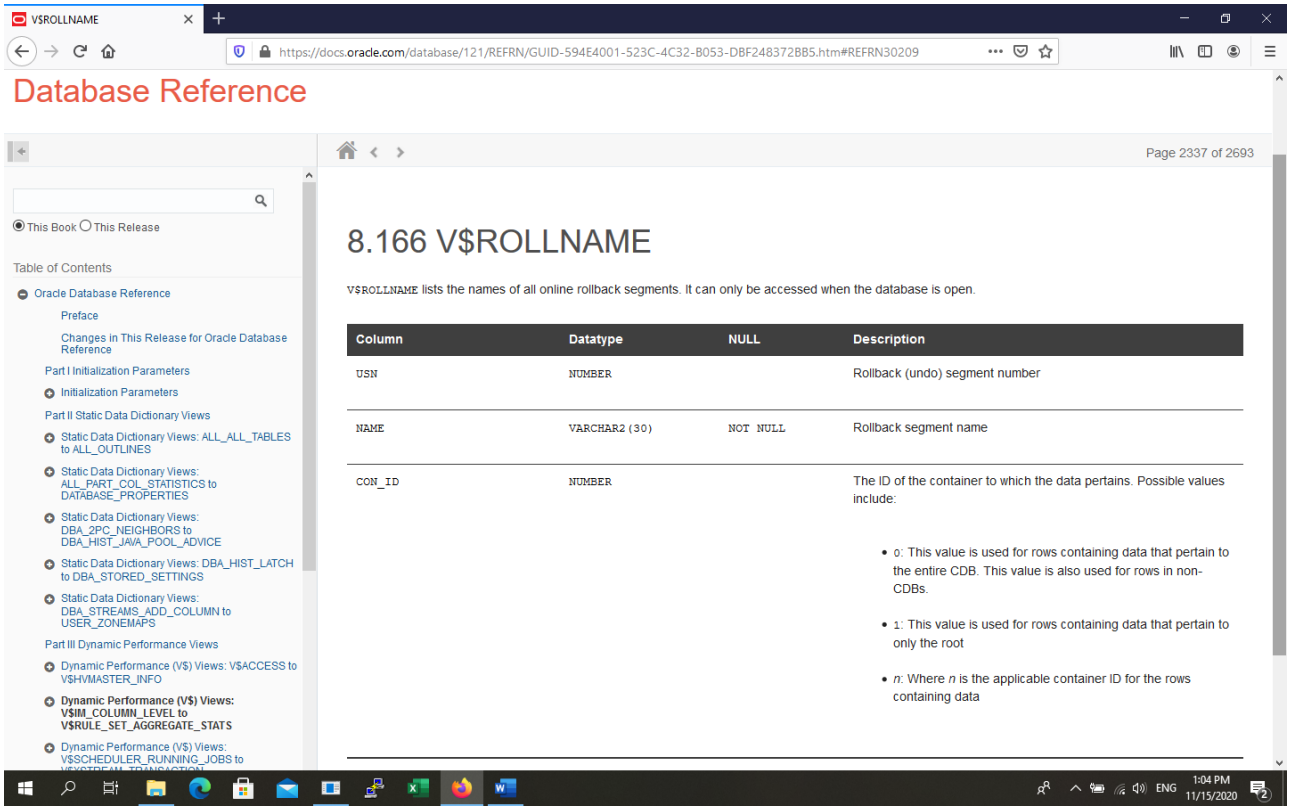


SQL> select * from v$rollname;


USN	NAME	CON_ID
0	SYSTEM	0
1	_SYSSMU1_1607784644$	0
2	_SYSSMU2_3197760948$	0
3	_SYSSMU3_2165878102$	0
4	_SYSSMU4_910366693$	0
5	_SYSSMU5_3484600714$	0
6	_SYSSMU6_3822221795$	0
7	_SYSSMU7_233526786$	0
8	_SYSSMU8_153572397$	0
9	_SYSSMU9_889291946$	0
10	_SYSSMU10_3901898544$	0

5) Statistici despre segmentele de undo:

SQL> desc v$rollstat

Name	Null?	Type
USN		NUMBER
LATCH		NUMBER
EXTENTS		NUMBER
RSSIZE		NUMBER
WRITES		NUMBER
XACTS		NUMBER
GETS		NUMBER
WAITS		NUMBER
OPTSIZE		NUMBER
HWMSIZE		NUMBER
SHRINKS		NUMBER
WRAPS		NUMBER
EXTENDS		NUMBER
AVESHRINK		NUMBER
AVEACTIVE		NUMBER
STATUS		VARCHAR2(15)
CUREXT		NUMBER
CURBLK		NUMBER
CON_ID		NUMBER

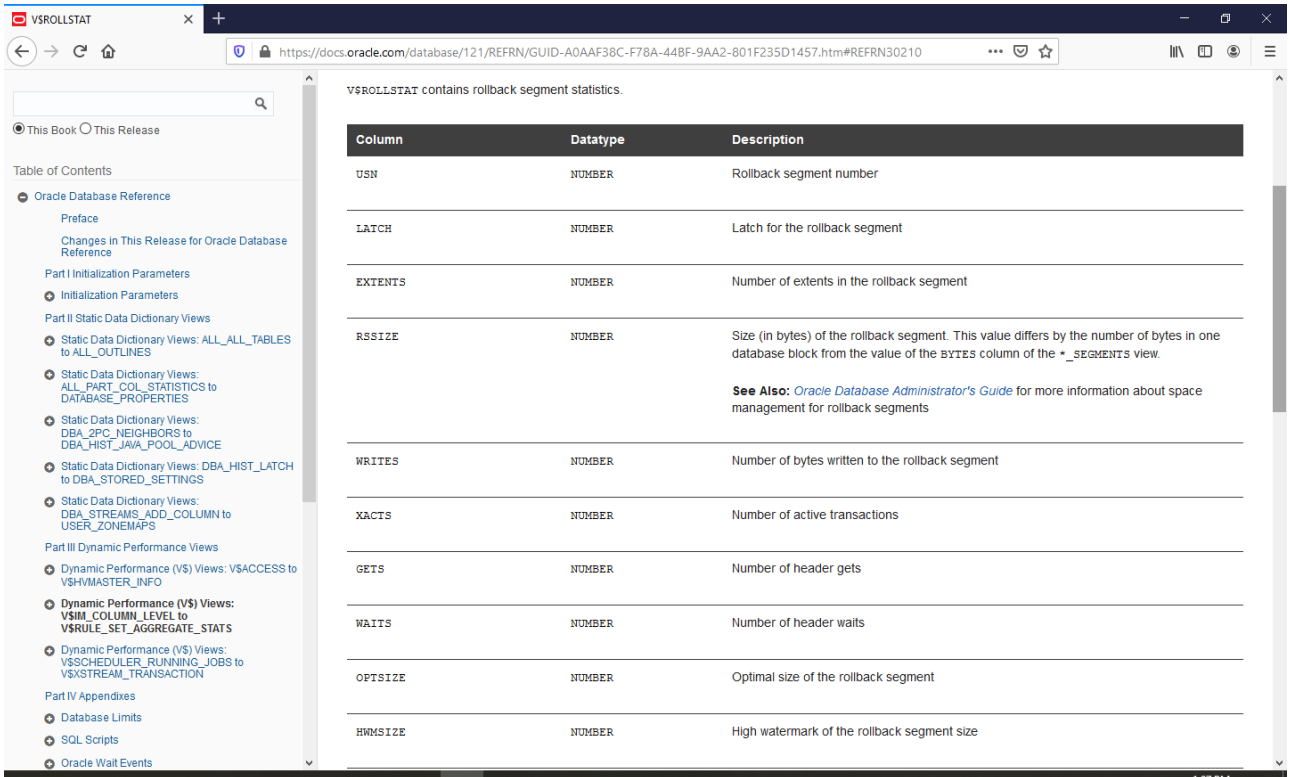

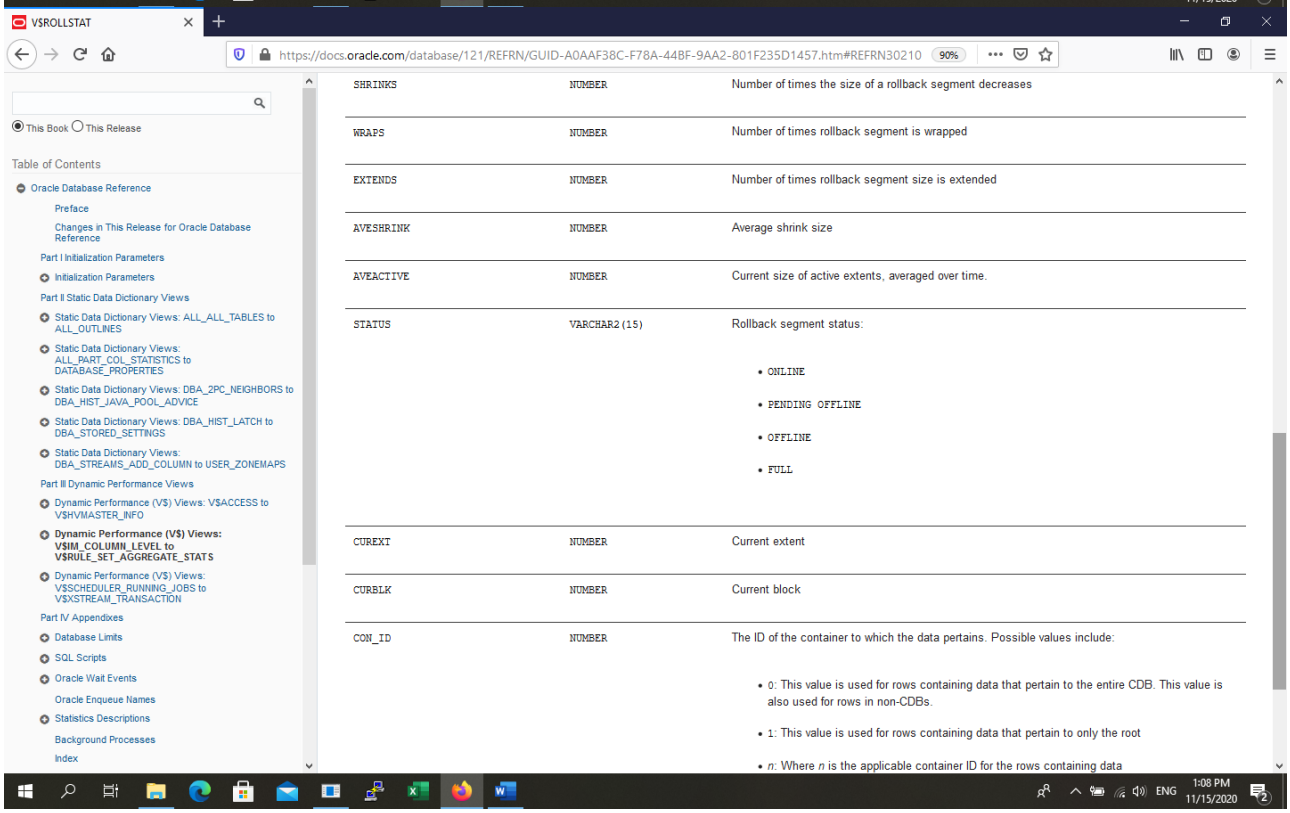

SQL> select usn, rssize, extents, status from v$rollstat;

USN	RSSIZE	EXTENTS	STATUS
0	385024	6	ONLINE
1	1171456	3	ONLINE
2	1171456	3	ONLINE
3	1171456	3	ONLINE
4	1171456	3	ONLINE


5	1171456	3	ONLINE
6	1171456	3	ONLINE
7	1171456	3	ONLINE
8	385024	6	ONLINE
9	1171456	3	ONLINE
10	1171456	3	ONLINE


6) Informatii despre useri si sesiuni:

SQL> desc v$session

Name	Null?	Type
SADDR		RAW(4)
SID		NUMBER
SERIAL#		NUMBER
AUDSID		NUMBER
PADDR		RAW(4)
USER#		NUMBER
USERNAME		VARCHAR2(30)
COMMAND		NUMBER
OWNERID		NUMBER
TADDR		VARCHAR2(8)
LOCKWAIT		VARCHAR2(8)
STATUS		VARCHAR2(8)
SERVER		VARCHAR2(9)
SCHEMA#		NUMBER
SCHEMANAME		VARCHAR2(30)
OSUSER		VARCHAR2(30)
PROCESS		VARCHAR2(12)
MACHINE		VARCHAR2(64)
TERMINAL		VARCHAR2(16)
PROGRAM		VARCHAR2(64)
TYPE		VARCHAR2(10)
SQL_ADDRESS		RAW(4)
SQL_HASH_VALUE		NUMBER
PREV_SQL_ADDR		RAW(4)
PREV_HASH_VALUE		NUMBER
MODULE		VARCHAR2(48)
MODULE_HASH		NUMBER
ACTION		VARCHAR2(32)
ACTION_HASH		NUMBER
CLIENT_INFO		VARCHAR2(64)
FIXED_TABLE_SEQUENCE		NUMBER
ROW_WAIT_OBJ#		NUMBER
ROW_WAIT_FILE#		NUMBER
ROW_WAIT_BLOCK#		NUMBER
ROW_WAIT_ROW#		NUMBER
LOGON_TIME		DATE
LAST_CALL_ET		NUMBER
PDML_ENABLED		VARCHAR2(3)
FAILOVER_TYPE		VARCHAR2(13)
FAILOVER_METHOD		VARCHAR2(10)
FAILED_OVER		VARCHAR2(3)
RESOURCE_CONSUMER_GROUP		VARCHAR2(32)


PDML_STATUS VARCHAR2(8)
PDDL_STATUS VARCHAR2(8)
PQ_STATUS VARCHAR2(8)
CURRENT_QUEUE_DURATION NUMBER
CLIENT_IDENTIFIER VARCHAR2(64)
…..
SERVICE_NAME VARCHAR2(64)
SQL_TRACE VARCHAR2(8)
SQL_TRACE_WAITS VARCHAR2(5)
SQL_TRACE_BINDS VARCHAR2(5)
SQL_TRACE_PLAN_STATS VARCHAR2(10)
SESSION_EDITION_ID NUMBER
CREATOR_ADDR RAW(8)
CREATOR_SERIAL# NUMBER
ECID VARCHAR2(64)
SQL_TRANSLATION_PROFILE_ID NUMBER
PGA_TUNABLE_MEM NUMBER
CON_ID NUMBER
EXTERNAL_NAME VARCHAR2(1024)

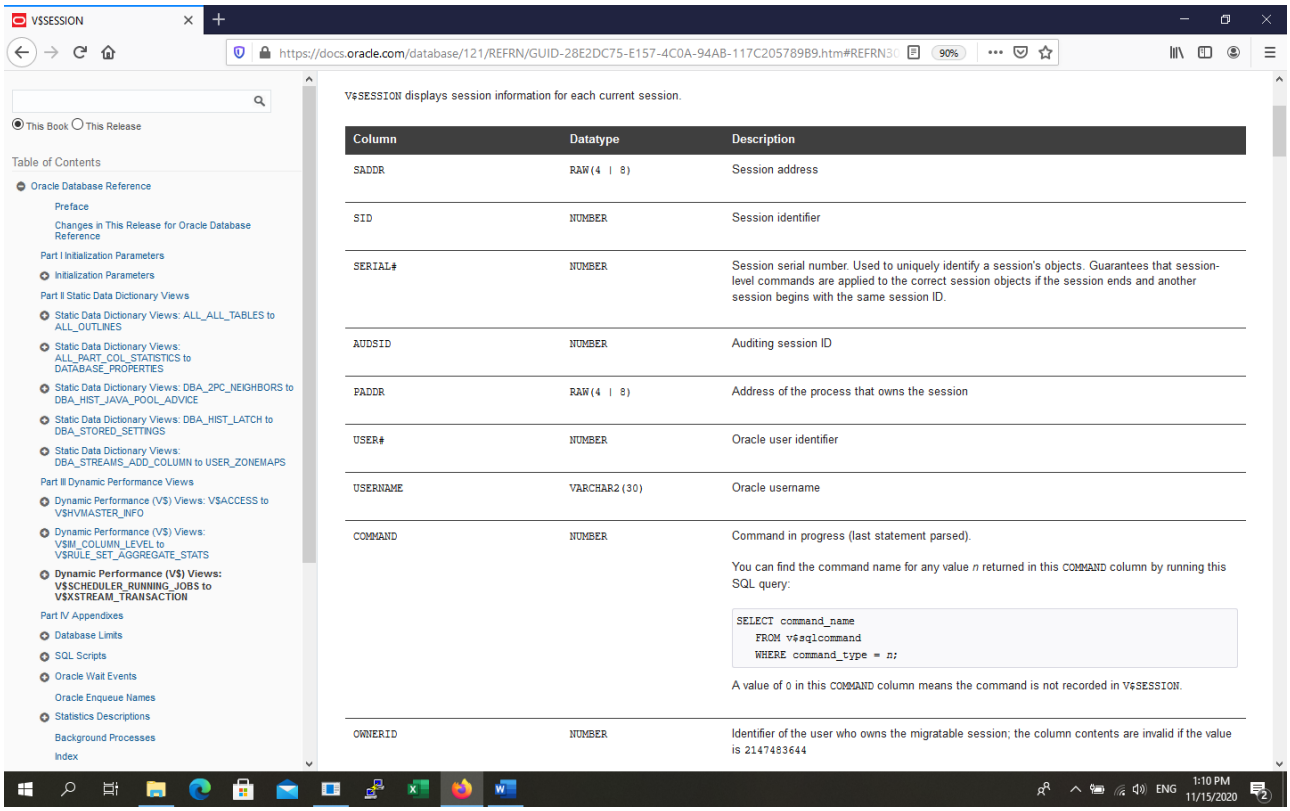

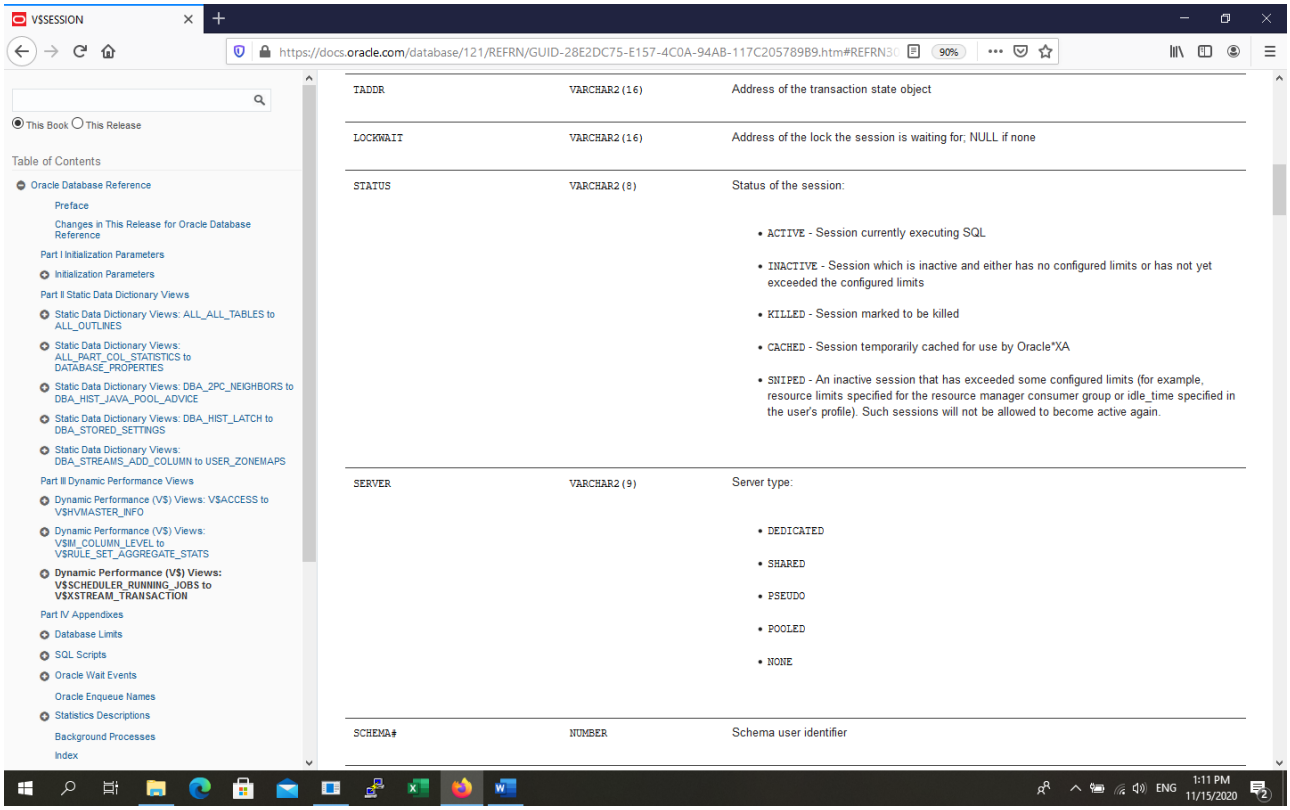


TADDR	VARCHAR2(16)	Address of the transaction state object
LOCKWAIT	VARCHAR2(16)	Address of the lock the session is waiting for; NULL if none
STATUS	VARCHAR2(8)	Status of the session: • ACTIVE - Session currently executing SQL • INACTIVE - Session which is inactive and either has no configured limits or has not yet exceeded the configured limits • KILLED - Session marked to be killed • CACHED - Session temporarily cached for use by Oracle*XA • SNIPED - An inactive session that has exceeded some configured limits (for example, resource limits specified for the resource manager consumer group or idle_time specified in the user's profile). Such sessions will not be allowed to become active again.
SERVER	VARCHAR2(9)	Server type: • DEDICATED • SHARED • PSEUDO • POOLED • NONE
SCHEMA#	NUMBER	Schema user identifier

. . . . . .

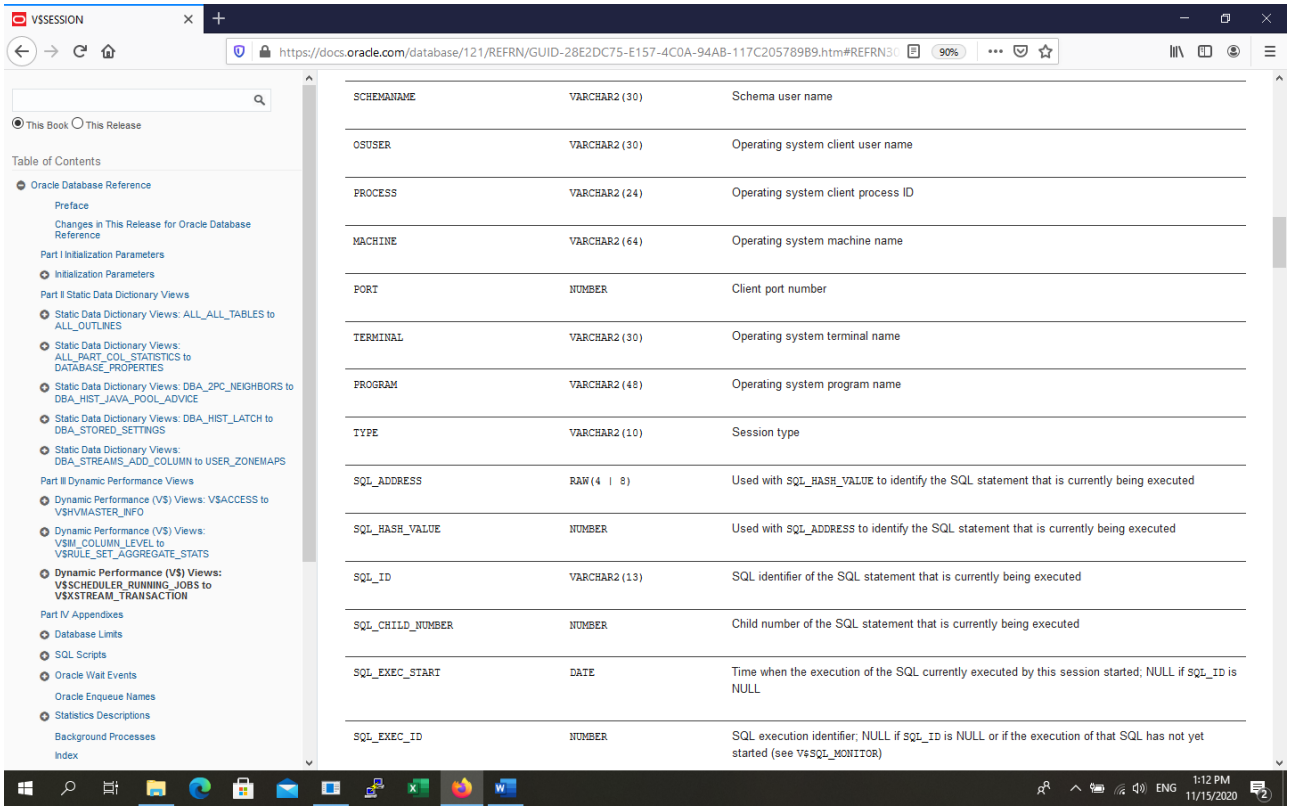

SCHEMANAME	VARCHAR2(30)	Schema user name
OSUSER	VARCHAR2(30)	Operating system client user name
PROCESS	VARCHAR2(24)	Operating system client process ID
MACHINE	VARCHAR2(64)	Operating system machine name
PORT	NUMBER	Client port number
TERMINAL	VARCHAR2(30)	Operating system terminal name
PROGRAM	VARCHAR2(48)	Operating system program name
TYPE	VARCHAR2(10)	Session type
SQL_ADDRESS	RAW(4 | 8)	Used with SQL_HASH_VALUE to identify the SQL statement that is currently being executed
SQL_HASH_VALUE	NUMBER	Used with SQL_ADDRESS to identify the SQL statement that is currently being executed
SQL_ID	VARCHAR2(13)	SQL identifier of the SQL statement that is currently being executed
SQL_CHILD_NUMBER	NUMBER	Child number of the SQL statement that is currently being executed
SQL_EXEC_START	DATE	Time when the execution of the SQL currently executed by this session started; NULL if SQL_ID is NULL
SQL_EXEC_ID	NUMBER	SQL execution identifier; NULL if SQL_ID is NULL or if the execution of that SQL has not yet started (see V$SQL_MONITOR)

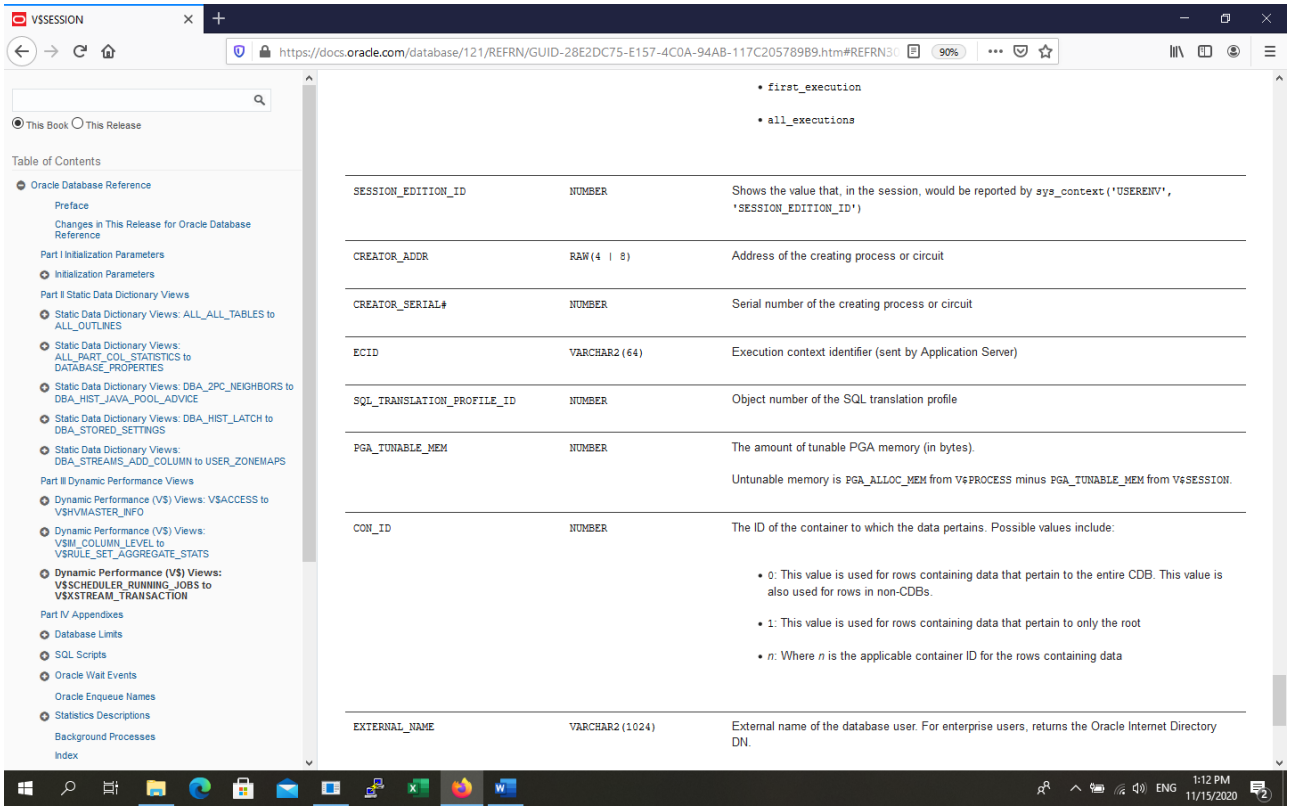

V$SESSION

https://docs.oracle.com/database/121/REFRN/GUID-28E2DC75-E157-4C0A-94AB-117C205789B9.htm#REFRN3

This Book / This Release

Table of Contents

- Oracle Database Reference
  - Preface
  - Changes in This Release for Oracle Database Reference
- Part I Initialization Parameters
  - Initialization Parameters
- Part II Static Data Dictionary Views
  - Static Data Dictionary Views: ALL_ALL_TABLES to ALL_OUTLINES
  - Static Data Dictionary Views: ALL_PART_COL_STATISTICS to DATABASE_PROPERTIES
  - Static Data Dictionary Views: DBA_2PC_NEIGHBORS to DBA_HIST_JAVA_POOL_ADVICE
  - Static Data Dictionary Views: DBA_HIST_LATCH to DBA_STORED_SETTINGS
  - Static Data Dictionary Views: DBA_STREAMS_ADD_COLUMN to USER_ZONEMAPS
- Part III Dynamic Performance Views
  - Dynamic Performance (V$) Views: V$ACCESS to V$HVMASTER_INFO
  - Dynamic Performance (V$) Views: V$IM_COLUMN_LEVEL to V$RULE_SET_AGGREGATE_STATS
  - **Dynamic Performance (V$) Views: V$SCHEDULER_RUNNING_JOBS to V$XSTREAM_TRANSACTION**
- Part IV Appendixes
  - Database Limits
  - SQL Scripts
  - Oracle Wait Events
    - Oracle Enqueue Names
  - Statistics Descriptions
    - Background Processes
    - Index

- first_execution
- all_executions

SESSION_EDITION_ID	NUMBER	Shows the value that, in the session, would be reported by sys_context('USERENV', 'SESSION_EDITION_ID')
CREATOR_ADDR	RAW(4 | 8)	Address of the creating process or circuit
CREATOR_SERIAL#	NUMBER	Serial number of the creating process or circuit
ECID	VARCHAR2(64)	Execution context identifier (sent by Application Server)
SQL_TRANSLATION_PROFILE_ID	NUMBER	Object number of the SQL translation profile
PGA_TUNABLE_MEM	NUMBER	The amount of tunable PGA memory (in bytes). Untunable memory is PGA_ALLOC_MEM from V$PROCESS minus PGA_TUNABLE_MEM from V$SESSION.
CON_ID	NUMBER	The ID of the container to which the data pertains. Possible values include: • 0: This value is used for rows containing data that pertain to the entire CDB. This value is also used for rows in non-CDBs. • 1: This value is used for rows containing data that pertain to only the root • n: Where n is the applicable container ID for the rows containing data
EXTERNAL_NAME	VARCHAR2(1024)	External name of the database user. For enterprise users, returns the Oracle Internet Directory DN.

ENG 1:12 PM 11/15/2020

SQL> select username, sid, saddr, service_name from v$session;


USERNAME	SID	SADDR	SERVICE_NAME
	1	00007FFC6DD1F780	SYS$BACKGROUND
	2	00007FFC6DD1D6B0	SYS$BACKGROUND
	3	00007FFC6DD1B5E0	SYS$BACKGROUND
	4	00007FFC6DD19510	SYS$BACKGROUND
	5	00007FFC6DD17440	SYS$BACKGROUND
	6	00007FFC6DD15370	SYS$BACKGROUND
	7	00007FFC6DD132A0	SYS$BACKGROUND
	8	00007FFC6DD111D0	SYS$BACKGROUND
	9	00007FFC6DD0F100	SYS$BACKGROUND
	10	00007FFC6DD0D030	SYS$BACKGROUND
	13	00007FFC6DD06DC0	SYS$BACKGROUND
	14	00007FFC6DD04CF0	SYS$BACKGROUND
SCOTT	16	00007FFC6DD00B50	SYS$USERS
	40	00007FFC6DCCF7D0	SYS$BACKGROUND


7) Informatii despre tranzactii(adresele tranzactiilor pot fi relationate cu sesiunile prin ses_addr):


SQL> desc v$transaction

Name	Null?	Type
ADDR		RAW(4)
XIDUSN		NUMBER
XIDSLOT		NUMBER

XIDSQN	NUMBER
UBAFIL	NUMBER
UBABLK	NUMBER
UBASQN	NUMBER
UBAREC	NUMBER
STATUS	VARCHAR2(16)
START_TIME	VARCHAR2(20)
START_SCNB	NUMBER
START_SCNW	NUMBER
START_UEXT	NUMBER
START_UBAFIL	NUMBER
START_UBABLK	NUMBER
START_UBASQN	NUMBER
START_UBAREC	NUMBER
SES_ADDR	RAW(4)
FLAG	NUMBER
SPACE	VARCHAR2(3)
RECURSIVE	VARCHAR2(3)
NOUNDO	VARCHAR2(3)
PTX	VARCHAR2(3)
NAME	VARCHAR2(256)
PRV_XIDUSN	NUMBER
PRV_XIDSLT	NUMBER
PRV_XIDSQN	NUMBER
PTX_XIDUSN	NUMBER
PTX_XIDSLT	NUMBER
PTX_XIDSQN	NUMBER
DSCN-B	NUMBER
DSCN-W	NUMBER
USED_UBLK	NUMBER
USED_UREC	NUMBER
LOG_IO	NUMBER
PHY_IO	NUMBER
CR_GET	NUMBER
CR_CHANGE	NUMBER
START_DATE	DATE
DSCN_BASE	NUMBER
DSCN_WRAP	NUMBER
START_SCN	NUMBER
DEPENDENT_SCN	NUMBER
XID	RAW(8)
PRV_XID	RAW(8)
PTX_XID	RAW(8)
CON_ID	NUMBER

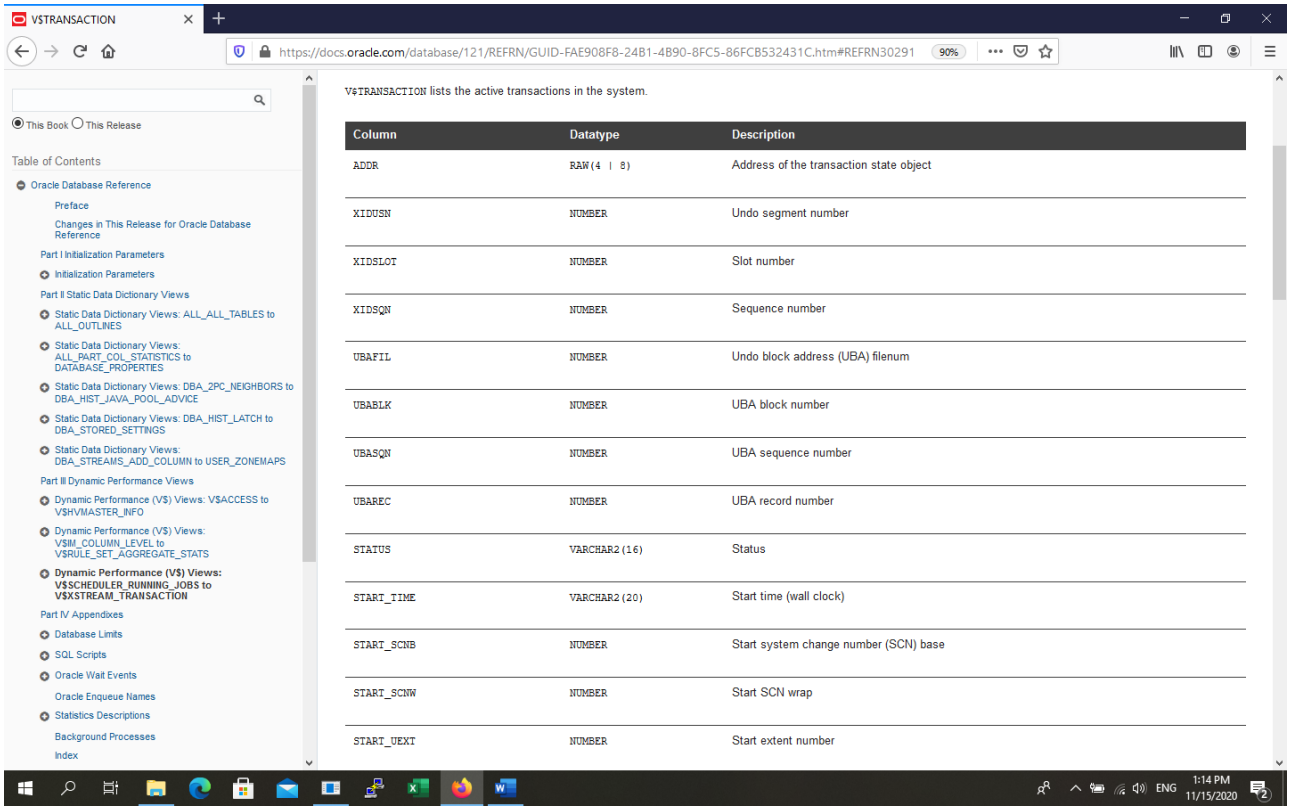
V$TRANSACTION
https://docs.oracle.com/database/121/REFRN/GUID-FAE908F8-24B1-4B90-8FC5-86FCB532431C.htm#REFRN30291
90%
This Book
This Release
Table of Contents
Oracle Database Reference
Preface
Changes in This Release for Oracle Database Reference
Part I Initialization Parameters
Initialization Parameters
Part II Static Data Dictionary Views
Static Data Dictionary Views: ALL_ALL_TABLES to ALL_OUTLINES
Static Data Dictionary Views: ALL_PART_COL_STATISTICS to DATABASE_PROPERTIES
Static Data Dictionary Views: DBA_2PC_NEIGHBORS to DBA_HIST_JAVA_POOL_ADVICE
Static Data Dictionary Views: DBA_HIST_LATCH to DBA_STORED_SETTINGS
Static Data Dictionary Views: DBA_STREAMS_ADD_COLUMN to USER_ZONEMAPS
Part III Dynamic Performance Views
Dynamic Performance (V$) Views: V$ACCESS to V$HVMASTER_INFO
Dynamic Performance (V$) Views: V$IM_COLUMN_LEVEL to V$RULE_SET_AGGREGATE_STATS
Dynamic Performance (V$) Views: V$SCHEDULER_RUNNING_JOBS to V$XSTREAM_TRANSACTION
Part IV Appendixes
Database Limits
SQL Scripts
Oracle Wait Events
Oracle Enqueue Names
Statistics Descriptions
Background Processes
Index
V$TRANSACTION lists the active transactions in the system.
Column
Datatype
Description
ADDR
RAW(4 | 8)
Address of the transaction state object
XIDUSN
NUMBER
Undo segment number
XIDSLOT
NUMBER
Slot number
XIDSQN
NUMBER
Sequence number
UBAFIL
NUMBER
Undo block address (UBA) filenum
UBABLK
NUMBER
UBA block number
UBASQN
NUMBER
UBA sequence number
UBAREC
NUMBER
UBA record number
STATUS
VARCHAR2(16)
Status
START_TIME
VARCHAR2(20)
Start time (wall clock)
START_SCNB
NUMBER
Start system change number (SCN) base
START_SCNW
NUMBER
Start SCN wrap
START_UEXT
NUMBER
Start extent number
ENG
1:14 PM
11/15/2020

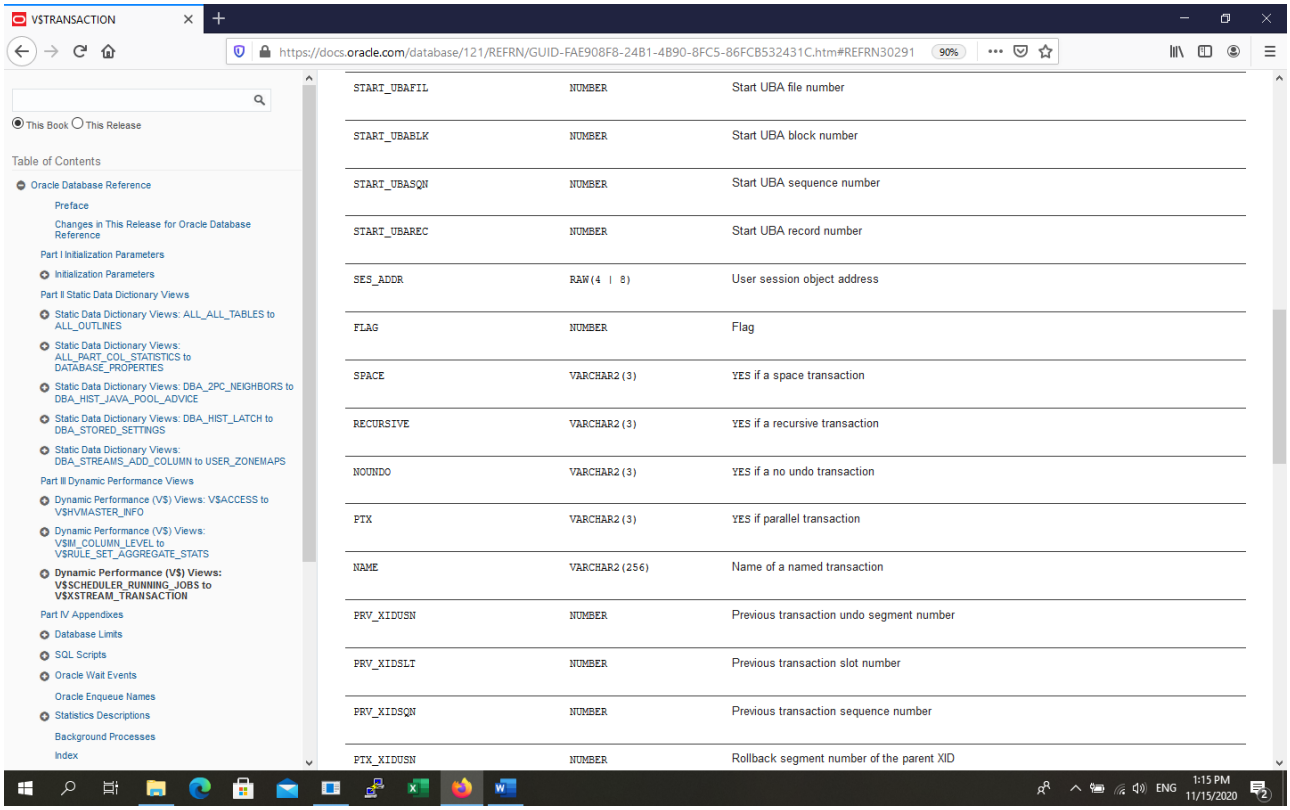
V$TRANSACTION
https://docs.oracle.com/database/121/REFRN/GUID-FAE908F8-24B1-4B90-8FC5-86FCB532431C.htm#REFRN30291
90%
This Book
This Release
Table of Contents
Oracle Database Reference
Preface
Changes in This Release for Oracle Database Reference
Part I Initialization Parameters
Initialization Parameters
Part II Static Data Dictionary Views
Static Data Dictionary Views: ALL_ALL_TABLES to ALL_OUTLINES
Static Data Dictionary Views: ALL_PART_COL_STATISTICS to DATABASE_PROPERTIES
Static Data Dictionary Views: DBA_2PC_NEIGHBORS to DBA_HIST_JAVA_POOL_ADVICE
Static Data Dictionary Views: DBA_HIST_LATCH to DBA_STORED_SETTINGS
Static Data Dictionary Views: DBA_STREAMS_ADD_COLUMN to USER_ZONEMAPS
Part III Dynamic Performance Views
Dynamic Performance (V$) Views: V$ACCESS to V$HVMASTER_INFO
Dynamic Performance (V$) Views: V$IM_COLUMN_LEVEL to V$RULE_SET_AGGREGATE_STATS
Dynamic Performance (V$) Views: V$SCHEDULER_RUNNING_JOBS to V$XSTREAM_TRANSACTION
Part IV Appendixes
Database Limits
SQL Scripts
Oracle Wait Events
Oracle Enqueue Names
Statistics Descriptions
Background Processes
Index
START_UBAFIL
NUMBER
Start UBA file number
START_UBABLK
NUMBER
Start UBA block number
START_UBASQN
NUMBER
Start UBA sequence number
START_UBAREC
NUMBER
Start UBA record number
SES_ADDR
RAW(4 | 8)
User session object address
FLAG
NUMBER
Flag
SPACE
VARCHAR2(3)
YES if a space transaction
RECURSIVE
VARCHAR2(3)
YES if a recursive transaction
NOUNDO
VARCHAR2(3)
YES if a no undo transaction
PTX
VARCHAR2(3)
YES if parallel transaction
NAME
VARCHAR2(256)
Name of a named transaction
PRV_XIDUSN
NUMBER
Previous transaction undo segment number
PRV_XIDSLT
NUMBER
Previous transaction slot number
PRV_XIDSQN
NUMBER
Previous transaction sequence number
PTX_XIDUSN
NUMBER
Rollback segment number of the parent XID
ENG
1:15 PM
11/15/2020

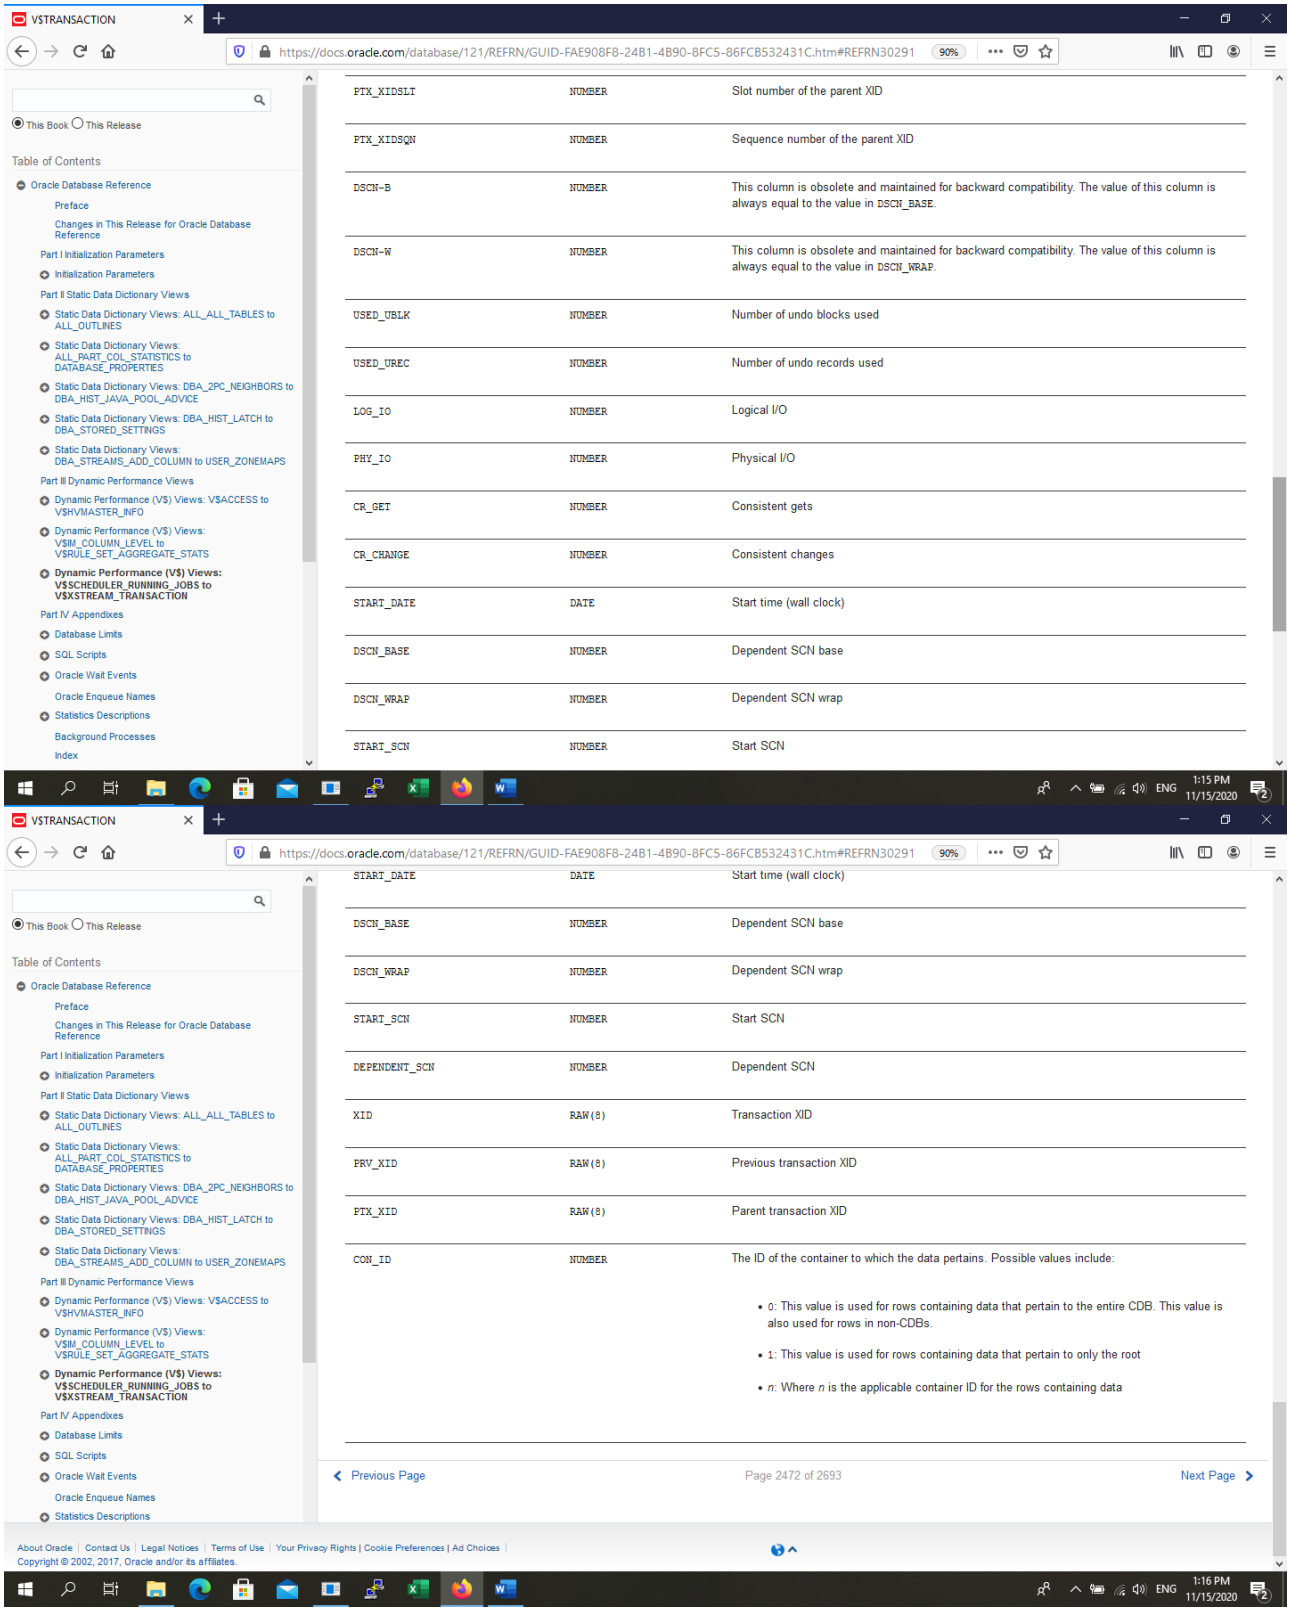

SQL> insert into emp values (999, 'TEST','TRANZACT',1111,sysdate, 100,0,10)
1 row created.

SQL> select addr, xidusn, used_ublk,start_uext, start_ubafil from v$transaction

ADDR	XIDUSN	USED_UBLK	START_UEXT	START_UBAFIL
00007FFC695843D8	2	1	2	5

ADDR – adresa sesiunii

XIDUSN – nr. segmentului de undo
USED_UBLK – nr. de blocuri de undo generate de tranzactie
START_UEXT- extensia segmentului de undo pentru care tranzactia a inceput scrierea
START_UBAFIL – fisierul de undo in care tranzactia curenta a inceput scrierea


8) Informatii despre blocurile de undo folosite de tranzactia curenta:

```
SQL> SELECT s.username, t.xidusn, t.ubafil, t.ubablk, t.used_ublk FROM v$session s,
       v$transaction t WHERE s.saddr = t.ses_addr;

USERNAME                       XIDUSN    UBAFIL         UBABLK      USED_UBLK
------------------------------ ---------- ---------- --------- ----------
SCOTT                               2          5          441              1
```

9) Statistici privind dimensiunea spatiului de undo:

```
SQL> desc v$undostat
 Name                                      Null?    Type
 ----------------------------------------- -------- ------------
 BEGIN_TIME                                         DATE
 END_TIME                                           DATE
 UNDOTSN                                            NUMBER
 UNDOBLKS                                           NUMBER
 TXNCOUNT                                           NUMBER
 MAXQUERYLEN                                        NUMBER
 MAXQUERYID                                         VARCHAR2(13)
 MAXCONCURRENCY                                     NUMBER
 UNXPSTEALCNT                                       NUMBER
 UNXPBLKRELCNT                                      NUMBER
 UNXPBLKREUCNT                                      NUMBER
 EXPSTEALCNT                                        NUMBER
 EXPBLKRELCNT                                       NUMBER
 EXPBLKREUCNT                                       NUMBER
 SSOLDERRCNT                                        NUMBER
 NOSPACEERRCNT                                      NUMBER
 ACTIVEBLKS                                         NUMBER
 UNEXPIREDBLKS                                      NUMBER
 EXPIREDBLKS                                        NUMBER
 TUNED_UNDORETENTION                                NUMBER
 CON_ID                                             NUMBER
```

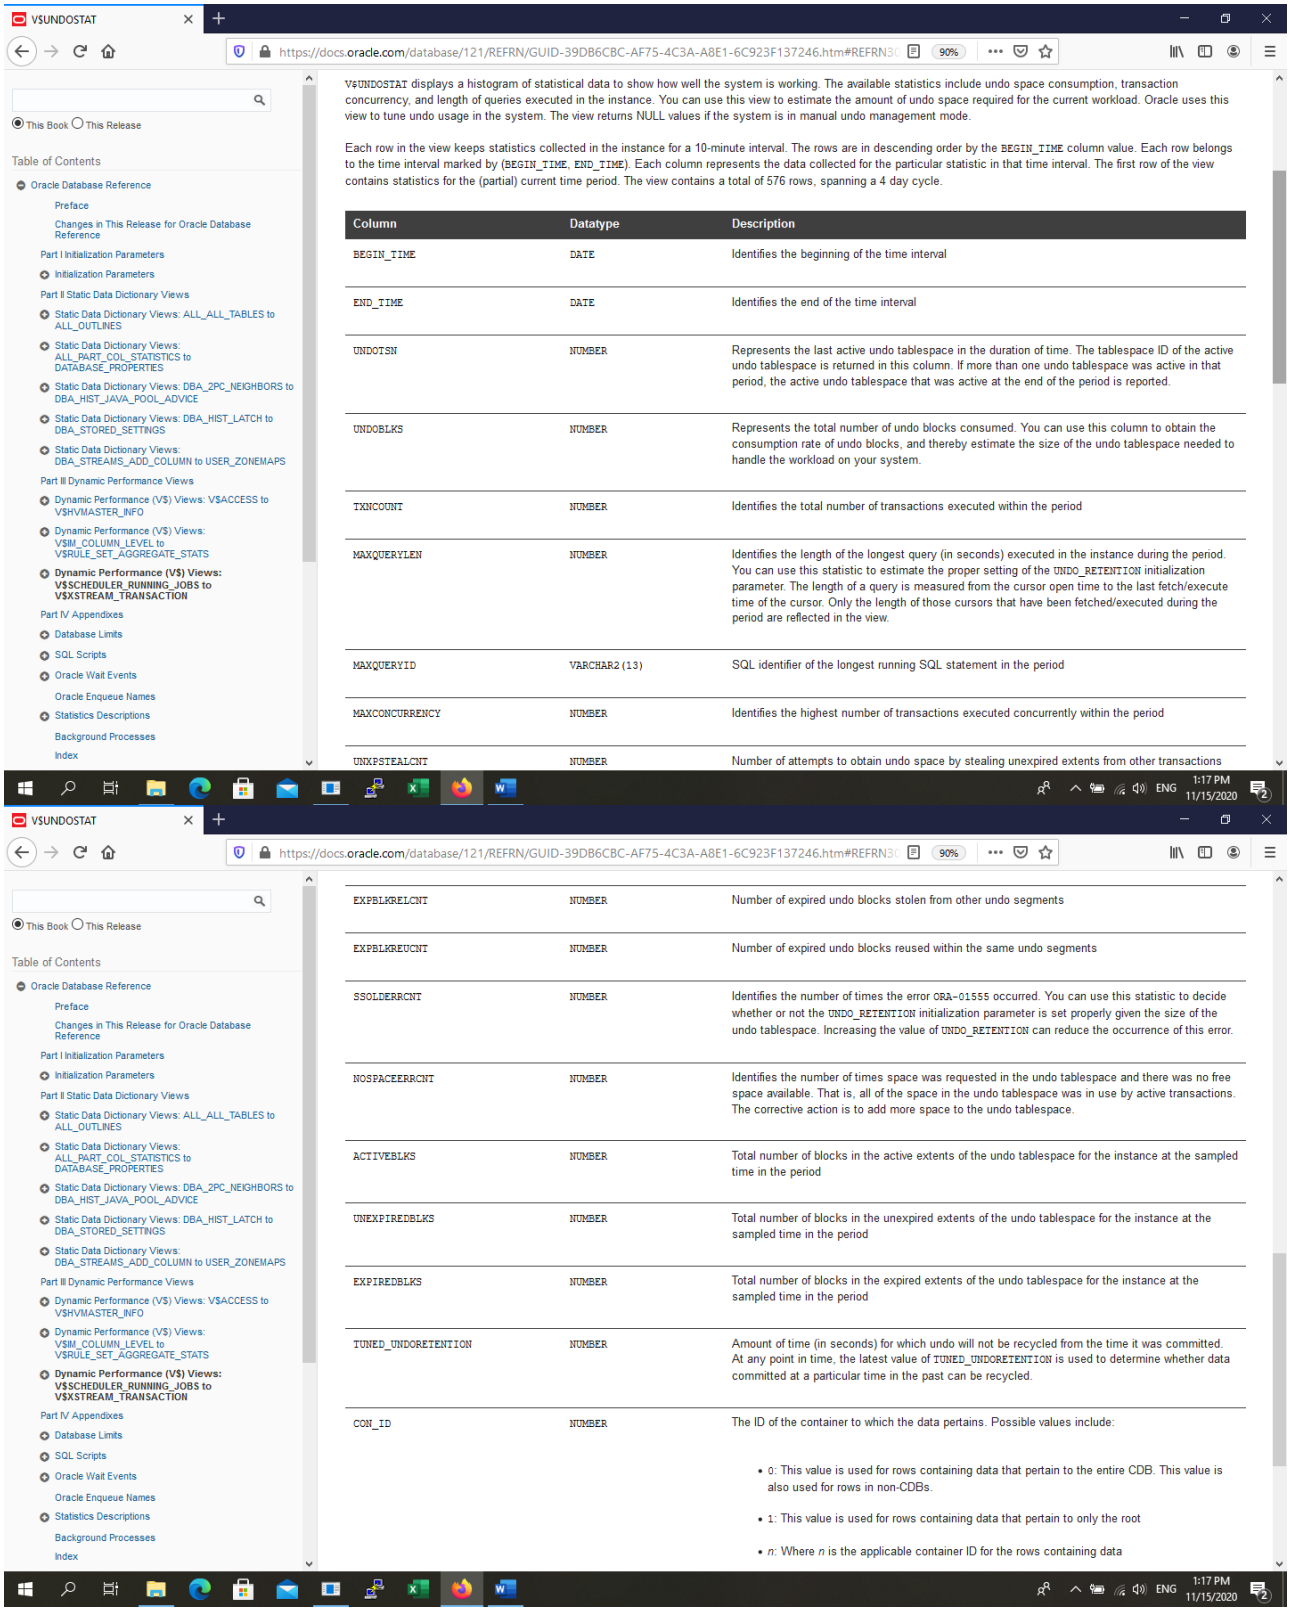

SQL> SELECT to_char(begin_time, 'dd-mm-yyyy hh:mi:ss') start_time, to_char(end_time,'dd-mm-yyyy hh:mi:ss') end_time, ((end_time-begin_time)* 24)*60 minute, undoblks FROM v$undostat;

START_TIME	END_TIME	MINUTE	UNDOBLKS
29-10-2019 11:53:53	29-10-2019 12:01:36	7.71666667	171
29-10-2019 11:43:53	29-10-2019 11:53:53	10	7
29-10-2019 11:33:53	29-10-2019 11:43:53	10	1
29-10-2019 11:23:53	29-10-2019 11:33:53	10	4

```
29-10-2019 11:13:53     29-10-2019 11:23:53     10          3
29-10-2019 11:03:53     29-10-2019 11:13:53     10          7
29-10-2019 10:53:53     29-10-2019 11:03:53     10          174
29-10-2019 10:43:53     29-10-2019 10:53:53     10          1
```

```
SQL> SELECT (SUM(undoblks) / SUM ((end_time - begin_time) * 24*60*60))
nr_med_blocuri_undo_sec FROM v$undostat;

NR_MED_BLOCURI_UNDO_SEC
-----------------------------------------
         0 .114826753
```

10) Reducerea spatiului alocat unui segment de undo:

```
SQL> alter rollback segment ubd shrink to 4M;
Rollback segment altered.
```


11) Stergerea din dictionar a unui segment de undo:

```
SQL> drop rollback segment ubd;
Rollback segment dropped.
```

12) Informatii despre segmentele temporare de sortare (folosite in comenzile SQL de sortare):


```
SQL> desc v$sort_segment

Name                          Null?     Type
 ----------------------------- --------  ----
 TABLESPACE_NAME                         VARCHAR2(31)
 SEGMENT_FILE                            NUMBER
 SEGMENT_BLOCK                           NUMBER
 EXTENT_SIZE                             NUMBER
 CURRENT_USERS                           NUMBER
 TOTAL_EXTENTS                           NUMBER
 TOTAL_BLOCKS                            NUMBER
 USED_EXTENTS                            NUMBER
 USED_BLOCKS                             NUMBER
 FREE_EXTENTS                            NUMBER
 FREE_BLOCKS                             NUMBER
 ADDED_EXTENTS                           NUMBER
 EXTENT_HITS                             NUMBER
 FREED_EXTENTS                           NUMBER
 FREE_REQUESTS                           NUMBER
 MAX_SIZE                                NUMBER
 MAX_BLOCKS                              NUMBER
 MAX_USED_SIZE                           NUMBER
 MAX_USED_BLOCKS                         NUMBER
 MAX_SORT_SIZE                           NUMBER
 MAX_SORT_BLOCKS                         NUMBER
 RELATIVE_FNO                            NUMBER
TS#                                     NUMBER
CON_ID                                  NUMBER
```

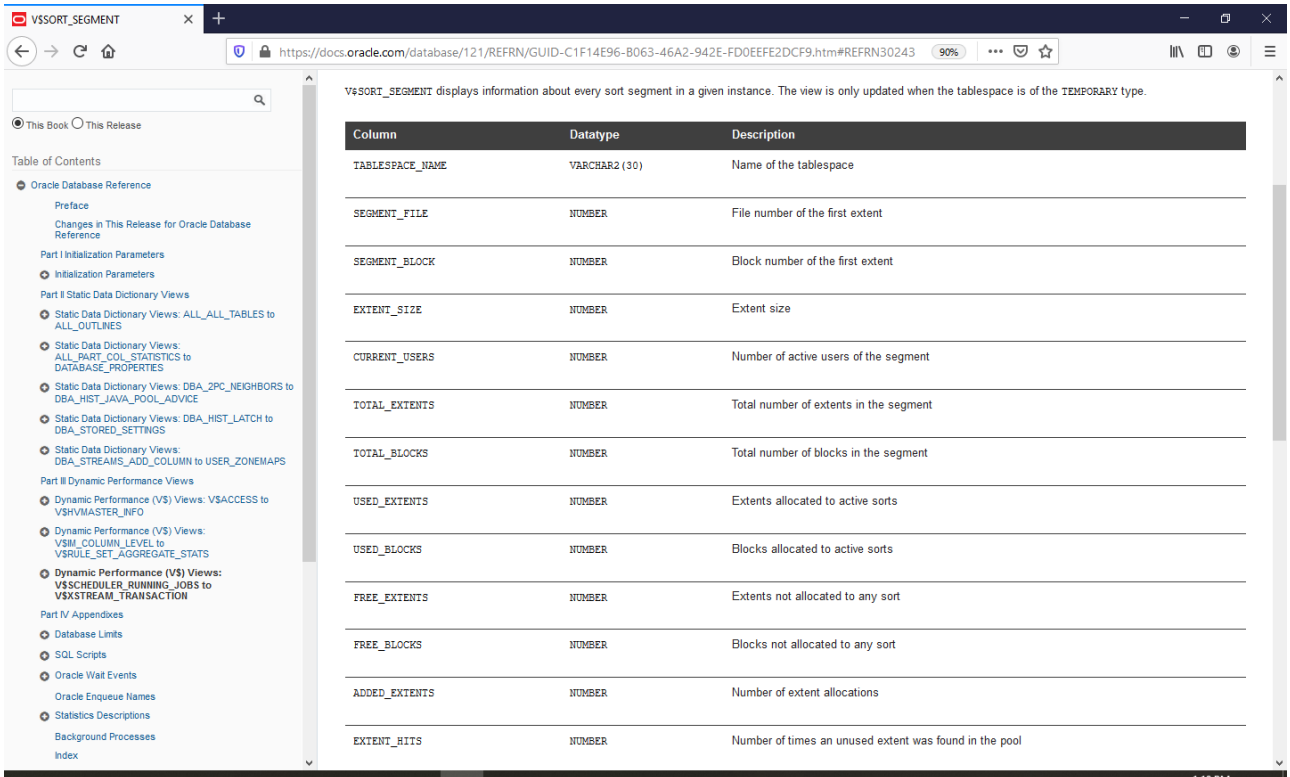

V$SORT_SEGMENT displays information about every sort segment in a given instance. The view is only updated when the tablespace is of the TEMPORARY type.

Column	Datatype	Description
TABLESPACE_NAME	VARCHAR2(30)	Name of the tablespace
SEGMENT_FILE	NUMBER	File number of the first extent
SEGMENT_BLOCK	NUMBER	Block number of the first extent
EXTENT_SIZE	NUMBER	Extent size
CURRENT_USERS	NUMBER	Number of active users of the segment
TOTAL_EXTENTS	NUMBER	Total number of extents in the segment
TOTAL_BLOCKS	NUMBER	Total number of blocks in the segment
USED_EXTENTS	NUMBER	Extents allocated to active sorts
USED_BLOCKS	NUMBER	Blocks allocated to active sorts
FREE_EXTENTS	NUMBER	Extents not allocated to any sort
FREE_BLOCKS	NUMBER	Blocks not allocated to any sort
ADDED_EXTENTS	NUMBER	Number of extent allocations
EXTENT_HITS	NUMBER	Number of times an unused extent was found in the pool

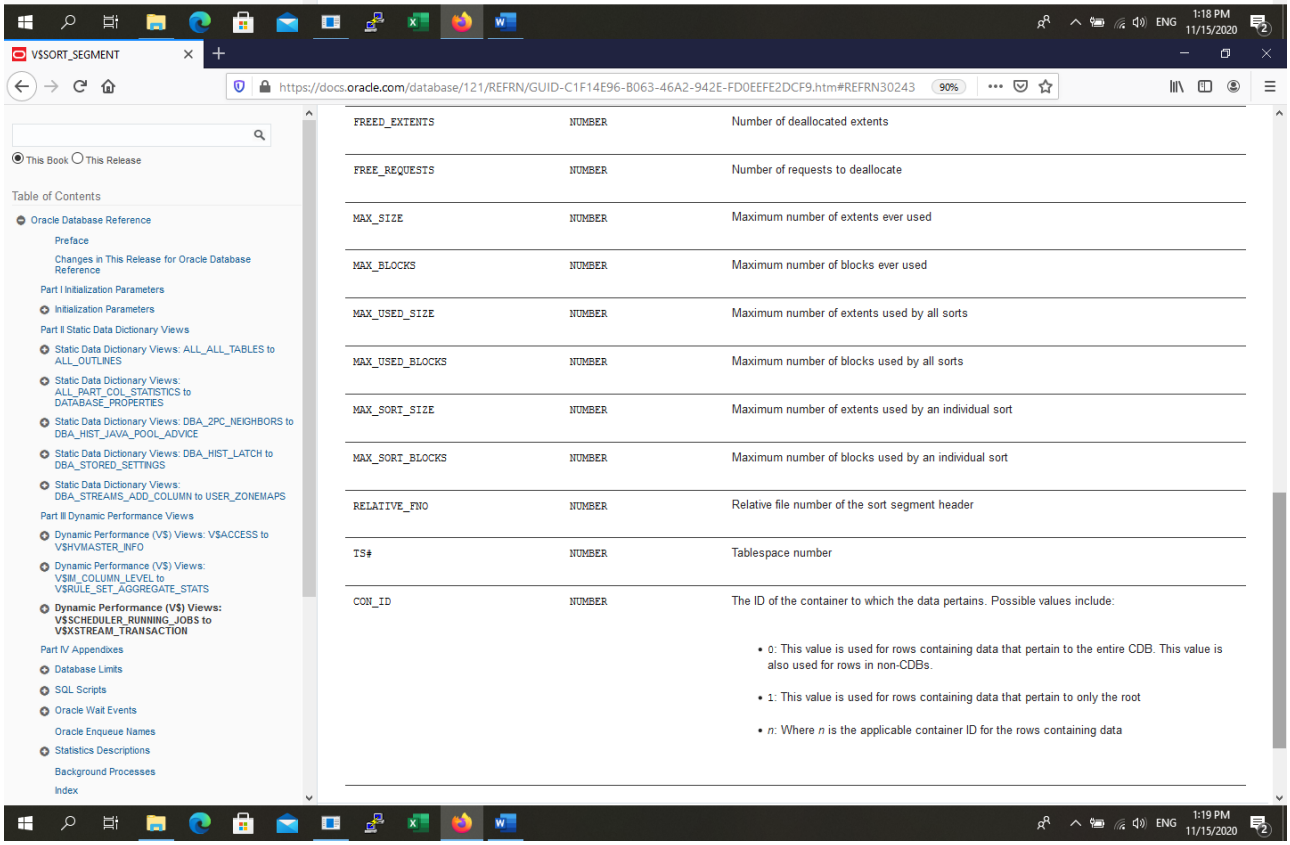

FREED_EXTENTS	NUMBER	Number of deallocated extents
FREE_REQUESTS	NUMBER	Number of requests to deallocate
MAX_SIZE	NUMBER	Maximum number of extents ever used
MAX_BLOCKS	NUMBER	Maximum number of blocks ever used
MAX_USED_SIZE	NUMBER	Maximum number of extents used by all sorts
MAX_USED_BLOCKS	NUMBER	Maximum number of blocks used by all sorts
MAX_SORT_SIZE	NUMBER	Maximum number of extents used by an individual sort
MAX_SORT_BLOCKS	NUMBER	Maximum number of blocks used by an individual sort
RELATIVE_FNO	NUMBER	Relative file number of the sort segment header
TS#	NUMBER	Tablespace number
CON_ID	NUMBER	The ID of the container to which the data pertains. Possible values include: • 0: This value is used for rows containing data that pertain to the entire CDB. This value is also used for rows in non-CDBs. • 1: This value is used for rows containing data that pertain to only the root • *n*: Where *n* is the applicable container ID for the rows containing data


SQL> select tablespace_name,max_sort_size,extent_size,max_sort_blocks from v$sort_segment;


TABLESPACE_NAME	MAX_SORT_SIZE	EXTENT_SIZE	MAX_SORT_BLOCKS
TEMP	1	128	128
UBD_TEMP	1	512	512

13) Informatii despre sesiuni si tablespace-ul in care se afla segmentele temporare de sortare folosite in sesiunea curenta:

SQL> desc v$tempseg_usage (v$sort_usage)

Name	Null?	Type
USERNAME		VARCHAR2(30)
USER		VARCHAR2(30)
SESSION_ADDR		RAW(4)
SESSION_NUM		NUMBER
SQLADDR		RAW(4)
SQLHASH		NUMBER
TABLESPACE		VARCHAR2(31)
CONTENTS		VARCHAR2(9)
SEGTYPE		VARCHAR2(9)
SEGFILE#		NUMBER
SEGBLK#		NUMBER
EXTENTS		NUMBER
BLOCKS		NUMBER
SEGRFNO#		NUMBER
TS#		NUMBER
CON_ID		NUMBER
SQL_ID_TEMPSEG		VARCHAR2(13)

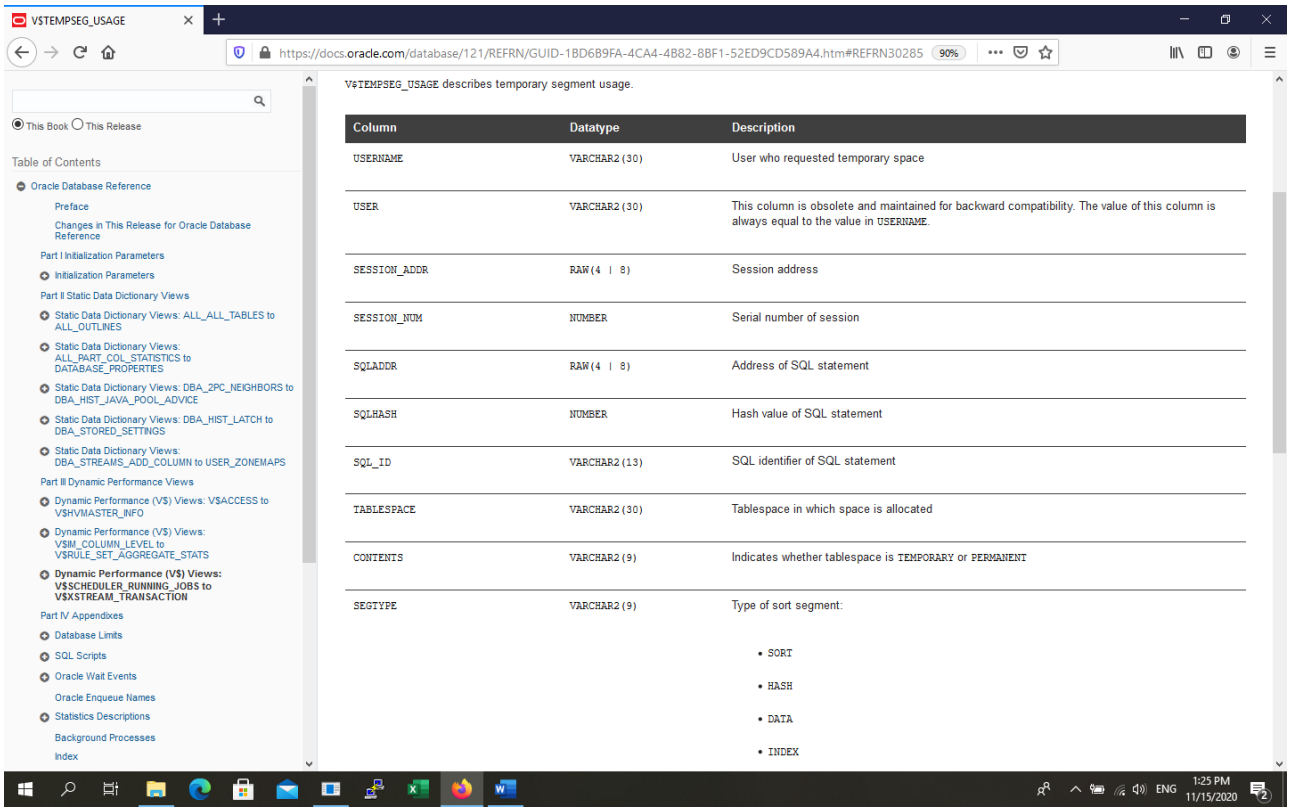

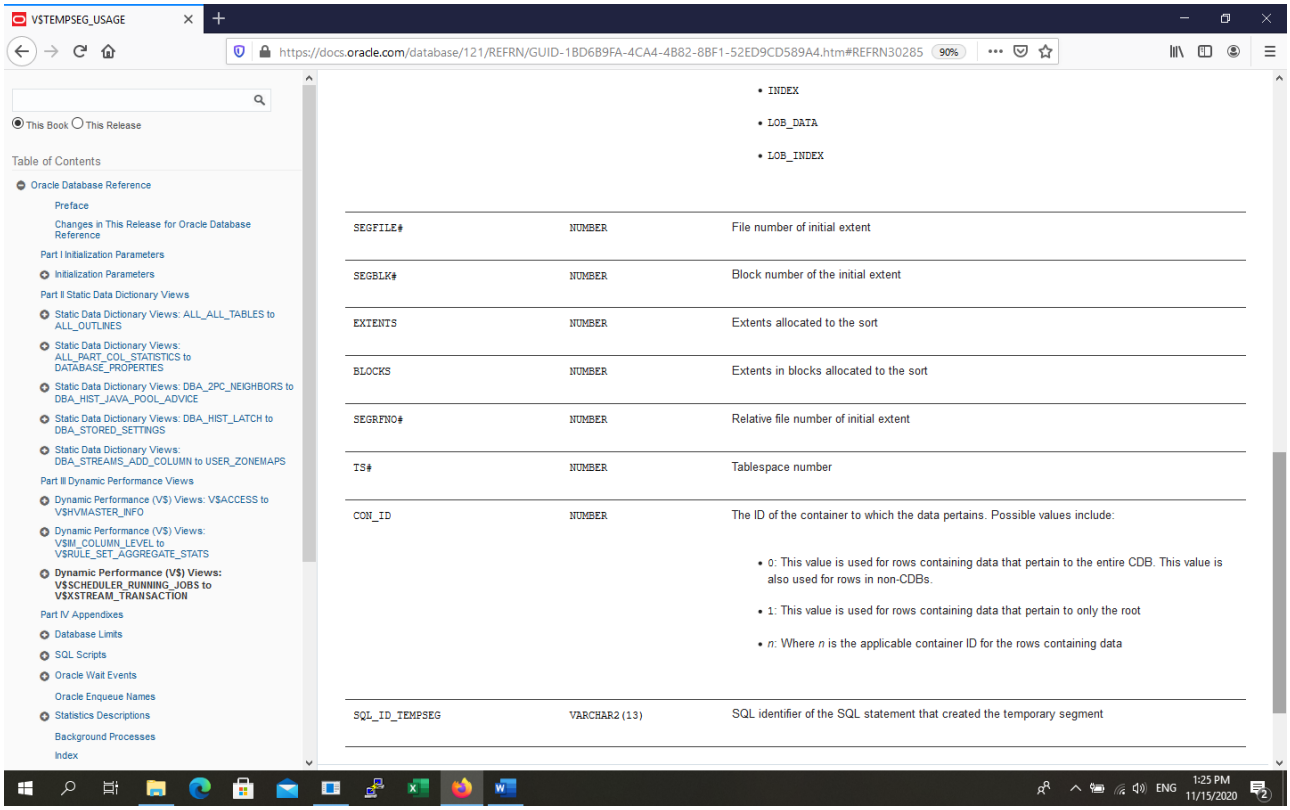

V$TEMPSEG_USAGE

https://docs.oracle.com/database/121/REFRN/GUID-1BD6B9FA-4CA4-4B82-8BF1-52ED9CD589A4.htm#REFRN30285

This Book / This Release

Table of Contents

- Oracle Database Reference
  - Preface
  - Changes in This Release for Oracle Database Reference
- Part I Initialization Parameters
  - Initialization Parameters
- Part II Static Data Dictionary Views
  - Static Data Dictionary Views: ALL_ALL_TABLES to ALL_OUTLINES
  - Static Data Dictionary Views: ALL_PART_COL_STATISTICS to DATABASE_PROPERTIES
  - Static Data Dictionary Views: DBA_2PC_NEIGHBORS to DBA_HIST_JAVA_POOL_ADVICE
  - Static Data Dictionary Views: DBA_HIST_LATCH to DBA_STORED_SETTINGS
  - Static Data Dictionary Views: DBA_STREAMS_ADD_COLUMN to USER_ZONEMAPS
- Part III Dynamic Performance Views
  - Dynamic Performance (V$) Views: V$ACCESS to V$HVMASTER_INFO
  - Dynamic Performance (V$) Views: V$IM_COLUMN_LEVEL to V$RULE_SET_AGGREGATE_STATS
  - **Dynamic Performance (V$) Views: V$SCHEDULER_RUNNING_JOBS to V$XSTREAM_TRANSACTION**
- Part IV Appendixes
  - Database Limits
  - SQL Scripts
  - Oracle Wait Events
    - Oracle Enqueue Names
  - Statistics Descriptions
    - Background Processes
    - Index

- INDEX
- LOB_DATA
- LOB_INDEX

SEGFILE#	NUMBER	File number of initial extent
SEGBLK#	NUMBER	Block number of the initial extent
EXTENTS	NUMBER	Extents allocated to the sort
BLOCKS	NUMBER	Extents in blocks allocated to the sort
SEGRFNO#	NUMBER	Relative file number of initial extent
TS#	NUMBER	Tablespace number
CON_ID	NUMBER	The ID of the container to which the data pertains. Possible values include: • 0: This value is used for rows containing data that pertain to the entire CDB. This value is also used for rows in non-CDBs. • 1: This value is used for rows containing data that pertain to only the root • *n*: Where *n* is the applicable container ID for the rows containing data
SQL_ID_TEMPSEG	VARCHAR2(13)	SQL identifier of the SQL statement that created the temporary segment

ENG 1:25 PM 11/15/2020

SQL> select username,user,tablespace,contents,extents,blocks from v$tempseg_usage;

USERNAME	USER	TABLESPACE	CONTENTS	EXTENTS	BLOCKS
SYS	SCOTT	TEMP	TEMPORARY	1	128

14) Setarea zonei de memorie utilizata pentru sortare in sesiunea curenta la 10K.

SQL> alter system set sort_area_size=10240 deferred;