


Administrare useri si privilegii


A. Administrare useri

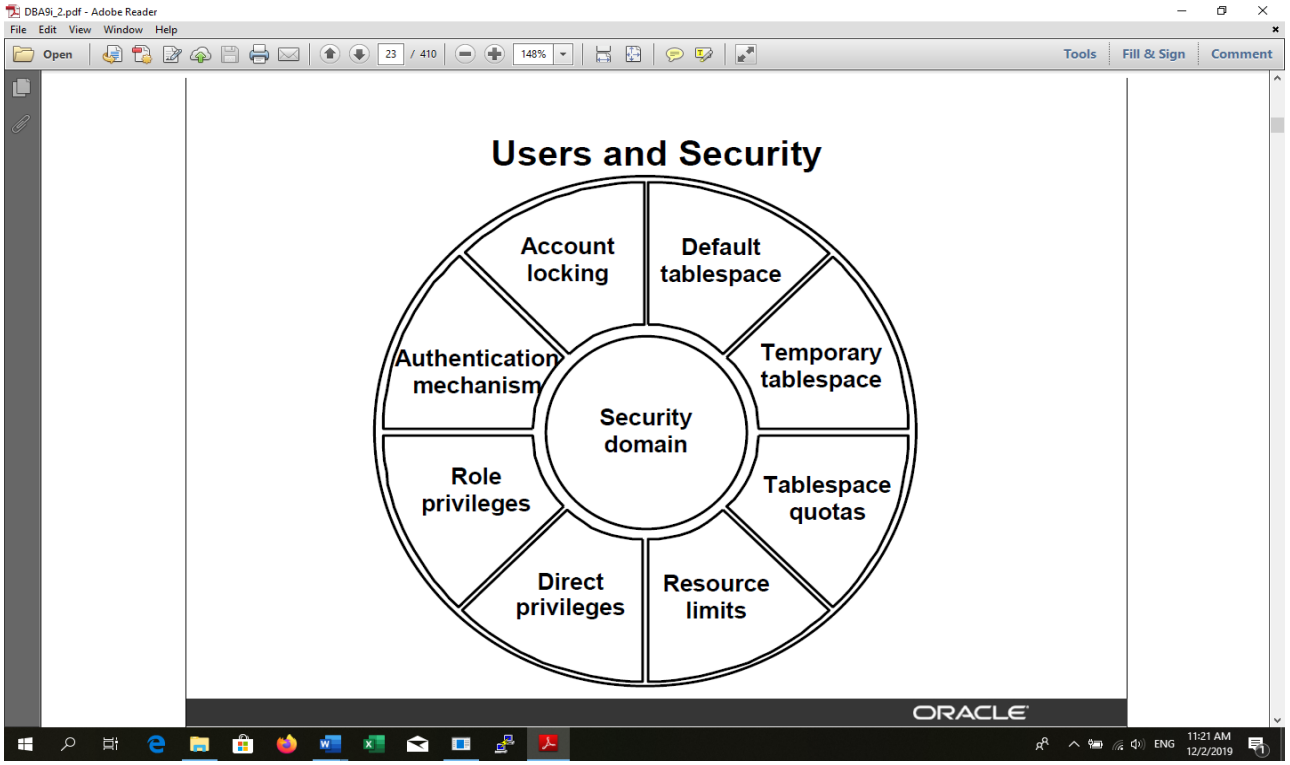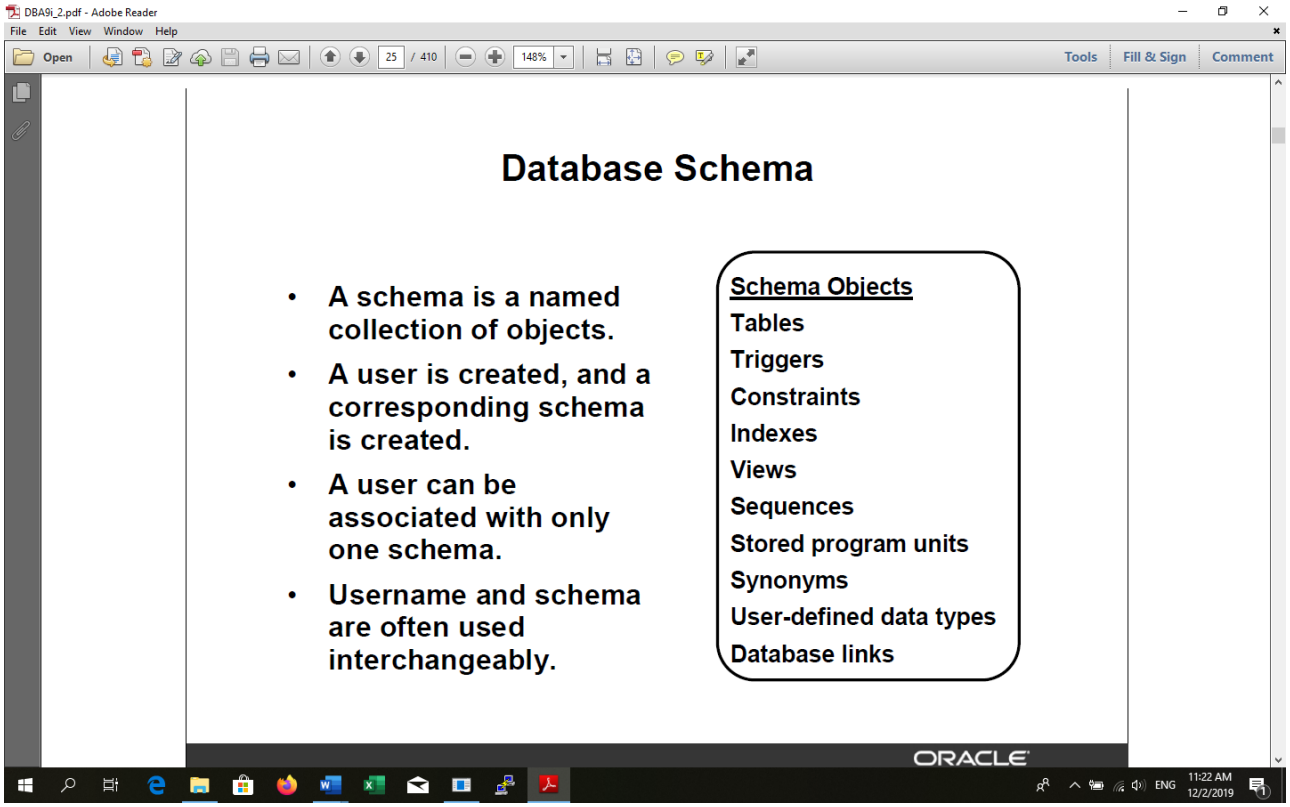


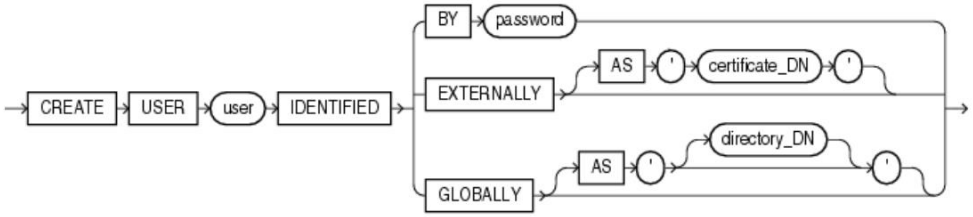

create_user::=


CREATE
USER
user
IDENTIFIED
BY
password
EXTERNALLY
AS
'
certificate_DN
'
GLOBALLY
AS
'
directory_DN
'

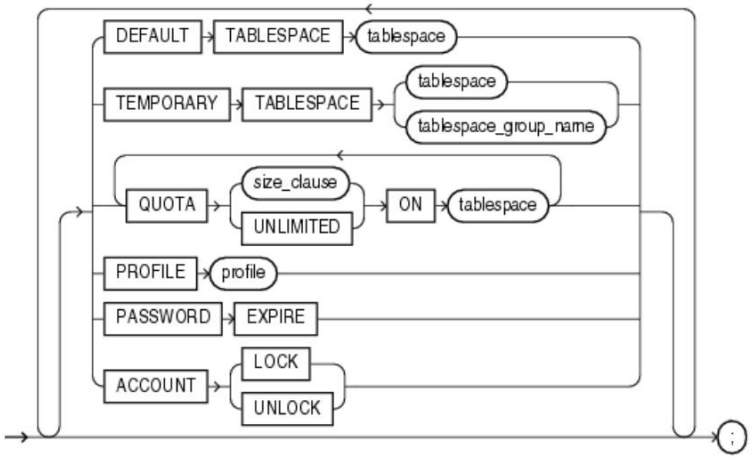
DEFAULT
TABLESPACE
tablespace
TEMPORARY
TABLESPACE
tablespace
tablespace_group_name
QUOTA
size_clause
UNLIMITED
ON
tablespace
PROFILE
profile
PASSWORD
EXPIRE
ACCOUNT
LOCK
UNLOCK
;

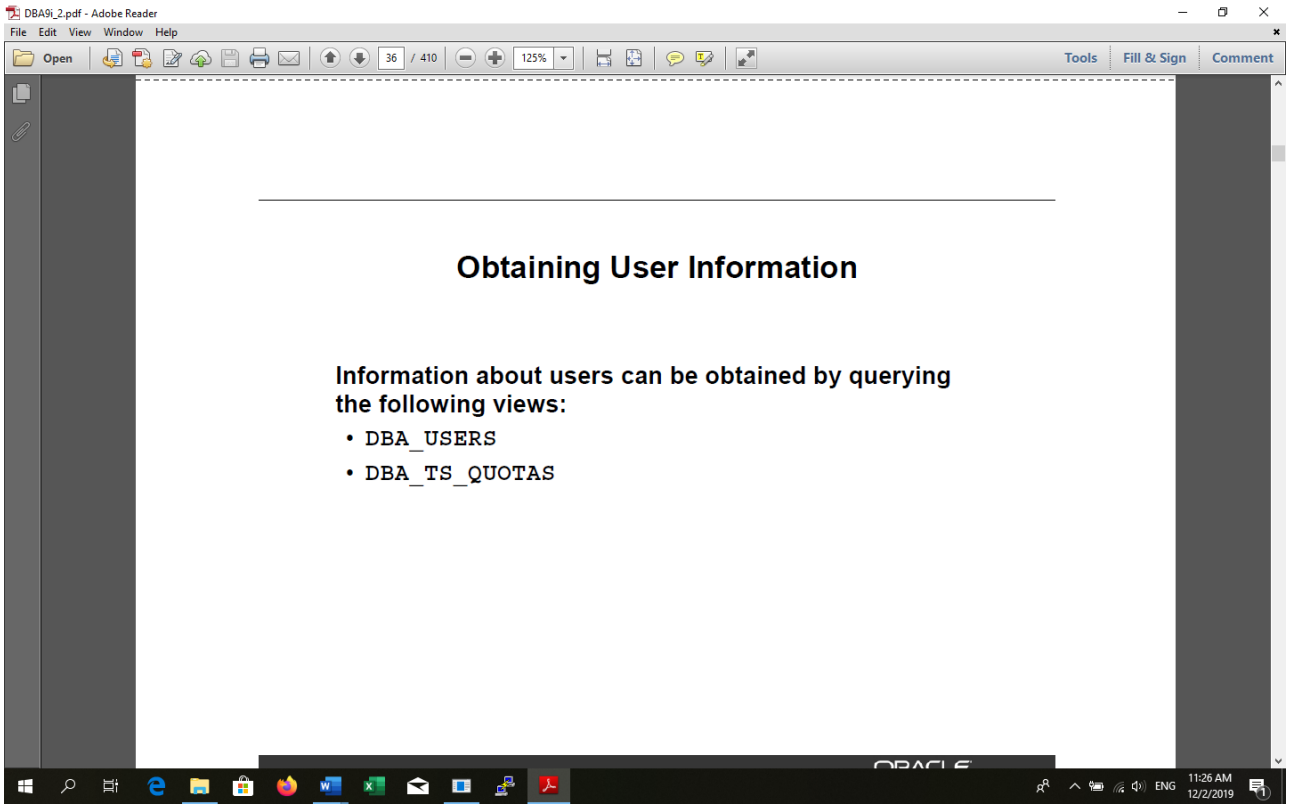
DBA9i_2.pdf - Adobe Reader
File Edit View Window Help
Open
36 / 410
125%
Tools
Fill & Sign
Comment
Obtaining User Information
Information about users can be obtained by querying the following views:
• DBA_USERS
• DBA_TS_QUOTAS
ENG
11:26 AM
12/2/2019

1) Verificare setare parametru pentru prefixul userului comun (*common user*):

```
SQL> connect  scott@bd /tiger      -- user cu privilegiul DBA

SQL>  show parameter common_user_prefix;

NAME                           TYPE       VALUE
------------------------------ ---------- -----------
common_user_prefix             string         C##
```

Obs.

- Numele userilor comuni(*common user*) au prefixul C## sau c## si implica o conexiune la o baza de date container de tipul *Multitenant Container Database* (CDB).
- Numele userilor locali (*local user*) nu au prefixul C## sau c## si implica o conexiune la o baza de date de tipul *Pluggable Database* (PDB).
- O baza de date container (CDB) poate conține mai multe baze de date conectabile (PDB).

2) Creare user local cu parola de conexiune la baza de date:

```
SQL> create user test identified by test
default tablespace bd_data
temporary tablespace bd_temp
quota 10M on bd_data;

User created.
```

3) Schimbarea parolei unui user:

```
SQL> alter user test identified by pass_test;

User altered.
```

4) Creare privilegiu pentru conectare:

```
SQL> grant create session to test;

Grant succeeded.
```

5) Creare privilegiu pentru conectare cu ADMIN OPTION:

```
SQL> grant create session to test with admin option;

Grant succeeded.
```

6) Alocarea unui spatiu de dimensiune fixa/nelimitata in tablespace-ul permanent BD_DATA pentru userul test:

```
SQL> alter user test quota 5 M on bd_data;
User altered.

SQL> alter user test quota unlimited on bd_data;
User altered.
```

7) Revocarea spatiului in tablespace-ul permanent BD_DATA pentru userul test:

```
SQL> alter user test quota  0 M on bd_data;

User altered.
```

8) Blocarea unui user:

```
SQL> alter user test account lock;
User altered.

SQL> conn test
Enter password: ****

ERROR:
ORA-28000: the account is locked
Warning: You are no longer connected to ORACLE.
```

9) Deblocarea unui user:

```
SQL> alter user test account unlock;

User altered.


SQL> conn test
Enter password: ****
Connected.
```


10) Vizualizarea informatiilor despre userii creati pe baza de date:

```
SQL> desc dba_users

 Name                                      Null?    Type
 ----------------------------------------- -------- ----------------------------
 USERNAME                                  NOT NULL VARCHAR2(30)
 USER_ID                                   NOT NULL NUMBER
 PASSWORD                                           VARCHAR2(30)
```

ACCOUNT_STATUS	NOT NULL	VARCHAR2(32)
LOCK_DATE		DATE
EXPIRY_DATE		DATE
DEFAULT_TABLESPACE	NOT NULL	VARCHAR2(30)
TEMPORARY_TABLESPACE	NOT NULL	VARCHAR2(30)
CREATED	NOT NULL	DATE
PROFILE	NOT NULL	VARCHAR2(30)
INITIAL_RSRC_CONSUMER_GROUP		VARCHAR2(30)
EXTERNAL_NAME		VARCHAR2(4000)
PASSWORD_VERSIONS		VARCHAR2(12)
EDITIONS_ENABLED		VARCHAR2(1)
AUTHENTICATION_TYPE		VARCHAR2(8)
PROXY_ONLY_CONNECT		VARCHAR2(1)
COMMON		VARCHAR2(3)
LAST_LOGIN		TIMESTAMP(9) WITH TIME ZONE
ORACLE_MAINTAINED		VARCHAR2(1)

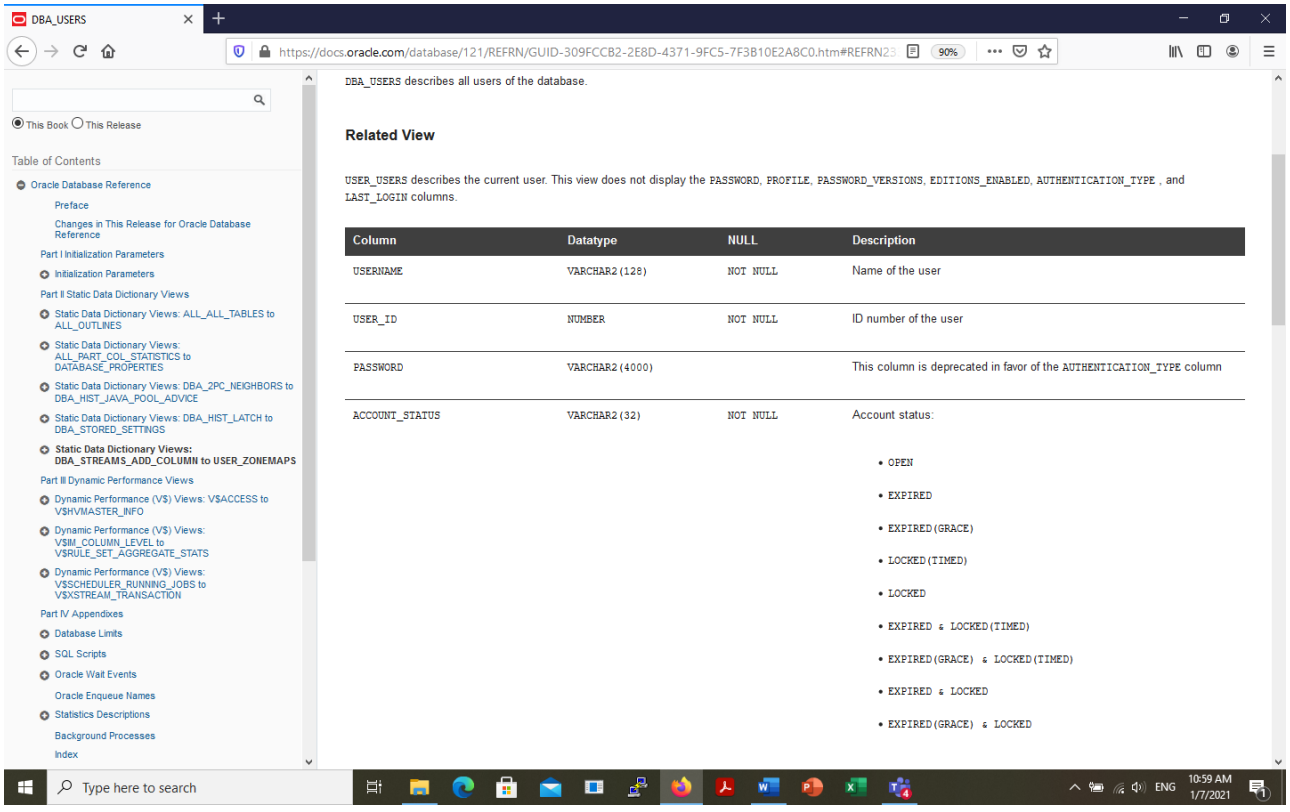

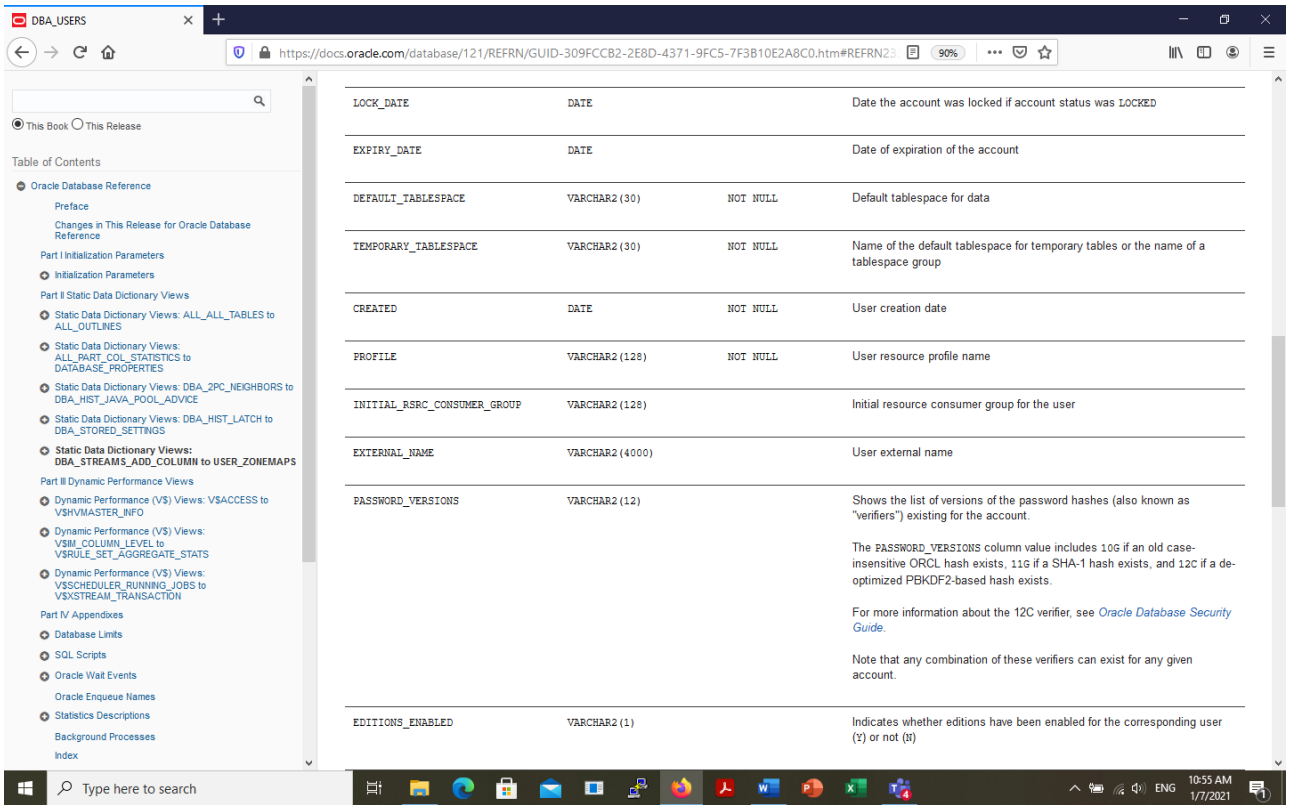

DBA_USERS

https://docs.oracle.com/database/121/REFRN/GUID-309FCCB2-2E8D-4371-9FC5-7F3B10E2A8C0.htm#REFRN23

This Book / This Release


Table of Contents

- Oracle Database Reference
  - Preface
  - Changes in This Release for Oracle Database Reference
  - Part I Initialization Parameters
  - Initialization Parameters
  - Part II Static Data Dictionary Views
  - Static Data Dictionary Views: ALL_ALL_TABLES to ALL_OUTLINES
  - Static Data Dictionary Views: ALL_PART_COL_STATISTICS to DATABASE_PROPERTIES
  - Static Data Dictionary Views: DBA_2PC_NEIGHBORS to DBA_HIST_JAVA_POOL_ADVICE
  - Static Data Dictionary Views: DBA_HIST_LATCH to DBA_STORED_SETTINGS
  - **Static Data Dictionary Views: DBA_STREAMS_ADD_COLUMN to USER_ZONEMAPS**
  - Part III Dynamic Performance Views
  - Dynamic Performance (V$) Views: V$ACCESS to V$HVMASTER_INFO
  - Dynamic Performance (V$) Views: V$IM_COLUMN_LEVEL to V$RULE_SET_AGGREGATE_STATS
  - Dynamic Performance (V$) Views: V$SCHEDULER_RUNNING_JOBS to V$XSTREAM_TRANSACTION
  - Part IV Appendixes
  - Database Limits
  - SQL Scripts
  - Oracle Wait Events
  - Oracle Enqueue Names
  - Statistics Descriptions
  - Background Processes
  - Index

LOCK_DATE	DATE		Date the account was locked if account status was LOCKED
EXPIRY_DATE	DATE		Date of expiration of the account
DEFAULT_TABLESPACE	VARCHAR2(30)	NOT NULL	Default tablespace for data
TEMPORARY_TABLESPACE	VARCHAR2(30)	NOT NULL	Name of the default tablespace for temporary tables or the name of a tablespace group
CREATED	DATE	NOT NULL	User creation date
PROFILE	VARCHAR2(128)	NOT NULL	User resource profile name
INITIAL_RSRC_CONSUMER_GROUP	VARCHAR2(128)		Initial resource consumer group for the user
EXTERNAL_NAME	VARCHAR2(4000)		User external name
PASSWORD_VERSIONS	VARCHAR2(12)		Shows the list of versions of the password hashes (also known as "verifiers") existing for the account. The PASSWORD_VERSIONS column value includes 10G if an old case-insensitive ORCL hash exists, 11G if a SHA-1 hash exists, and 12C if a de-optimized PBKDF2-based hash exists. For more information about the 12C verifier, see *Oracle Database Security Guide*. Note that any combination of these verifiers can exist for any given account.
EDITIONS_ENABLED	VARCHAR2(1)		Indicates whether editions have been enabled for the corresponding user (Y) or not (N)

Type here to search

ENG 10:55 AM 1/7/2021

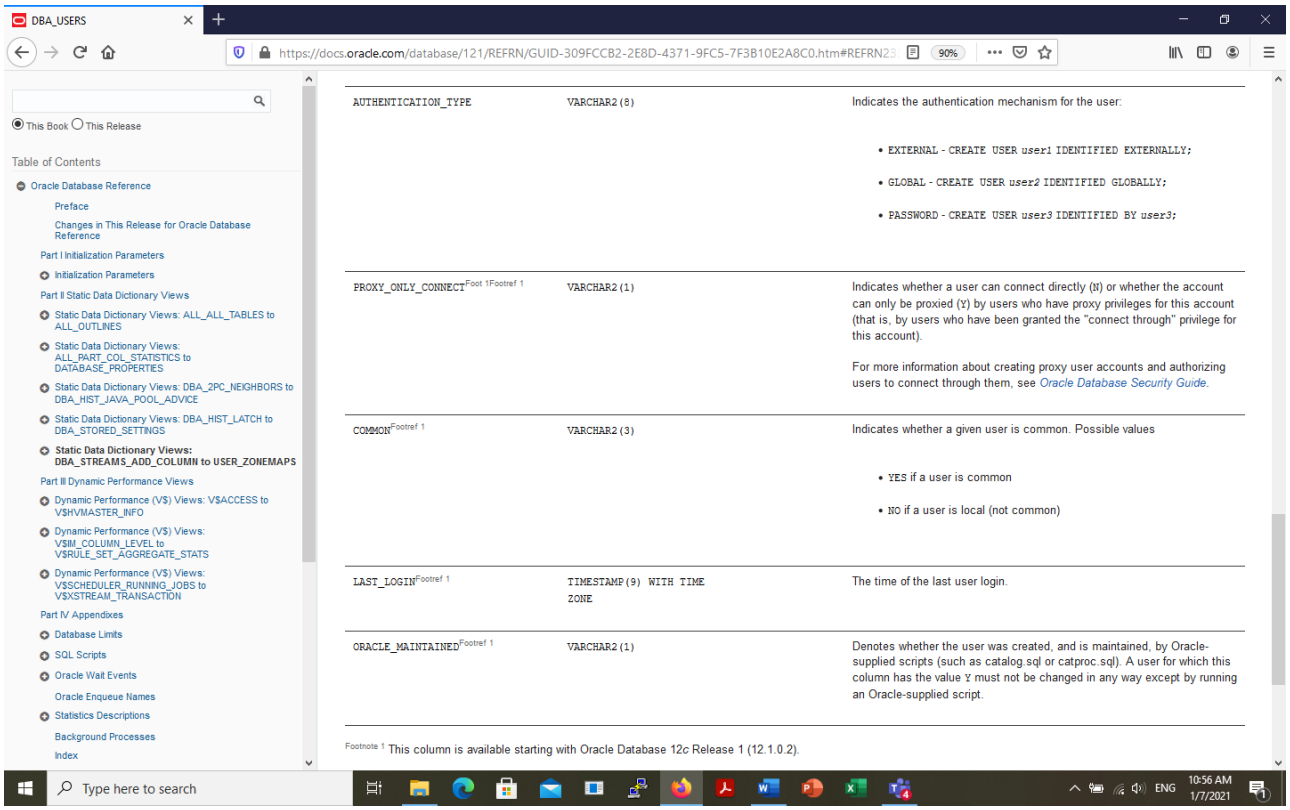

DBA_USERS

https://docs.oracle.com/database/121/REFRN/GUID-309FCCB2-2E8D-4371-9FC5-7F3B10E2A8C0.htm#REFRN23

This Book / This Release

Table of Contents

- Oracle Database Reference
  - Preface
  - Changes in This Release for Oracle Database Reference
  - Part I Initialization Parameters
  - Initialization Parameters
  - Part II Static Data Dictionary Views
  - Static Data Dictionary Views: ALL_ALL_TABLES to ALL_OUTLINES
  - Static Data Dictionary Views: ALL_PART_COL_STATISTICS to DATABASE_PROPERTIES
  - Static Data Dictionary Views: DBA_2PC_NEIGHBORS to DBA_HIST_JAVA_POOL_ADVICE
  - Static Data Dictionary Views: DBA_HIST_LATCH to DBA_STORED_SETTINGS
  - **Static Data Dictionary Views: DBA_STREAMS_ADD_COLUMN to USER_ZONEMAPS**
  - Part III Dynamic Performance Views
  - Dynamic Performance (V$) Views: V$ACCESS to V$HVMASTER_INFO
  - Dynamic Performance (V$) Views: V$IM_COLUMN_LEVEL to V$RULE_SET_AGGREGATE_STATS
  - Dynamic Performance (V$) Views: V$SCHEDULER_RUNNING_JOBS to V$XSTREAM_TRANSACTION
  - Part IV Appendixes
  - Database Limits
  - SQL Scripts
  - Oracle Wait Events
  - Oracle Enqueue Names
  - Statistics Descriptions
  - Background Processes
  - Index

AUTHENTICATION_TYPE	VARCHAR2(8)		Indicates the authentication mechanism for the user: • EXTERNAL - CREATE USER *user1* IDENTIFIED EXTERNALLY; • GLOBAL - CREATE USER *user2* IDENTIFIED GLOBALLY; • PASSWORD - CREATE USER *user3* IDENTIFIED BY *user3*;
PROXY_ONLY_CONNECT[Foot 1][Footref 1]	VARCHAR2(1)		Indicates whether a user can connect directly (N) or whether the account can only be proxied (Y) by users who have proxy privileges for this account (that is, by users who have been granted the "connect through" privilege for this account). For more information about creating proxy user accounts and authorizing users to connect through them, see *Oracle Database Security Guide*.
COMMON[Footref 1]	VARCHAR2(3)		Indicates whether a given user is common. Possible values • YES if a user is common • NO if a user is local (not common)
LAST_LOGIN[Footref 1]	TIMESTAMP(9) WITH TIME ZONE		The time of the last user login.
ORACLE_MAINTAINED[Footref 1]	VARCHAR2(1)		Denotes whether the user was created, and is maintained, by Oracle-supplied scripts (such as catalog.sql or catproc.sql). A user for which this column has the value Y must not be changed in any way except by running an Oracle-supplied script.

[Footnote 1] This column is available starting with Oracle Database 12*c* Release 1 (12.1.0.2).

Type here to search

ENG 10:56 AM 1/7/2021


SQL> select username, default_tablespace, temporary_tablespace from dba_users;

USERNAME	DEFAULT_TABLESPACE	TEMPORARY_TABLESPACE
SCOTT	USERS	TEMP
BI	USERS	TEMP
SH	USERS	TEMP
OE	USERS	TEMP
HR	USERS	TEMP
TEST	BD_DATA	BD_TEMP
UBD1	BD_DATA	BD_TEMP

11) Vizualizarea informatiilor despre spatiul alocat si spatiul utilizat de catre userii creati pe baza de date:

SQL> desc dba_ts_quotas

Name	Null?	Type
TABLESPACE_NAME	NOT NULL	VARCHAR2(30)
USERNAME	NOT NULL	VARCHAR2(30)
BYTES		NUMBER
MAX_BYTES		NUMBER
BLOCKS		NUMBER
MAX_BLOCKS		NUMBER
DROPPED		VARCHAR2(3)

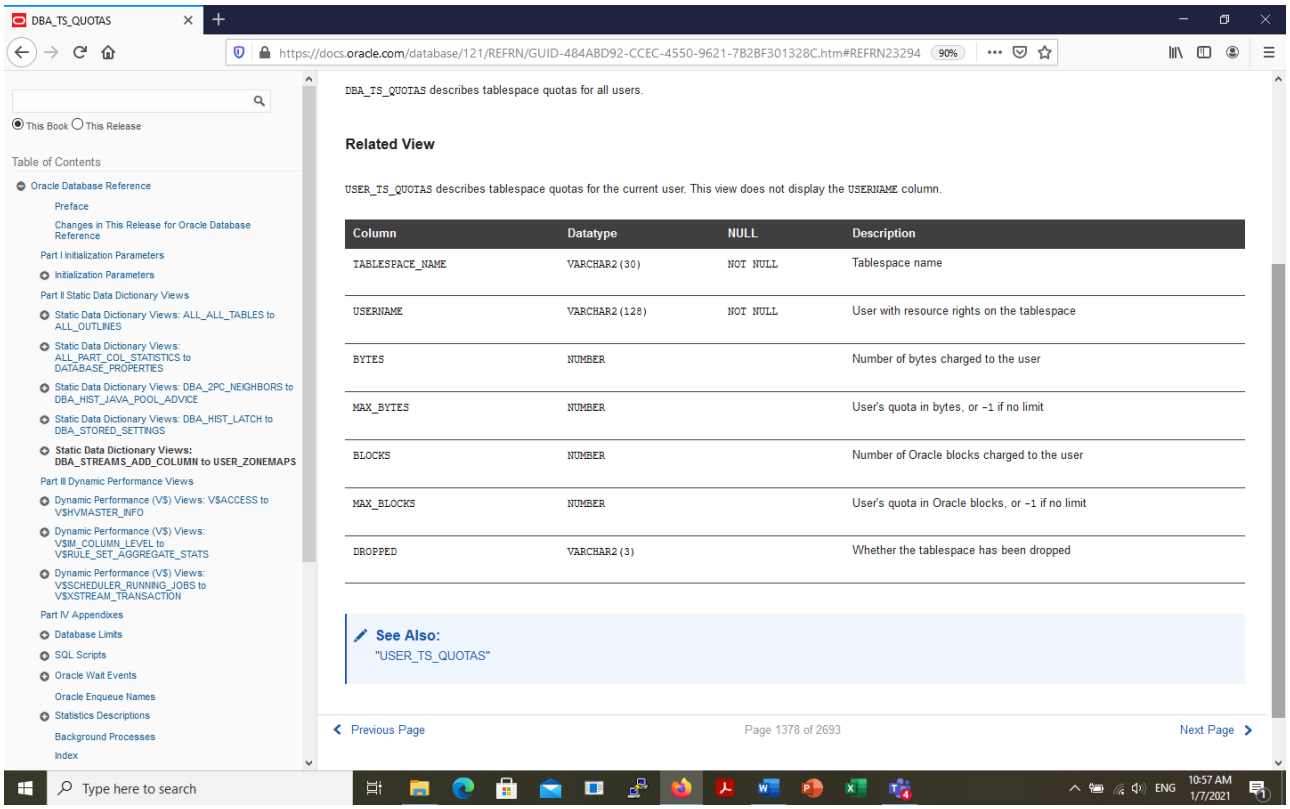

SQL> select username, tablespace_name, max_bytes, bytes from dba_ts_quotas;

USERNAME	TABLESPACE_NAME	MAX_BYTES	BYTES
DMSYS	SYSAUX	209715200	262144
SYSMAN	SYSAUX	-1	62521344
TEST	UPB_DATA	1048576	65536
OLAPSYS	SYSAUX	-1	16318464
DMUSER	USERS	10485760	7143424

12) Vizualizarea informatiilor despre userul curent:

SQL> desc user_users

Name	Null?	Type
USERNAME	NOT NULL	VARCHAR2(30)
USER_ID	NOT NULL	NUMBER
ACCOUNT_STATUS	NOT NULL	VARCHAR2(32)
LOCK_DATE		DATE
EXPIRY_DATE		DATE
DEFAULT_TABLESPACE	NOT NULL	VARCHAR2(30)
TEMPORARY_TABLESPACE	NOT NULL	VARCHAR2(30)
CREATED	NOT NULL	DATE

```
INITIAL_RSRC_CONSUMER_GROUP                VARCHAR2(30)
EXTERNAL_NAME                              VARCHAR2(4000)
PROXY_ONLY_CONNECT                         VARCHAR2(1)
COMMON                                     VARCHAR2(3)
ORACLE_MAINTAINED                          VARCHAR2(1)
```

```
SQL> select user_id, username, created, lock_date from user_users;

   USER_ID USERNAME                       CREATED   LOCK_DATE
---------- ------------------------------ --------- ---------
        54 SCOTT                          15-APR-17
```

13) Stergerea unui user din dictionar:

```
SQL> drop user test;

User dropped.
```


Obs. Daca userul are create propriile obiecte trebuie folosita optiunea CASCADE, pentru a sterge mai intai obiectele create de catre user. Altfel se genereaza eroarea:


```
ERROR at line 1:
ORA-01922: CASCADE must be specified to drop 'TEST'

SQL> drop user test cascade;   -- se sterg mai intai obiectele create, apoi userul

User dropped.
```

B. Administrare privilegii

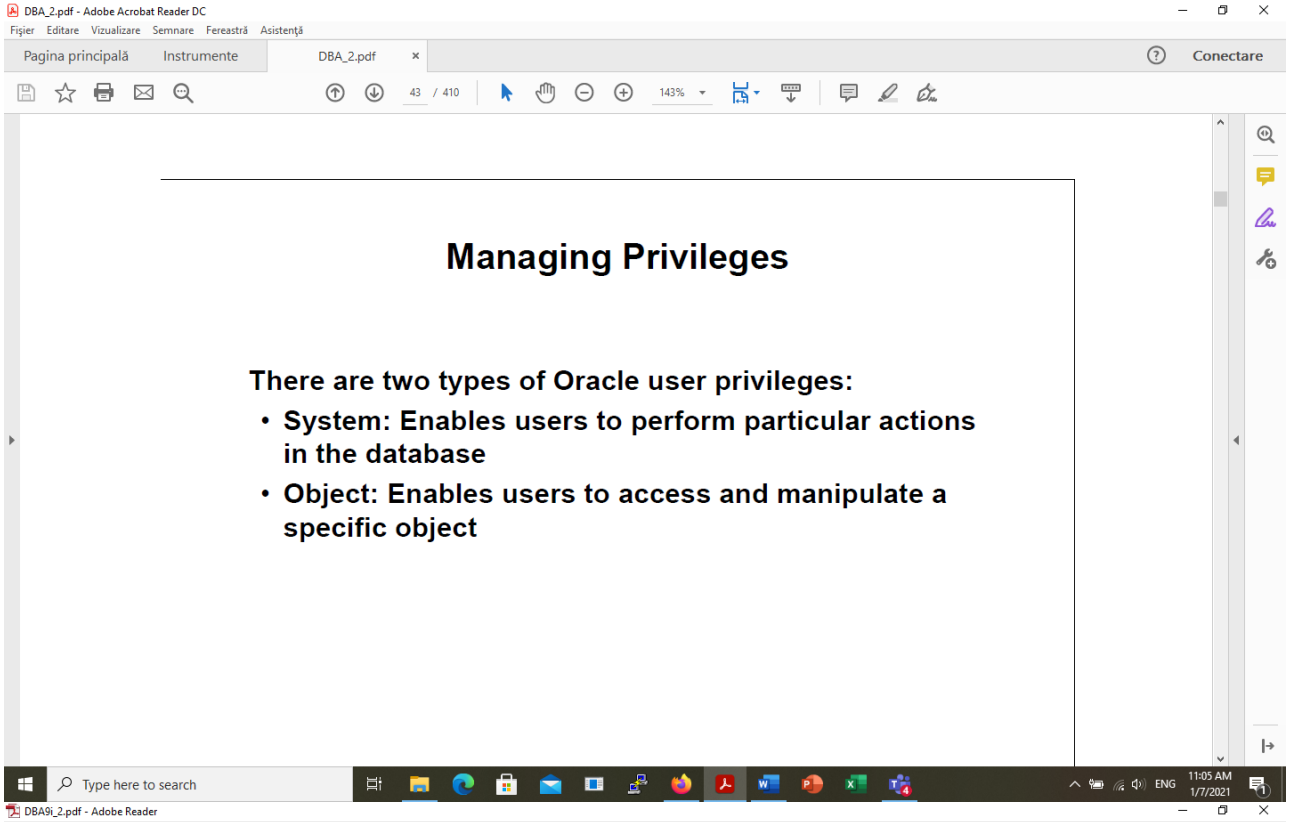

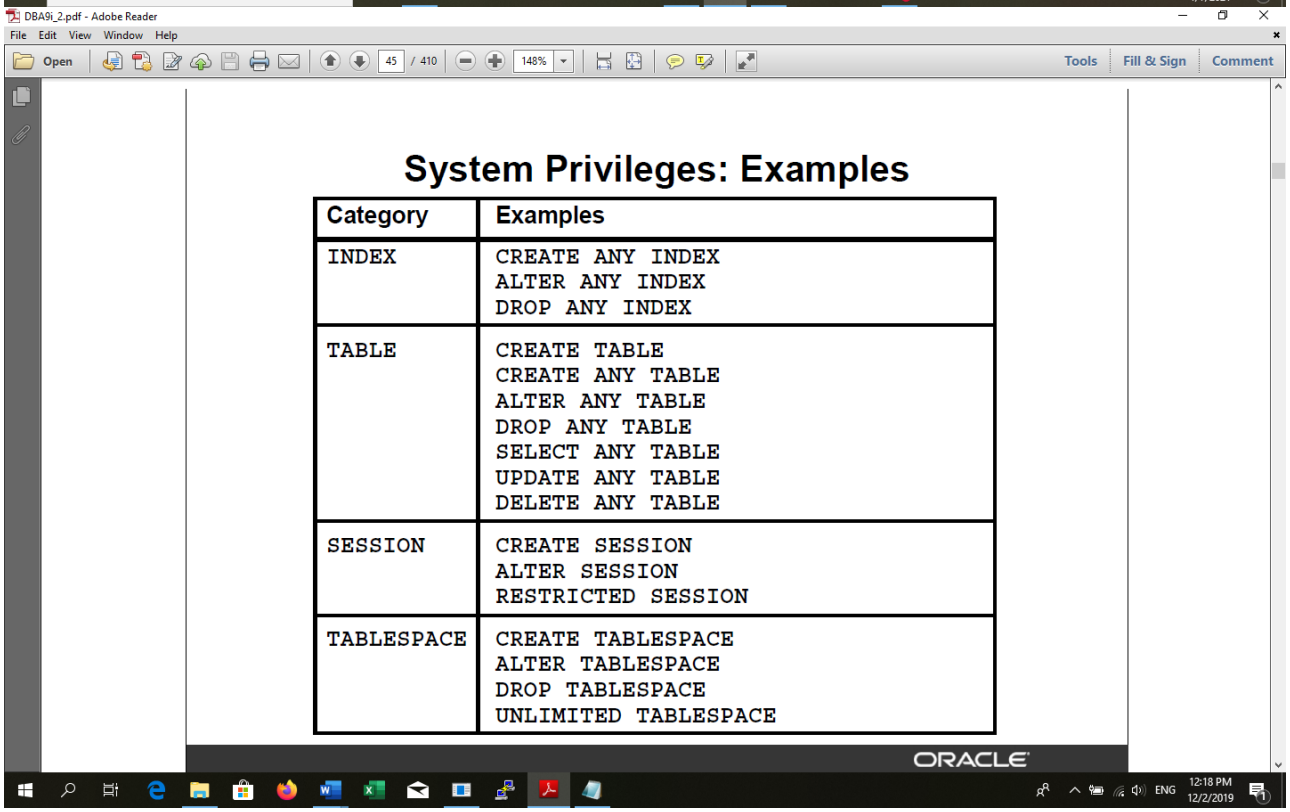

DBA9i_2.pdf - Adobe Reader

File Edit View Window Help

Open 49 / 410 148% Tools Fill & Sign Comment

SYSDBA and SYSOPER Privileges

Category	Examples
SYSOPER	STARTUP SHUTDOWN ALTER DATABASE OPEN | MOUNT ALTER DATABASE BACKUP CONTROLFILE TO RECOVER DATABASE ALTER DATABASE ARCHIVELOG RESTRICTED SESSION
SYSDBA	SYSOPER PRIVILEGES WITH ADMIN OPTION CREATE DATABASE ALTER TABLESPACE BEGIN/END BACKUP RESTRICTED SESSION RECOVER DATABASE UNTIL

ORACLE

ENG 12:20 PM 12/2/2019

DBA9i_2.pdf - Adobe Reader

File Edit View Window Help

Open 54 / 410 148% Tools Fill & Sign Comment

Object Privileges

Object priv.	Table	View	Sequence	Procedure
ALTER	√	√	√	
DELETE	√	√		
EXECUTE				√
INDEX	√	√		
INSERT	√	√		
REFERENCES	√			
SELECT	√	√	√	
UPDATE	√	√		

ORACLE


ENG 12:22 PM 12/2/2019

DBA9i_2.pdf - Adobe Reader

File Edit View Window Help

Open 53 / 410 148% Tools Fill & Sign Comment

Revoking System Privileges with the ADMIN OPTION

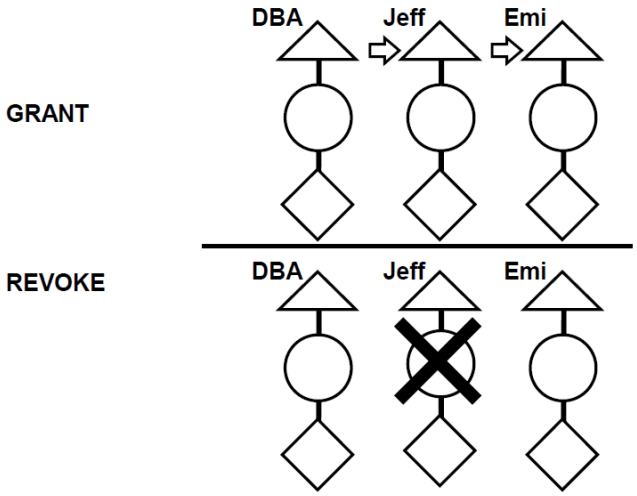

ORACLE


ENG 12:21 PM 12/2/2019

DBA9i_2.pdf - Adobe Reader

File Edit View Window Help


Open 61 / 410 148% Tools Fill & Sign Comment


Revoking Object Privileges with GRANT OPTION

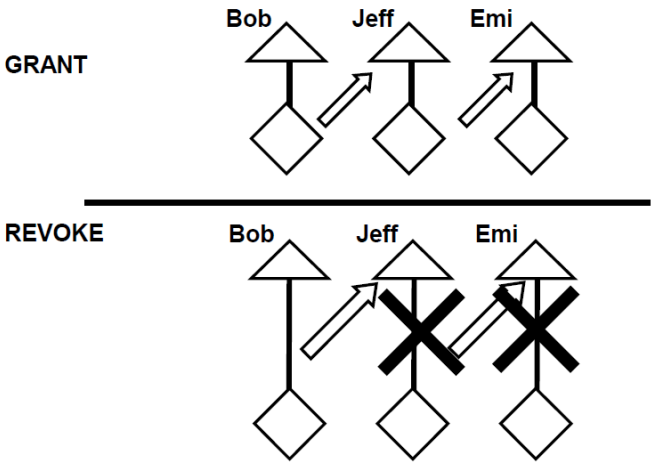



ORACLE

ENG 12:24 PM 12/2/2019

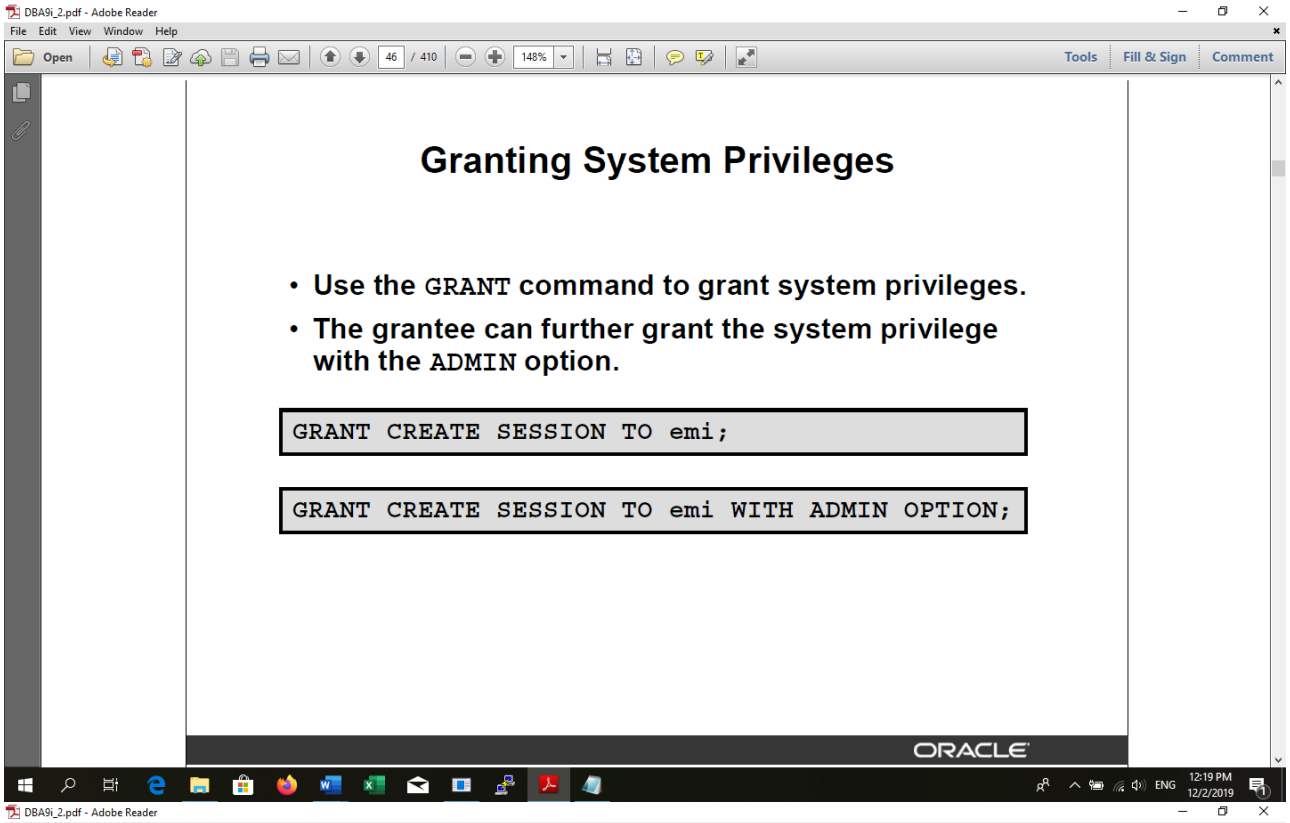
DBA9i_2.pdf - Adobe Reader
File Edit View Window Help
Open
46 / 410
148%
Tools
Fill & Sign
Comment
Granting System Privileges
• Use the GRANT command to grant system privileges.
• The grantee can further grant the system privilege with the ADMIN option.
GRANT CREATE SESSION TO emi;
GRANT CREATE SESSION TO emi WITH ADMIN OPTION;
ORACLE
ENG
12:19 PM
12/2/2019

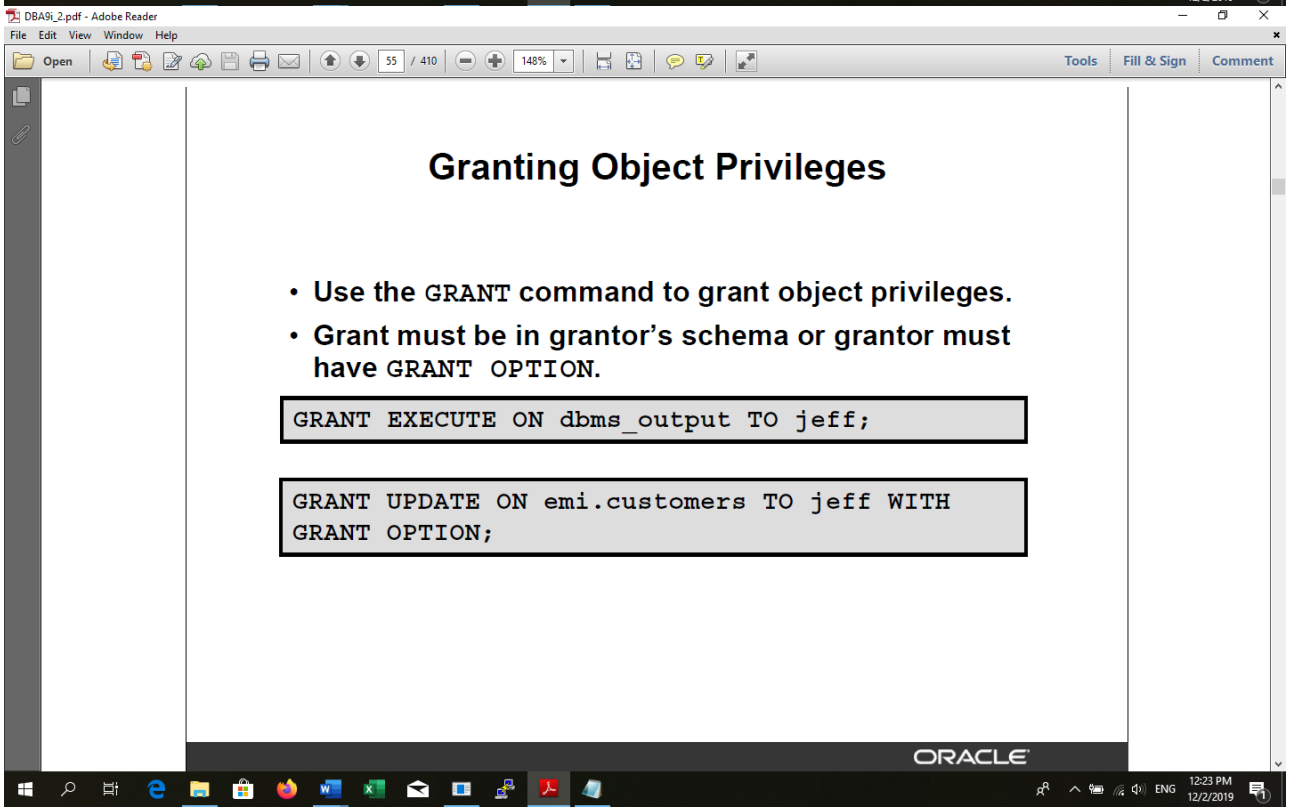
DBA9i_2.pdf - Adobe Reader
File Edit View Window Help
Open
55 / 410
148%
Tools
Fill & Sign
Comment
Granting Object Privileges
• Use the GRANT command to grant object privileges.
• Grant must be in grantor's schema or grantor must have GRANT OPTION.
GRANT EXECUTE ON dbms_output TO jeff;
GRANT UPDATE ON emi.customers TO jeff WITH GRANT OPTION;
ORACLE
ENG
12:23 PM
12/2/2019

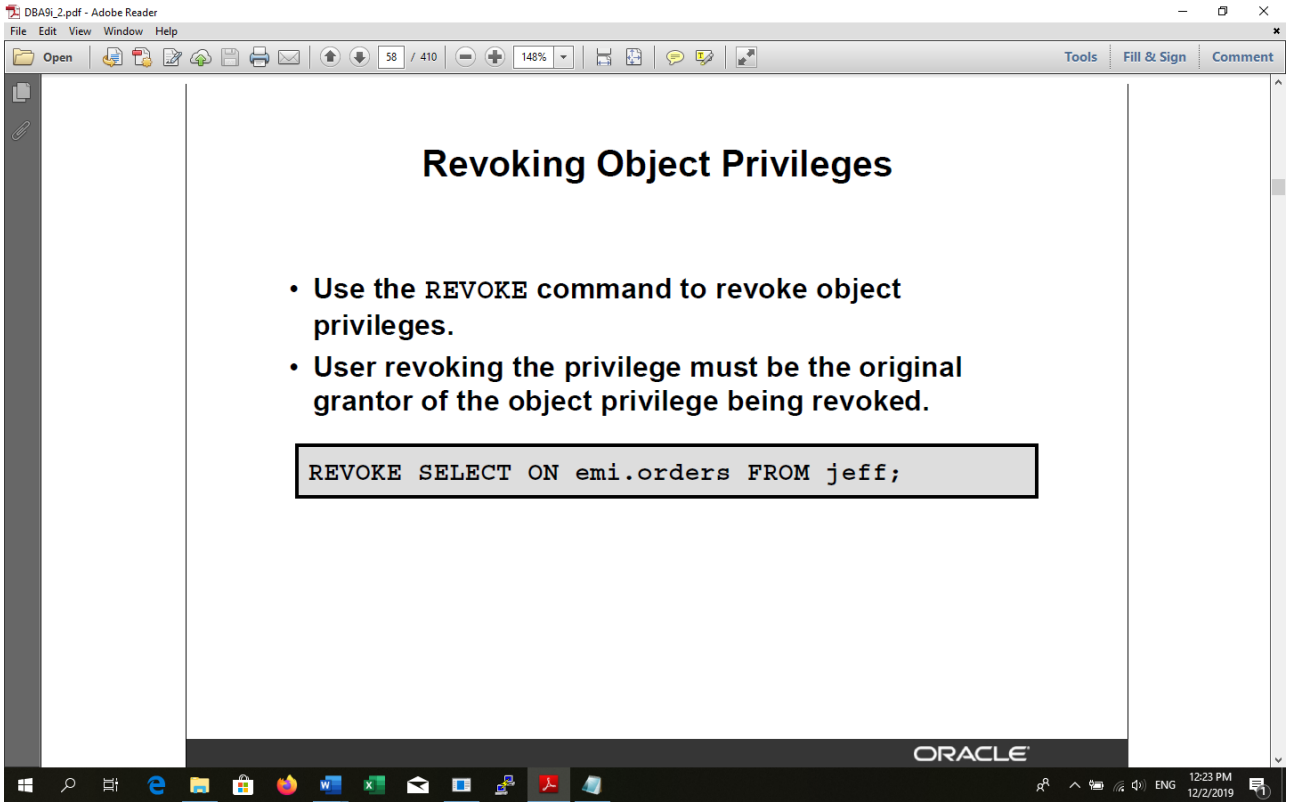
DBA9i_2.pdf - Adobe Reader
File Edit View Window Help
Open
58 / 410
148%
Tools
Fill & Sign
Comment
Revoking Object Privileges
• Use the REVOKE command to revoke object privileges.
• User revoking the privilege must be the original grantor of the object privilege being revoked.
REVOKE SELECT ON emi.orders FROM jeff;
ORACLE
ENG
12:23 PM
12/2/2019

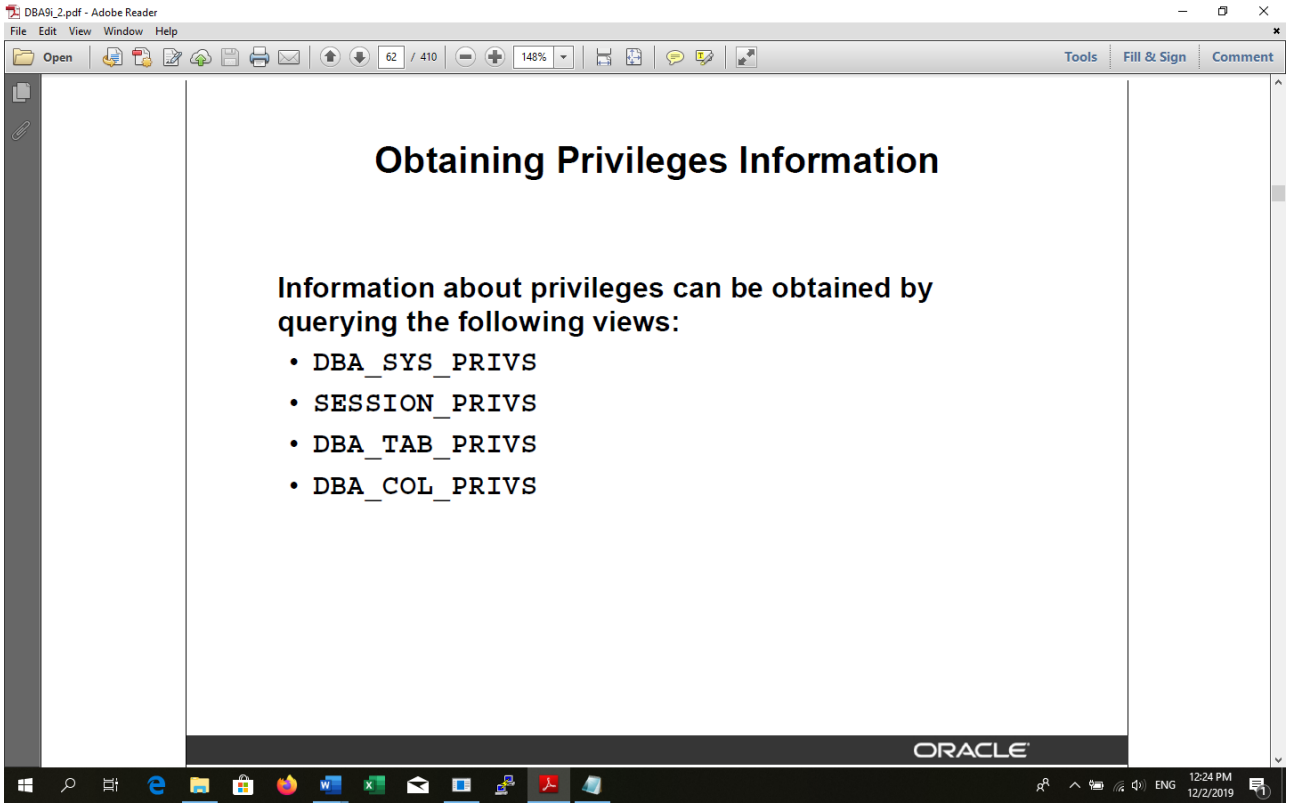
DBA9i_2.pdf - Adobe Reader
File Edit View Window Help
Open
62 / 410
148%
Tools
Fill & Sign
Comment
Obtaining Privileges Information
Information about privileges can be obtained by querying the following views:
• DBA_SYS_PRIVS
• SESSION_PRIVS
• DBA_TAB_PRIVS
• DBA_COL_PRIVS
ORACLE
ENG
12:24 PM
12/2/2019

1) Acordare de privilegii pe o tabela din schema curenta(userul curent) unui alt user:

SQL> connect scott@bd /tiger

SQL> grant select, insert, update on emp_copy to test;

Grant succeeded.

2) Verificare privilegii acordate:

SQL> connect test@bd /test

SQL> select * from scott.emp_copy where deptno=10 ;

SQL> insert into scott.emp_copy values (1111,'Test','Student',7902, sysdate, 1000, 200, 10);

SQL> update scott.emp_copy set sal=1500 where empno=1111;

3) Crearea unei copii a unei tabele creata in alta schema:

SQL> connect scott@bd /tiger

SQL> grant create table to test;

SQL> connect test@bd /test

SQL> create table emp_test as select * from scott.emp_copy;

Obs. Cand se creeaza o tabela nu se creeaza automat si constrangerile de integritate :

SQL> connect scott@bd /tiger

SQL> select owner, table_name, constraint_name from dba_constraints where owner='SCOTT' and table_name=’EMP’;

OWNER	TABLE_NAME	CONSTRAINT_NAME
SCOTT	EMP	PK_EMP
SCOTT	EMP	FK_DEPTNO

SQL> connect test@bd /test

SQL> select owner, table_name, constraint_name from user_constraints where owner='TEST' and table_name=’EMP_TEST’;

No rows selected.

4) Revocarea unui privilegiu:

SQL> connect scott@bd /tiger

SQL> revoke select on emp_copy from test;

Revoke succeeded.

SQL> connect test@bd /test

SQL> select * from scott.emp_copy;

ERROR at line 1:
ORA-01031: insufficient privileges

SQL> connect scott@bd /tiger

SQL> revoke all on emp_copy from test cascade constraints; -- revocarea tuturor privilegiilor ;


Obs. Se sterg si toate constrangerile de integritate create de user folosind REFERENCES sau ALL.

5) Vizualizarea privilegiilor de sistem acordate direct unui user(nu prin intermediul rolurilor) :

SQL> connect scott@bd /tiger

SQL> desc dba_sys_privs

Name	Null?	Type
GRANTEE	NOT NULL	VARCHAR2(30)
PRIVILEGE	NOT NULL	VARCHAR2(40)
ADMIN_OPTION		VARCHAR2(3)
COMMON		VARCHAR2(3)

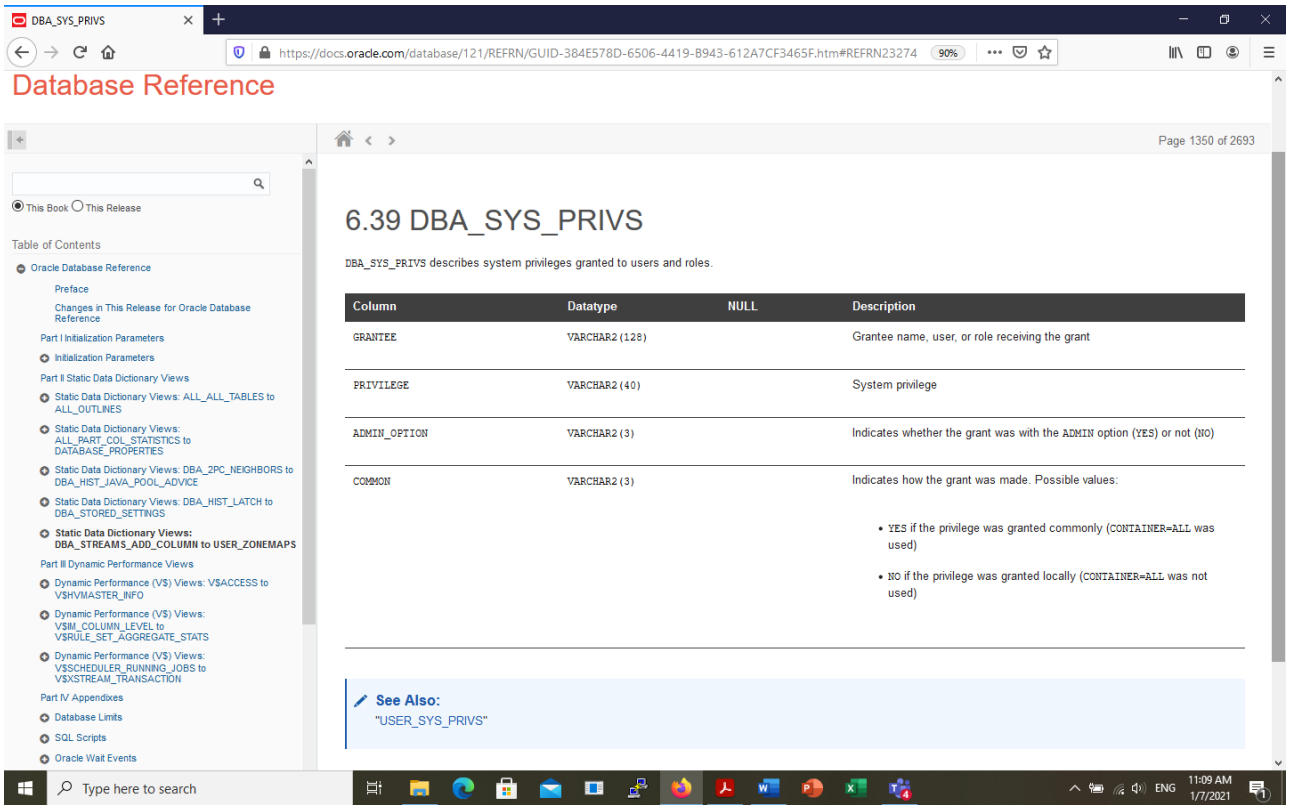

SQL> select * from dba_sys_privs where grantee='TEST';


GRANTEE	PRIVILEGE	ADMIN	COM
TEST	CREATE TABLE	NO	NO
TEST	CREATE SESSION	NO	NO

6) Vizualizarea tuturor privilegiilor de sistem acordate userului curent(acordate direct sau indirect prin intermediul rolurilor):

SQL> connect scott@bd /tiger

SQL> desc session_privs

Name	Null?	Type
PRIVILEGE	NOT NULL	VARCHAR2(40)

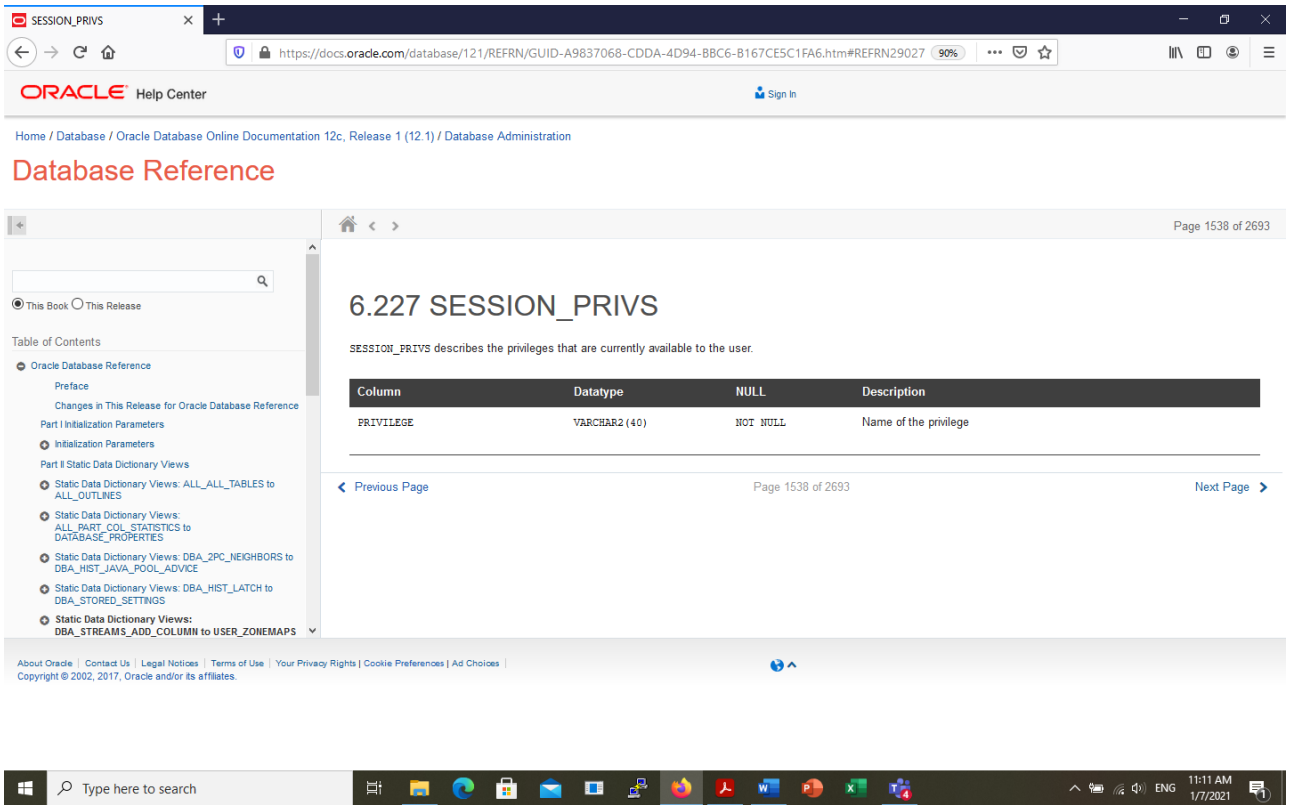

SQL> select * from session_privs order by privilege;

PRIVILEGE


ALTER SYSTEM
AUDIT SYSTEM
CREATE SESSION
ALTER SESSION
RESTRICTED SESSION
CREATE TABLESPACE
ALTER TABLESPACE
MANAGE TABLESPACE
DROP TABLESPACE
UNLIMITED TABLESPACE
CREATE USER
. . . .

7) Vizualizarea tuturor privilegiilor acordate pe obiectele bazei de date:

SQL> connect scott@bd /tiger

SQL> desc dba_tab_privs

Name	Null?	Type
GRANTEE	NOT NULL	VARCHAR2(30)
OWNER	NOT NULL	VARCHAR2(30)
TABLE_NAME	NOT NULL	VARCHAR2(30)
GRANTOR	NOT NULL	VARCHAR2(30)
PRIVILEGE	NOT NULL	VARCHAR2(40)
GRANTABLE		VARCHAR2(3)
HIERARCHY		VARCHAR2(3)
COMMON		VARCHAR2(3)
TYPE		VARCHAR2(24)

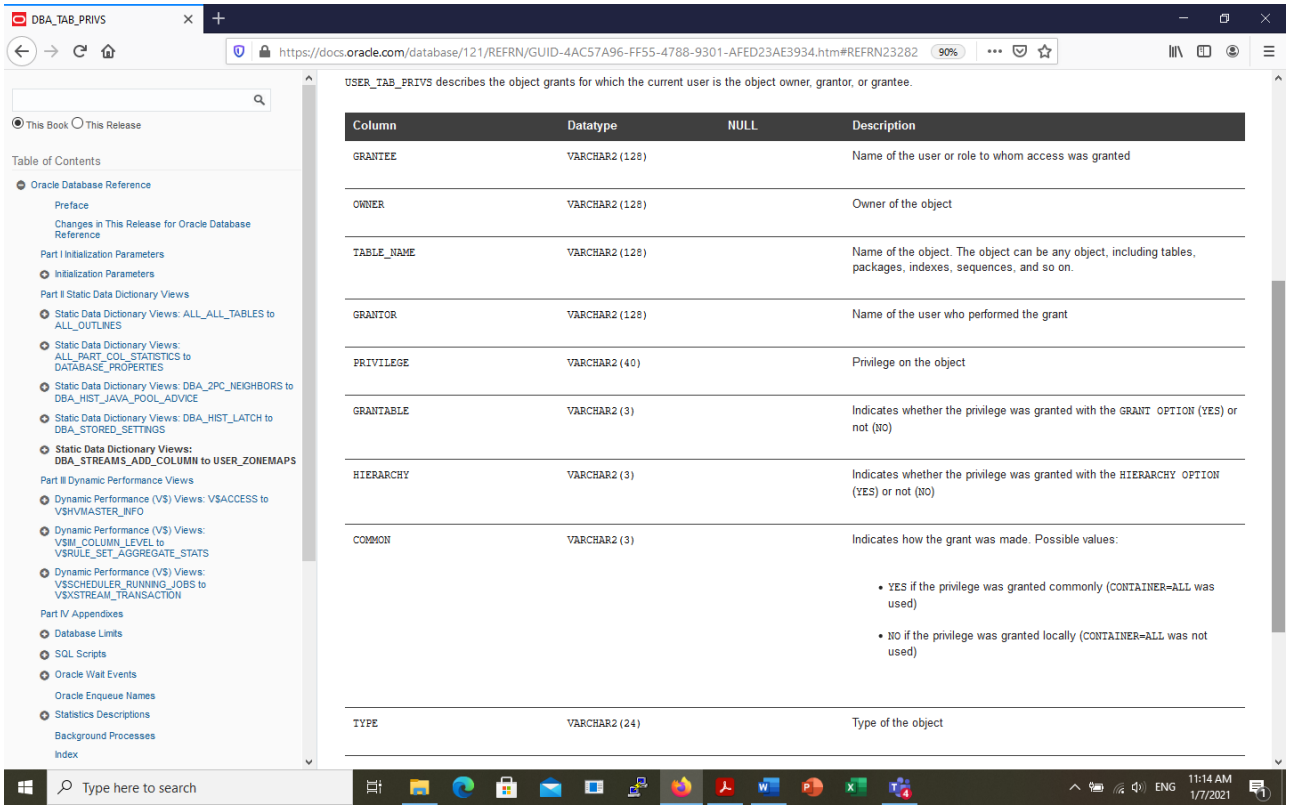

SQL> select grantee, owner, table_name, grantor, privilege from dba_tab_privs
where grantee='TEST';

GRANTEE	OWNER	TABLE_NAME	GRANTOR	PRIVILEGE
TEST	SCOTT	EMP_COPY	SCOTT	INSERT
TEST	SCOTT	EMP_COPY	SCOTT	UPDATE

8) Privilegii acordate pe anumite coloane ale unei tabele (numai insert si update):

```
SQL> grant insert(empno, ename) on emp_copy to test;

SQL> grant update(empno, ename) on emp_copy to test;

SQL> conn  test@bd/test

SQL> insert into scott.emp_copy(empno,ename) values (1111,'Popa');

1 row created.

SQL> insert into scott.emp_copy(empno,sal) values (1111,100);

ERROR at line 1:
ORA-01031: insufficient privileges

SQL> update scott.emp_copy set ename='Tache' where ename='Popa';


1 row updated.

SQL> update scott.emp_copy set sal=1000 where ename='Tache';

ERROR at line 1:
ORA-01031: insufficient privileges
```

9) Vizualizare privilegii acordate pe anumite coloane:

```
SQL> desc dba_col_privs
 Name                                      Null?    Type
 ----------------------------------------- -------- ----------------
 GRANTEE                                   NOT NULL VARCHAR2(30)
 OWNER                                     NOT NULL VARCHAR2(30)
 TABLE_NAME                                NOT NULL VARCHAR2(30)
 COLUMN_NAME                               NOT NULL VARCHAR2(30)
 GRANTOR                                   NOT NULL VARCHAR2(30)
 PRIVILEGE                                 NOT NULL VARCHAR2(40)
 GRANTABLE                                          VARCHAR2(3)
COMMON                                              VARCHAR2(3)
```

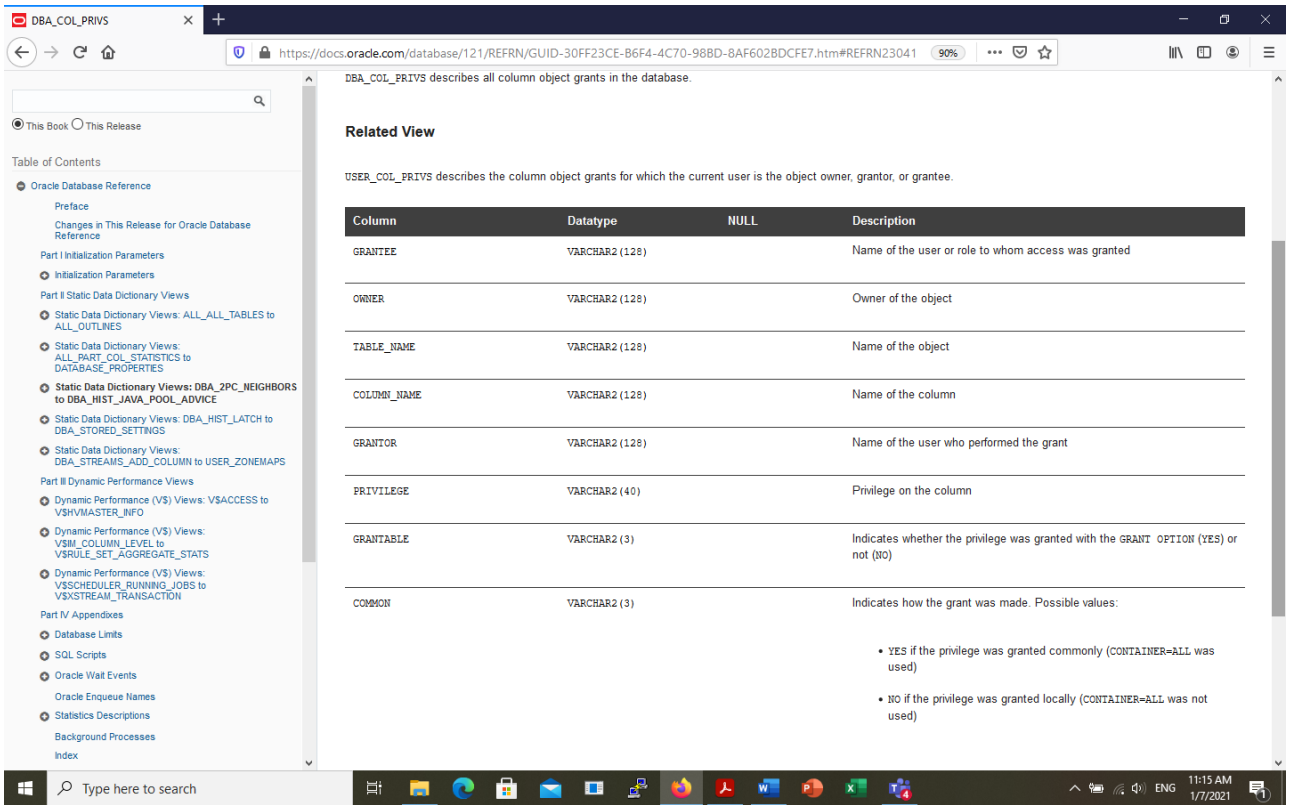

SQL> select grantee, owner, table_name, column_name, grantor, privilege
from dba_col_privs;

GRANTEE	OWNER	TABLE_NAME	COLUMN_NAME	GRANTOR	PRIVILEGE
TEST	SCOTT	EMP_COPY	ENAME	SCOTT	UPDATE
TEST	SCOTT	EMP_COPY	EMPNO	SCOTT	UPDATE

10) Acordare privilegii de conexiune pentru un user (pentru versiuni pana la Oracle 11g):

SQL> conn sys as sysdba;

SQL> grant connect to test;
Grant succeeded.

SQL> grant create session to test;
Grant succeeded.

11) Creare restrictii de conexiune la instanta curenta:

SQL> alter system enable restricted session;
System altered.

SQL> conn test/test
ERROR:
ORA-01035: ORACLE only available to users with RESTRICTED SESSION privilege

12) Vizualizarea tipului de conexiune pentru userul curent:

SQL> select logins from v$instance;

LOGINS

RESTRICTED

SQL> alter system disable restricted session;

System altered.

SQL> select logins from v$instance;

LOGINS

ALLOWED

SQL> conn test
Enter password: ****

Connected.