Möbii³us × Buddy

Comic system guides: one truth stream • many render contracts • parental guardian routin

ONE TRUTH STREAM

MANY RENDER CONTRACTS

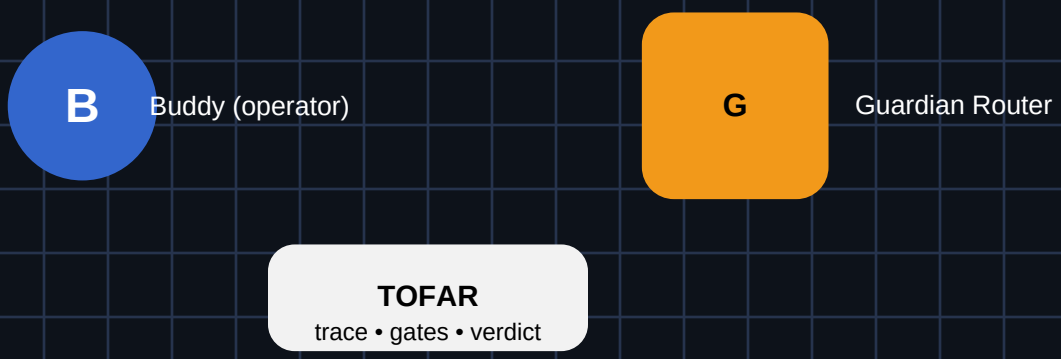

One truth stream

TOFAR is the authority layer: every meaningful thing becomes an event with trace_id, intent, evidence, gate_vector, verdict, trust.

Everything else is a view.

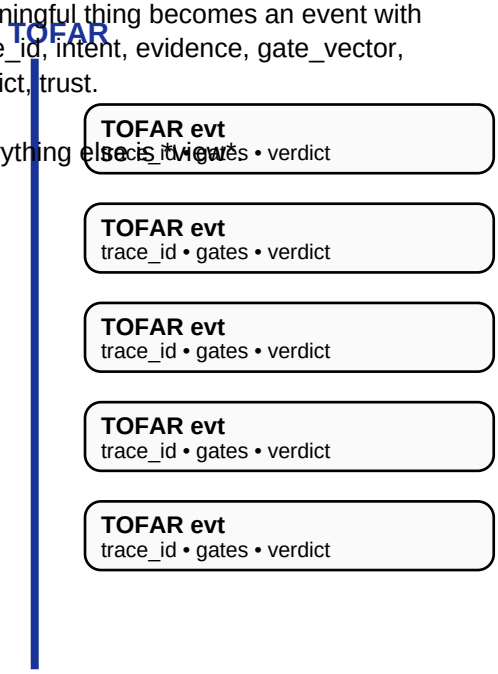

Render contracts (not realities)

BOOT / TILE / LATTICE / FLOW / FIELD / CAPTURE / CAL are lenses over the same events.

A lens may hide details, but it may not invent them.

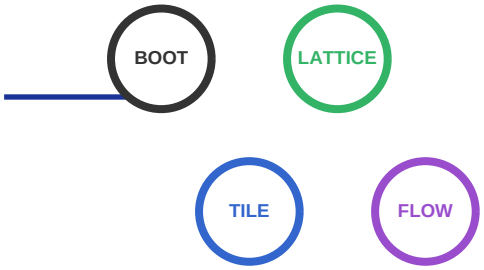

Active vs Visible

active_regs govern reality (always on).
visible_regs are what this mode shows.

Hiding ≠ disabling. **Physics stays on; visibility changes.**

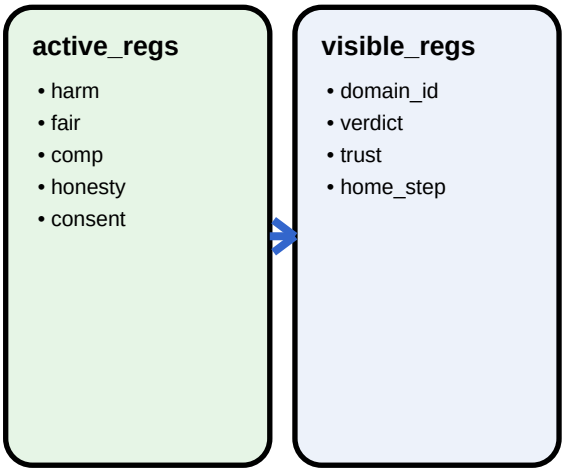

No parallel timelines

A single event can render as a tile, a flow ribbon, or a field checklist.

Verdict stays consistent. Emphasis changes.

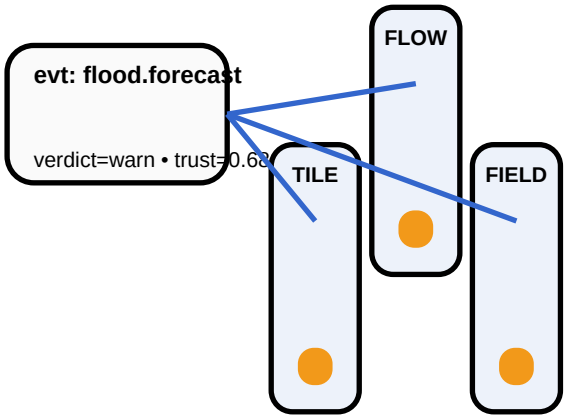

Same truth → different emphasis.

Guardian Router (parental)

ROUTE

Guardian isn't a cop. It's a routing parent:
• reduce harm
• increase clarity
• guide toward 'home'

It prefers help over force.

Prefer Route/Brake over Forbid

Seven gates

AUDIT

Every outward action is measured across seven normalized gates:
Harm • Fairness • Compassion • Honesty • Consent • Transparency • Sustainability.

Gate_vector is logged in TOFAR.

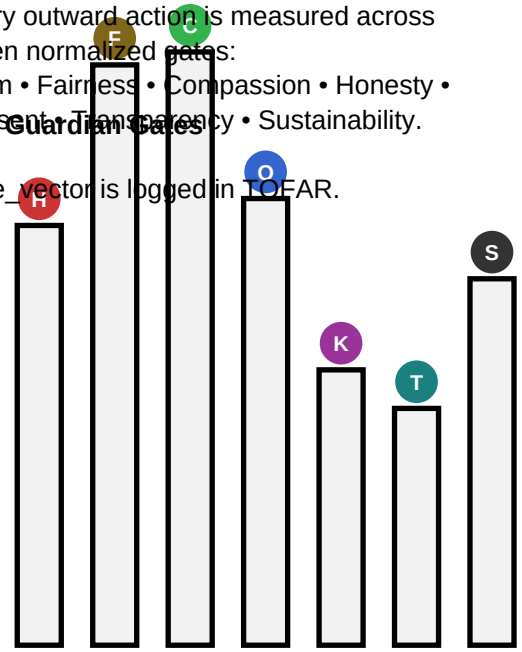

R/B over F

BIAS

Bias rule:
R = Route (do the safe thing)
B = Brake (pause + narrow)
F = Forbid (only when harm can't be reduced)

This keeps the system humane and operable.

Prefer Route/Brake over Forbid

Pause reveals home

BRAKE

When expansion is blocked (shall.opens=false), UI collapses to:
• verdict badge
• trust + ethic + integrity
• 'Shortcut Home' next step

Pause → Home Gradient (not punishment)

No shame. Just a path back.

WARN

Shortcut Home:
• add evidence URL/hash
• confirm location/time

Collapse is a UI contract

CLEAN

Collapse should not spray extra events everywhere.

Treat collapse as a local rendering boundary: a calm, minimal view with a home_step.

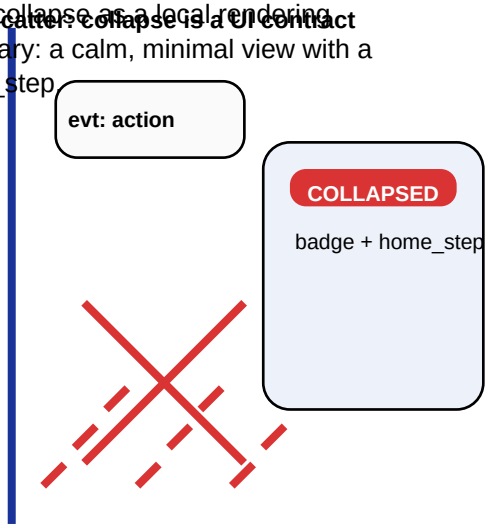

Stop■motion reveals home

HOME

Instead of instant 'full reveal', the UI can unfold in stop■motion:

- show one safe tile
- then one explanation
- then one action

Each step imports the same home attrs.

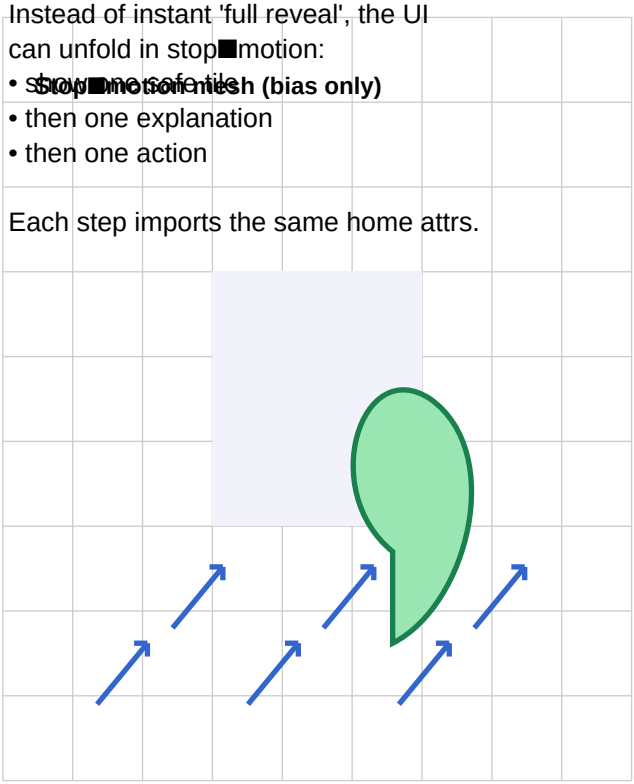

Hypergumby mesh

MESH

Think fullerene smart mesh: flexible, edge■propagating, fractal subdivision.

Stop■motion mesh (bias only)

We propagate *bias* (home_pull/home_step) to neighbors—not new truth.

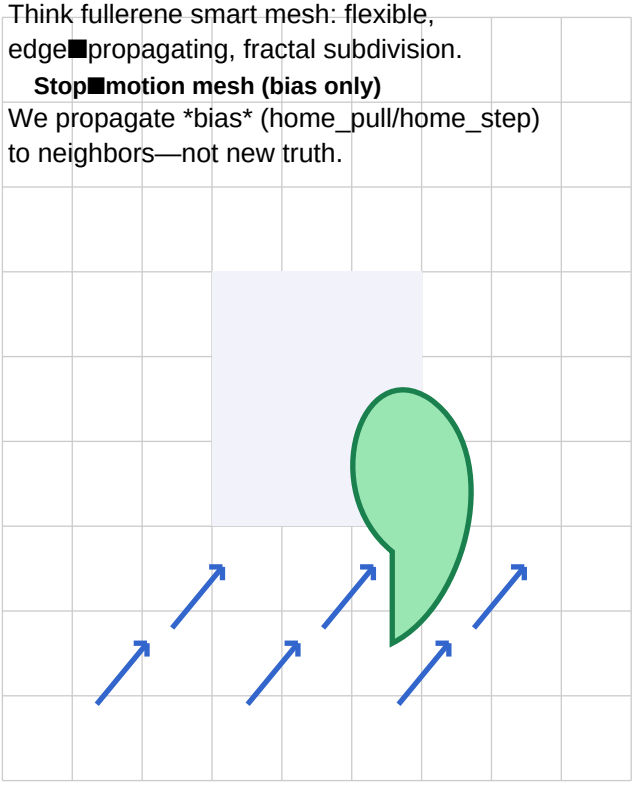

Truth stays centralized

TOFAR

Only TOFAR events update authority fields.

Meshes may cache:

- home_bias
- last_known_risk
- routing targets

…but never rewrite verdicts.

Physics stays on; visibility changes.

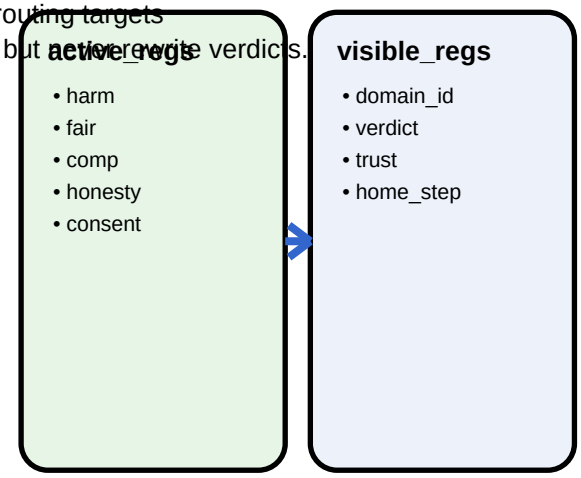

Mode map

MODES

render_mode is derived from domain_id + device + verdict + shall.opens.
Overrides must be calibration events.

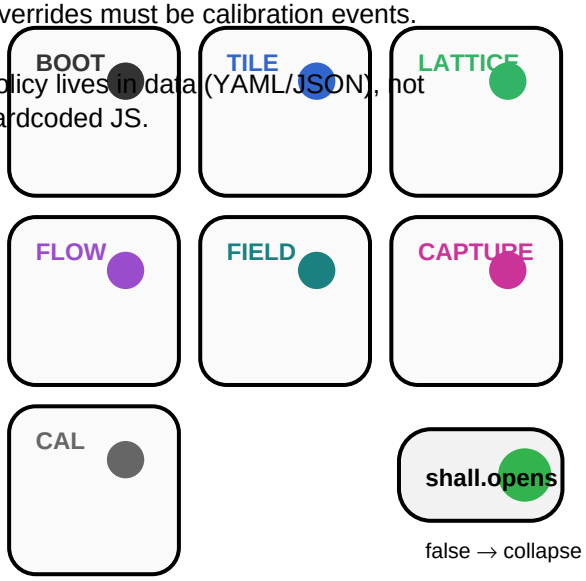

Policy lives in data (YAML/JSON), not hardcoded JS.

BOOT / SEAL

BOOT

Integrity before beauty.
Show: ethic_integrity, delta_hig, trust_floor, gate_vector.
Only then unlock richer views.

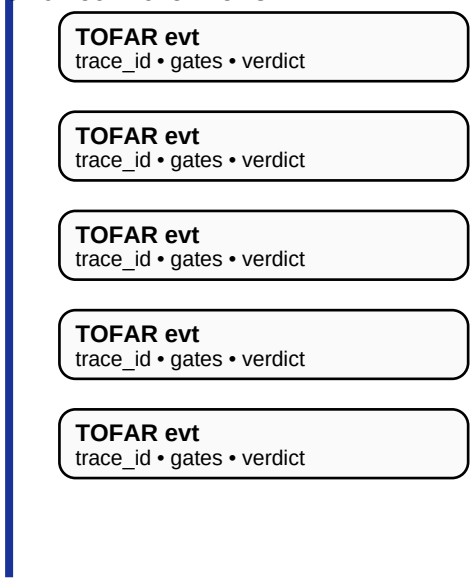

FLOW / FIELD / CAPTURE

OPS

FLOW shows physics (current, turbidity, O■, weight).
FIELD shows evidence, place, checklist.
CAPTURE stamps photo/audio + consent + route target.

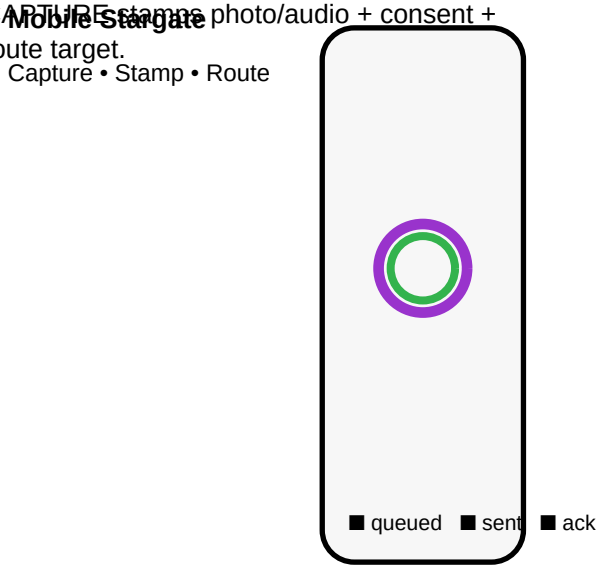

CAL (safe tuning)

CAL

Calibration console changes thresholds, rate limits, and gains.
Every change emits a policy event.

Physics stays on; visibility changes.

Knobs are constrained; preview is honest.

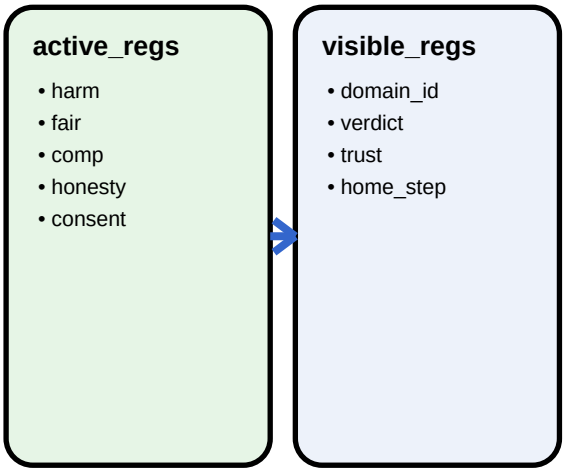

Twine is a routing node

NODE

Twine exposes endpoints (health, domains, facets, dashboards, simulate, export).
It routes requests into the lattice.

Routing node (not the epistemic core)
It is not the epistemic core.

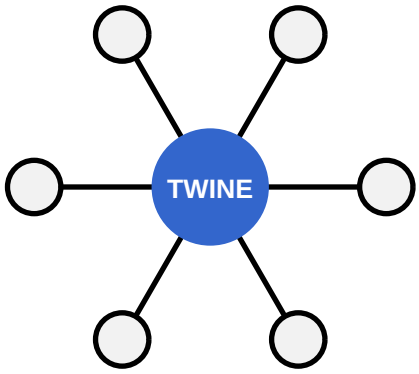

Non■blocking simulations

ASYNC

Never run heavy simulation inside the HTTP request.
Queue it. Run in a worker.
Return an ACK immediately.

Non■blocking: server stays responsive

Truth stays responsive.

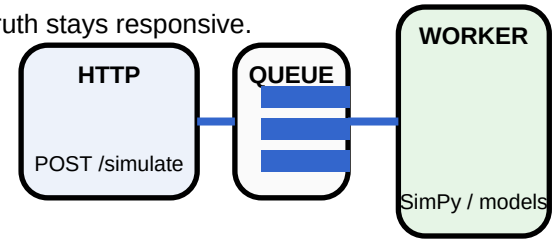

Export bundles (no recursio

ZIP

Exports should be curated:
include runtime/*.py, canon/*.json, docs/*.md
exclude junk, big binaries, and the archive itself.

EXPORT.zip

Handoff stays clean.

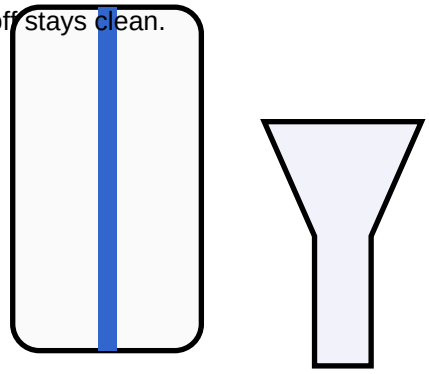

include: runtime/*.py

include: canon/*.json

exclude: junk/recursion

Wire distress→triad→artery

STUB

Next step: inside /simulate or /route, call:
distress → triad → tensor_artery → pulse
…but only with TOFAR reasons stamped.

TOFAR

Refuse to lie.

TOFAR evt
trace_id • gates • verdict

TOFAR evt
trace_id • gates • verdict

TOFAR evt
trace_id • gates • verdict

TOFAR evt
trace_id • gates • verdict

TOFAR evt
trace_id • gates • verdict

Field truth rule

FIELD

In the field, unverified stays visually hollow.
Verified chips are tiny:
• location_confirmed
• photo_received
• time_window_ok
Each emits a small TOFAR event.

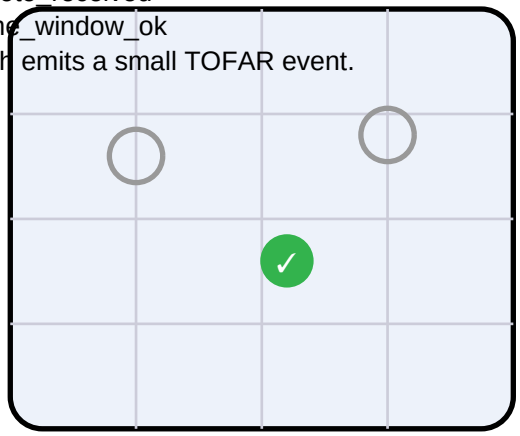

Store■and■forward

OFFLINE

When signal is bad:
• queue events locally (IndexedDB)
• replay on reconnect
• show queued/sent/ack lamps

Truth survives the wilderness.

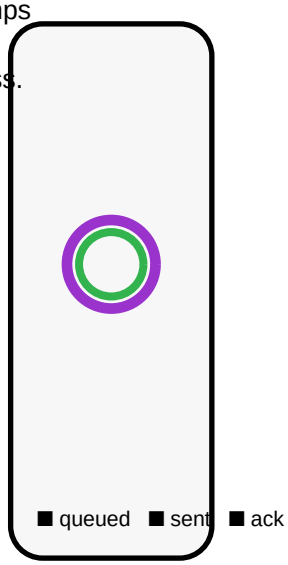

Tee + unify

BUS

Split streams safely (log/UI/alerts).
Re■join downstream only with provenance.

This keeps observability without contaminating authority.

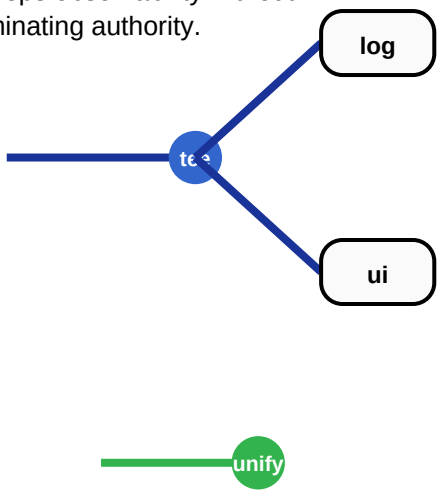

Split safely; re■join with provenance.

AET-style ops dashboard

OPS

Maps + overlays + severity tiers + tooltips.
Buttons should capture reality fast: photo, note, confirm.

Mum-simple, engineer-useful.

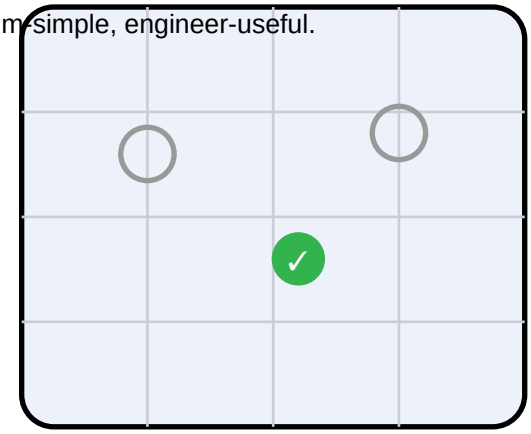

Offline voice ingestion

STT

Whisper++ runs on-device.
Audio → transcript + timestamps.
Then tag into your 8D→42D semantic space.
Every step stamps TOFAR provenance.

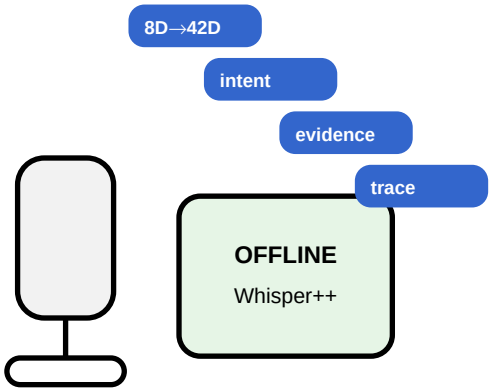

Voice → Home Gradient

ASK

When voice is uncertain, the parental router asks for the smallest next step:
“Confirm the location?”
“Attach a photo?”
Pause → Home Gradient (not punishment)

Stop-motion makes this gentle.

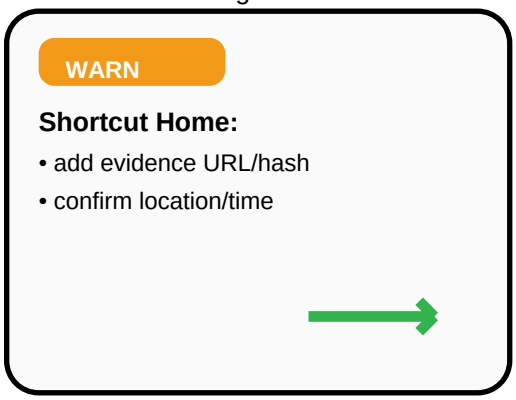

Deploy & replicate

SHIP

Canonical stack:
TinyBox sensors → Gateway (Guardian+TOFAR) → HUD + doinbetter.com.
Docker-compose + smoke tests make it repeatable.

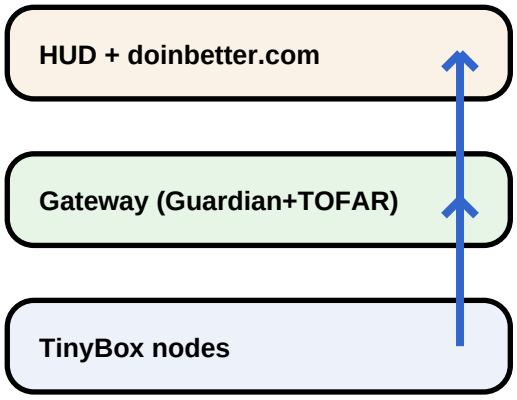

Audit replay

AUDIT

Because everything is events:
• you can replay a run
• compare verdict changes
• explain “why this happened”

That’s how the system stays accountable.

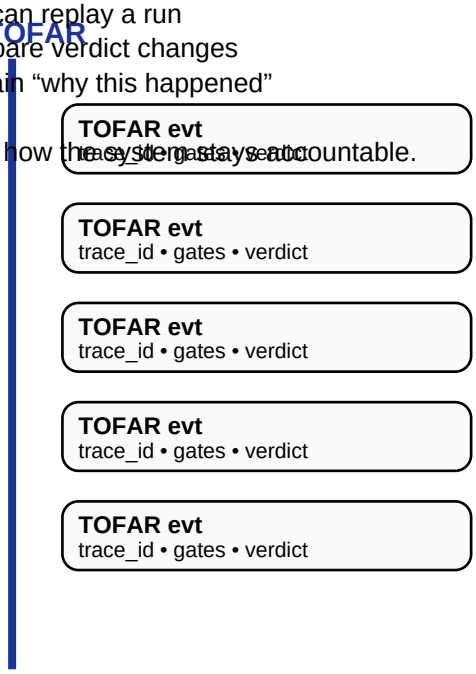

Glossary (tiny, practical)

TOFAR	Event contract: trace + origin/intent + attachments/evidence + verdict/gates.
Guardian Router	Parental gating: Route/Brake before Forbid; always shows Shortcut Home.
shall.opens	Boolean: may the UI expand? false → collapse contract.
home_gradient	Next smallest step that increases trust/clarity.
render_mode	Rendering contract derived from domain_id + device + verdict.
Twine	Routing node: API surface that connects HUD ↔ lattice ↔ modules.

Next build step (coherence-first):

1) Make domain→mode mapping table-driven.
2) Move render emission into the gateway (optional), keep collapse local.
3) Turn field captures into tiny verified chips (hollow→solid).
4) Add replay tooling: explain any verdict with a reason chain.