
Question 1

Create a LabFiles directory and perform create/copy/move/rename/delete operations using touch, cp, mv, rm, unlink, ls, stat.

Step 1 – Create the LabFiles directory

Commands used: mkdir Labfiles, ls, pwd.


We created the Labfiles directory inside Project1. ls confirmed it was created, and pwd showed the current location.

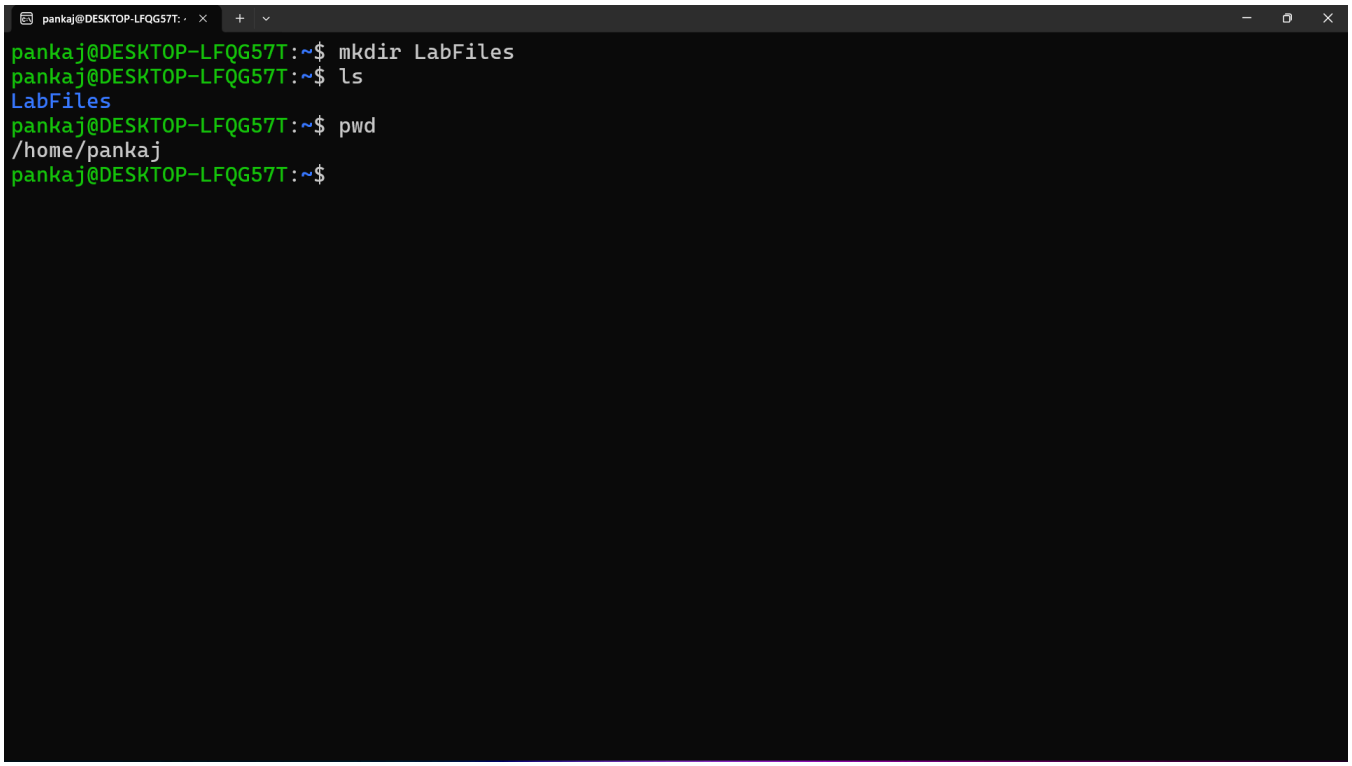

Step 2 – Create the first file

Commands used: cd LabFiles, touch Files.txt, ls.


We entered Labfiles and used touch to create files1.txt. ls confirmed the file was present.

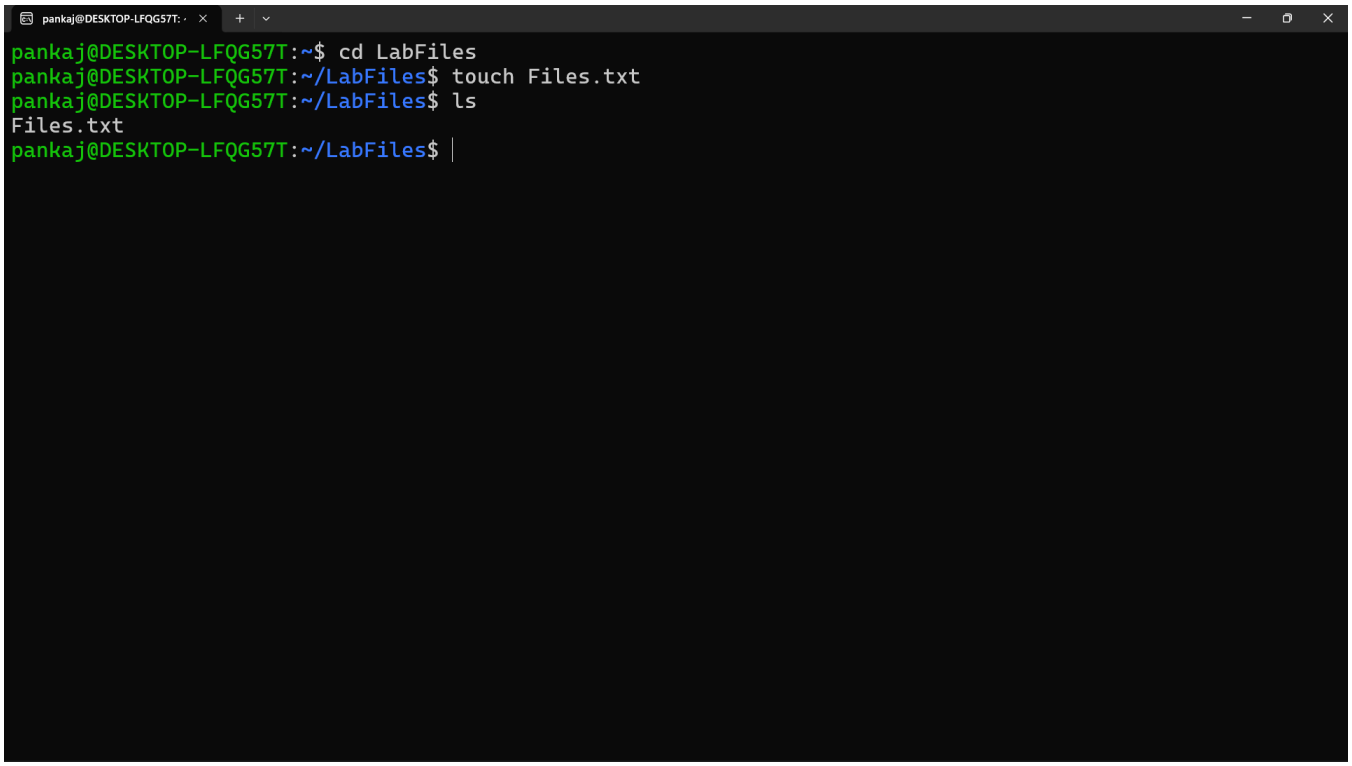

Step 3 – Copy the file

Commands used: cp File1.txt File2.txt, ls.


We copied files1.txt to create files2.txt. ls confirmed both files were present.

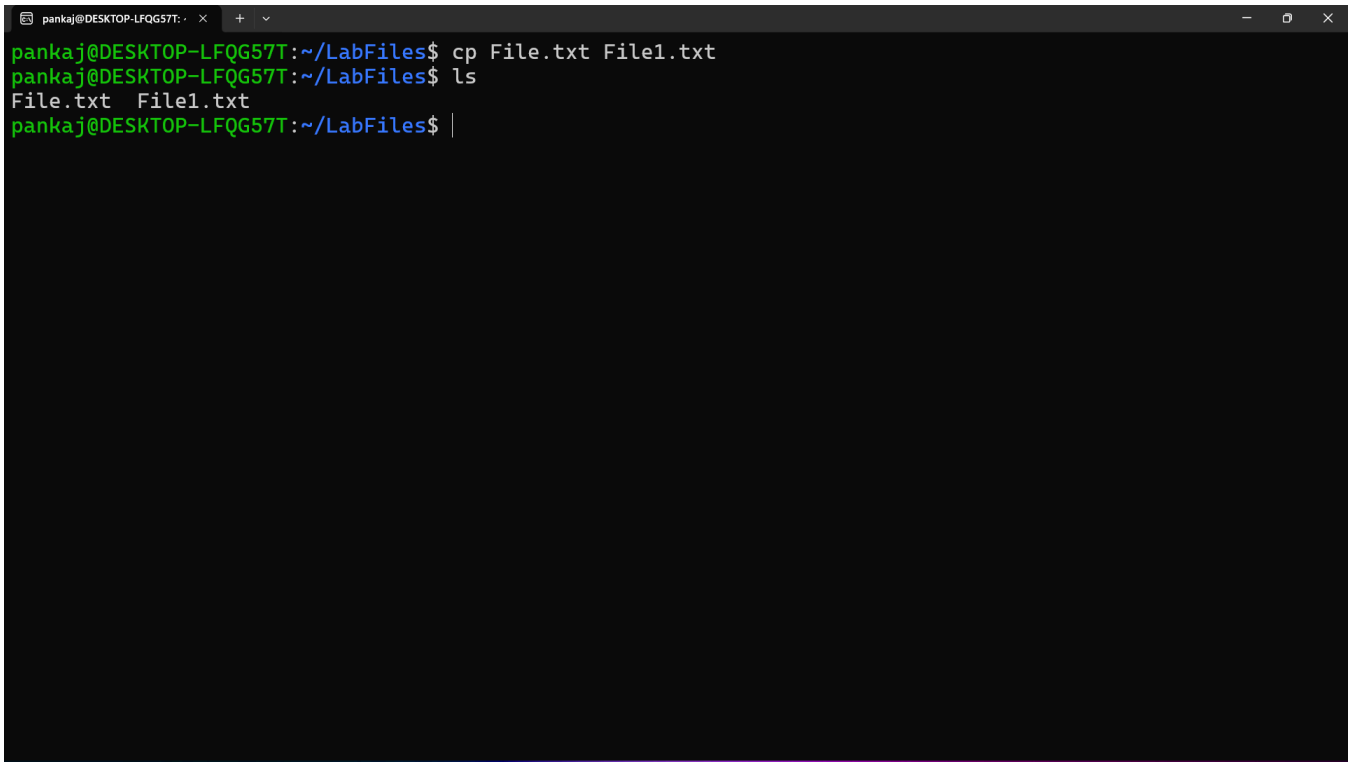

Step 4 – Create another file and check Backup

Commands used: touch File3.txt, ls, ls Backup/.


We created file3.txt, listed the Labfiles contents, and checked the Backup directory.

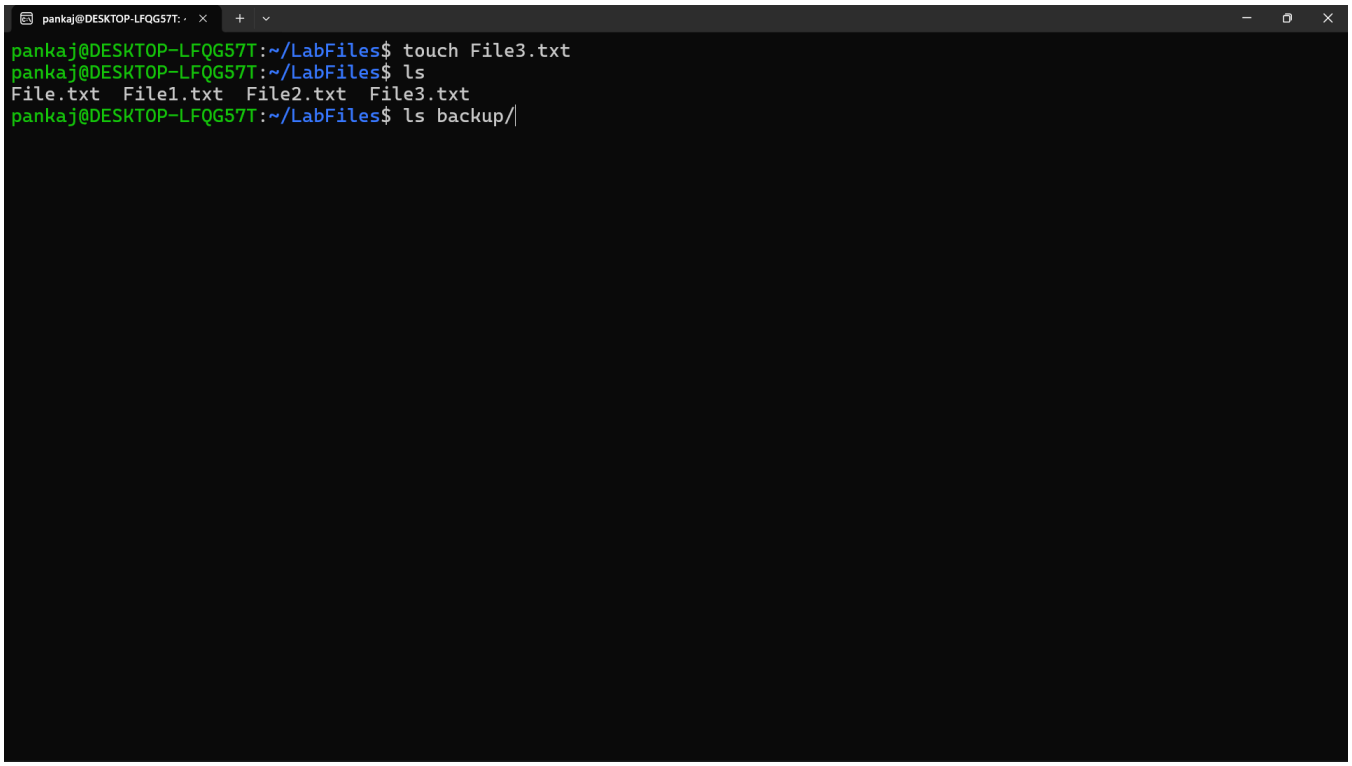

Step 5 – Rename the copied file

Command used: mv File2.txt file2.txt.


We renamed files2.txt to file2.txt using mv and confirmed the renamed file with ls.

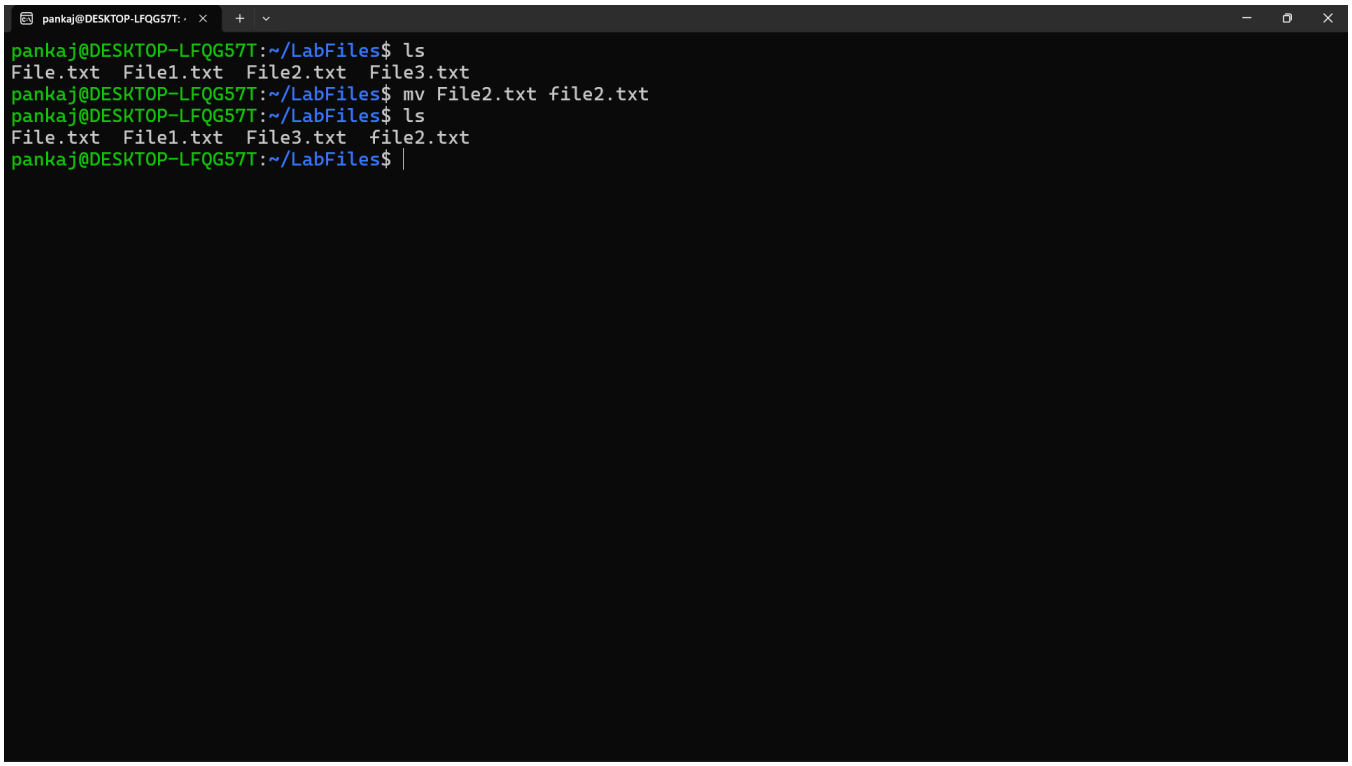

Step 6 – Display file information

Command used: stat File.txt.


We used stat to display detailed information about files1.txt, including permissions, owner, inode, size, and timestamps.

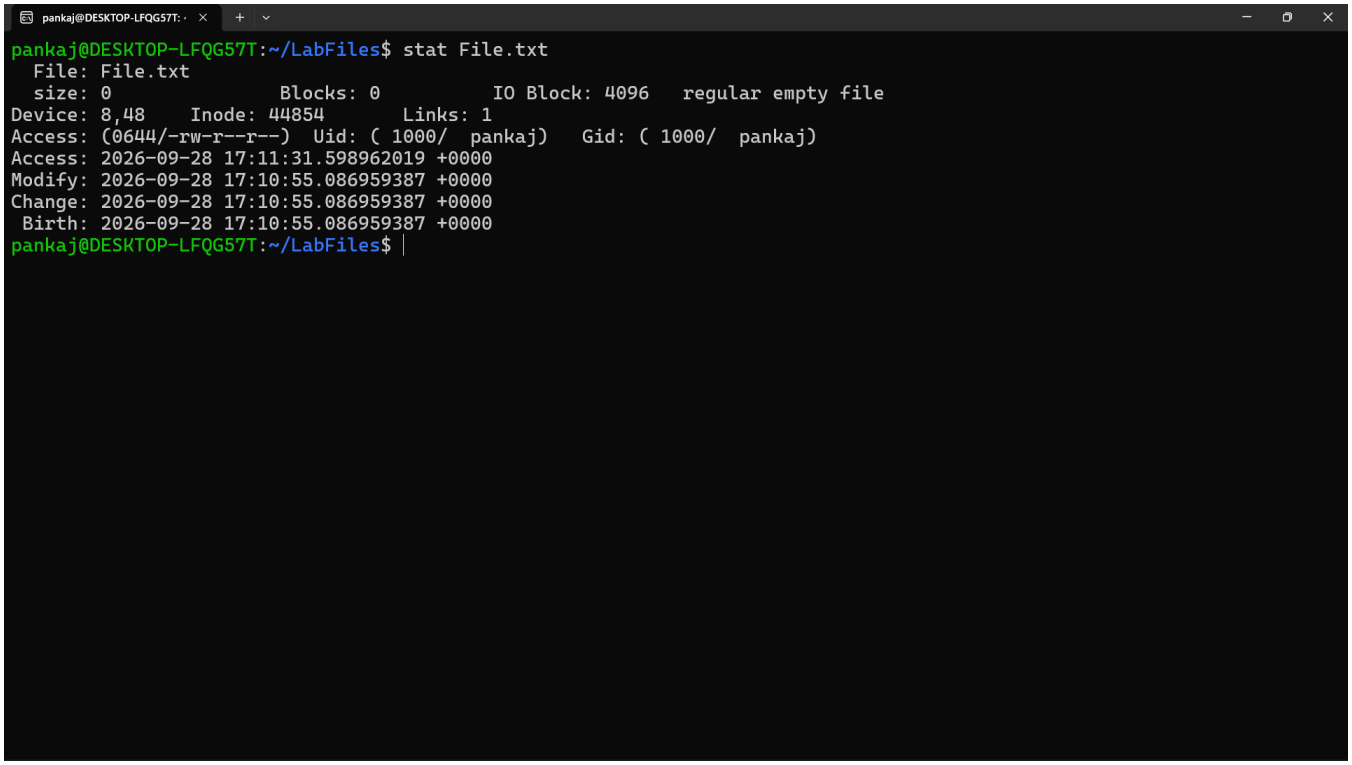

Step 7 – Delete the file

Commands used: ls, rm File1.txt, ls.

We deleted files1.txt using rm and used ls to confirm it was removed.

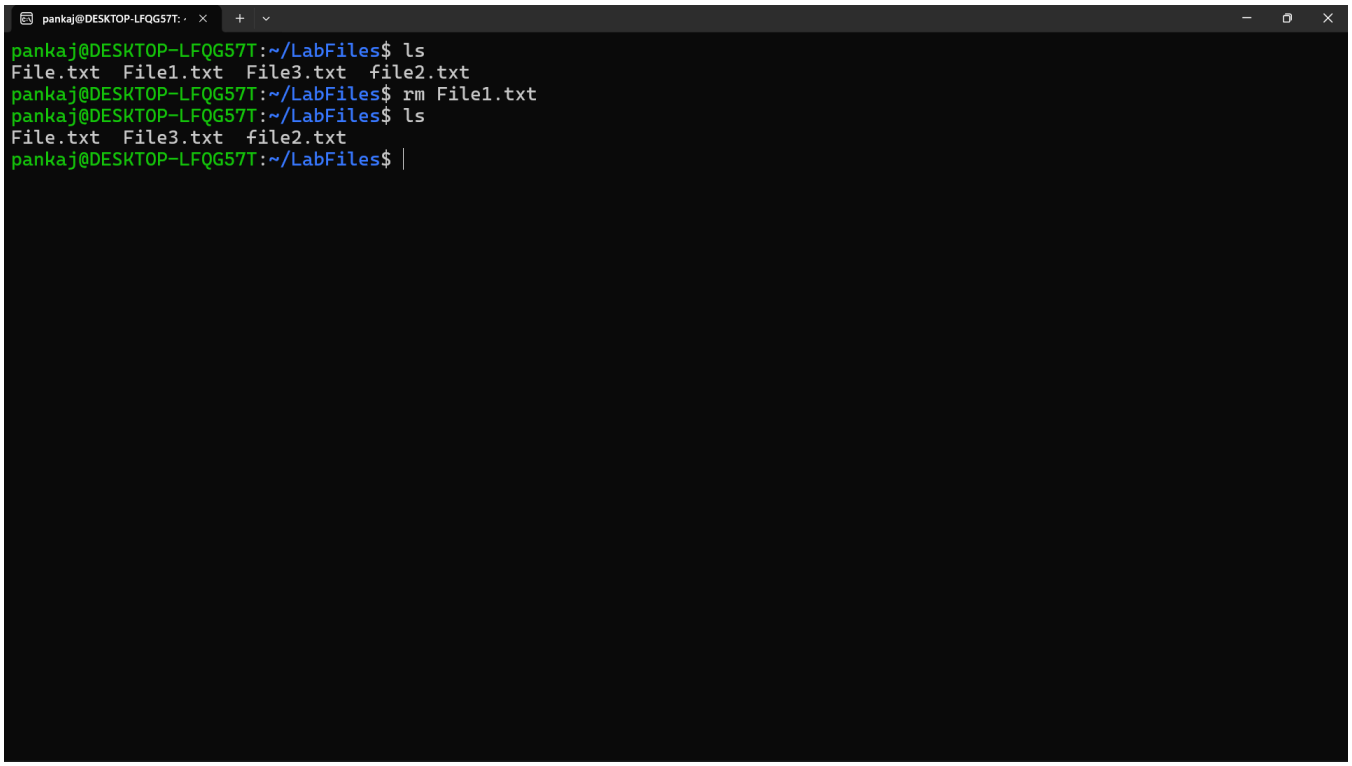

Note: The supplied screenshots do not show an unlink command being executed, so it is not claimed as evidence.