
LINUX LABORATORY

Question 4

Configure file permissions and ownership.

Step 1 – Create permission.txt and verify the file

We created permission.txt using touch and used ls to verify that the file was created successfully.

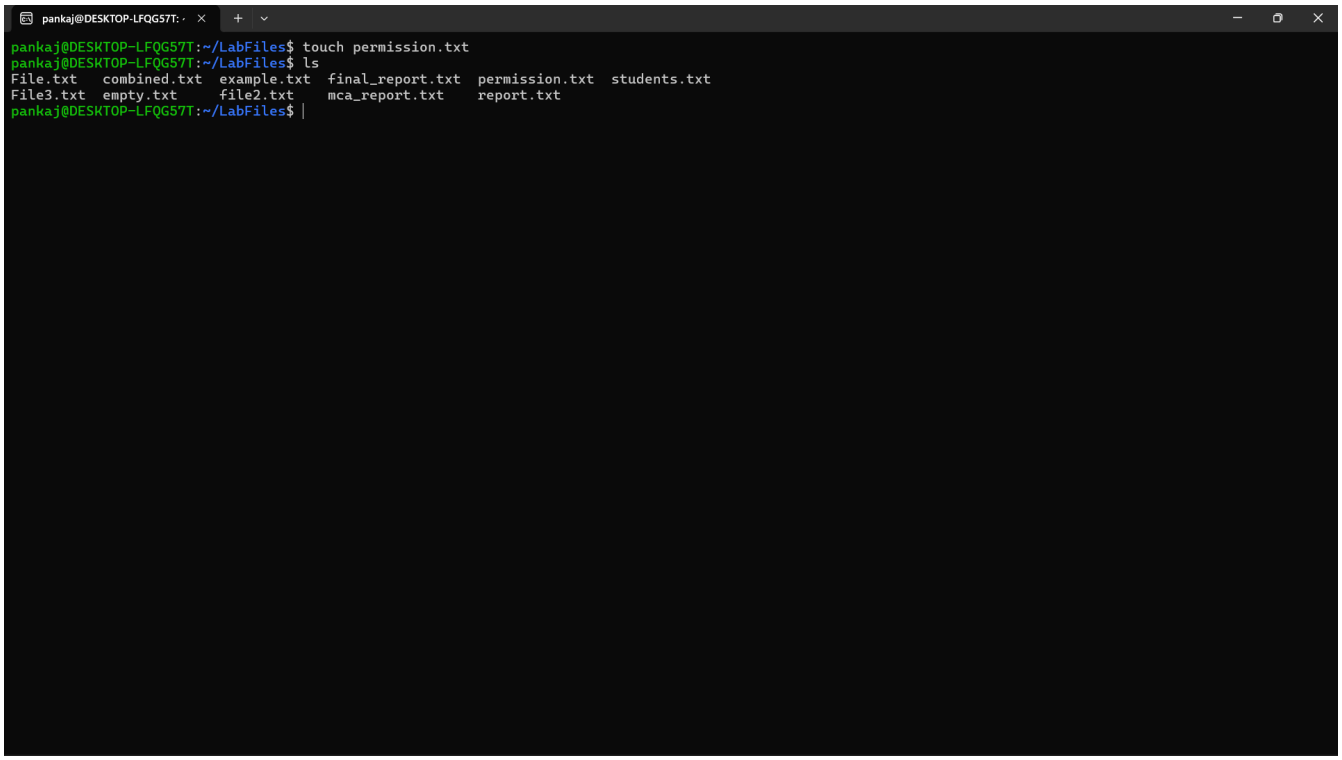


Step 2 – View the initial file permissions

We used ls -l to display the initial permissions, owner, group, size and other file details for permission.txt.




Step 3 – Change permissions to 755

We changed the permissions of permission.txt to 755 using chmod and then verified the new permissions with ls -l.

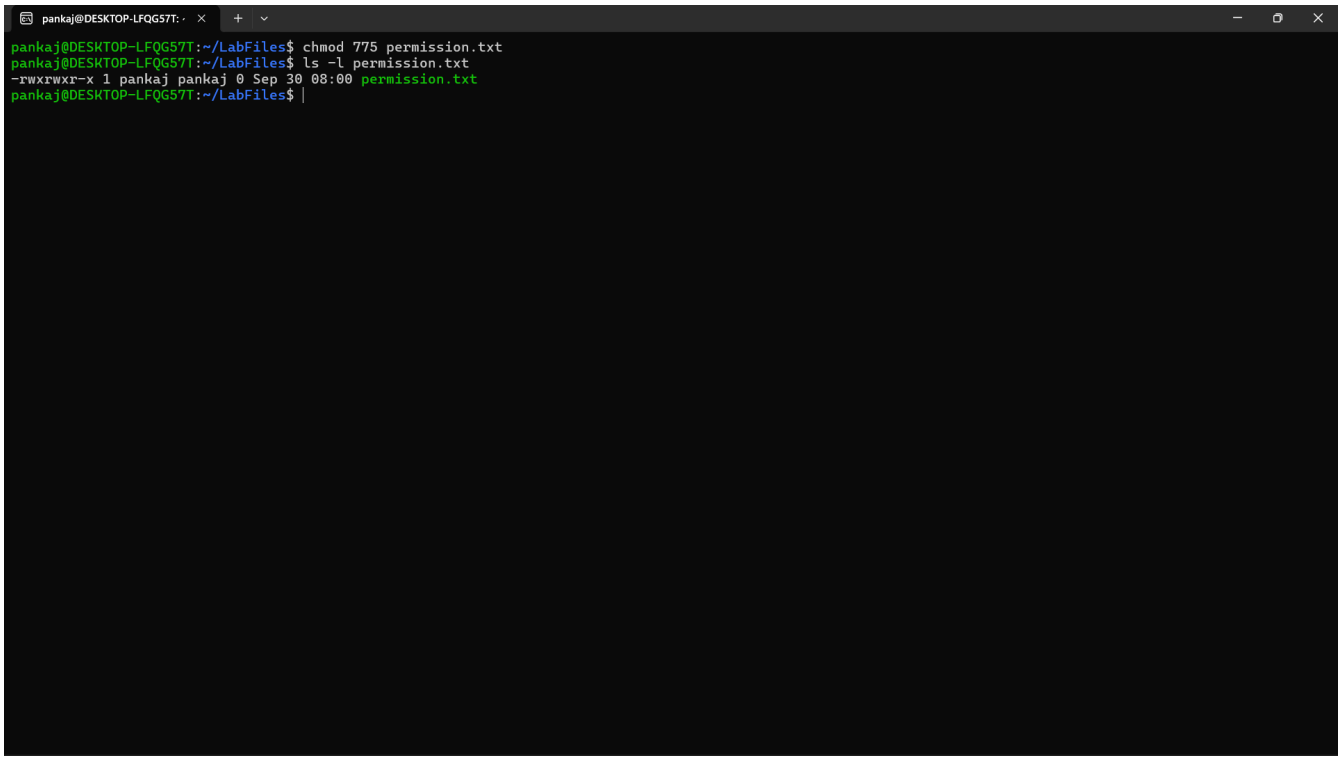


Step 4 – Change permissions to 644

We changed the permissions back to 644 using chmod and verified the result with ls -l.

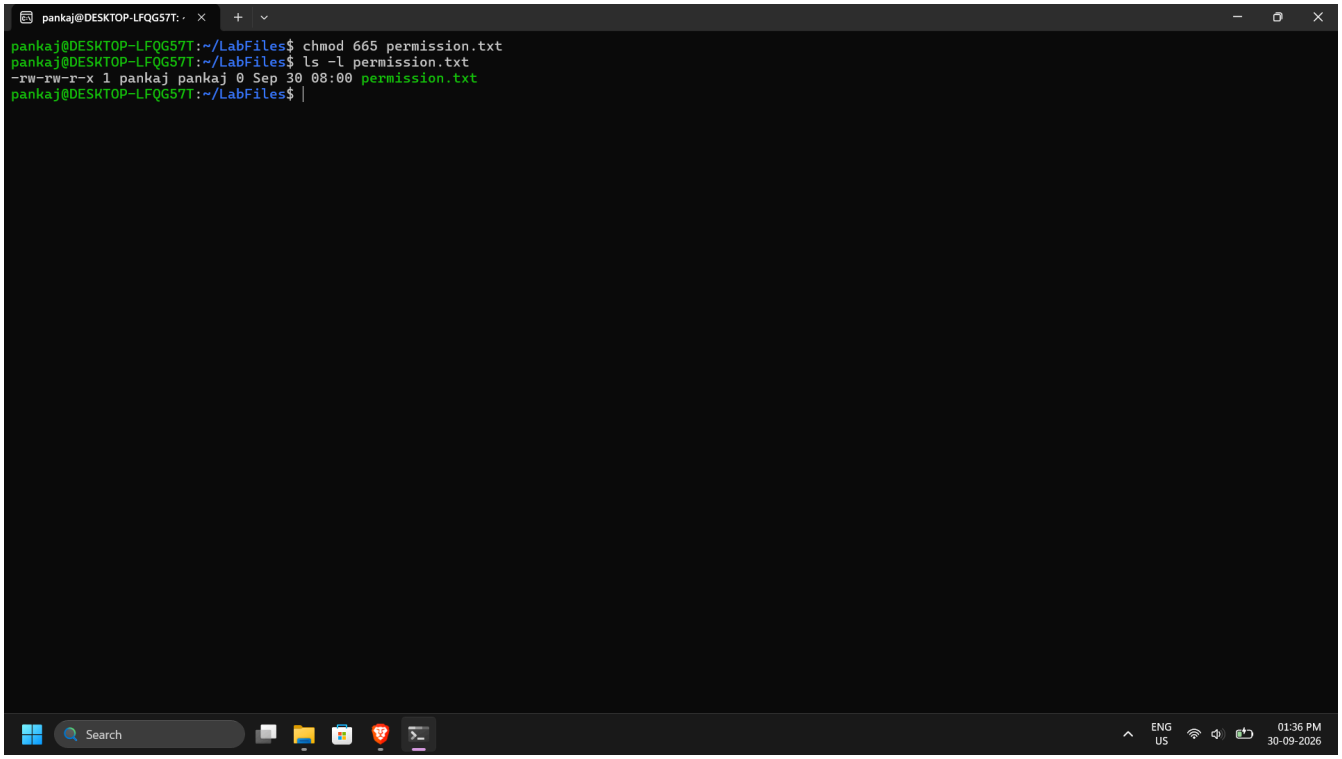


Step 5 – View detailed file information

We used stat to view detailed information about permission.txt, including its permissions, owner, group, size and timestamps.

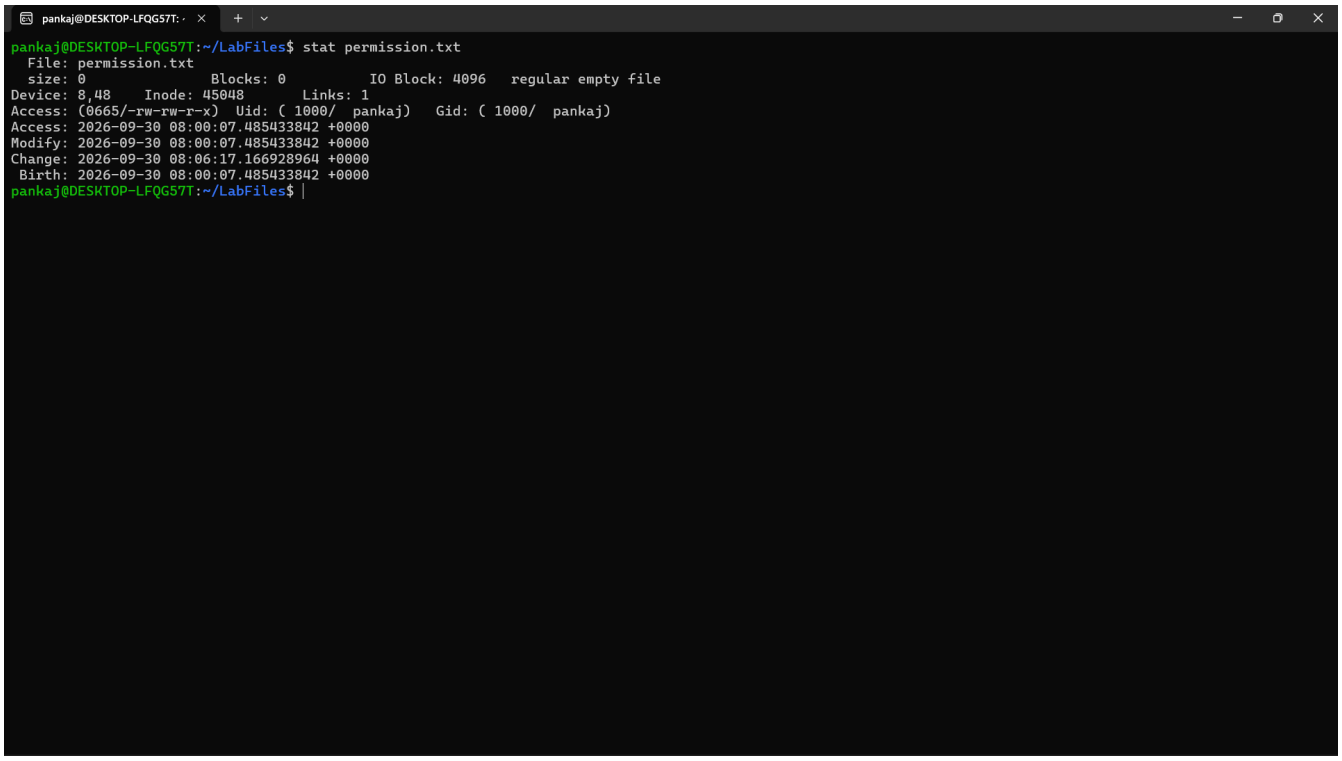

Step 6 – Change file ownership

We used chown to set the owner and group of permission.txt to pankaj and then used ls -l to verify the ownership.

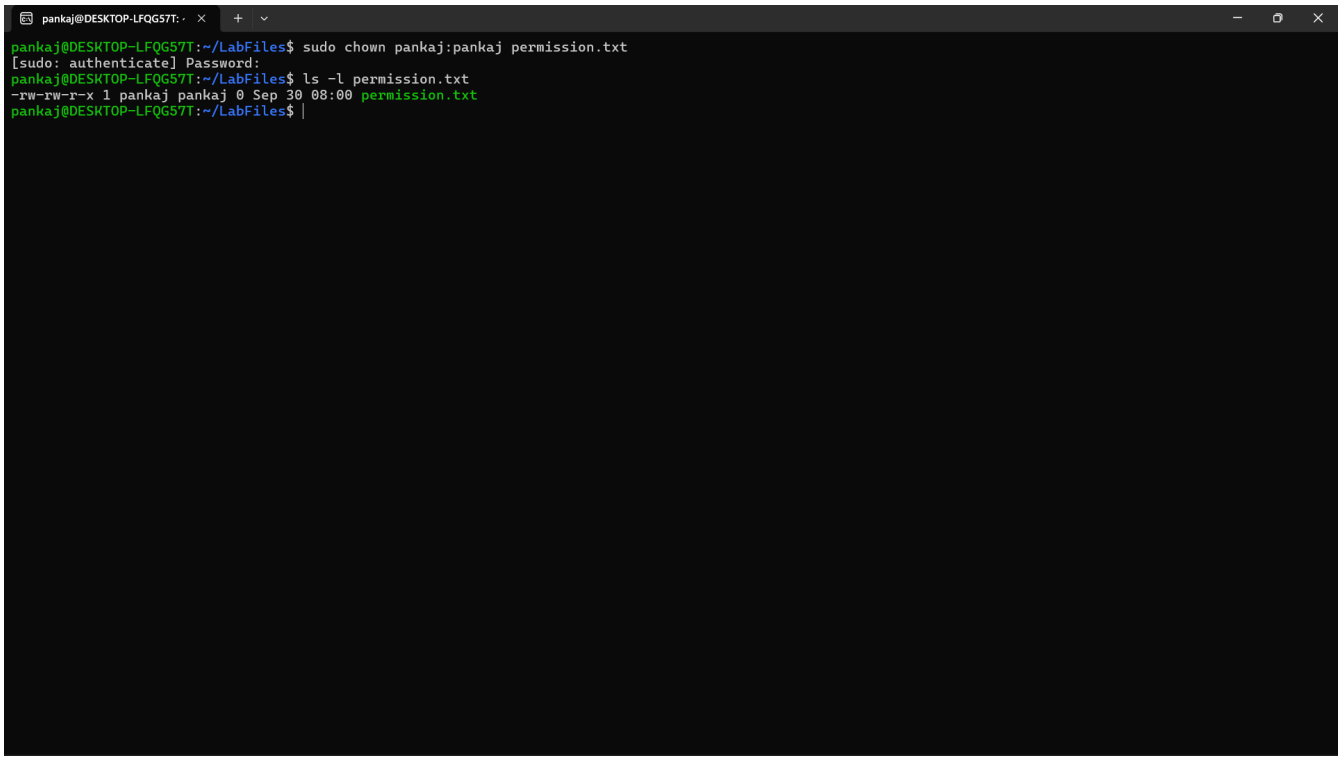

Step 7 – Verify the file information again

We ran stat again to verify the detailed metadata of permission.txt after the ownership operation.

