

Git Ignore Lab Exercise - 2

Objective

Explain Git Ignore and implement .gitignore to ignore unwanted files and folders.

Prerequisites

- Git environment configured
- Notepad++ configured as default editor
- Existing local and remote Git repository


Step 1: Open Repository

Command:

```
cd ~/Desktop/GitDemo
```

Description: Open the existing Git repository.

Screenshot:

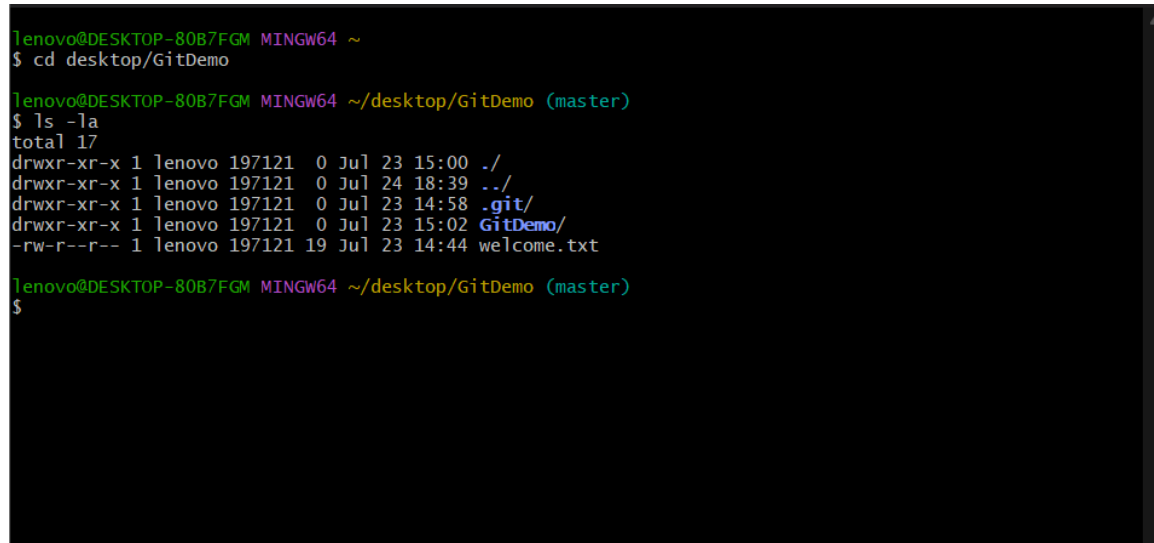

```
lenovo@DESKTOP-80B7FGM MINGW64 ~
$ cd desktop/GitDemo

lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (master)
$ ls -la
total 17
drwxr-xr-x 1 lenovo 197121 0 Jul 23 15:00 ./
drwxr-xr-x 1 lenovo 197121 0 Jul 24 18:39 ../
drwxr-xr-x 1 lenovo 197121 0 Jul 23 14:58 .git/
drwxr-xr-x 1 lenovo 197121 0 Jul 23 15:02 GitDemo/
-rw-r--r-- 1 lenovo 197121 19 Jul 23 14:44 welcome.txt

lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (master)
$
```


Step 2: Verify Repository

Command:

```
ls -la
```

Description: Verify repository files.

Screenshot:

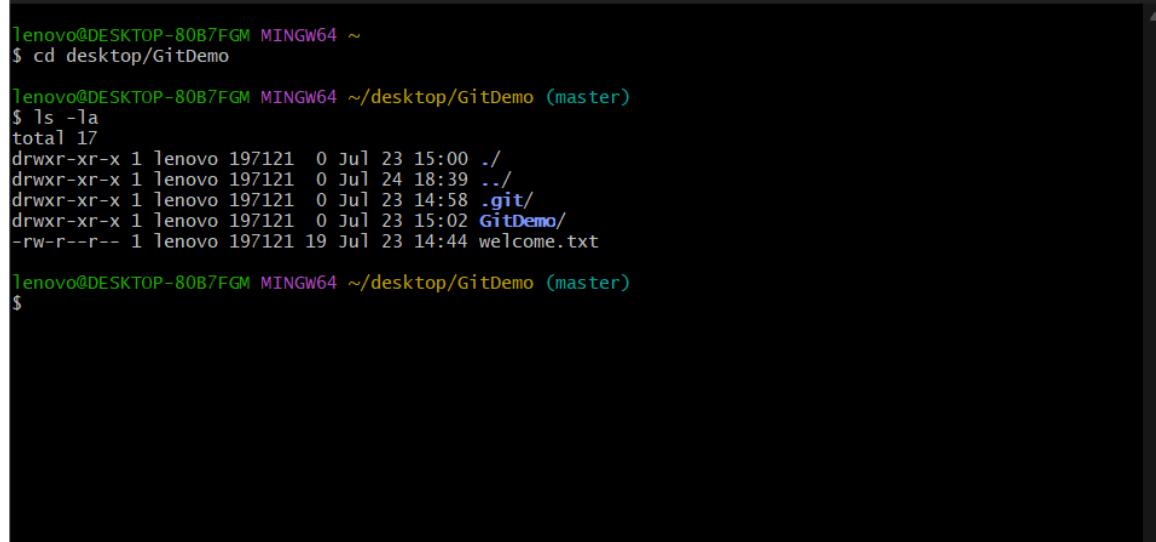

```
lenovo@DESKTOP-80B7FGM MINGW64 ~  
$ cd desktop/GitDemo  
  
lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (master)  
$ ls -la  
total 17  
drwxr-xr-x 1 lenovo 197121 0 Jul 23 15:00 ./  
drwxr-xr-x 1 lenovo 197121 0 Jul 24 18:39 ../  
drwxr-xr-x 1 lenovo 197121 0 Jul 23 14:58 .git/  
drwxr-xr-x 1 lenovo 197121 0 Jul 23 15:02 GitDemo/  
-rw-r--r-- 1 lenovo 197121 19 Jul 23 14:44 welcome.txt  
  
lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (master)  
$
```

Step 3: Create Log File

Command:

```
echo "Application started" > app.log
```

Description: Create a sample log file.

Screenshot:



```
lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (master)  
$ echo "Application started" > app.log  
  
lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (master)  
$ ls  
GitDemo/ app.log welcome.txt  
  
lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (master)  
$
```


Step 4: Create Log Folder

Command:

```
mkdir log  
echo "Error Log" > log/error.log
```

Description: Create log folder and file.

Screenshot:

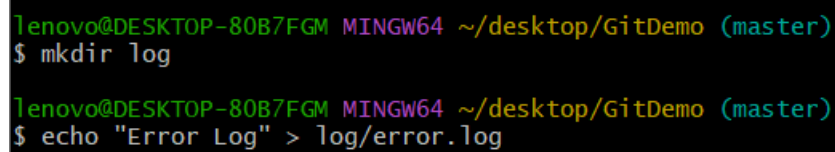A screenshot of a terminal window showing the execution of two commands. The first command is 'mkdir log' and the second is 'echo "Error Log" > log/error.log'. The terminal prompt is 'lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (master)'.

```
lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (master)  
$ mkdir log  
  
lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (master)  
$ echo "Error Log" > log/error.log
```


Step 5: Check Status

Command:

```
git status
```

Description: Verify app.log and log/ are untracked.

Screenshot:

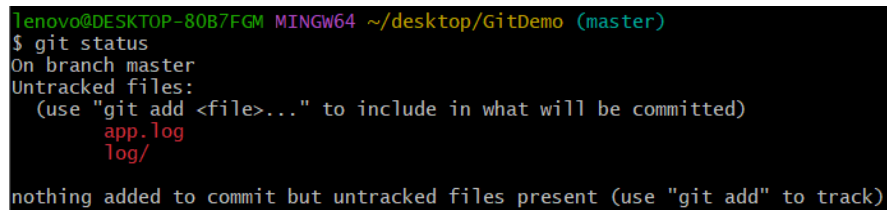A screenshot of a terminal window showing the output of the 'git status' command. The output indicates that the files 'app.log' and 'log/' are untracked. The terminal prompt is 'lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (master)'.

```
lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (master)  
$ git status  
On branch master  
Untracked files:  
  (use "git add <file>..." to include in what will be committed)  
    app.log  
    log/  
  
nothing added to commit but untracked files present (use "git add" to track)
```


Step 6: Create .gitignore

Command:

```
notepad++ .gitignore
```

Description: Create .gitignore file.

Screenshot:



```
lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (master)
$ np .gitignore
```

Step 7: Update .gitignore


Command:

```
*.log
```

```
log/
```

Description: Ignore log files and log folder.

Screenshot:

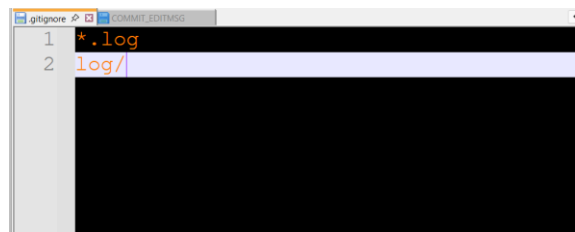

```
.gitignore
1 *.log
2 log/
```


Step 8: Verify .gitignore

Command:

```
cat .gitignore
```

Description: Display .gitignore content.

Screenshot:

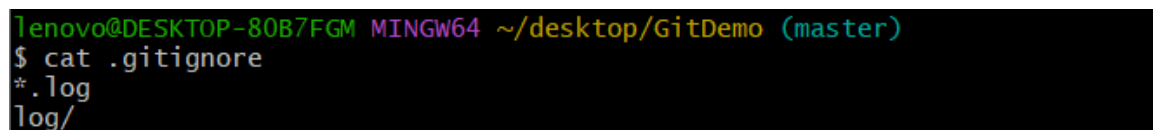

```
lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (master)
$ cat .gitignore
*.log
log/
```

Step 9: Verify Status Again

Command:

```
git status
```

Description: Only .gitignore should appear.

Screenshot:

```
lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (master)
$ git status
On branch master
Untracked files:
  (use "git add <file>..." to include in what will be committed)
        .gitignore

nothing added to commit but untracked files present (use "git add" to track)
```

Step 10: Stage File

Command:

```
git add .gitignore
```

Description: Stage .gitignore.

Screenshot:

```
lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (master)
$ git add .gitignore
```

Step 11: Commit

Command:

```
git commit
```

Description: Commit changes.

Screenshot:

```
lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (master)
$ git commit
[master b62f8bf] Added .gitignore
1 file changed, 2 insertions(+)
create mode 100644 .gitignore
```

Step 12: Working Tree

Command:

```
git status
```

Description: Verify working tree is clean.

Screenshot:

```
lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (master)
$ git status
On branch master
nothing to commit, working tree clean
```

Step 13: Push

Command:

```
git push -u origin main
```

Description: Push to GitLab.

Screenshot:

```
lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (main)
$ git push -u origin main
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 349 bytes | 349.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://gitlab.com/group8732430/gitDemo.git
    52ea664..b62f8bf  main -> main
branch 'main' set up to track 'origin/main'.

lenovo@DESKTOP-80B7FGM MINGW64 ~/desktop/GitDemo (main)
$
```

Conclusion

The .gitignore file successfully ignored all .log files and the log folder. The repository status was verified, the changes were committed, and the repository was ready to be pushed to GitLab.