

Task 1


1. Login to Console and search for VPC and click on VPC.

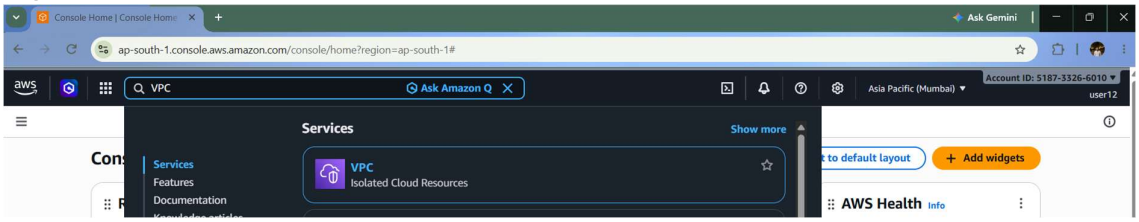


2. Once you click on VPC the below page will open.

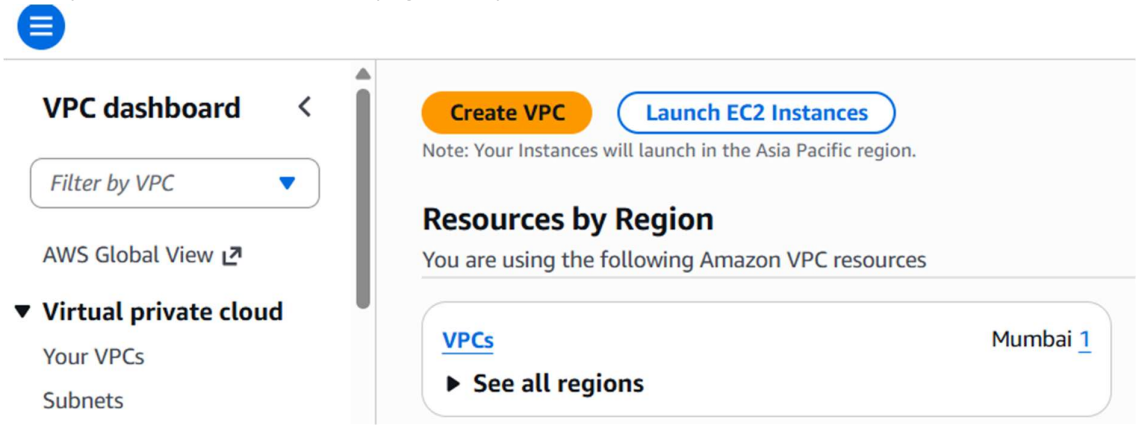



3. Click on VPC and then click on Create VPC.

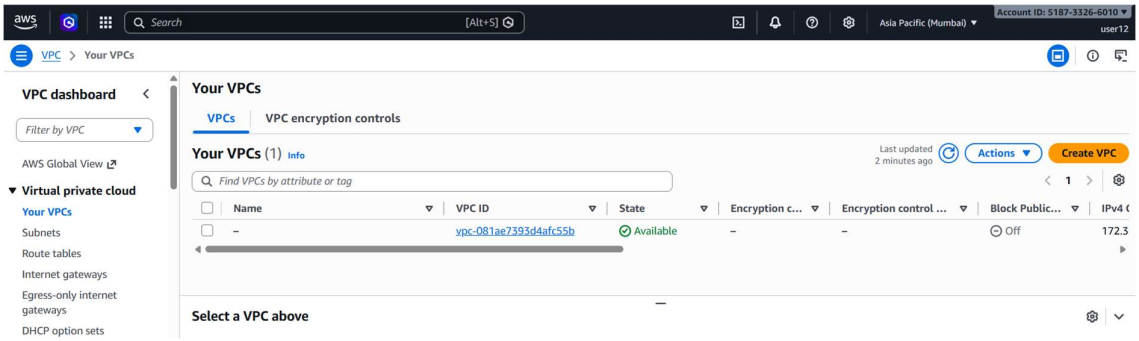

4. Once you click on Create VPC, the below page will appear. Click as per the below highlights that will create a VPC, CIDR blocks, 2 Private Subnets, 2 Public Subnets, NAT Gateway per public subnet, Internet Gateway, Route Table, Entries in the Route table will get automatically updated.
5. Then click on the Create VPC.

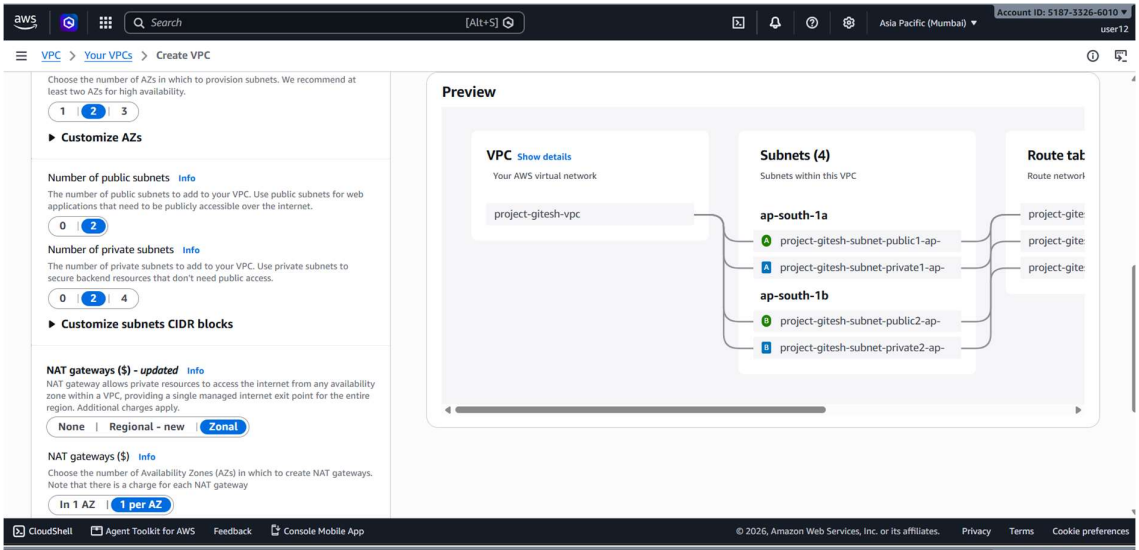

Search [Alt+S]
Asia Pacific (Mumbai)
Account ID: 5187-3326-6010
user12
VPC > Your VPCs > Create VPC
Choose the number of AZs in which to provision subnets. We recommend at least two AZs for high availability.
1 | 2 | 3
Customize AZs
Number of public subnets Info
The number of public subnets to add to your VPC. Use public subnets for web applications that need to be publicly accessible over the internet.
0 | 2
Number of private subnets Info
The number of private subnets to add to your VPC. Use private subnets to secure backend resources that don't need public access.
0 | 2 | 4
Customize subnets CIDR blocks
NAT gateways ($) - updated Info
NAT gateway allows private resources to access the internet from any availability zone within a VPC, providing a single managed internet exit point for the entire region. Additional charges apply.
None | Regional - new | Zonal
NAT gateways ($) Info
Choose the number of Availability Zones (AZs) in which to create NAT gateways. Note that there is a charge for each NAT gateway
In 1 AZ | 1 per AZ
Preview
VPC Show details
Your AWS virtual network
project-gitesh-vpc
Subnets (4)
Subnets within this VPC
ap-south-1a
project-gitesh-subnet-public1-ap-
project-gitesh-subnet-private1-ap-
ap-south-1b
project-gitesh-subnet-public2-ap-
project-gitesh-subnet-private2-ap-
Route tab
Route networ
project-gite
project-gite
project-gite
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

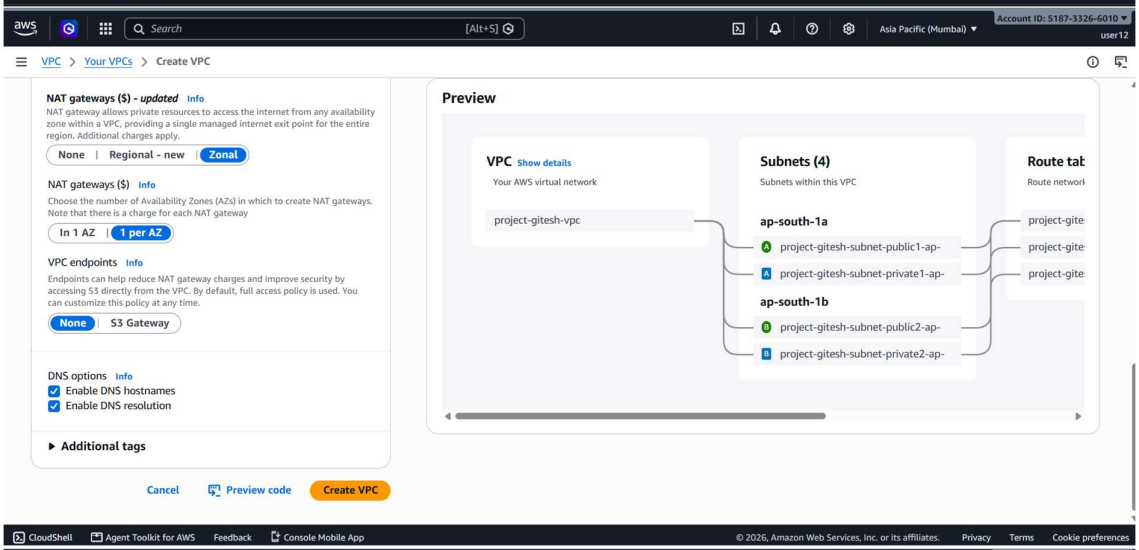
Search [Alt+S]
Asia Pacific (Mumbai)
Account ID: 5187-3326-6010
user12
VPC > Your VPCs > Create VPC
NAT gateways ($) - updated Info
NAT gateway allows private resources to access the internet from any availability zone within a VPC, providing a single managed internet exit point for the entire region. Additional charges apply.
None | Regional - new | Zonal
NAT gateways ($) Info
Choose the number of Availability Zones (AZs) in which to create NAT gateways. Note that there is a charge for each NAT gateway
In 1 AZ | 1 per AZ
VPC endpoints Info
Endpoints can help reduce NAT gateway charges and improve security by accessing S3 directly from the VPC. By default, full access policy is used. You can customize this policy at any time.
None | S3 Gateway
DNS options Info
Enable DNS hostnames
Enable DNS resolution
Additional tags
Cancel
Preview code
Create VPC
Preview
VPC Show details
Your AWS virtual network
project-gitesh-vpc
Subnets (4)
Subnets within this VPC
ap-south-1a
project-gitesh-subnet-public1-ap-
project-gitesh-subnet-private1-ap-
ap-south-1b
project-gitesh-subnet-public2-ap-
project-gitesh-subnet-private2-ap-
Route tab
Route networ
project-gite
project-gite
project-gite
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

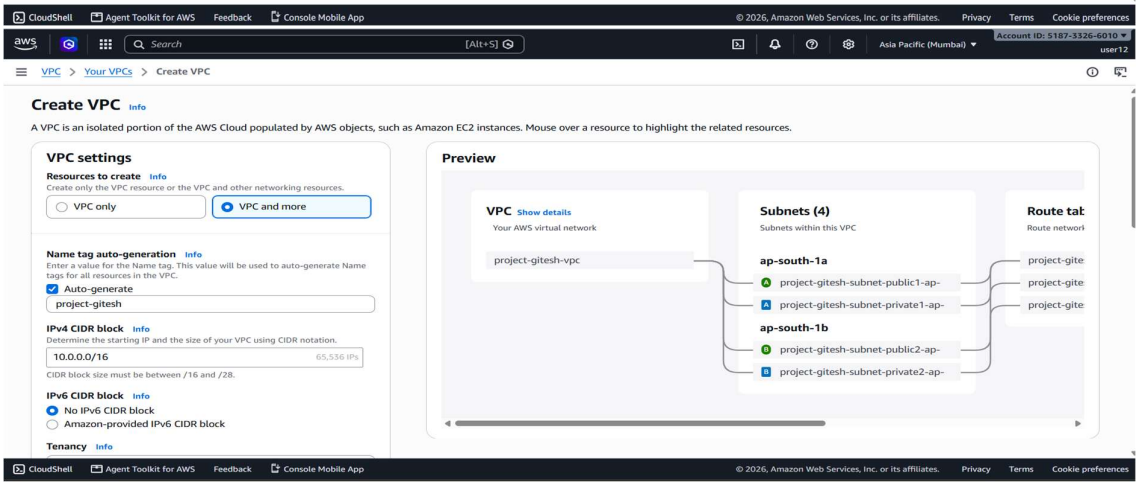

Search [Alt+S]
Asia Pacific (Mumbai)
Account ID: 5187-3326-6010
user12
VPC > Your VPCs > Create VPC
Create VPC Info
A VPC is an isolated portion of the AWS Cloud populated by AWS objects, such as Amazon EC2 instances. Mouse over a resource to highlight the related resources.
VPC settings
Resources to create Info
Create only the VPC resource or the VPC and other networking resources.
VPC only
VPC and more
Name tag auto-generation Info
Enter a value for the Name tag. This value will be used to auto-generate Name tags for all resources in the VPC.
Auto-generate
project-gitesh
IPv4 CIDR block Info
Determine the starting IP and the size of your VPC using CIDR notation.
10.0.0.0/16
65,536 IPs
CIDR block size must be between /16 and /28.
IPv6 CIDR block Info
No IPv6 CIDR block
Amazon-provided IPv6 CIDR block
Tenancy Info
Preview
VPC Show details
Your AWS virtual network
project-gitesh-vpc
Subnets (4)
Subnets within this VPC
ap-south-1a
project-gitesh-subnet-public1-ap-
project-gitesh-subnet-private1-ap-
ap-south-1b
project-gitesh-subnet-public2-ap-
project-gitesh-subnet-private2-ap-
Route tab
Route networ
project-gite
project-gite
project-gite
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

Task 2: Create 2 Security Groups


1. Go to the AWS Management console and search for VPC and in the left-hand side we will find the Security Group. Click on it.

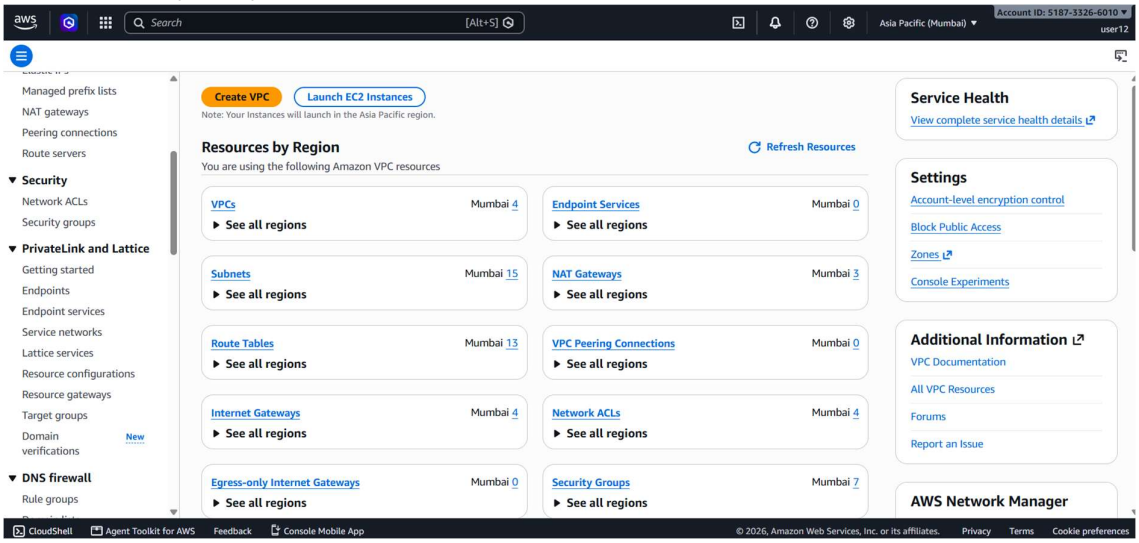


2. Select Create security group.

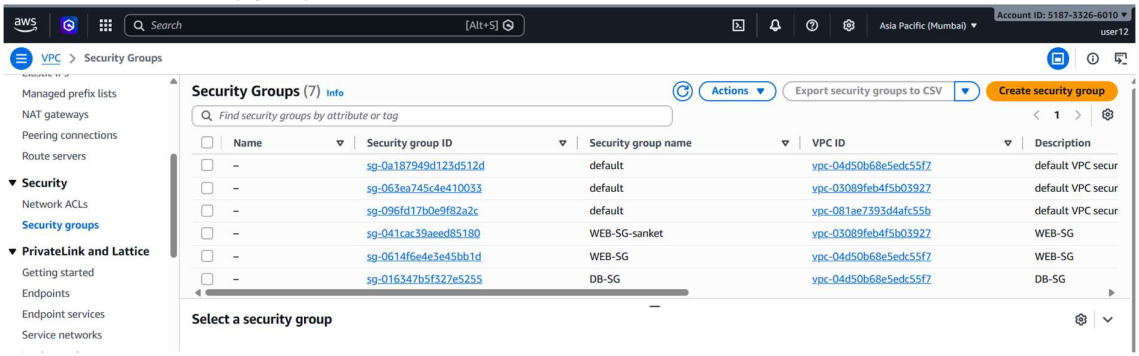


3. Give name and description as WEB-SG and select demo-vpc created in step 1. In the inbound rule section click on Add rule.

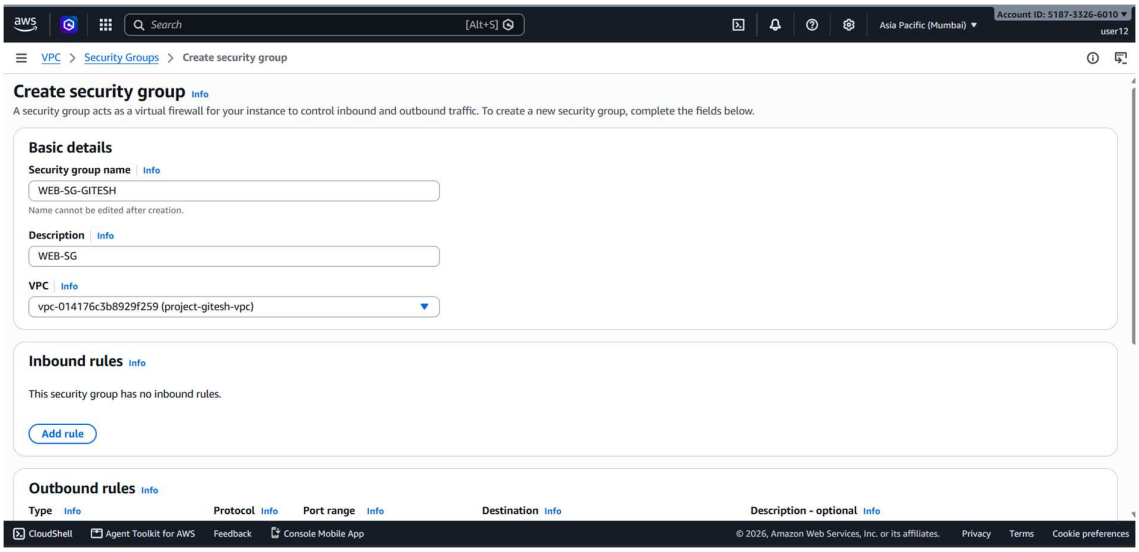


4. Add rule as shown below (for testing instance we are opening ssh and http for 0.0.0.0/0, later on we will change source IP for ssh and http)

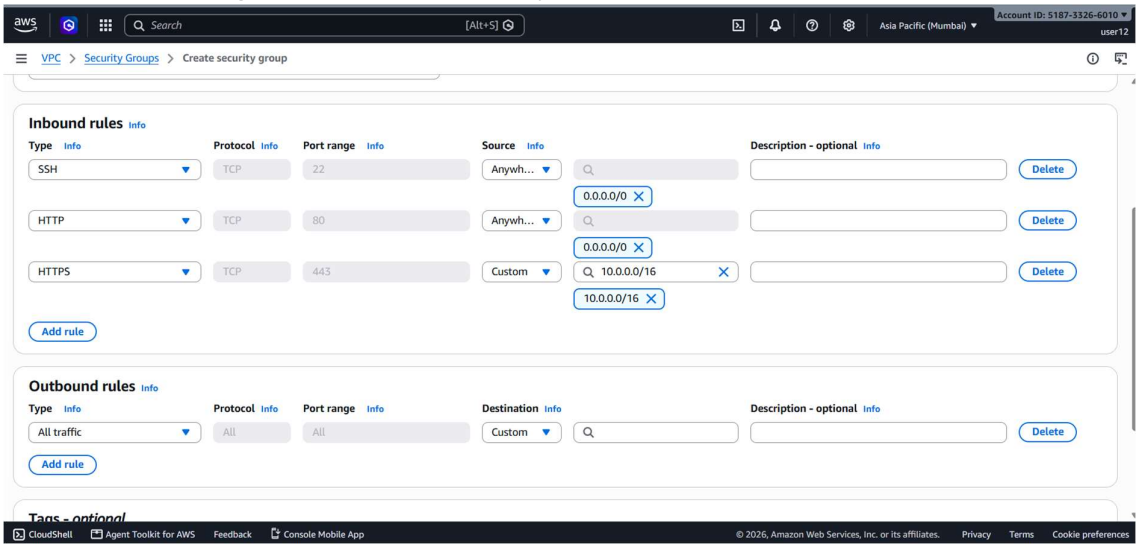

5. Other option keep default and select create security group.

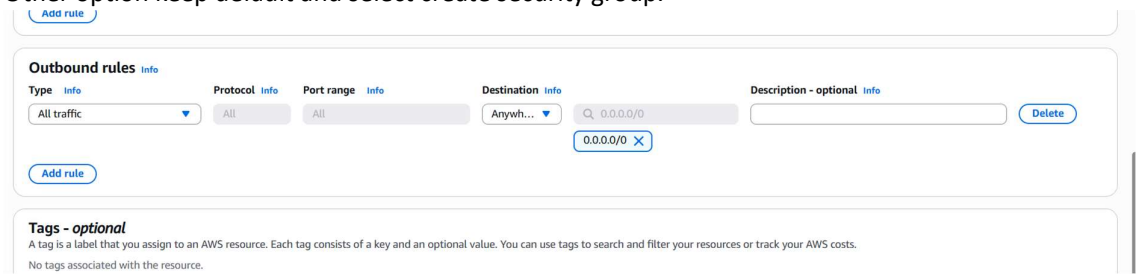

6. Create one more security group for database. Go to VPC service and select security group from left hand side then click on create security group. Give name and description as DB-SG and select demo-vpc created in step 1. In the inbound rule section click on Add rule.
7. In Type select MYSQL/Aurora, in source select Custom and click on WEB-SG (security group created in task2 step 3.

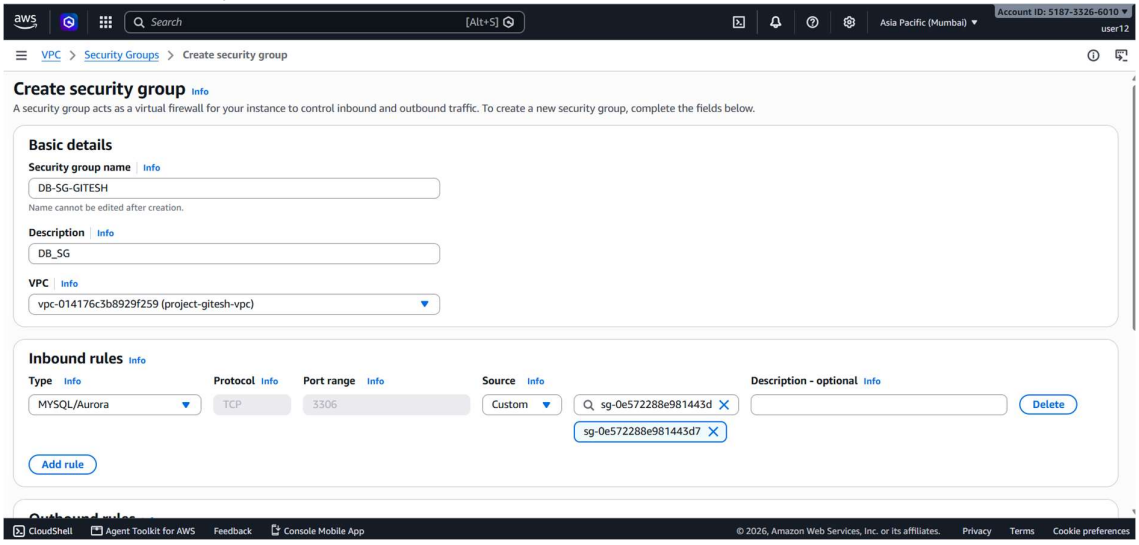


8. Other option keep default and select create security group.


Task 3: Create, connect, and configure Instance

Now we are supposed to launch 1 testing Instance which we will use to install our require packages to host the application, also we will test whether application running on this instance is connecting to RDS databases successfully and finally we will create our AMI image from it.

1. Go to console and search for EC2 and click on EC2.
2. Then click on instances (running).
3. Click on launch instances.
4. The below page will appear. Please put the instance name TEST-WEB-SERVER.

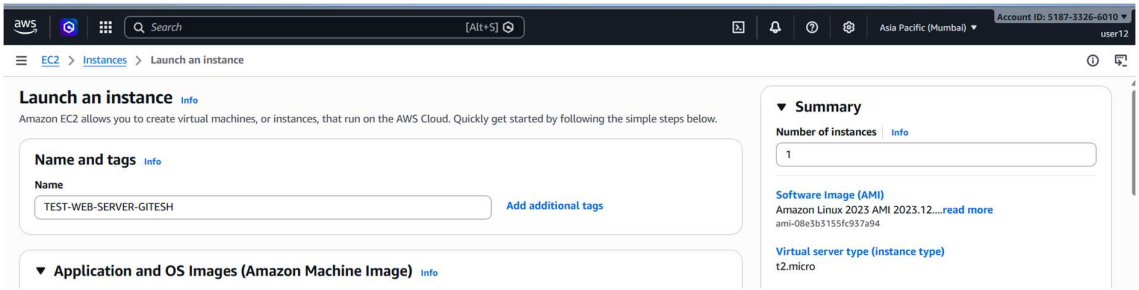


5. Select the Ubuntu AMI

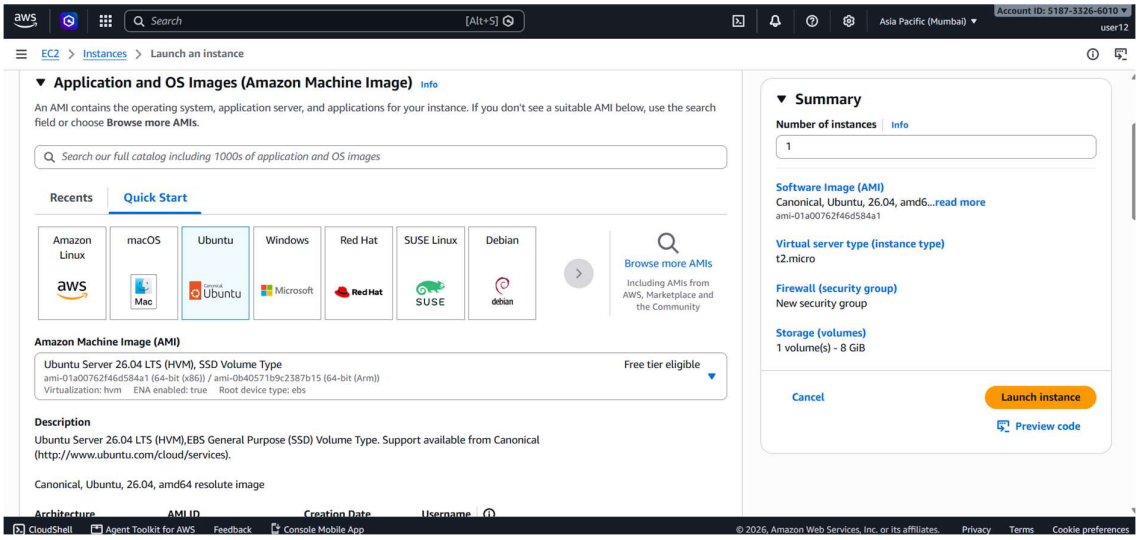


a) Under instance type – change it to Amazon Linux 2 AMI (HVM)

b) Under Key pair (login) – Select Proceed without a key pair (not recommended)


c) Under Network settings – select edit.

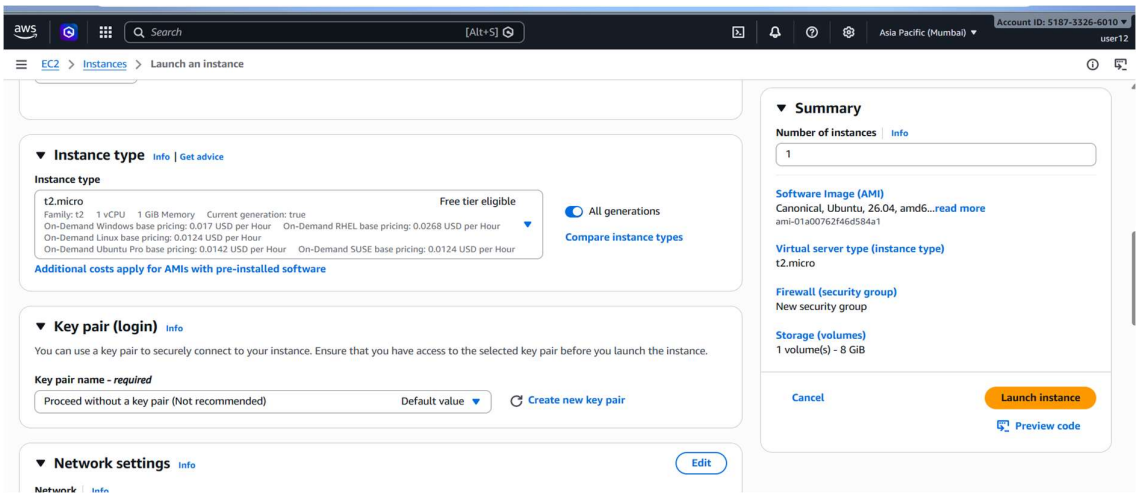


6. When you click on edit the below page will get displayed. We are supposed to select the VPC which we have created with name Demo-vpc.
   a) Under subnets we must select any one public subnet that we have created previously.
   b) Under Auto assign public IP select enable.
   c) Under Firewall (Security Groups) – Select existing security group.
   d) Under Common security group- Select WEB-SG.

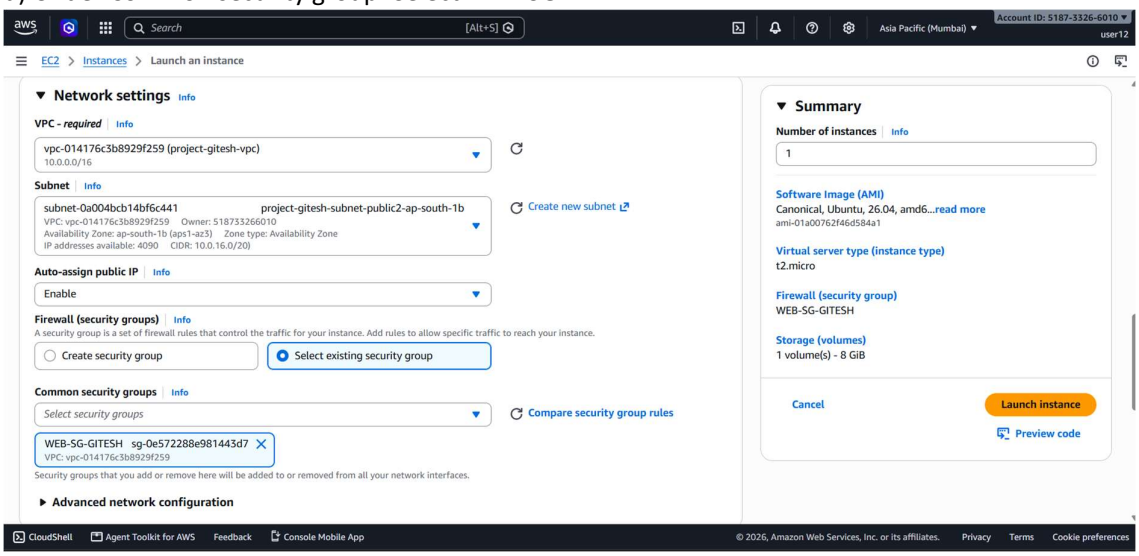


7. Rest keeps it as it is and select Launch instance.
8. Once instance launch successfully, connect to the instance from console. For this go to EC2 service, select instances option from left hand side, click on your instance (TEST WEB-SERVER), select connect.

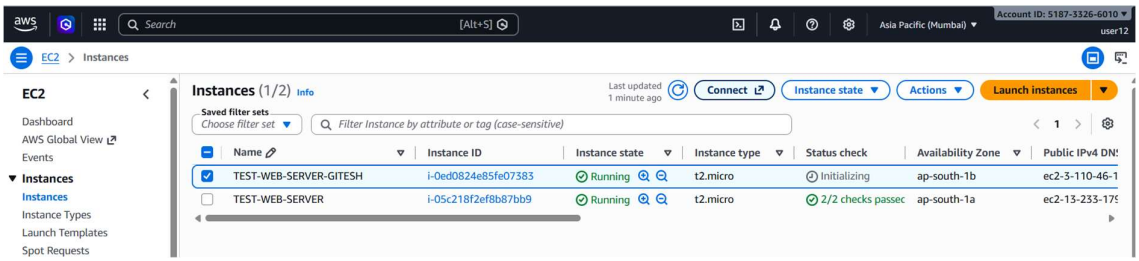

9. Under connect to instance click on EC2 instance connect, then click on connect.

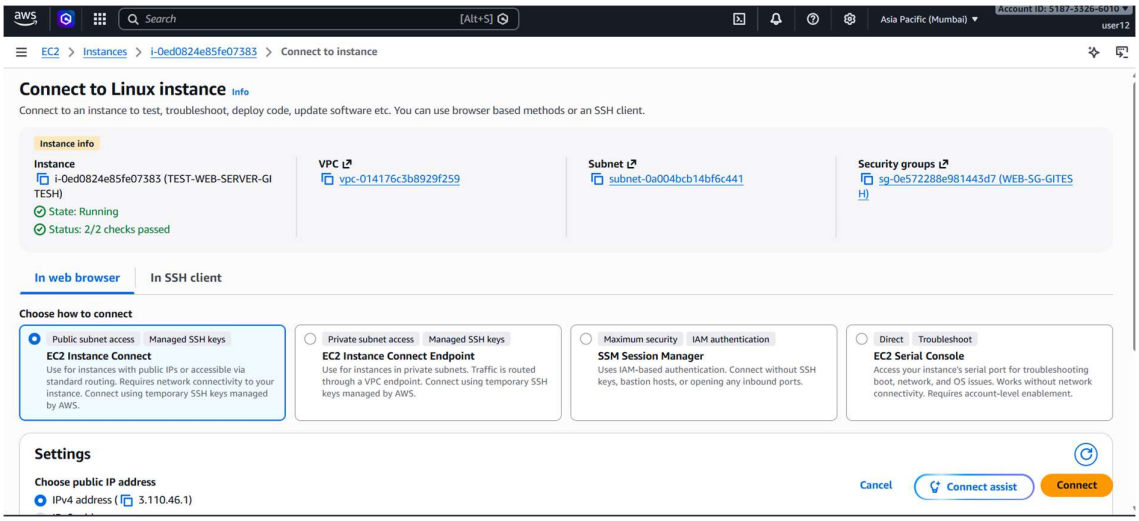

10. A new tab will get open your browser which will give you cl access to your ubuntu instance.

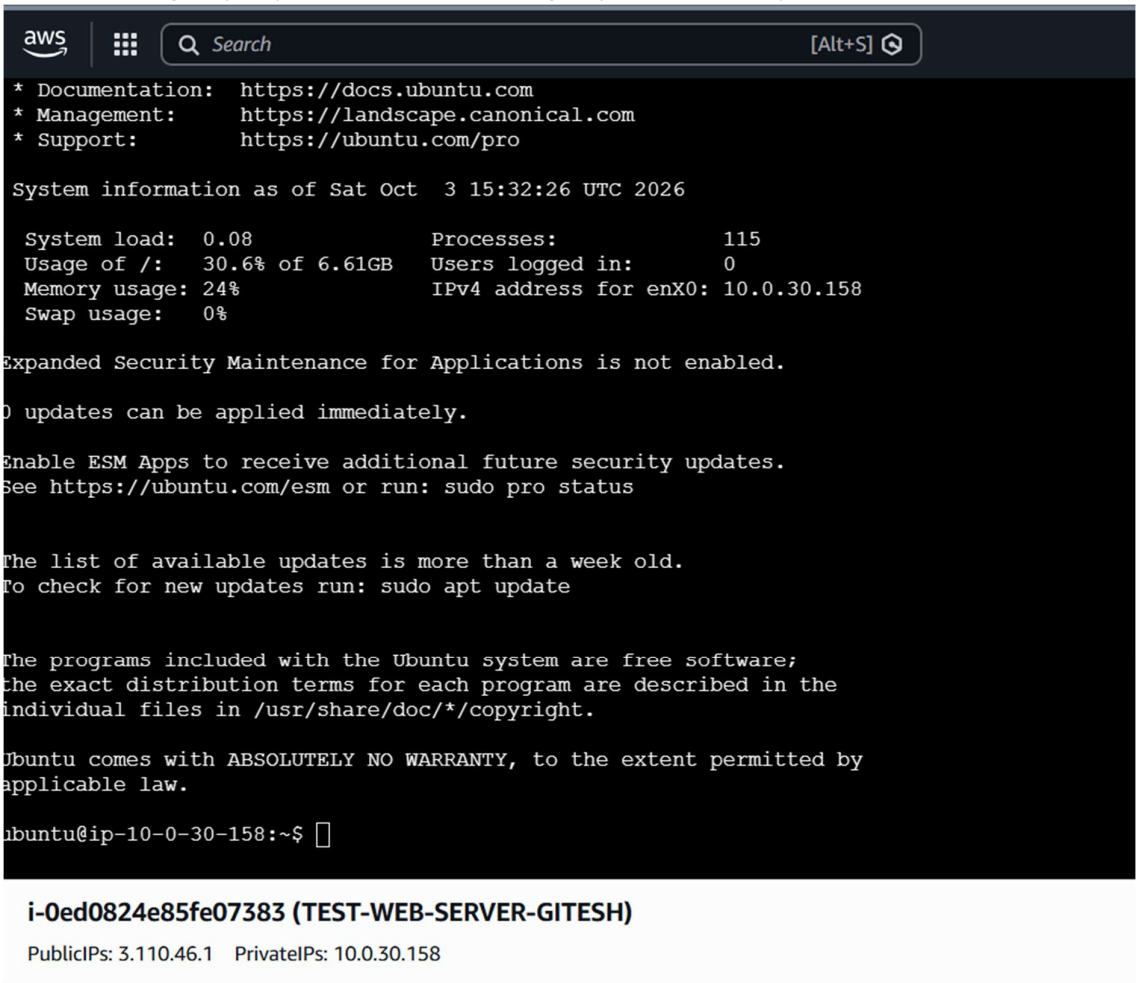

11. Put the below commands so that the instances will get updated first.
    $sudo su
    $ apt-get update -y (If this command gives you error then you can use apt update command)

```
individual files in /usr/share/doc/*/copyright.


Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

ubuntu@ip-10-0-30-158:~$ sudo su
root@ip-10-0-30-158:/home/ubuntu# apt-get update -y
Hit:1 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute InRelease
Get:2 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-updates InRelease [137 kB]
Get:3 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-backports InRelease [137 kB]
Get:4 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute/universe amd64v3 Packages [16.3 MB]
Get:5 http://security.ubuntu.com/ubuntu resolute-security InRelease [137 kB]
Get:6 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute/universe Translation-en [6329 kB]
Get:7 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute/universe amd64 Components [4556 kB]
Get:8 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute/universe amd64 c-n-f Metadata [313 kB]
Get:9 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute/multiverse amd64v3 Packages [291 kB]
Get:10 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute/multiverse Translation-en [127 kB]
Get:11 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute/multiverse amd64 Components [50.0 kB]
Get:12 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute/multiverse amd64 c-n-f Metadata [8276 B]
Get:13 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/main amd64v3 Packages [718 kB]
Get:14 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/main Translation-en [167 kB]
Get:15 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/main amd64 Components [98.1 kB]
Get:16 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/main amd64 c-n-f Metadata [5756 B]
Get:17 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/universe amd64v3 Packages [316 kB]
Get:18 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/universe Translation-en [101 kB]
```

i-0ed0824e85fe07383 (TEST-WEB-SERVER-GITESH)

PublicIPs: 3.110.46.1 PrivateIPs: 10.0.30.158


12. Now give the below command one by one
    $ apt-get install apache2 php php-mysql -y
    $ service apache2 restart
    $ service apache2 enable
    $ service apache2 status
    $ cd /var/www/html $ vi index.php
13. New blank window will open for you. Copy the below code without any modifications in blank window. (Before pasting the code press, I key to insert data in blank file).
14. Now copy and paste the public IP of your instance in browser and add /index.php after the public IP of your instance. Below is the expected output. (Note that it is not displaying the message that database is connected successfully). Now next task is to create database and connect to your web application.

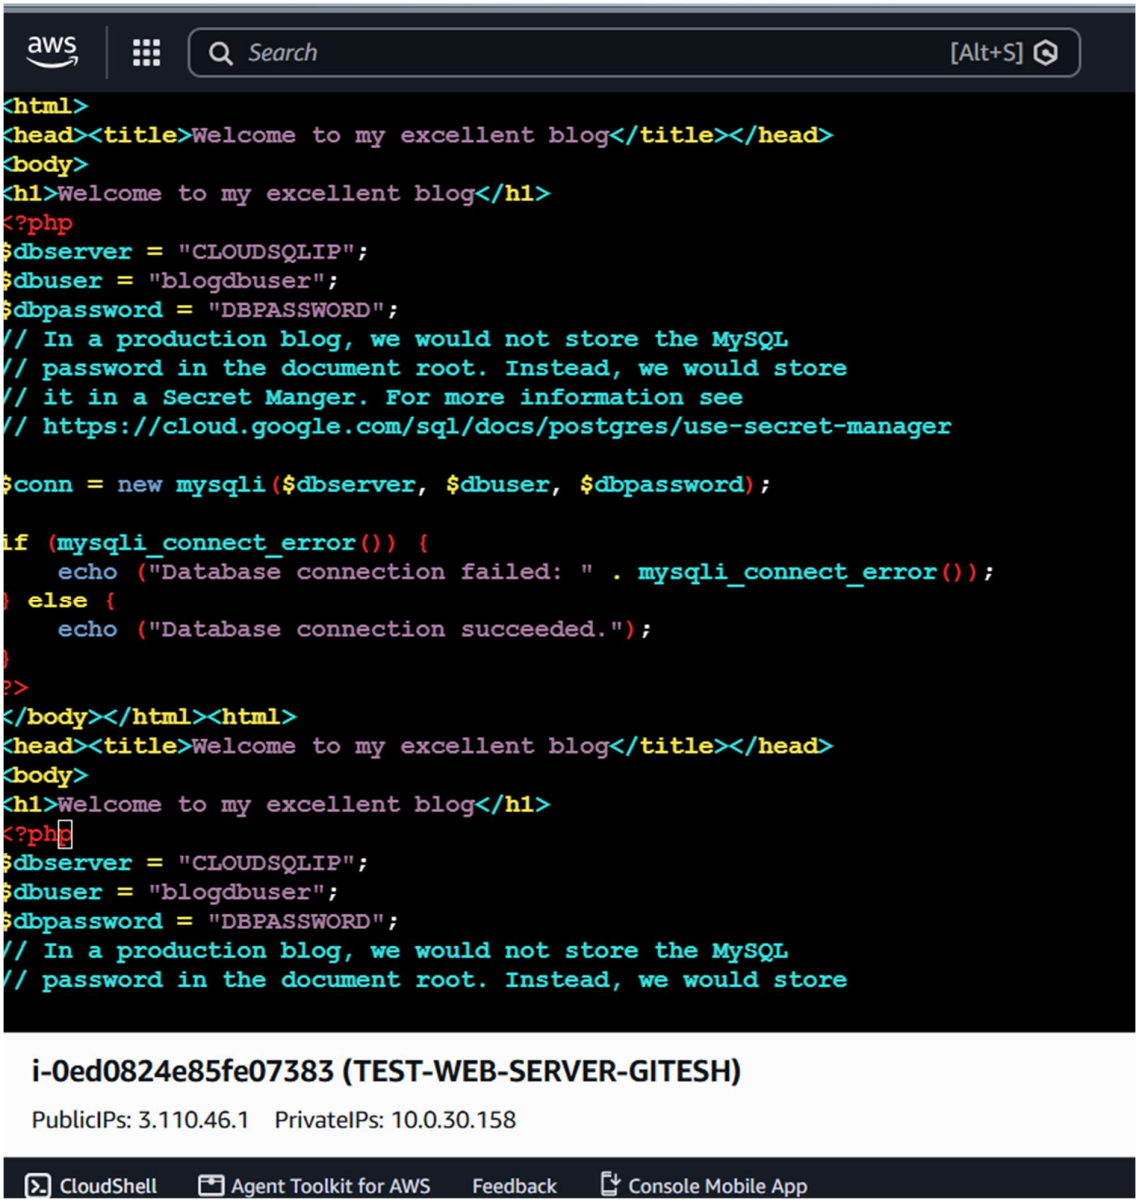


15. Press esc key, then :wq and enter key, so that code will get save in file.


Task 4: Create, RDS MySQL database.


1. Select Database then click on Create Database

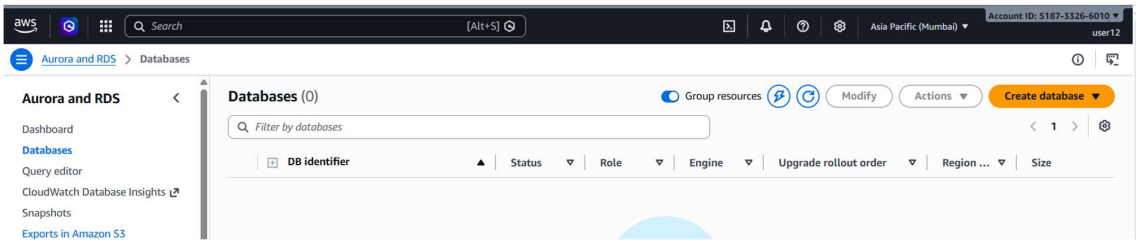


2. Select the Standard Create, Under Engine options select MySQL.

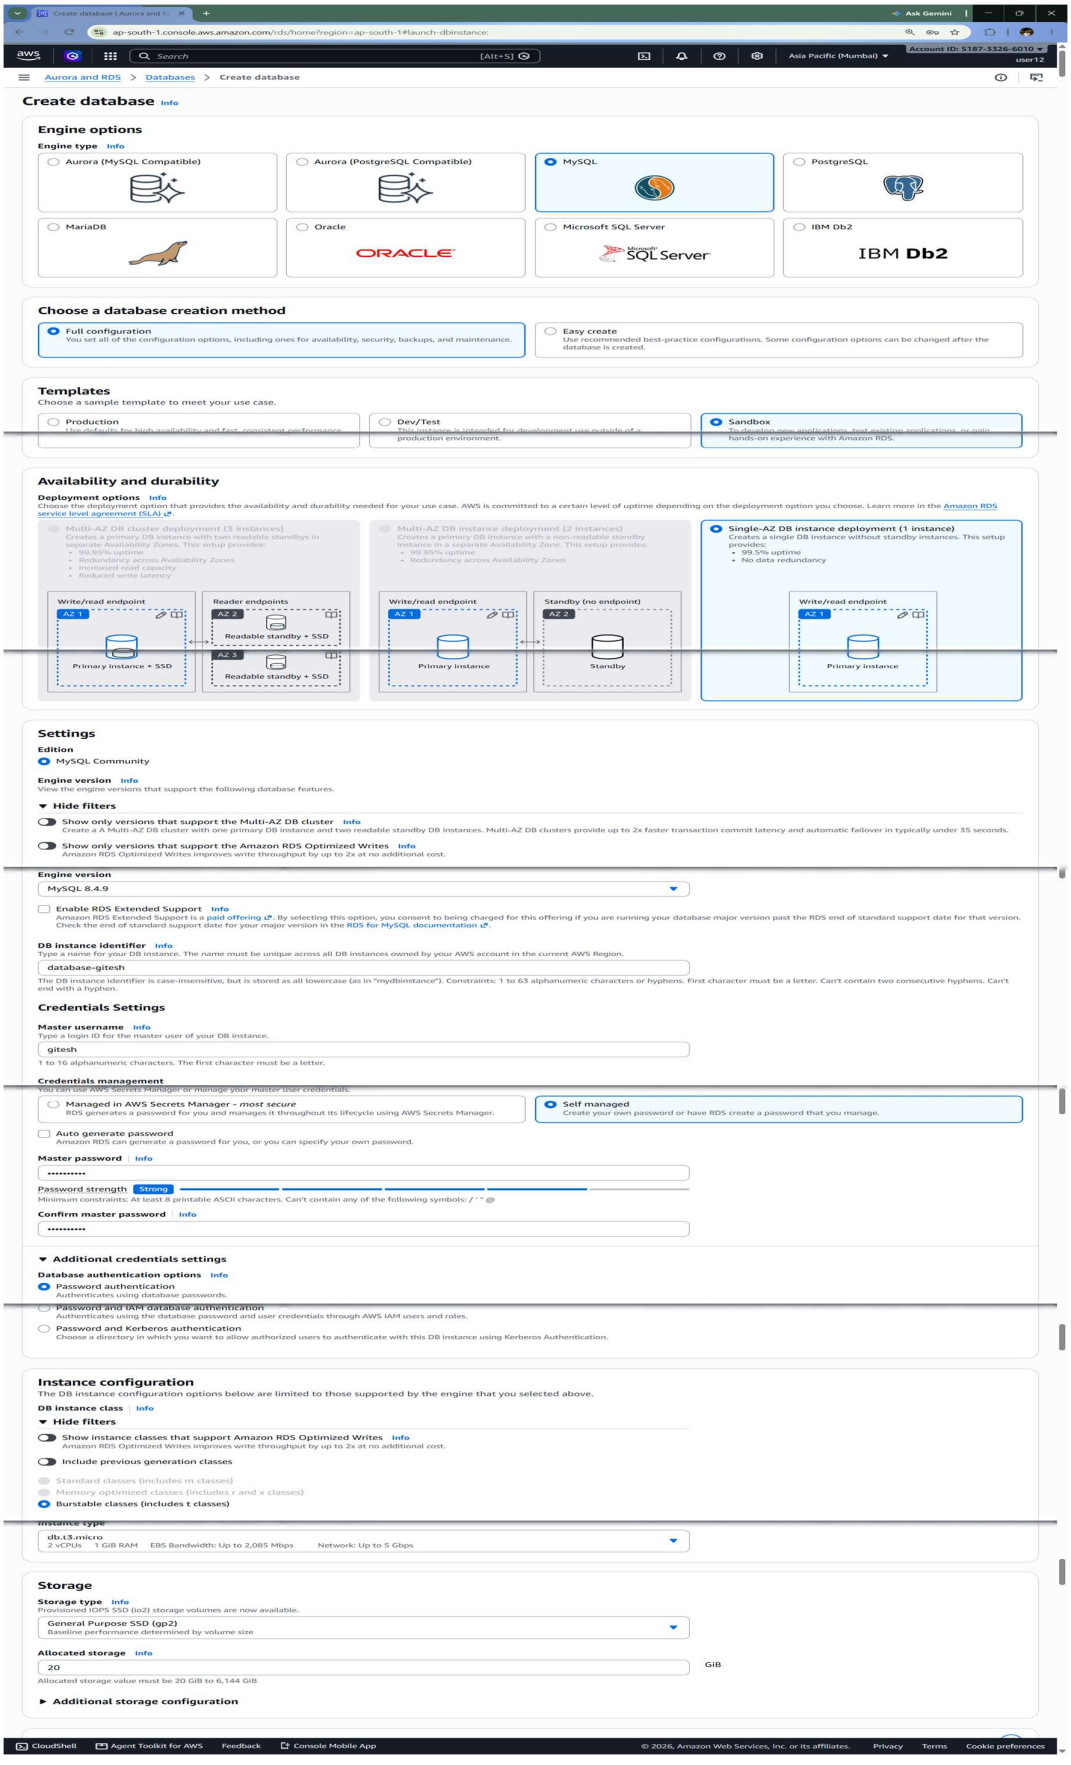
Create database | Aurora and R
Ask Gemini
ap-south-1.console.aws.amazon.com/rds/home?region=ap-south-1#launch-dbinstance:
aws
Search
[Alt+S]
Asia Pacific (Mumbai)
Account ID: 5187-3326-6010
user12
Aurora and RDS > Databases > Create database
Create database Info
Engine options
Engine type Info
Aurora (MySQL Compatible)
Aurora (PostgreSQL Compatible)
MySQL
PostgreSQL
MariaDB
Oracle
Microsoft SQL Server
IBM Db2
Choose a database creation method
Full configuration
You set all of the configuration options, including ones for availability, security, backups, and maintenance.
Easy create
Use recommended best-practice configurations. Some configuration options can be changed after the database is created.
Templates
Choose a sample template to meet your use case.
Production
Use defaults for high availability and fast, consistent performance.
Dev/Test
This instance is intended for development use outside of a production environment.
Sandbox
Availability and durability
Deployment options Info
Choose the deployment option that provides the availability and durability needed for your use case. AWS is committed to a certain level of uptime depending on the deployment option you choose. Learn more in the Amazon RDS service level agreement (SLA).
Multi-AZ DB cluster deployment (3 instances)
Creates a primary DB instance with two readable standbys in separate Availability Zones. This setup provides:
99.95% uptime
Redundancy across Availability Zones
Increased read capacity
Reduced write latency
Write/read endpoint
AZ 1
Primary instance + SSD
Reader endpoints
AZ 2
Readable standby + SSD
AZ 3
Readable standby + SSD
Multi-AZ DB instance deployment (2 instances)
Creates a primary DB instance with a non-readable standby instance in a separate Availability Zone. This setup provides:
99.95% uptime
Redundancy across Availability Zones
Write/read endpoint
AZ 1
Primary instance
Standby (no endpoint)
AZ 2
Standby
Single-AZ DB instance deployment (1 instance)
Creates a single DB instance without standby instances. This setup provides:
99.5% uptime
No data redundancy
Write/read endpoint
AZ 1
Primary instance
Settings
Edition
MySQL Community
Engine version Info
View the engine versions that support the following database features.
Hide filters
Show only versions that support the Multi-AZ DB cluster Info
Create a Multi-AZ DB cluster with one primary DB instance and two readable standby DB instances. Multi-AZ DB clusters provide up to 2x faster transaction commit latency and automatic failover in typically under 35 seconds.
Show only versions that support the Amazon RDS Optimized Writes Info
Amazon RDS Optimized Writes improves write throughput by up to 2x at no additional cost.
Engine version
MySQL 8.4.9
Enable RDS Extended Support Info
Amazon RDS Extended Support is a paid offering. By selecting this option, you consent to being charged for this offering if you are running your database major version past the RDS end of standard support date for that version. Check the end of standard support date for your major version in the RDS for MySQL documentation.
DB instance identifier Info
Type a name for your DB instance. The name must be unique across all DB instances owned by your AWS account in the current AWS Region.
database-gitesh
The DB instance identifier is case-insensitive, but is stored as all lowercase (as in "mydbinstance"). Constraints: 1 to 63 alphanumeric characters or hyphens. First character must be a letter. Can't contain two consecutive hyphens. Can't end with a hyphen.
Credentials Settings
Master username Info
Type a login ID for the master user of your DB instance.
gitesh
1 to 16 alphanumeric characters. The first character must be a letter.
Credentials management
You can use AWS Secrets Manager or manage your master user credentials.
Managed in AWS Secrets Manager - most secure
RDS generates a password for you and manages it throughout its lifecycle using AWS Secrets Manager.
Self managed
Create your own password or have RDS create a password that you manage.
Auto generate password
Amazon RDS can generate a password for you, or you can specify your own password.
Master password Info
Password strength Strong
Minimum constraints: At least 8 printable ASCII characters. Can't contain any of the following symbols: / ' " @
Confirm master password Info
Additional credentials settings
Database authentication options Info
Password authentication
Authenticates using database passwords.
Password and IAM database authentication
Authenticates using the database password and user credentials through AWS IAM users and roles.
Password and Kerberos authentication
Choose a directory in which you want to allow authorized users to authenticate with this DB instance using Kerberos Authentication.
Instance configuration
The DB instance configuration options below are limited to those supported by the engine that you selected above.
DB instance class Info
Hide filters
Show instance classes that support Amazon RDS Optimized Writes Info
Amazon RDS Optimized Writes improves write throughput by up to 2x at no additional cost.
Include previous generation classes
Standard classes (includes m classes)
Memory optimized classes (includes r and x classes)
Burstable classes (includes t classes)
Instance type
db.t3.micro
2 vCPUs 1 GiB RAM EBS Bandwidth: Up to 2,085 Mbps Network: Up to 5 Gbps
Storage
Storage type Info
Provisioned IOPS SSD (io2) storage volumes are now available.
General Purpose SSD (gp2)
Baseline performance determined by volume size
Allocated storage Info
20
GiB
Allocated storage value must be 20 GiB to 6,144 GiB
Additional storage configuration
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

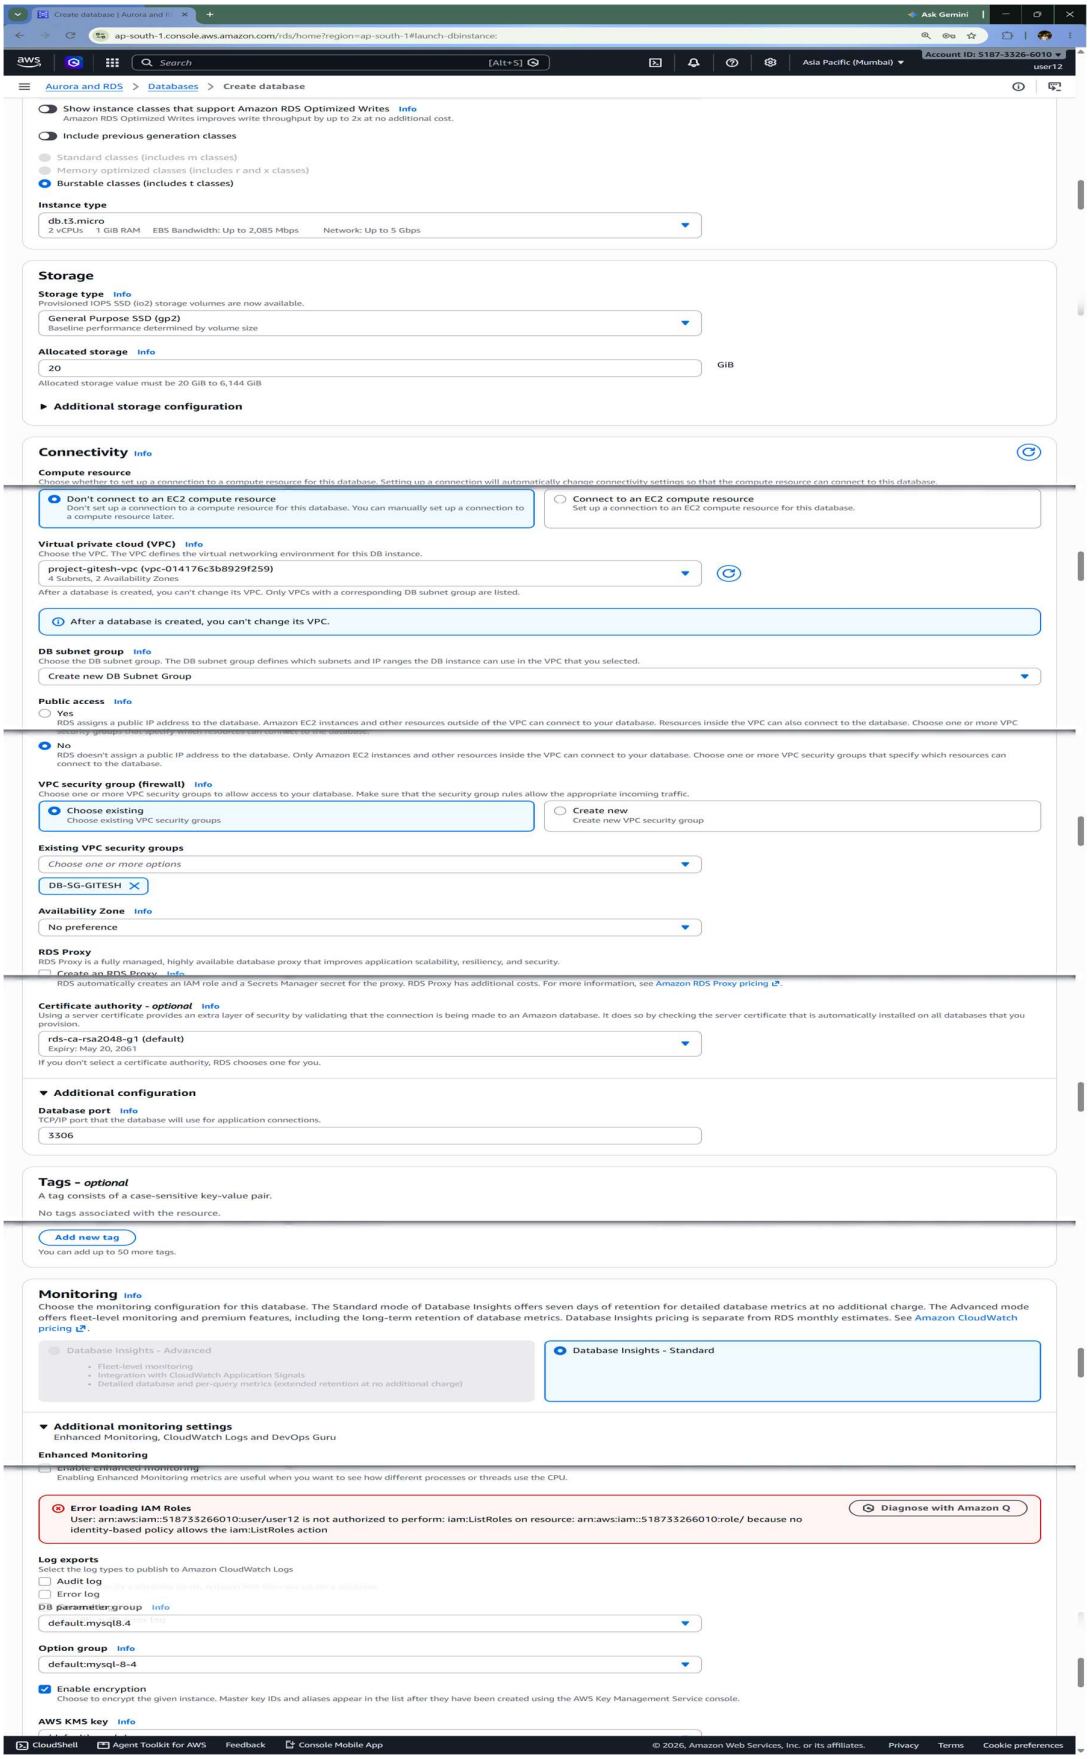
Create database | Aurora and R
Ask Gemini
ap-south-1.console.aws.amazon.com/rds/home?region=ap-south-1#launch-dbinstance:
aws
Search
[Alt+S]
Asia Pacific (Mumbai)
Account ID: 5187-3326-6010
user12
Aurora and RDS > Databases > Create database
Show instance classes that support Amazon RDS Optimized Writes Info
Amazon RDS Optimized Writes improves write throughput by up to 2x at no additional cost.
Include previous generation classes
Standard classes (includes m classes)
Memory optimized classes (includes r and x classes)
Burstable classes (includes t classes)
Instance type
db.t3.micro
2 vCPUs 1 GiB RAM EBS Bandwidth: Up to 2,085 Mbps Network: Up to 5 Gbps
Storage
Storage type Info
Provisioned IOPS SSD (io2) storage volumes are now available.
General Purpose SSD (gp2)
Baseline performance determined by volume size
Allocated storage Info
20
GiB
Allocated storage value must be 20 GiB to 6,144 GiB
Additional storage configuration
Connectivity Info
Compute resource
Choose whether to set up a connection to a compute resource for this database. Setting up a connection will automatically change connectivity settings so that the compute resource can connect to this database.
Don't connect to an EC2 compute resource
Don't set up a connection to a compute resource for this database. You can manually set up a connection to a compute resource later.
Connect to an EC2 compute resource
Set up a connection to an EC2 compute resource for this database.
Virtual private cloud (VPC) Info
Choose the VPC. The VPC defines the virtual networking environment for this DB instance.
project-gitesh-vpc (vpc-014176c3b8929f259)
4 Subnets, 2 Availability Zones
After a database is created, you can't change its VPC. Only VPCs with a corresponding DB subnet group are listed.
After a database is created, you can't change its VPC.
DB subnet group Info
Choose the DB subnet group. The DB subnet group defines which subnets and IP ranges the DB instance can use in the VPC that you selected.
Create new DB Subnet Group
Public access Info
Yes
RDS assigns a public IP address to the database. Amazon EC2 instances and other resources outside of the VPC can connect to your database. Resources inside the VPC can also connect to the database. Choose one or more VPC security groups that specify which resources can connect to the database.
No
RDS doesn't assign a public IP address to the database. Only Amazon EC2 instances and other resources inside the VPC can connect to your database. Choose one or more VPC security groups that specify which resources can connect to the database.
VPC security group (firewall) Info
Choose one or more VPC security groups to allow access to your database. Make sure that the security group rules allow the appropriate incoming traffic.
Choose existing
Choose existing VPC security groups
Create new
Create new VPC security group
Existing VPC security groups
Choose one or more options
DB-SG-GITESH
Availability Zone Info
No preference
RDS Proxy
RDS Proxy is a fully managed, highly available database proxy that improves application scalability, resiliency, and security.
Create an RDS Proxy Info
RDS automatically creates an IAM role and a Secrets Manager secret for the proxy. RDS Proxy has additional costs. For more information, see Amazon RDS Proxy pricing.
Certificate authority - optional Info
Using a server certificate provides an extra layer of security by validating that the connection is being made to an Amazon database. It does so by checking the server certificate that is automatically installed on all databases that you provision.
rds-ca-rsa2048-g1 (default)
Expiry: May 20, 2061
If you don't select a certificate authority, RDS chooses one for you.
Additional configuration
Database port Info
TCP/IP port that the database will use for application connections.
3306
Tags - optional
A tag consists of a case-sensitive key-value pair.
No tags associated with the resource.
Add new tag
You can add up to 50 more tags.
Monitoring Info
Choose the monitoring configuration for this database. The Standard mode of Database Insights offers seven days of retention for detailed database metrics at no additional charge. The Advanced mode offers fleet-level monitoring and premium features, including the long-term retention of database metrics. Database Insights pricing is separate from RDS monthly estimates. See Amazon CloudWatch pricing.
Database Insights - Advanced
Fleet-level monitoring
Integration with CloudWatch Application Signals
Detailed database and per-query metrics (extended retention at no additional charge)
Database Insights - Standard
Additional monitoring settings
Enhanced Monitoring, CloudWatch Logs and DevOps Guru
Enhanced Monitoring
Enable Enhanced monitoring
Enabling Enhanced Monitoring metrics are useful when you want to see how different processes or threads use the CPU.
Error loading IAM Roles
User: arn:aws:iam::518733266010:user/user12 is not authorized to perform: iam:ListRoles on resource: arn:aws:iam::518733266010:role/ because no identity-based policy allows the iam:ListRoles action
Diagnose with Amazon Q
Log exports
Select the log types to publish to Amazon CloudWatch Logs
Audit log
Error log
DB parameter group Info
default.mysql8.4
Option group Info
default:mysql-8-4
Enable encryption
Choose to encrypt the given instance. Master key IDs and aliases appear in the list after they have been created using the AWS Key Management Service console.
AWS KMS key Info
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

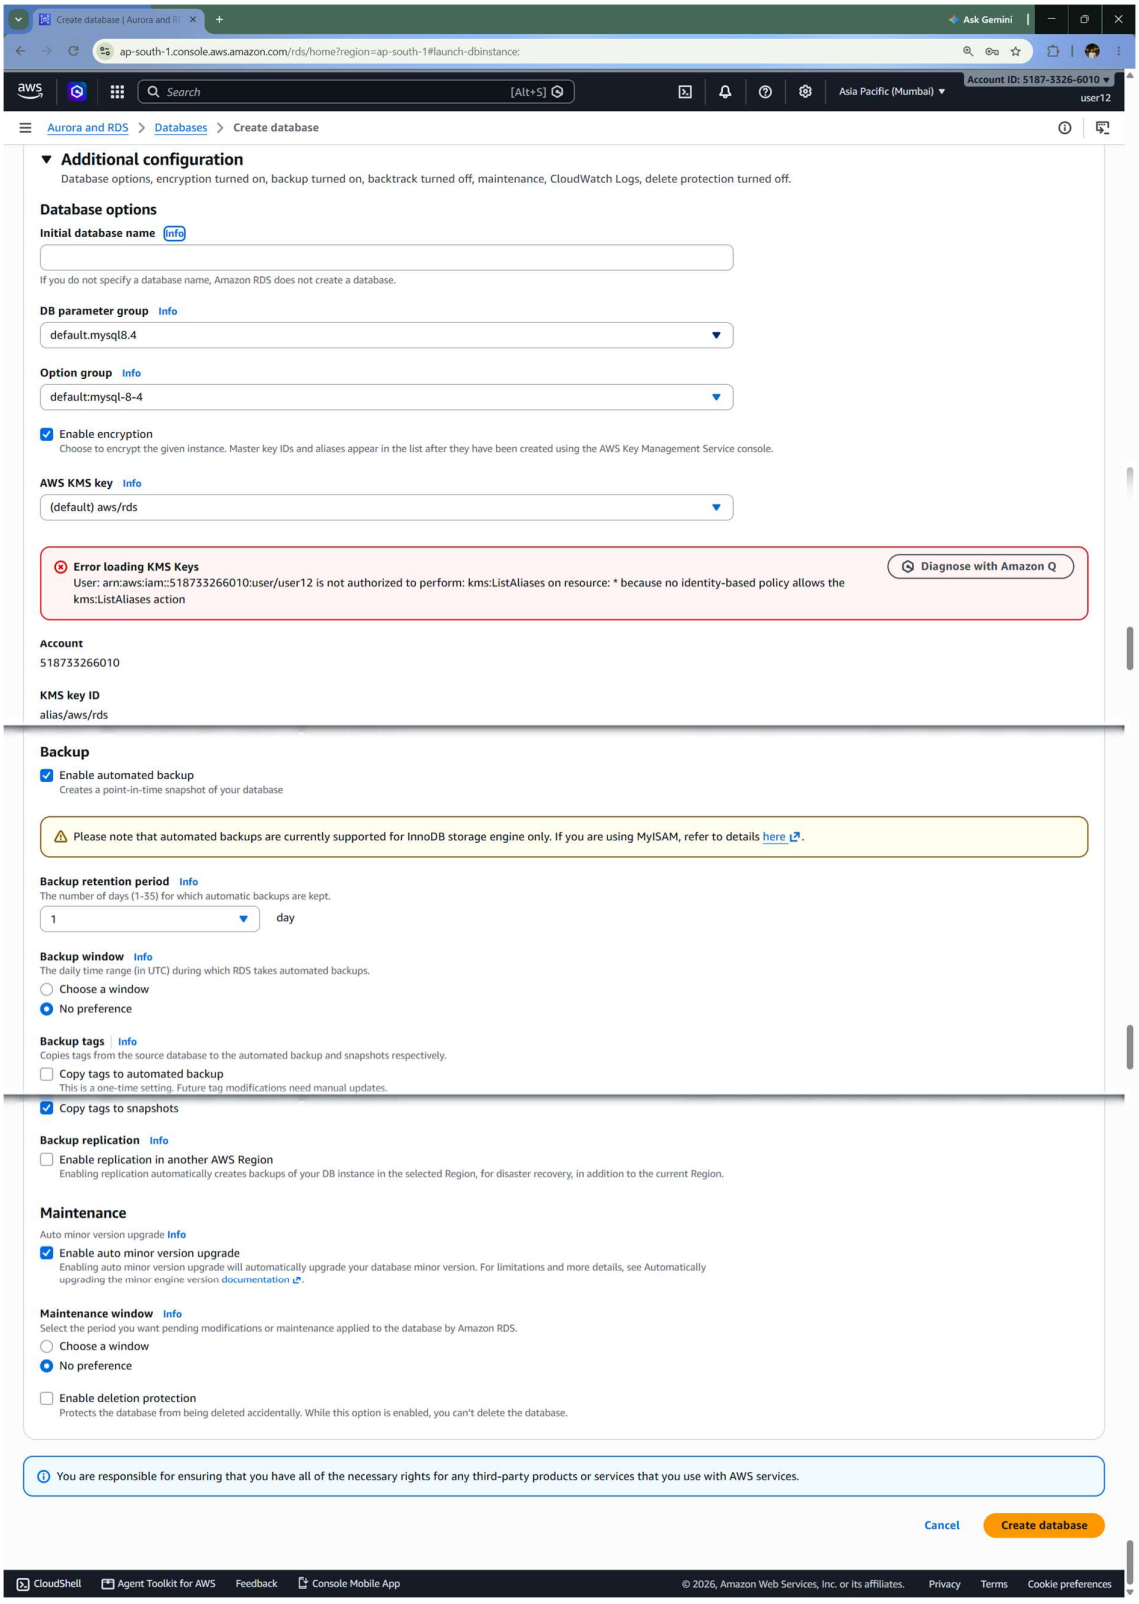

Create database | Aurora and R
Ask Gemini
ap-south-1.console.aws.amazon.com/rds/home?region=ap-south-1#launch-dbinstance:
Search
[Alt+S]
Asia Pacific (Mumbai)
Account ID: 5187-3326-6010
user12
Aurora and RDS
Databases
Create database
Additional configuration
Database options, encryption turned on, backup turned on, backtrack turned off, maintenance, CloudWatch Logs, delete protection turned off.
Database options
Initial database name Info
If you do not specify a database name, Amazon RDS does not create a database.
DB parameter group Info
default.mysql8.4
Option group Info
default:mysql-8-4
Enable encryption
Choose to encrypt the given instance. Master key IDs and aliases appear in the list after they have been created using the AWS Key Management Service console.
AWS KMS key Info
(default) aws/rds
Error loading KMS Keys
User: arn:aws:iam::518733266010:user/user12 is not authorized to perform: kms:ListAliases on resource: * because no identity-based policy allows the kms:ListAliases action
Diagnose with Amazon Q
Account
518733266010
KMS key ID
alias/aws/rds
Backup
Enable automated backup
Creates a point-in-time snapshot of your database
Please note that automated backups are currently supported for InnoDB storage engine only. If you are using MyISAM, refer to details here.
Backup retention period Info
The number of days (1-35) for which automatic backups are kept.
1
day
Backup window Info
The daily time range (in UTC) during which RDS takes automated backups.
Choose a window
No preference
Backup tags Info
Copies tags from the source database to the automated backup and snapshots respectively.
Copy tags to automated backup
This is a one-time setting. Future tag modifications need manual updates.
Copy tags to snapshots
Backup replication Info
Enable replication in another AWS Region
Enabling replication automatically creates backups of your DB instance in the selected Region, for disaster recovery, in addition to the current Region.
Maintenance
Auto minor version upgrade Info
Enable auto minor version upgrade
Enabling auto minor version upgrade will automatically upgrade your database minor version. For limitations and more details, see Automatically upgrading the minor engine version documentation.
Maintenance window Info
Select the period you want pending modifications or maintenance applied to the database by Amazon RDS.
Choose a window
No preference
Enable deletion protection
Protects the database from being deleted accidentally. While this option is enabled, you can't delete the database.
You are responsible for ensuring that you have all of the necessary rights for any third-party products or services that you use with AWS services.
Cancel
Create database
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

Task 5: Configure Instance to connect to MySQL Database

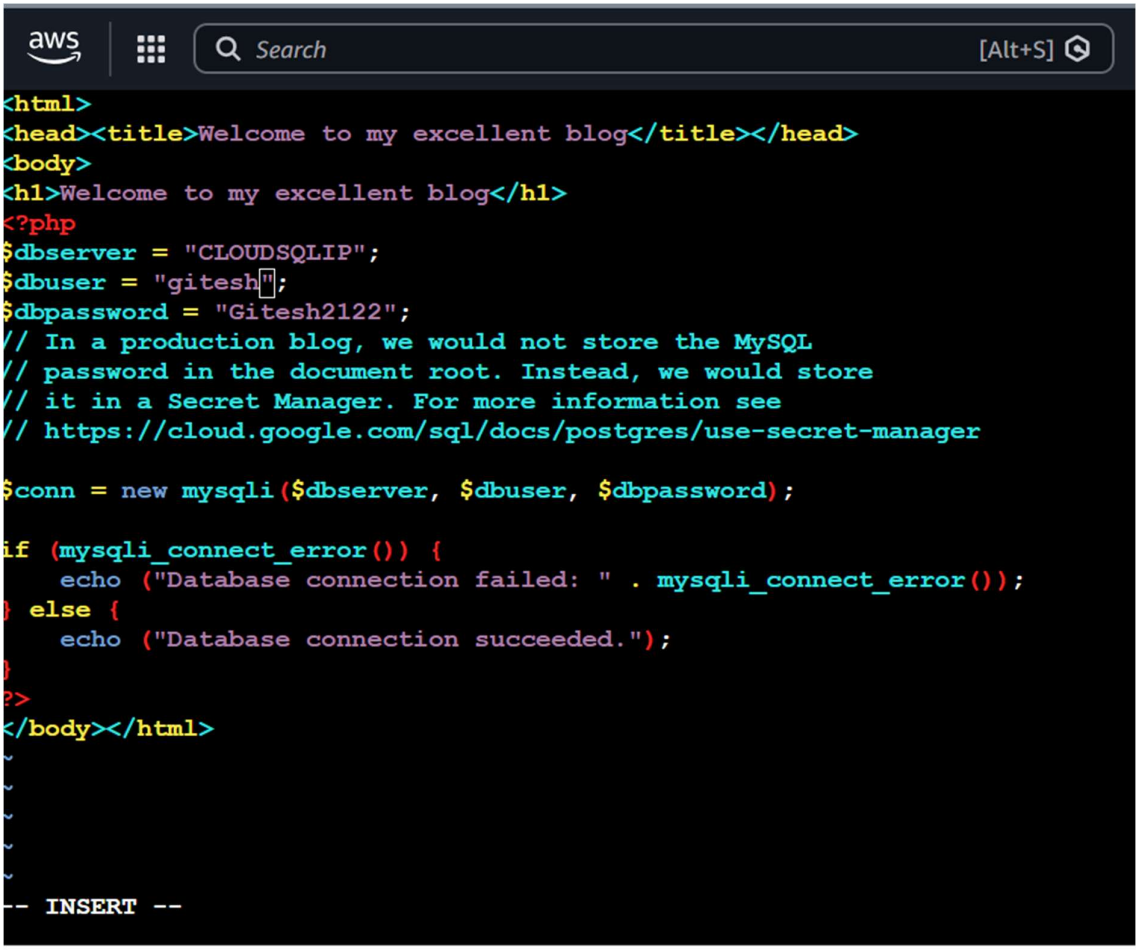

i-0ed0824e85fe07383 (TEST-WEB-SERVER-GITESH)

PublicIPs: 3.110.46.1 PrivateIPs: 10.0.30.158





Welcome to my excellent blog

Database connection succeeded.

TASK 6


Create S3 bucket | S3 | ap-south-1
Ask Gemini
ap-south-1.console.aws.amazon.com/s3/bucket/create?region=ap-south-1
Search
[Alt+S]
Asia Pacific (Mumbai)
Account ID: 5187-3326-6010
user12
Amazon S3 > Buckets > Create bucket
Create bucket Info
Buckets are containers for data stored in S3.
General configuration
AWS Region
Asia Pacific (Mumbai) ap-south-1
Bucket type Info
General purpose
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.
Directory
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.
Bucket namespace
Choose the namespace where you want to create your bucket. Learn more
Global namespace
By default, S3 creates general purpose buckets in the global namespace.
Account Regional namespace (recommended)
General purpose buckets created in your account Regional namespace are unique to your account. These buckets can never be created by another AWS account.
Bucket name Info
labdemotask-gitesh
Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). Learn more
Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.
Choose bucket
Format: s3://bucket/prefix
Object Ownership Info
Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.
Object Ownership
ACLs disabled (recommended)
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.
ACLs enabled
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.
We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.
Object Ownership
Bucket owner preferred
If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.
Object writer
The object writer remains the object owner.
If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. Learn more
Block Public Access settings for this bucket
Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. Learn more
Block all public access
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.
Block public access to buckets and objects granted through new access control lists (ACLs)
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
Block public access to buckets and objects granted through any access control lists (ACLs)
S3 will ignore all ACLs that grant public access to buckets and objects.
Block public access to buckets and objects granted through new public bucket or access point policies
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
Block public and cross-account access to buckets and objects through any public bucket or access point policies
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.
Turning off block all public access might result in this bucket and the objects within becoming public
AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.
I acknowledge that the current settings might result in this bucket and the objects within becoming public.
Bucket Versioning
Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. Learn more
Bucket Versioning
Disable
Enable
Tags - optional
You can use bucket tags to analyze, manage and specify permissions for a bucket. Learn more
You can use s3:ListTagsForResource, s3:TagResource, and s3:UntagResource APIs to manage tags on S3 general purpose buckets for access control in addition to cost allocation and resource organization. To ensure a seamless transition, please provide permissions to s3:ListTagsForResource, s3:TagResource, and s3:UntagResource actions. Learn more
No tags associated with this bucket.
Add new tag
You can add up to 50 tags.
Default encryption Info
Server-side encryption is automatically applied to new objects stored in this bucket.
Encryption type Info
Secure your objects with two separate layers of encryption. For details on pricing, see DSSE-KMS pricing on the Storage tab of the Amazon S3 pricing page.
Server-side encryption with Amazon S3 managed keys (SSE-S3)
Server-side encryption with AWS Key Management Service keys (SSE-KMS)
Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)
Bucket Key
Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. Learn more
Disable
Enable
Advanced settings
After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.
Cancel
Create bucket
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

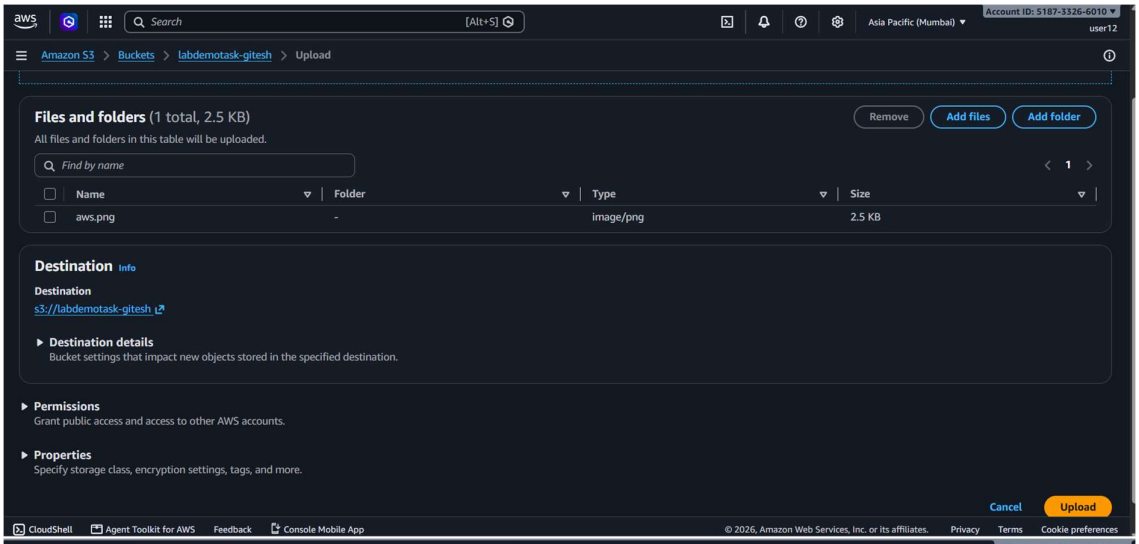
Search
[Alt+S]
Asia Pacific (Mumbai)
Account ID: 5187-3326-6010
user12
Amazon S3 > Buckets > labdemotask-gitesh > Upload
Files and folders (1 total, 2.5 KB)
All files and folders in this table will be uploaded.
Remove
Add files
Add folder
Find by name
Name
Folder
Type
Size
aws.png
-
image/png
2.5 KB
Destination Info
Destination
s3://labdemotask-gitesh
Destination details
Bucket settings that impact new objects stored in the specified destination.
Permissions
Grant public access and access to other AWS accounts.
Properties
Specify storage class, encryption settings, tags, and more.
Cancel
Upload
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

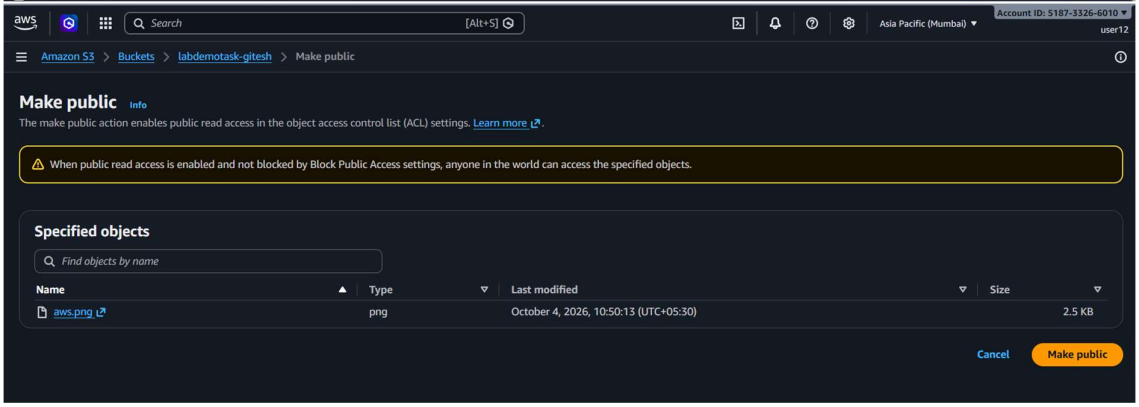
Search
[Alt+S]
Asia Pacific (Mumbai)
Account ID: 5187-3326-6010
user12
Amazon S3 > Buckets > labdemotask-gitesh > Make public
Make public Info
The make public action enables public read access in the object access control list (ACL) settings. Learn more
When public read access is enabled and not blocked by Block Public Access settings, anyone in the world can access the specified objects.
Specified objects
Find objects by name
Name
Type
Last modified
Size
aws.png
png
October 4, 2026, 10:50:13 (UTC+05:30)
2.5 KB
Cancel
Make public

```
<html>
<head><title>Welcome to my excellent blog</title></head>
<body>
<h1>Welcome to my excellent blog</h1>
<img src="https://labdemotask-gitesh.s3.ap-south-1.amazonaws.com/aws.png">
<?php
$dbserver = "database-gitesh.c7ouw8e0quk5.ap-south-1.rds.amazonaws.com";
$dbuser = "gitesh";
$dbpassword = "Gitesh2122";
// In a production blog, we would not store the MySQL
// password in the document root. Instead, we would store
// it in a Secret Manager. For more information see
// https://cloud.google.com/sql/docs/postgres/use-secret-manager

$conn = new mysqli($dbserver, $dbuser, $dbpassword);

if (mysqli_connect_error()) {
    echo ("Database connection failed: " . mysqli_connect_error());
} else {
    echo ("Database connection succeeded.");
}
?>
</body></html>
```


Not secure 13.233.19.99

Welcome to my excellent blog





Database connection succeeded.

Task 7: Create AMI image of Instance.

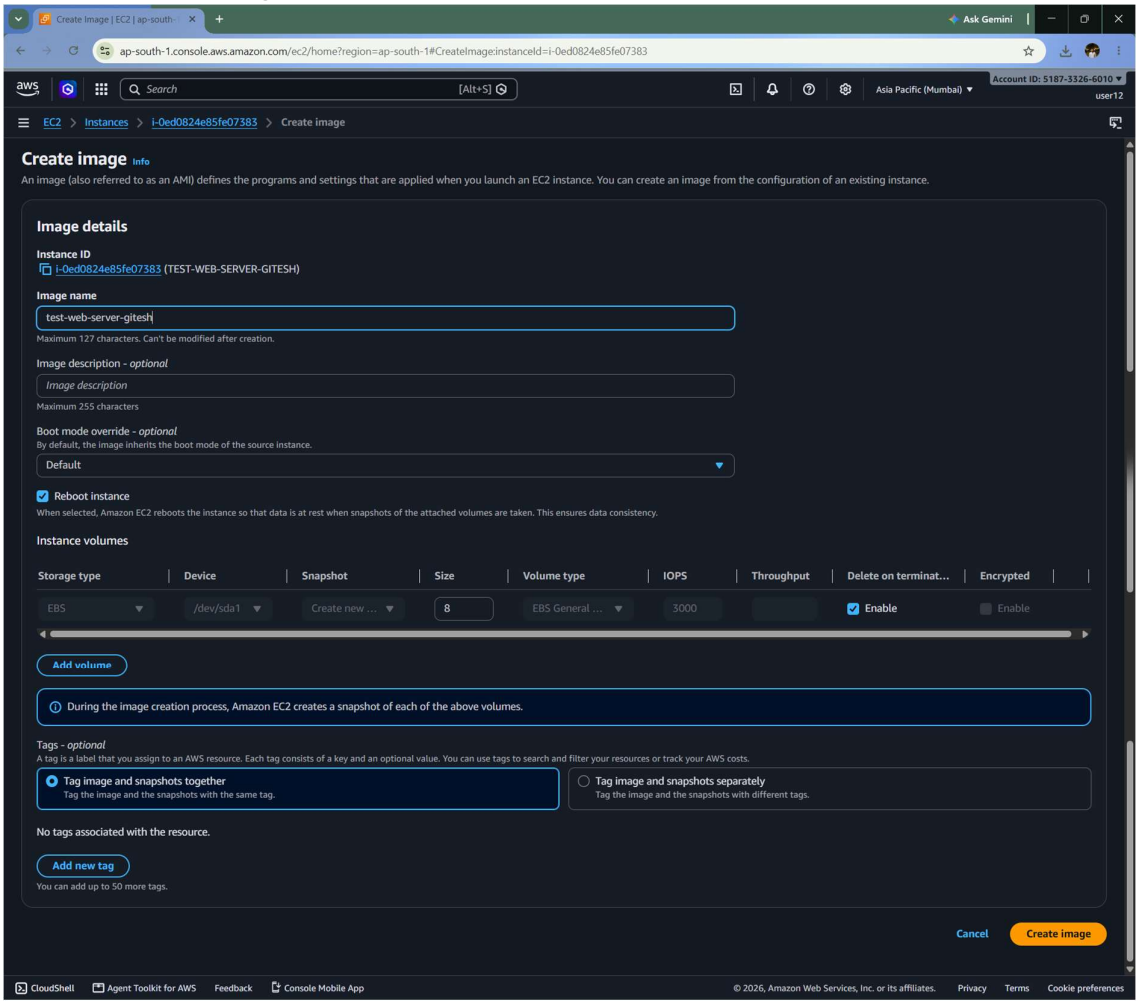



Task 8: Create security group for ALB and modify security group of instance.

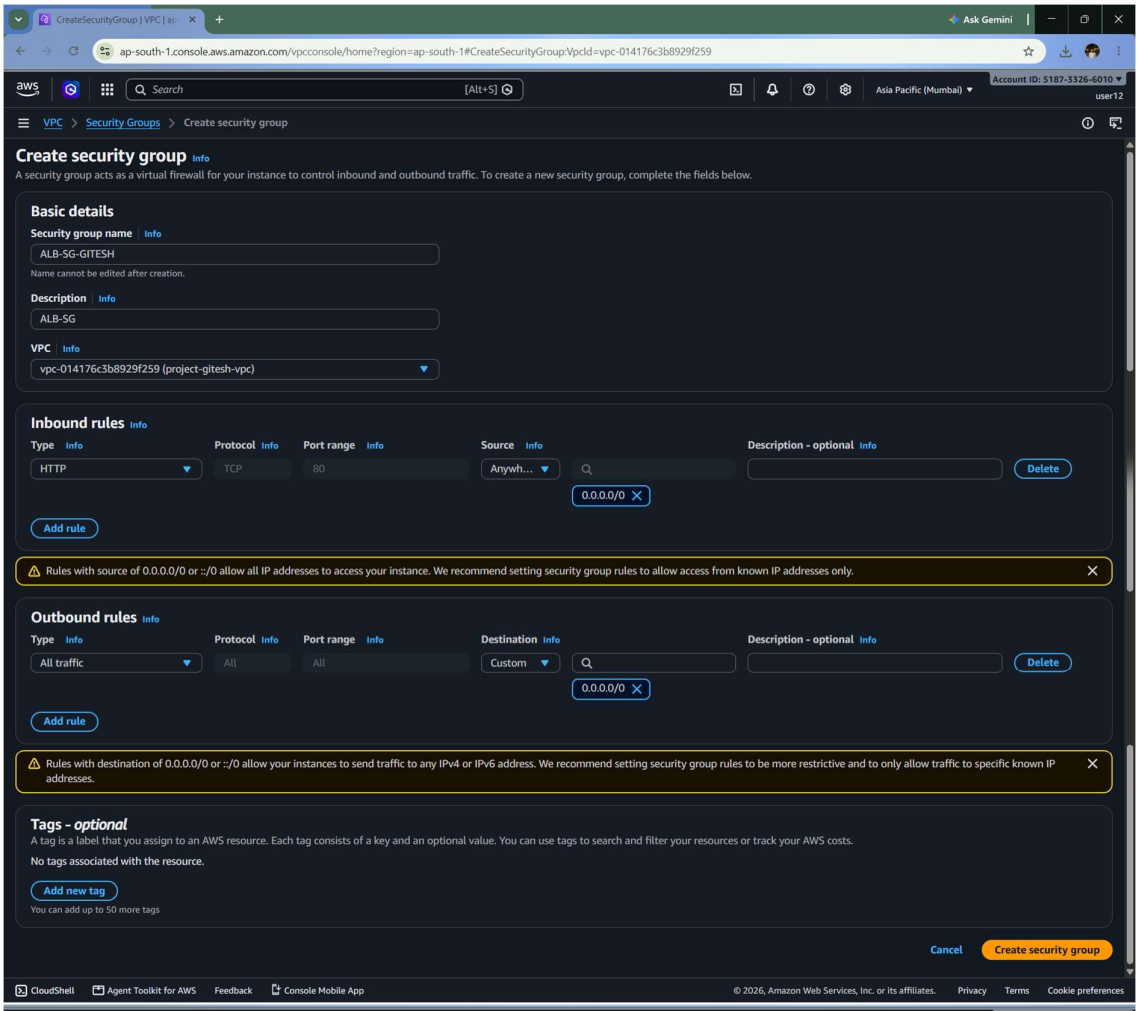

CreateSecurityGroup | VPC | ap
Ask Gemini
ap-south-1.console.aws.amazon.com/vpcconsole/home?region=ap-south-1#CreateSecurityGroup:VpcId=vpc-014176c3b8929f259
Search
[Alt+S]
Asia Pacific (Mumbai)
Account ID: 5187-3326-6010
user12
VPC > Security Groups > Create security group
Create security group Info
A security group acts as a virtual firewall for your instance to control inbound and outbound traffic. To create a new security group, complete the fields below.
Basic details
Security group name Info
ALB-SG-GITESH
Name cannot be edited after creation.
Description Info
ALB-SG
VPC Info
vpc-014176c3b8929f259 (project-gitesh-vpc)
Inbound rules Info
Type Info
Protocol Info
Port range Info
Source Info
Description - optional Info
HTTP
TCP
80
Anywh...
0.0.0.0/0
Delete
Add rule
Rules with source of 0.0.0.0/0 or ::/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.
Outbound rules Info
Type Info
Protocol Info
Port range Info
Destination Info
Description - optional Info
All traffic
All
All
Custom
0.0.0.0/0
Delete
Add rule
Rules with destination of 0.0.0.0/0 or ::/0 allow your instances to send traffic to any IPv4 or IPv6 address. We recommend setting security group rules to be more restrictive and to only allow traffic to specific known IP addresses.
Tags - optional
A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.
No tags associated with the resource.
Add new tag
You can add up to 50 more tags
Cancel
Create security group
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

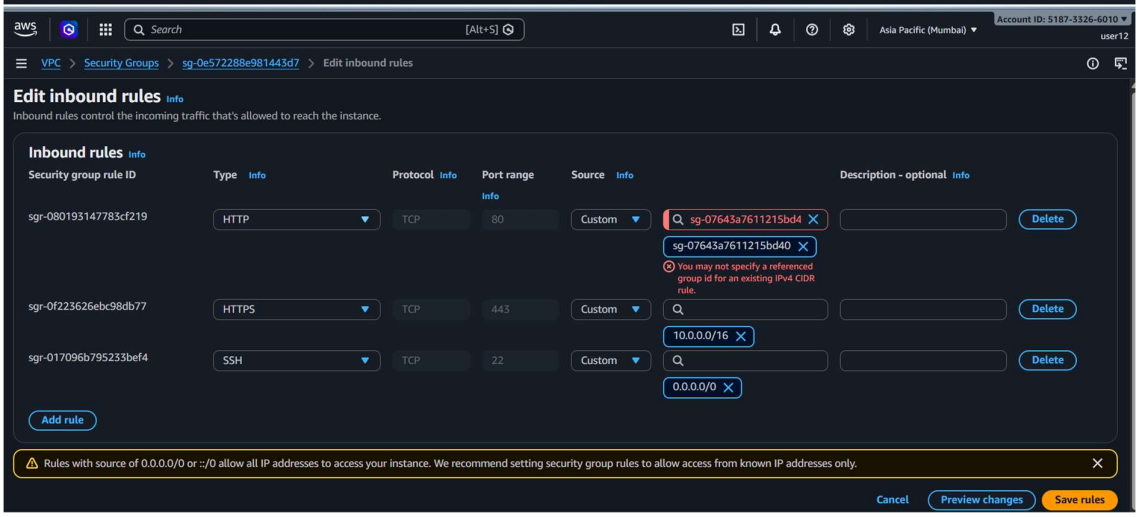

Search
[Alt+S]
Asia Pacific (Mumbai)
Account ID: 5187-3326-6010
user12
VPC > Security Groups > sg-0e572288e981443d7 > Edit inbound rules
Edit inbound rules Info
Inbound rules control the incoming traffic that's allowed to reach the instance.
Inbound rules Info
Security group rule ID
Type Info
Protocol Info
Port range Info
Source Info
Description - optional Info
sgr-080193147783cf219
HTTP
TCP
80
Custom
sg-07643a7611215bd4
sg-07643a7611215bd40
You may not specify a referenced group id for an existing IPv4 CIDR rule.
Delete
sgr-0f223626ebc98db77
HTTPS
TCP
443
Custom
10.0.0.0/16
Delete
sgr-017096b795233bef4
SSH
TCP
22
Custom
0.0.0.0/0
Delete
Add rule
Rules with source of 0.0.0.0/0 or ::/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.
Cancel
Preview changes
Save rules


Task 9: Implement high availability and scalability to the application.

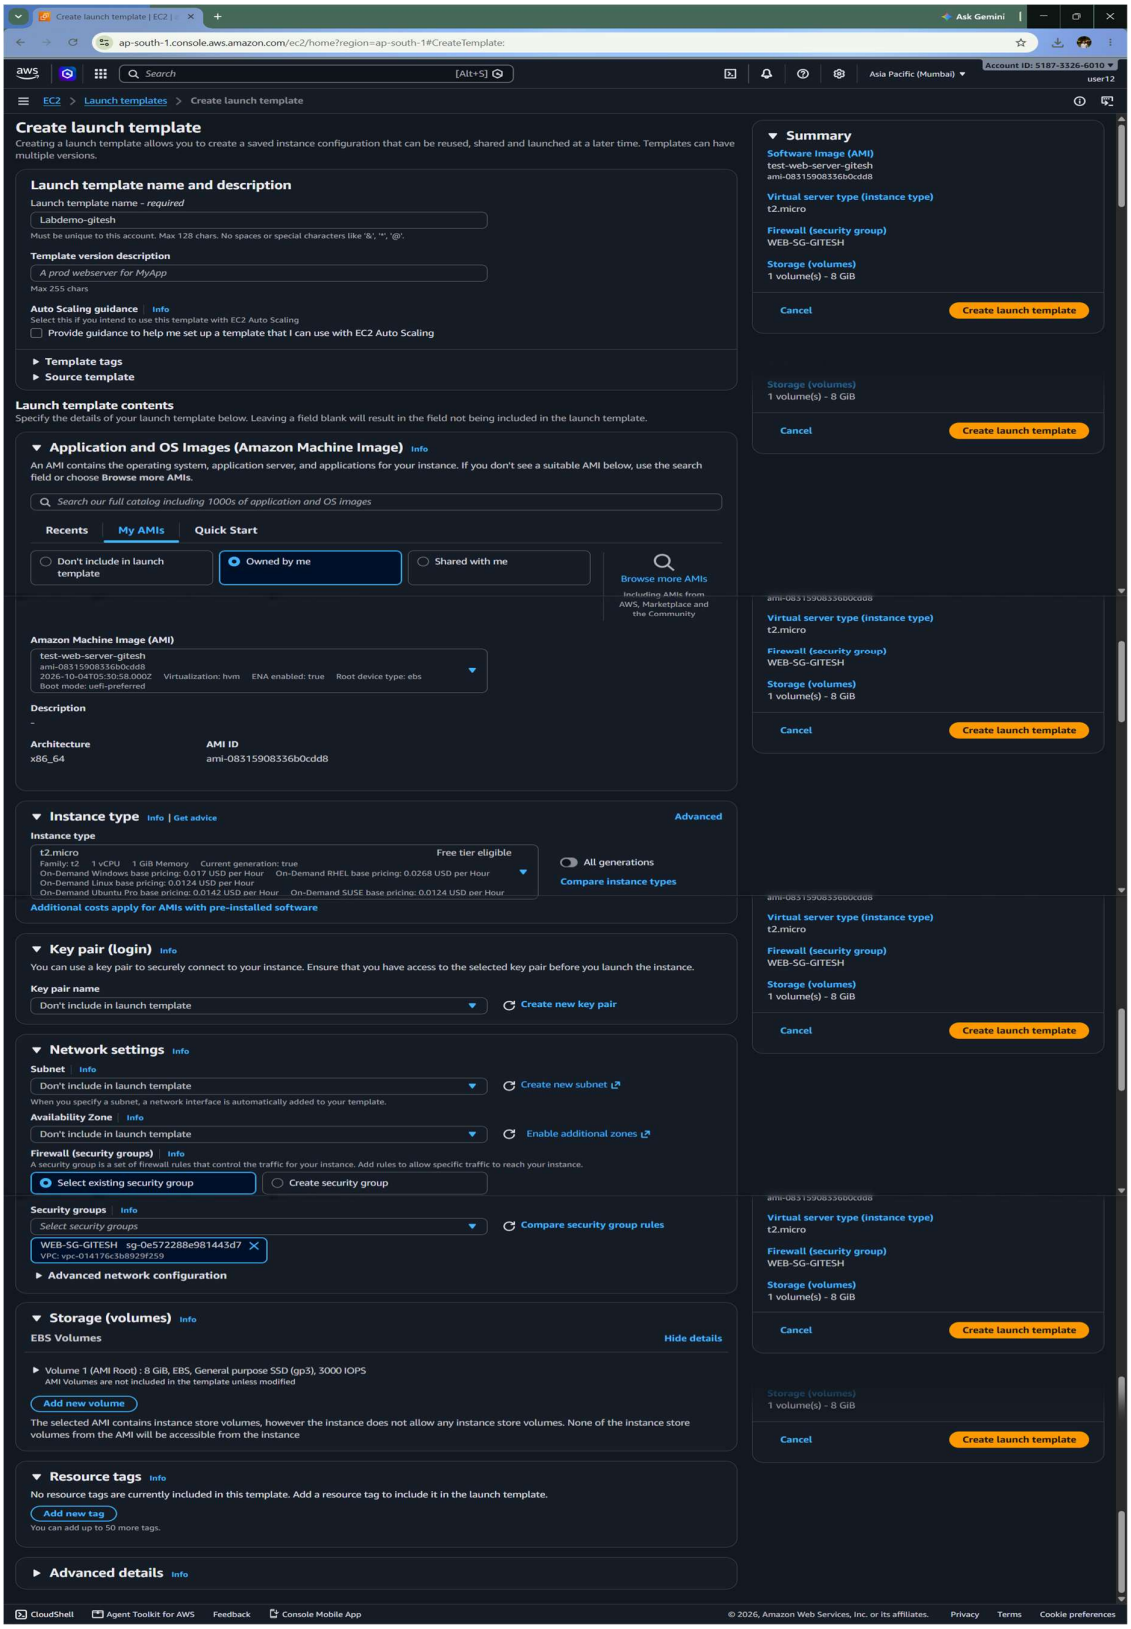


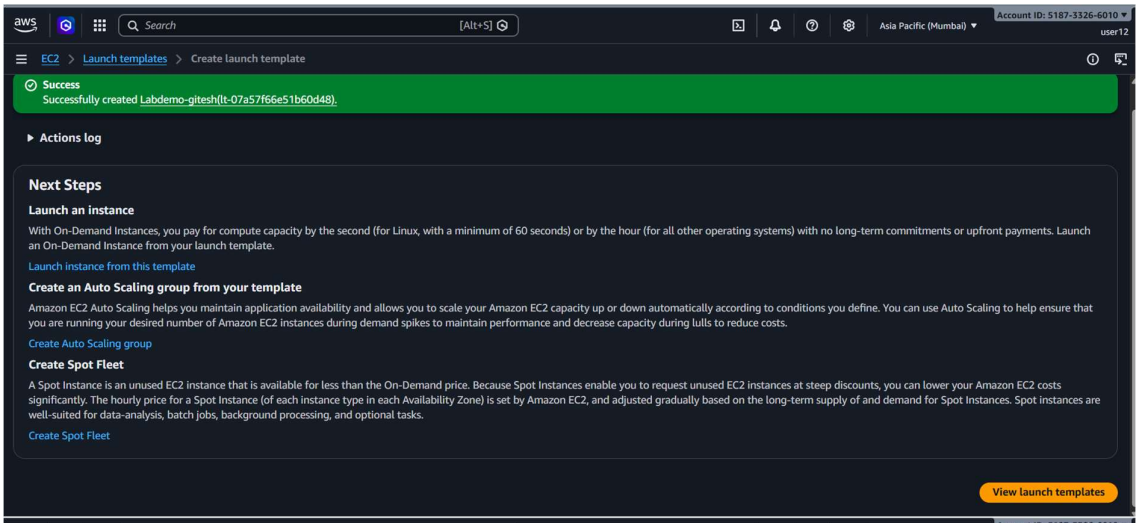

Search
[Alt+S]
Asia Pacific (Mumbai)
Account ID: 5187-3326-6010
user12
EC2 > Launch templates > Create launch template
Success
Successfully created Labdemo-gitesh(lt-07a57f66e51b60d48).
Actions log
Next Steps
Launch an instance
With On-Demand Instances, you pay for compute capacity by the second (for Linux, with a minimum of 60 seconds) or by the hour (for all other operating systems) with no long-term commitments or upfront payments. Launch an On-Demand Instance from your launch template.
Launch instance from this template
Create an Auto Scaling group from your template
Amazon EC2 Auto Scaling helps you maintain application availability and allows you to scale your Amazon EC2 capacity up or down automatically according to conditions you define. You can use Auto Scaling to help ensure that you are running your desired number of Amazon EC2 instances during demand spikes to maintain performance and decrease capacity during lulls to reduce costs.
Create Auto Scaling group
Create Spot Fleet
A Spot Instance is an unused EC2 instance that is available for less than the On-Demand price. Because Spot Instances enable you to request unused EC2 instances at steep discounts, you can lower your Amazon EC2 costs significantly. The hourly price for a Spot Instance (of each instance type in each Availability Zone) is set by Amazon EC2, and adjusted gradually based on the long-term supply of and demand for Spot Instances. Spot instances are well-suited for data-analysis, batch jobs, background processing, and optional tasks.
Create Spot Fleet
View launch templates

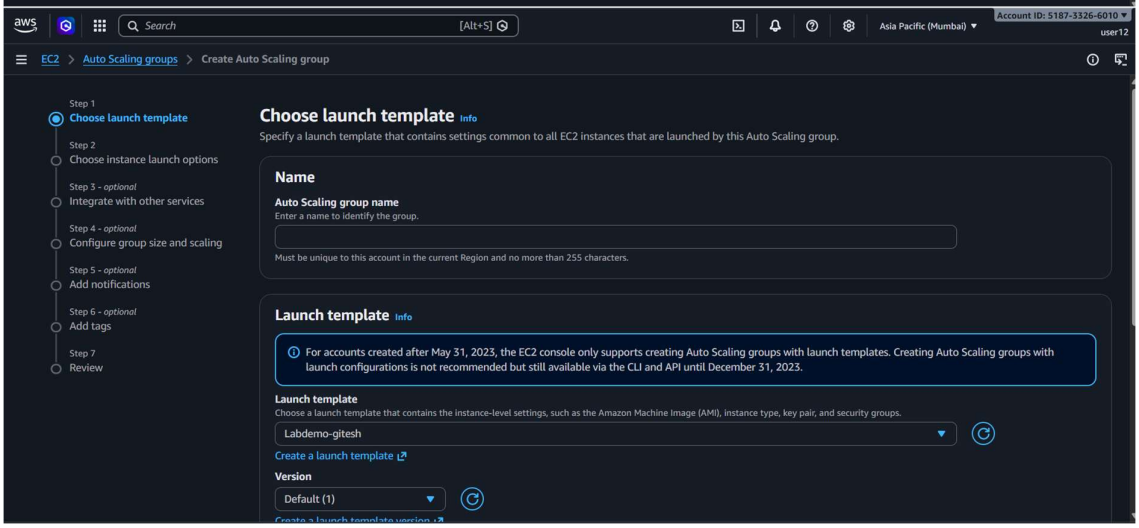

Search
[Alt+S]
Asia Pacific (Mumbai)
Account ID: 5187-3326-6010
user12
EC2 > Auto Scaling groups > Create Auto Scaling group
Step 1
Choose launch template
Step 2
Choose instance launch options
Step 3 - optional
Integrate with other services
Step 4 - optional
Configure group size and scaling
Step 5 - optional
Add notifications
Step 6 - optional
Add tags
Step 7
Review
Choose launch template Info
Specify a launch template that contains settings common to all EC2 instances that are launched by this Auto Scaling group.
Name
Auto Scaling group name
Enter a name to identify the group.
Must be unique to this account in the current Region and no more than 255 characters.
Launch template Info
For accounts created after May 31, 2023, the EC2 console only supports creating Auto Scaling groups with launch configurations is not recommended but still available via the CLI and API until December 31, 2023.
Launch template
Choose a launch template that contains the instance-level settings, such as the Amazon Machine Image (AMI), instance type, key pair, and security groups.
Labdemo-gitesh
Create a launch template
Version
Default (1)

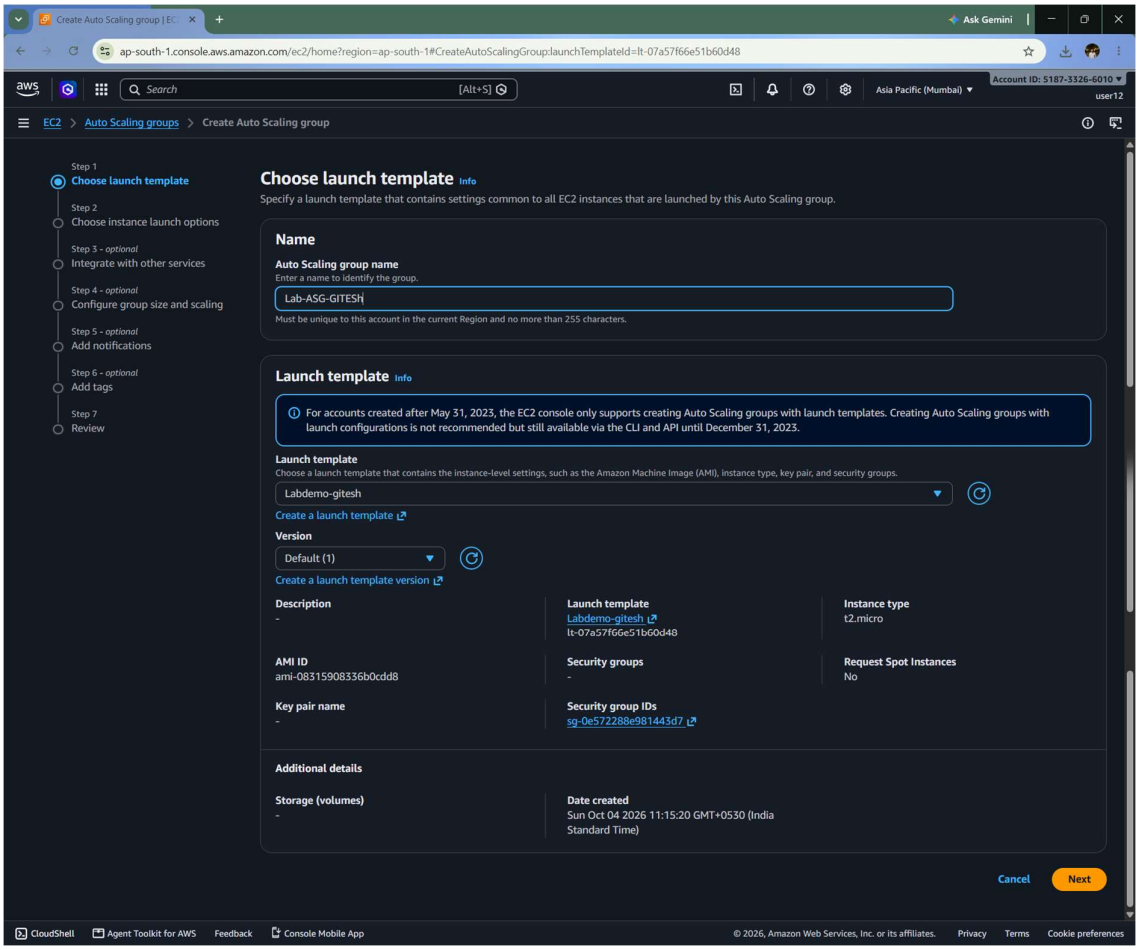

Create Auto Scaling group | EC
Ask Gemini
ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#CreateAutoScalingGroup:launchTemplateId=lt-07a57f66e51b60d48
Search
[Alt+S]
Asia Pacific (Mumbai)
Account ID: 5187-3326-6010
user12
EC2 > Auto Scaling groups > Create Auto Scaling group
Step 1
Choose launch template
Step 2
Choose instance launch options
Step 3 - optional
Integrate with other services
Step 4 - optional
Configure group size and scaling
Step 5 - optional
Add notifications
Step 6 - optional
Add tags
Step 7
Review
Choose launch template Info
Specify a launch template that contains settings common to all EC2 instances that are launched by this Auto Scaling group.
Name
Auto Scaling group name
Enter a name to identify the group.
Lab-ASG-GITESH
Must be unique to this account in the current Region and no more than 255 characters.
Launch template Info
For accounts created after May 31, 2023, the EC2 console only supports creating Auto Scaling groups with launch configurations is not recommended but still available via the CLI and API until December 31, 2023.
Launch template
Choose a launch template that contains the instance-level settings, such as the Amazon Machine Image (AMI), instance type, key pair, and security groups.
Labdemo-gitesh
Create a launch template
Version
Default (1)
Create a launch template version
Description
-
Launch template
Labdemo-gitesh
lt-07a57f66e51b60d48
Instance type
t2.micro
AMI ID
ami-08315908336b0cdd8
Security groups
-
Request Spot Instances
No
Key pair name
-
Security group IDs
sg-0e572288e981443d7
Additional details
Storage (volumes)
-
Date created
Sun Oct 04 2026 11:15:20 GMT+0530 (India Standard Time)
Cancel
Next
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

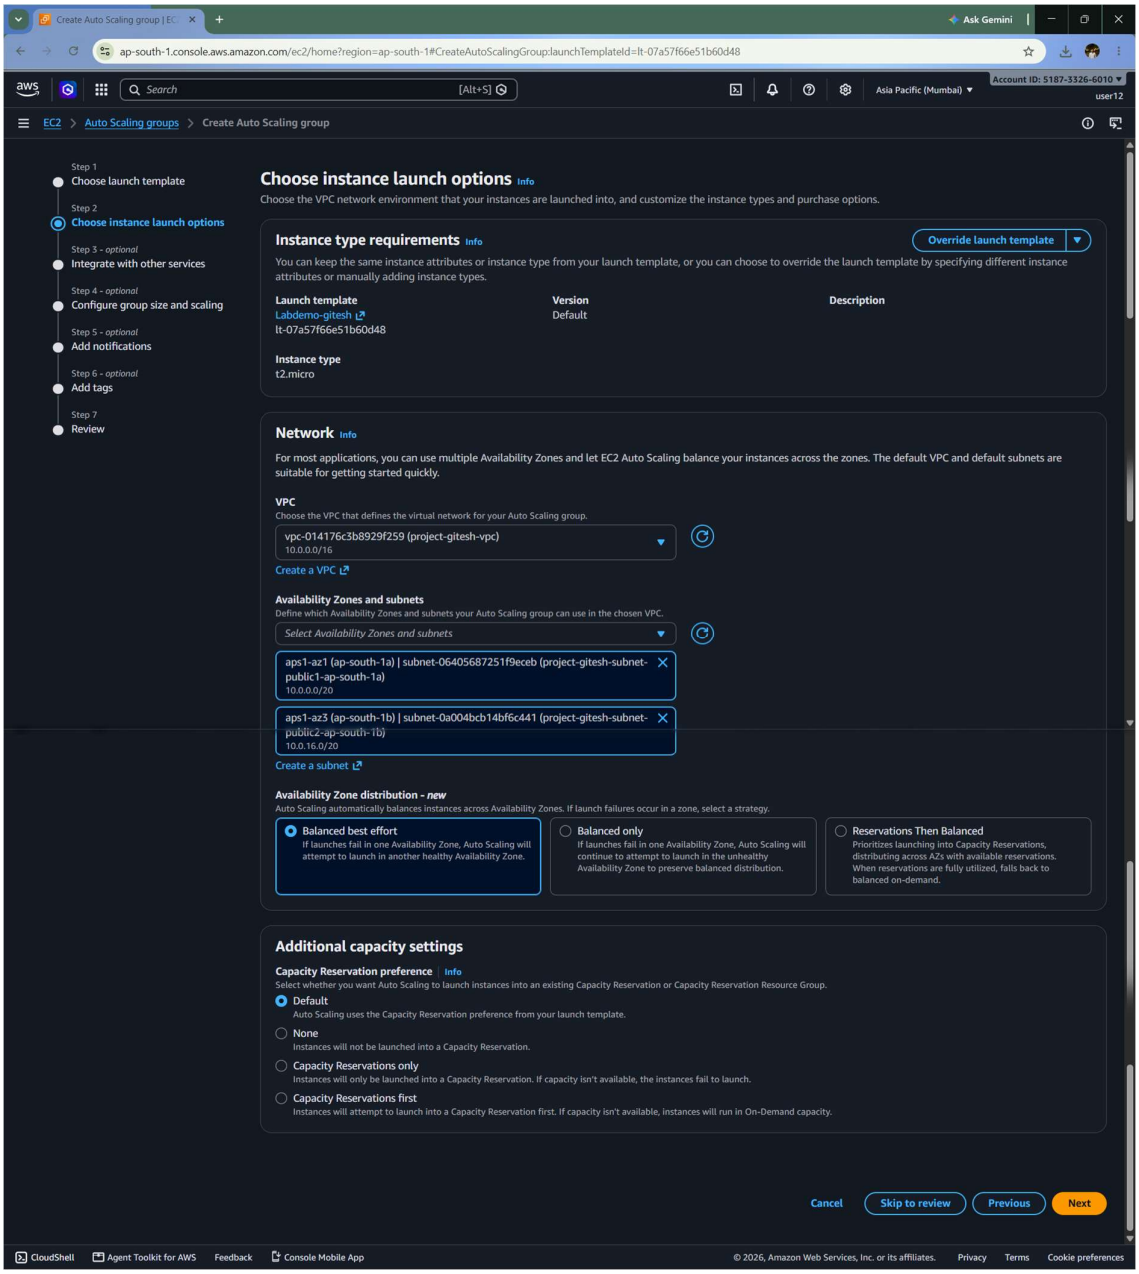

Create Auto Scaling group | EC
Ask Gemini
ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#CreateAutoScalingGroup:launchTemplateId=lt-07a57f66e51b60d48
Search
[Alt+S]
Asia Pacific (Mumbai)
Account ID: 5187-3326-6010
user12
EC2 > Auto Scaling groups > Create Auto Scaling group
Step 1
Choose launch template
Step 2
Choose instance launch options
Step 3 - optional
Integrate with other services
Step 4 - optional
Configure group size and scaling
Step 5 - optional
Add notifications
Step 6 - optional
Add tags
Step 7
Review
Choose instance launch options Info
Choose the VPC network environment that your instances are launched into, and customize the instance types and purchase options.
Instance type requirements Info
Override launch template
You can keep the same instance attributes or instance type from your launch template, or you can choose to override the launch template by specifying different instance attributes or manually adding instance types.
Launch template
Labdemo-gitesh
lt-07a57f66e51b60d48
Version
Default
Description
Instance type
t2.micro
Network Info
For most applications, you can use multiple Availability Zones and let EC2 Auto Scaling balance your instances across the zones. The default VPC and default subnets are suitable for getting started quickly.
VPC
Choose the VPC that defines the virtual network for your Auto Scaling group.
vpc-014176c3b8929f259 (project-gitesh-vpc)
10.0.0.0/16
Create a VPC
Availability Zones and subnets
Define which Availability Zones and subnets your Auto Scaling group can use in the chosen VPC.
Select Availability Zones and subnets
aps1-az1 (ap-south-1a) | subnet-06405687251f9eceb (project-gitesh-subnet-public1-ap-south-1a)
10.0.0.0/20
aps1-az3 (ap-south-1b) | subnet-0a004bcb14bf6c441 (project-gitesh-subnet-public2-ap-south-1b)
10.0.16.0/20
Create a subnet
Availability Zone distribution - new
Auto Scaling automatically balances instances across Availability Zones. If launch failures occur in a zone, select a strategy.
Balanced best effort
If launches fail in one Availability Zone, Auto Scaling will attempt to launch in another healthy Availability Zone.
Balanced only
If launches fail in one Availability Zone, Auto Scaling will continue to attempt to launch in the unhealthy Availability Zone to preserve balanced distribution.
Reservations Then Balanced
Prioritizes launching into Capacity Reservations, distributing across AZs with available reservations. When reservations are fully utilized, falls back to balanced on-demand.
Additional capacity settings
Capacity Reservation preference Info
Select whether you want Auto Scaling to launch instances into an existing Capacity Reservation or Capacity Reservation Resource Group.
Default
Auto Scaling uses the Capacity Reservation preference from your launch template.
None
Instances will not be launched into a Capacity Reservation.
Capacity Reservations only
Instances will only be launched into a Capacity Reservation. If capacity isn't available, the instances fail to launch.
Capacity Reservations first
Instances will attempt to launch into a Capacity Reservation first. If capacity isn't available, instances will run in On-Demand capacity.
Cancel
Skip to review
Previous
Next
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

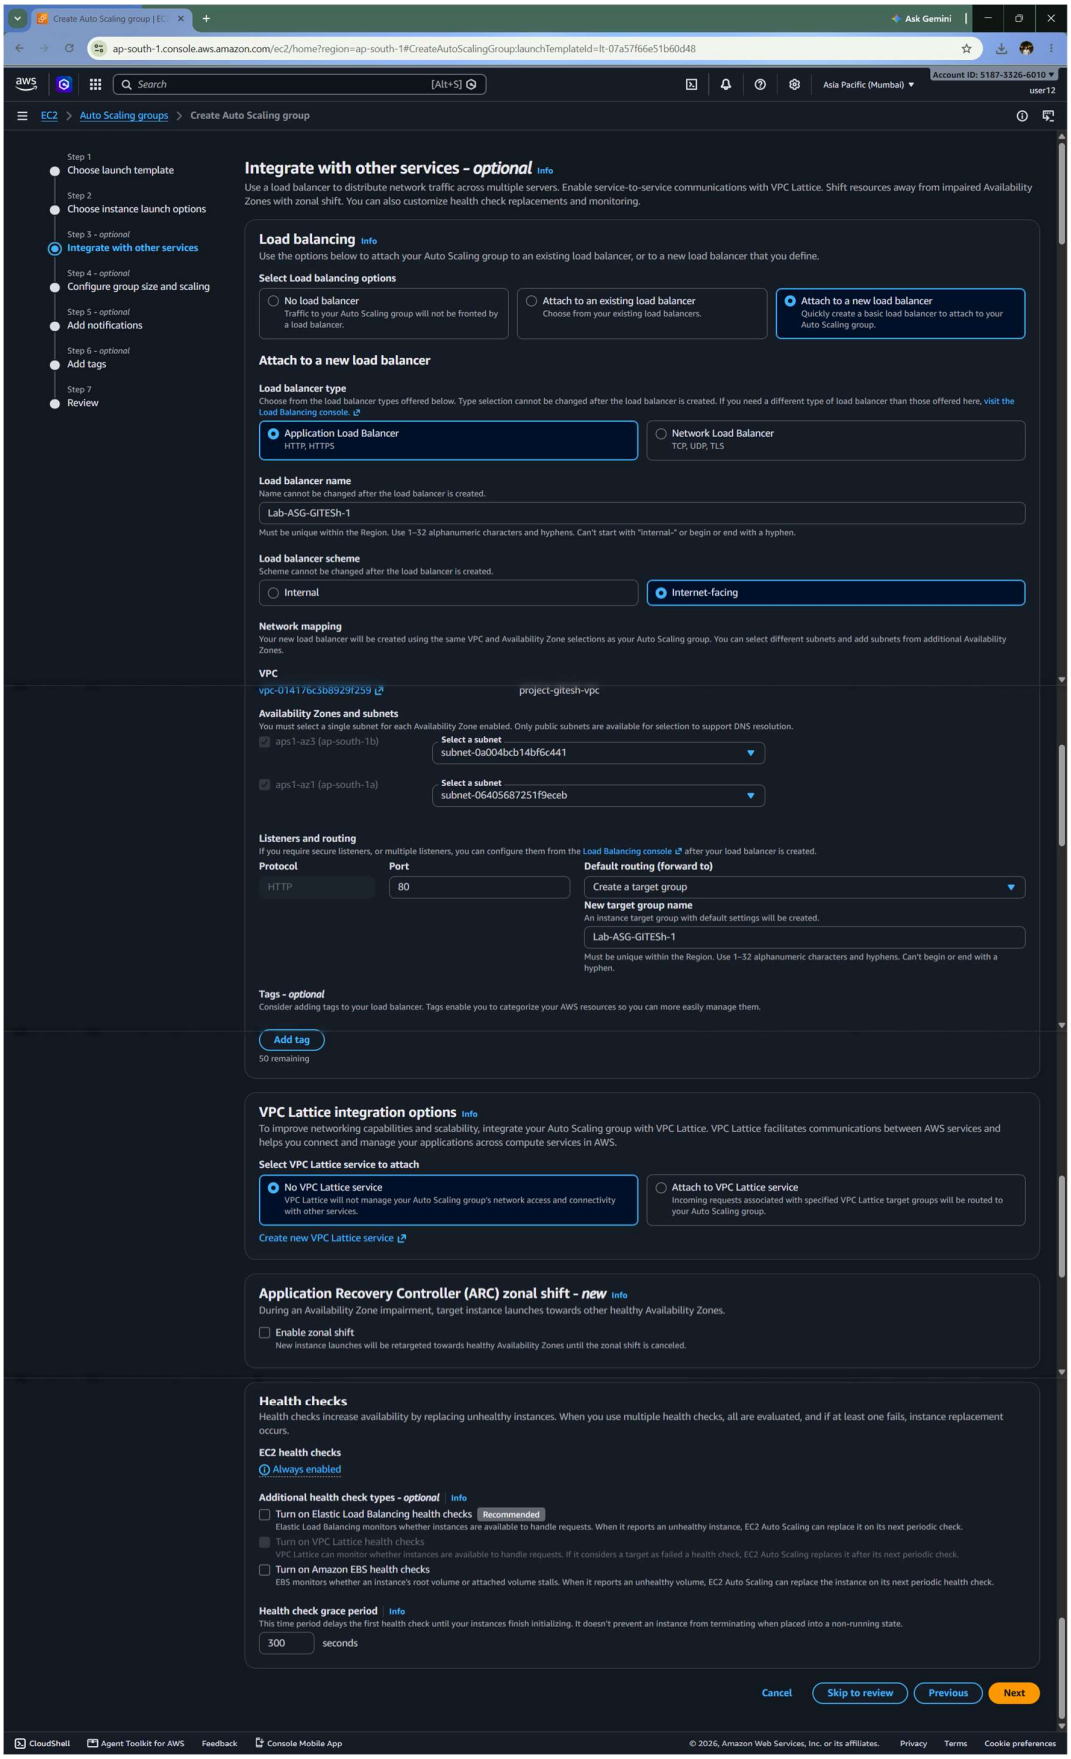
Create Auto Scaling group | EC...
Ask Gemini
ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#CreateAutoScalingGroup:launchTemplateId=lt-07a57f66e51b60d48
Search
[Alt+S]
Asia Pacific (Mumbai)
Account ID: 5187-3326-6010
user12
EC2 > Auto Scaling groups > Create Auto Scaling group
Step 1
Choose launch template
Step 2
Choose instance launch options
Step 3 - optional
Integrate with other services
Step 4 - optional
Configure group size and scaling
Step 5 - optional
Add notifications
Step 6 - optional
Add tags
Step 7
Review
Integrate with other services - optional Info
Use a load balancer to distribute network traffic across multiple servers. Enable service-to-service communications with VPC Lattice. Shift resources away from impaired Availability Zones with zonal shift. You can also customize health check replacements and monitoring.
Load balancing Info
Use the options below to attach your Auto Scaling group to an existing load balancer, or to a new load balancer that you define.
Select Load balancing options
No load balancer
Traffic to your Auto Scaling group will not be fronted by a load balancer.
Attach to an existing load balancer
Choose from your existing load balancers.
Attach to a new load balancer
Quickly create a basic load balancer to attach to your Auto Scaling group.
Attach to a new load balancer
Load balancer type
Choose from the load balancer types offered below. Type selection cannot be changed after the load balancer is created. If you need a different type of load balancer than those offered here, visit the Load Balancing console.
Application Load Balancer
HTTP, HTTPS
Network Load Balancer
TCP, UDP, TLS
Load balancer name
Name cannot be changed after the load balancer is created.
Lab-ASG-GITESh-1
Must be unique within the Region. Use 1–32 alphanumeric characters and hyphens. Can't start with "internal-" or begin or end with a hyphen.
Load balancer scheme
Scheme cannot be changed after the load balancer is created.
Internal
Internet-facing
Network mapping
Your new load balancer will be created using the same VPC and Availability Zone selections as your Auto Scaling group. You can select different subnets and add subnets from additional Availability Zones.
VPC
vpc-01417bc3b8929f259
project-gitesh-vpc
Availability Zones and subnets
You must select a single subnet for each Availability Zone enabled. Only public subnets are available for selection to support DNS resolution.
aps1-az3 (ap-south-1b)
Select a subnet
subnet-0a004bcb14bf6c441
aps1-az1 (ap-south-1a)
Select a subnet
subnet-06405687251f9eceb
Listeners and routing
If you require secure listeners, or multiple listeners, you can configure them from the Load Balancing console after your load balancer is created.
Protocol
HTTP
Port
80
Default routing (forward to)
Create a target group
New target group name
An instance target group with default settings will be created.
Lab-ASG-GITESh-1
Must be unique within the Region. Use 1–32 alphanumeric characters and hyphens. Can't begin or end with a hyphen.
Tags - optional
Consider adding tags to your load balancer. Tags enable you to categorize your AWS resources so you can more easily manage them.
Add tag
50 remaining
VPC Lattice integration options Info
To improve networking capabilities and scalability, integrate your Auto Scaling group with VPC Lattice. VPC Lattice facilitates communications between AWS services and helps you connect and manage your applications across compute services in AWS.
Select VPC Lattice service to attach
No VPC Lattice service
VPC Lattice will not manage your Auto Scaling group's network access and connectivity with other services.
Attach to VPC Lattice service
Incoming requests associated with specified VPC Lattice target groups will be routed to your Auto Scaling group.
Create new VPC Lattice service
Application Recovery Controller (ARC) zonal shift - new Info
During an Availability Zone impairment, target instance launches towards other healthy Availability Zones.
Enable zonal shift
New instance launches will be retargeted towards healthy Availability Zones until the zonal shift is canceled.
Health checks
Health checks increase availability by replacing unhealthy instances. When you use multiple health checks, all are evaluated, and if at least one fails, instance replacement occurs.
EC2 health checks
Always enabled
Additional health check types - optional Info
Turn on Elastic Load Balancing health checks
Recommended
Elastic Load Balancing monitors whether instances are available to handle requests. When it reports an unhealthy instance, EC2 Auto Scaling can replace it on its next periodic check.
Turn on VPC Lattice health checks
VPC Lattice can monitor whether instances are available to handle requests. If it considers a target as failed a health check, EC2 Auto Scaling replaces it after its next periodic check.
Turn on Amazon EBS health checks
EBS monitors whether an instance's root volume or attached volume stalls. When it reports an unhealthy volume, EC2 Auto Scaling can replace the instance on its next periodic health check.
Health check grace period Info
This time period delays the first health check until your instances finish initializing. It doesn't prevent an instance from terminating when placed into a non-running state.
300
seconds
Cancel
Skip to review
Previous
Next
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

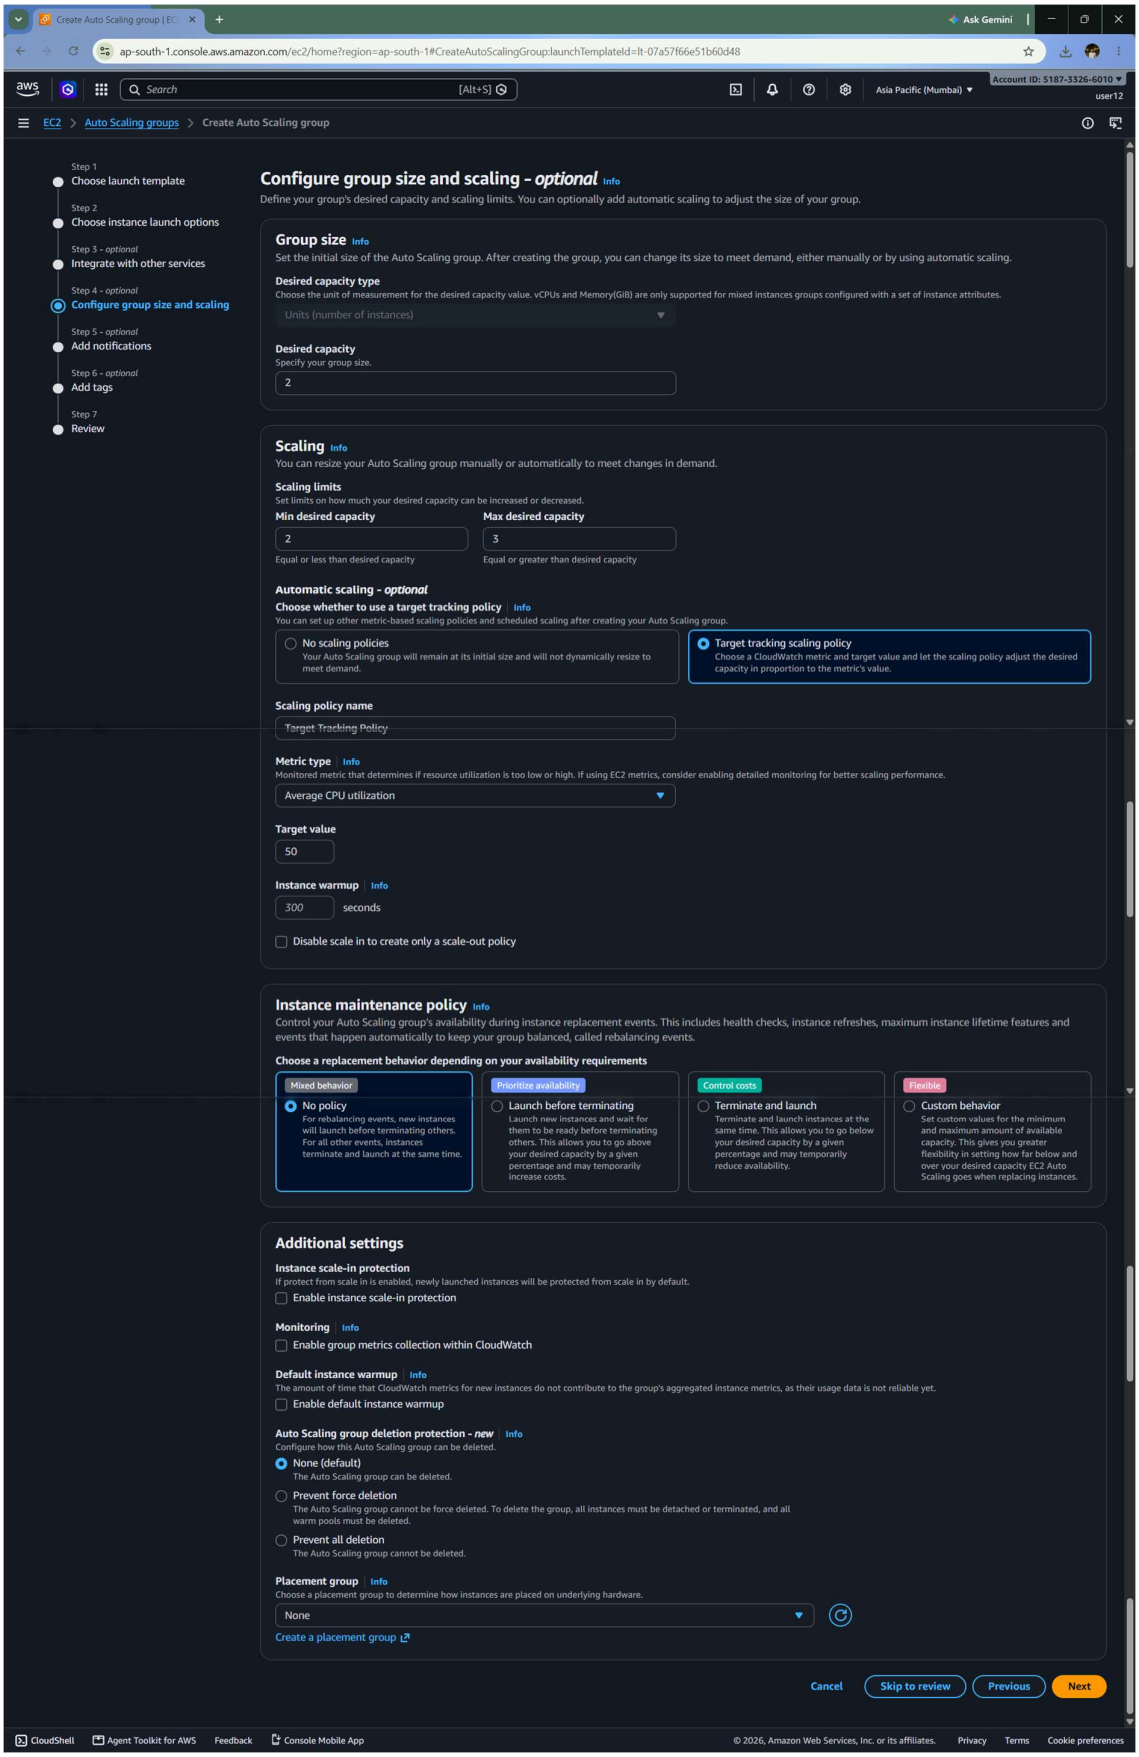
Create Auto Scaling group | EC
Ask Gemini
ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#CreateAutoScalingGroup:launchTemplateId=lt-07a57f66e51b60d48
Search
[Alt+S]
Asia Pacific (Mumbai)
Account ID: 5187-3326-6010
user12
EC2 > Auto Scaling groups > Create Auto Scaling group
Step 1
Choose launch template
Step 2
Choose instance launch options
Step 3 - optional
Integrate with other services
Step 4 - optional
Configure group size and scaling
Step 5 - optional
Add notifications
Step 6 - optional
Add tags
Step 7
Review
Configure group size and scaling - optional Info
Define your group's desired capacity and scaling limits. You can optionally add automatic scaling to adjust the size of your group.
Group size Info
Set the initial size of the Auto Scaling group. After creating the group, you can change its size to meet demand, either manually or by using automatic scaling.
Desired capacity type
Choose the unit of measurement for the desired capacity value. vCPUs and Memory(GiB) are only supported for mixed instances groups configured with a set of instance attributes.
Units (number of instances)
Desired capacity
Specify your group size.
2
Scaling Info
You can resize your Auto Scaling group manually or automatically to meet changes in demand.
Scaling limits
Set limits on how much your desired capacity can be increased or decreased.
Min desired capacity
2
Equal or less than desired capacity
Max desired capacity
3
Equal or greater than desired capacity
Automatic scaling - optional
Choose whether to use a target tracking policy Info
You can set up other metric-based scaling policies and scheduled scaling after creating your Auto Scaling group.
No scaling policies
Your Auto Scaling group will remain at its initial size and will not dynamically resize to meet demand.
Target tracking scaling policy
Choose a CloudWatch metric and target value and let the scaling policy adjust the desired capacity in proportion to the metric's value.
Scaling policy name
Target Tracking Policy
Metric type Info
Monitored metric that determines if resource utilization is too low or high. If using EC2 metrics, consider enabling detailed monitoring for better scaling performance.
Average CPU utilization
Target value
50
Instance warmup Info
300
seconds
Disable scale in to create only a scale-out policy
Instance maintenance policy Info
Control your Auto Scaling group's availability during instance replacement events. This includes health checks, instance refreshes, maximum instance lifetime features and events that happen automatically to keep your group balanced, called rebalancing events.
Choose a replacement behavior depending on your availability requirements
Mixed behavior
No policy
For rebalancing events, new instances will launch before terminating others. For all other events, instances terminate and launch at the same time.
Prioritize availability
Launch before terminating
Launch new instances and wait for them to be ready before terminating others. This allows you to go above your desired capacity by a given percentage and may temporarily increase costs.
Control costs
Terminate and launch
Terminate and launch instances at the same time. This allows you to go below your desired capacity by a given percentage and may temporarily reduce availability.
Flexible
Custom behavior
Set custom values for the minimum and maximum amount of available capacity. This gives you greater flexibility in setting how far below and over your desired capacity EC2 Auto Scaling goes when replacing instances.
Additional settings
Instance scale-in protection
If protect from scale in is enabled, newly launched instances will be protected from scale in by default.
Enable instance scale-in protection
Monitoring Info
Enable group metrics collection within CloudWatch
Default instance warmup Info
The amount of time that CloudWatch metrics for new instances do not contribute to the group's aggregated instance metrics, as their usage data is not reliable yet.
Enable default instance warmup
Auto Scaling group deletion protection - new Info
Configure how this Auto Scaling group can be deleted.
None (default)
The Auto Scaling group can be deleted.
Prevent force deletion
The Auto Scaling group cannot be force deleted. To delete the group, all instances must be detached or terminated, and all warm pools must be deleted.
Prevent all deletion
The Auto Scaling group cannot be deleted.
Placement group Info
Choose a placement group to determine how instances are placed on underlying hardware.
None
Create a placement group
Cancel
Skip to review
Previous
Next
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

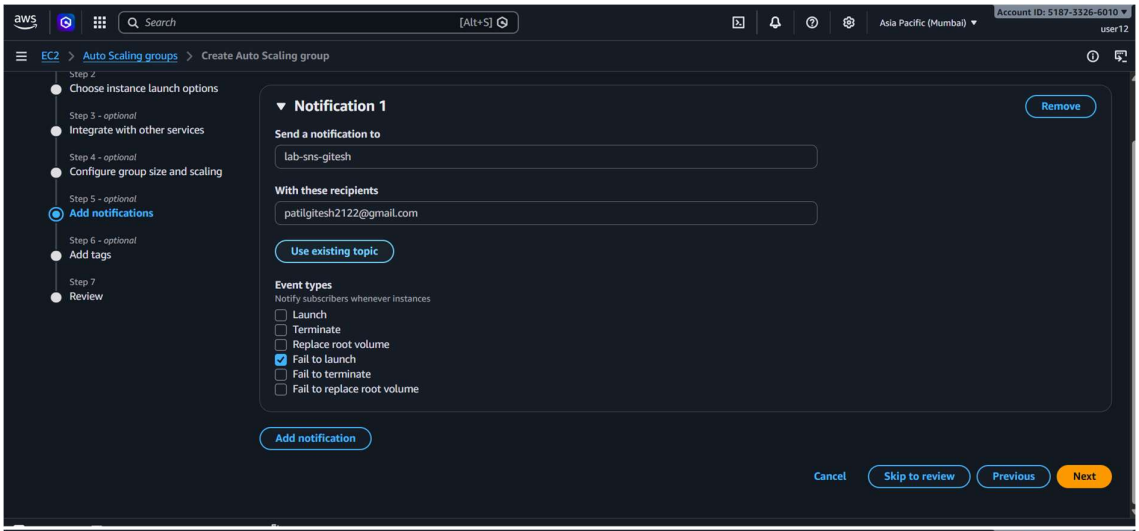

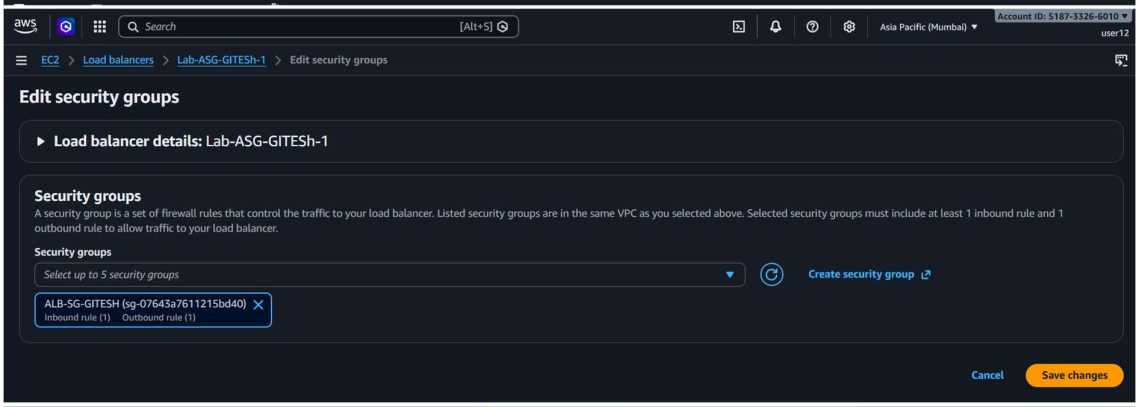


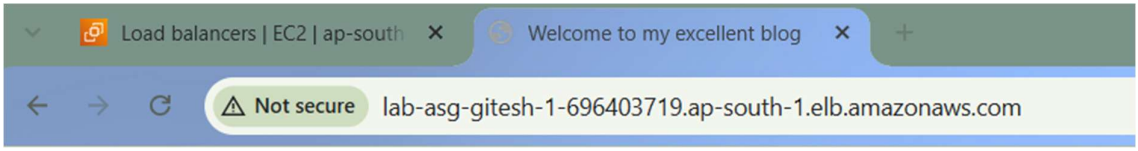



Welcome to my excellent blog


Database connection succeeded.


Task 10: Implement low latency and security from DDoS attack to the application.

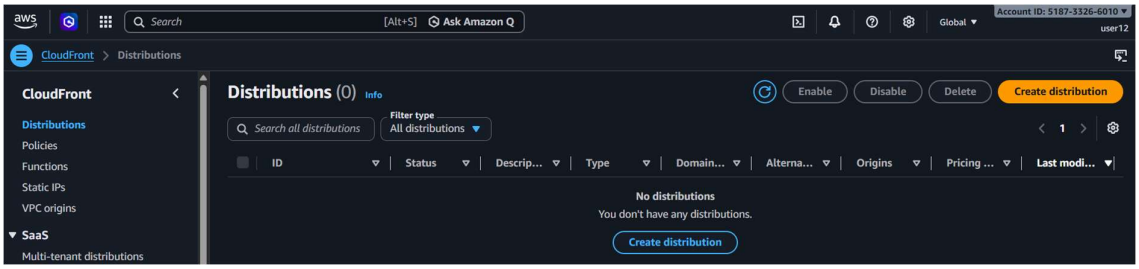

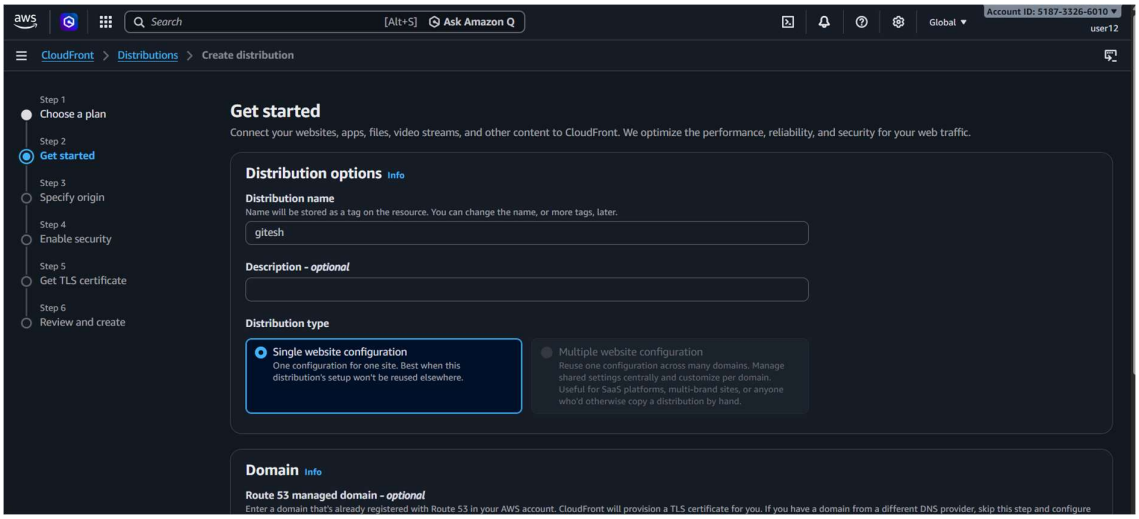
Search
[Alt+S]
Ask Amazon Q
Global
Account ID: 5187-3326-6010
user12
CloudFront
Distributions
Create distribution
Step 1
Choose a plan
Step 2
Get started
Step 3
Specify origin
Step 4
Enable security
Step 5
Get TLS certificate
Step 6
Review and create
Get started
Connect your websites, apps, files, video streams, and other content to CloudFront. We optimize the performance, reliability, and security for your web traffic.
Distribution options
Info
Distribution name
Name will be stored as a tag on the resource. You can change the name, or more tags, later.
gitesh
Description - optional
Distribution type
Single website configuration
One configuration for one site. Best when this distribution's setup won't be reused elsewhere.
Multiple website configuration
Reuse one configuration across many domains. Manage shared settings centrally and customize per domain. Useful for SaaS platforms, multi-brand sites, or anyone who'd otherwise copy a distribution by hand.
Domain
Info
Route 53 managed domain - optional
Enter a domain that's already registered with Route 53 in your AWS account. CloudFront will provision a TLS certificate for you. If you have a domain from a different DNS provider, skip this step and configure

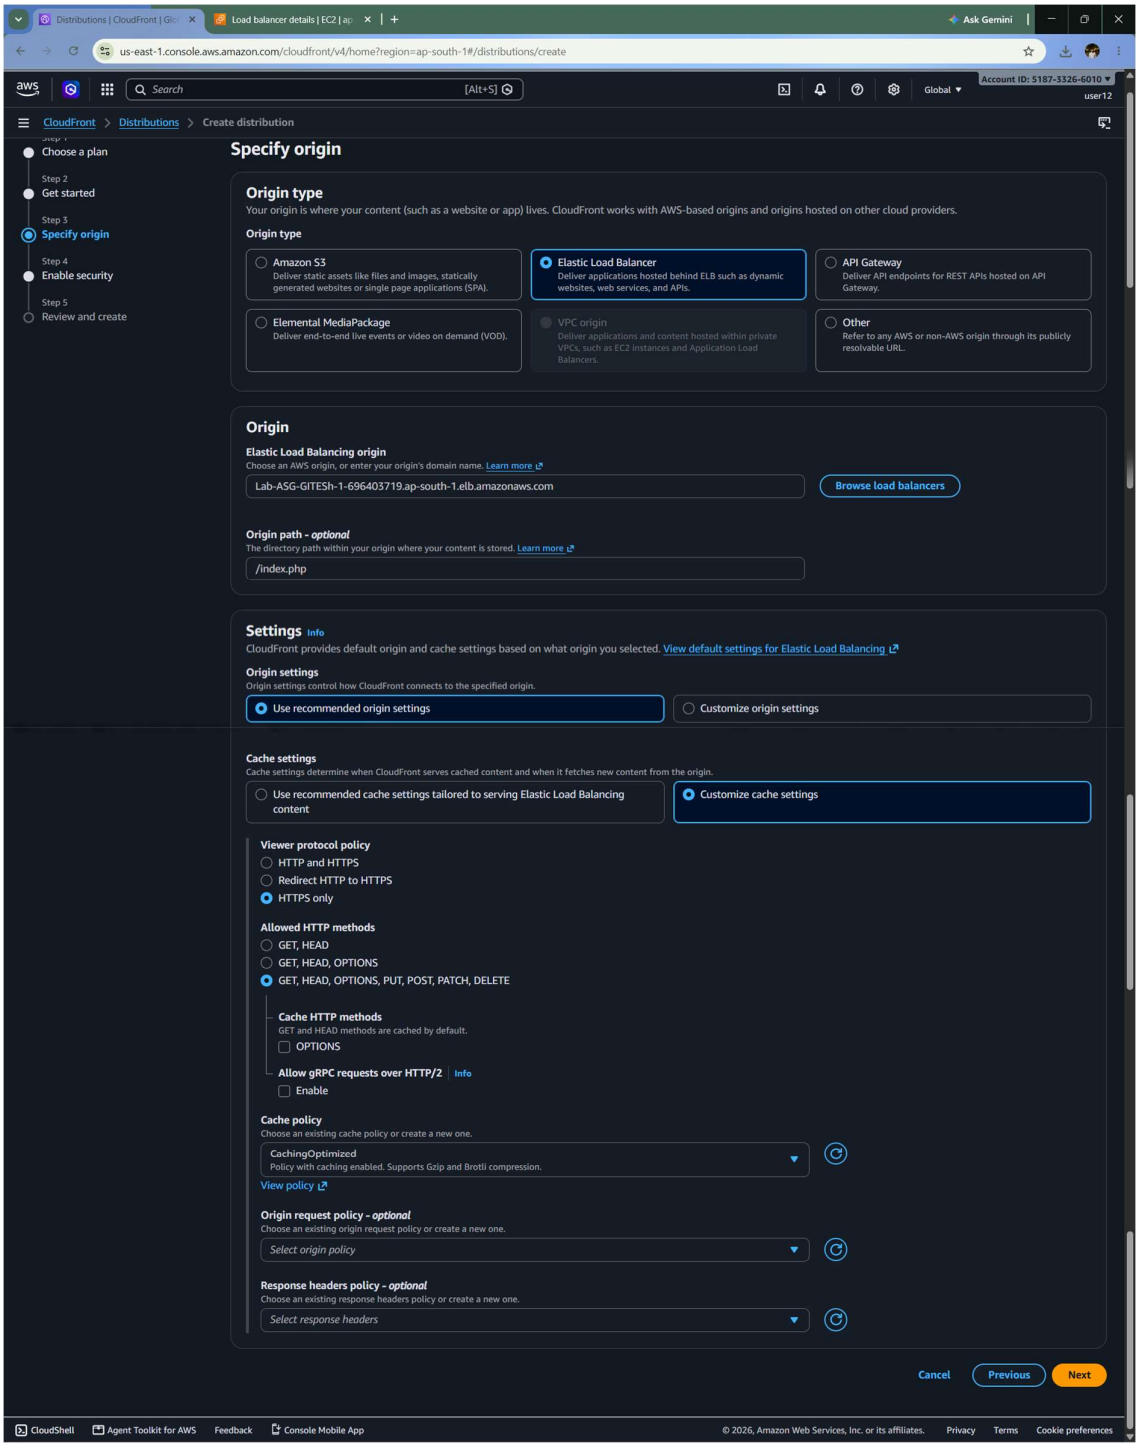
Distributions | CloudFront | Glo
Load balancer details | EC2 | ap
Ask Gemini
us-east-1.console.aws.amazon.com/cloudfront/v4/home?region=ap-south-1#/distributions/create
Search
[Alt+S]
Global
Account ID: 5187-3326-6010
user12
CloudFront
Distributions
Create distribution
Step 1
Choose a plan
Step 2
Get started
Step 3
Specify origin
Step 4
Enable security
Step 5
Review and create
Specify origin
Origin type
Your origin is where your content (such as a website or app) lives. CloudFront works with AWS-based origins and origins hosted on other cloud providers.
Origin type
Amazon S3
Deliver static assets like files and images, statically generated websites or single page applications (SPA).
Elastic Load Balancer
Deliver applications hosted behind ELB such as dynamic websites, web services, and APIs.
API Gateway
Deliver API endpoints for REST APIs hosted on API Gateway.
Elemental MediaPackage
Deliver end-to-end live events or video on demand (VOD).
VPC origin
Deliver applications and content hosted within private VPCs, such as EC2 instances and Application Load Balancers.
Other
Refer to any AWS or non-AWS origin through its publicly resolvable URL.
Origin
Elastic Load Balancing origin
Choose an AWS origin, or enter your origin's domain name. Learn more
Lab-ASG-GITESh-1-696403719.ap-south-1.elb.amazonaws.com
Browse load balancers
Origin path - optional
The directory path within your origin where your content is stored. Learn more
/index.php
Settings Info
CloudFront provides default origin and cache settings based on what origin you selected. View default settings for Elastic Load Balancing
Origin settings
Origin settings control how CloudFront connects to the specified origin.
Use recommended origin settings
Customize origin settings
Cache settings
Cache settings determine when CloudFront serves cached content and when it fetches new content from the origin.
Use recommended cache settings tailored to serving Elastic Load Balancing content
Customize cache settings
Viewer protocol policy
HTTP and HTTPS
Redirect HTTP to HTTPS
HTTPS only
Allowed HTTP methods
GET, HEAD
GET, HEAD, OPTIONS
GET, HEAD, OPTIONS, PUT, POST, PATCH, DELETE
Cache HTTP methods
GET and HEAD methods are cached by default.
OPTIONS
Allow gRPC requests over HTTP/2 Info
Enable
Cache policy
Choose an existing cache policy or create a new one.
CachingOptimized
Policy with caching enabled. Supports Gzip and Brotli compression.
View policy
Origin request policy - optional
Choose an existing origin request policy or create a new one.
Select origin policy
Response headers policy - optional
Choose an existing response headers policy or create a new one.
Select response headers
Cancel
Previous
Next
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

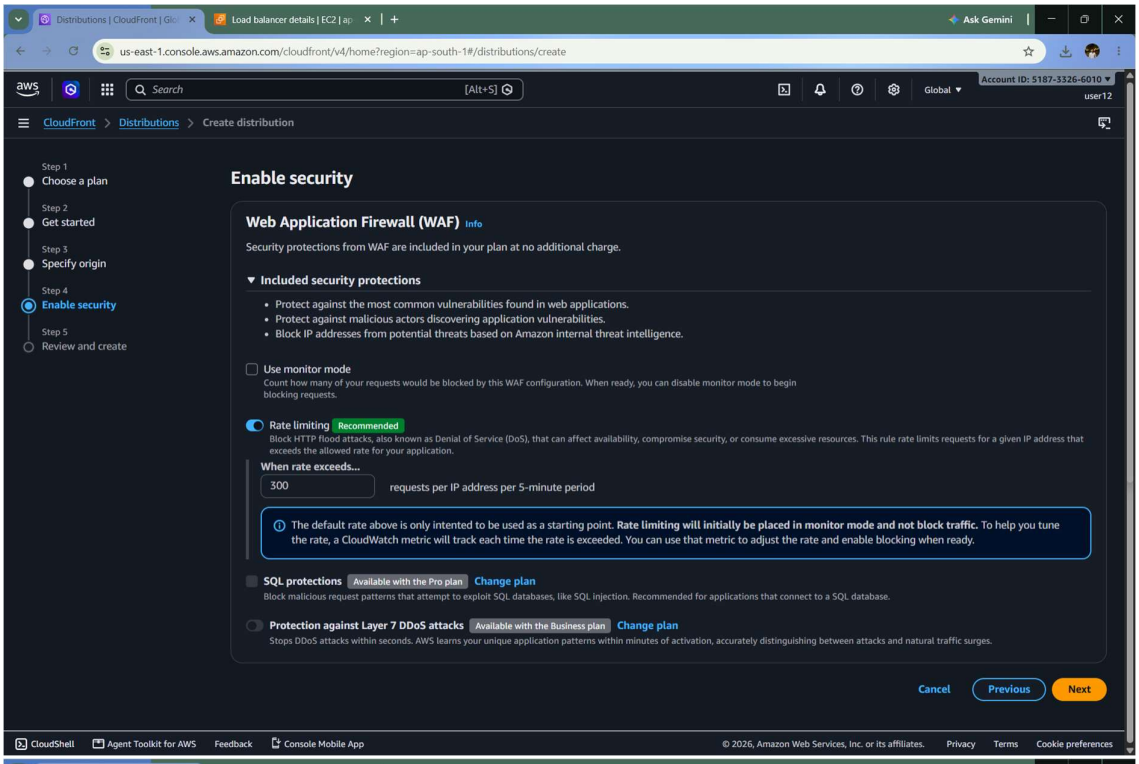
Distributions | CloudFront | Glo
Load balancer details | EC2 | ap
Ask Gemini
us-east-1.console.aws.amazon.com/cloudfront/v4/home?region=ap-south-1#/distributions/create
Search
[Alt+S]
Global
Account ID: 5187-3326-6010
user12
CloudFront > Distributions > Create distribution
Step 1
Choose a plan
Step 2
Get started
Step 3
Specify origin
Step 4
Enable security
Step 5
Review and create
Enable security
Web Application Firewall (WAF) Info
Security protections from WAF are included in your plan at no additional charge.
Included security protections
Protect against the most common vulnerabilities found in web applications.
Protect against malicious actors discovering application vulnerabilities.
Block IP addresses from potential threats based on Amazon internal threat intelligence.
Use monitor mode
Count how many of your requests would be blocked by this WAF configuration. When ready, you can disable monitor mode to begin blocking requests.
Rate limiting Recommended
Block HTTP flood attacks, also known as Denial of Service (DoS), that can affect availability, compromise security, or consume excessive resources. This rule rate limits requests for a given IP address that exceeds the allowed rate for your application.
When rate exceeds...
300
requests per IP address per 5-minute period
The default rate above is only intented to be used as a starting point. Rate limiting will initially be placed in monitor mode and not block traffic. To help you tune the rate, a CloudWatch metric will track each time the rate is exceeded. You can use that metric to adjust the rate and enable blocking when ready.
SQL protections Available with the Pro plan Change plan
Block malicious request patterns that attempt to exploit SQL databases, like SQL injection. Recommended for applications that connect to a SQL database.
Protection against Layer 7 DDoS attacks Available with the Business plan Change plan
Stops DDoS attacks within seconds. AWS learns your unique application patterns within minutes of activation, accurately distinguishing between attacks and natural traffic surges.
Cancel
Previous
Next
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

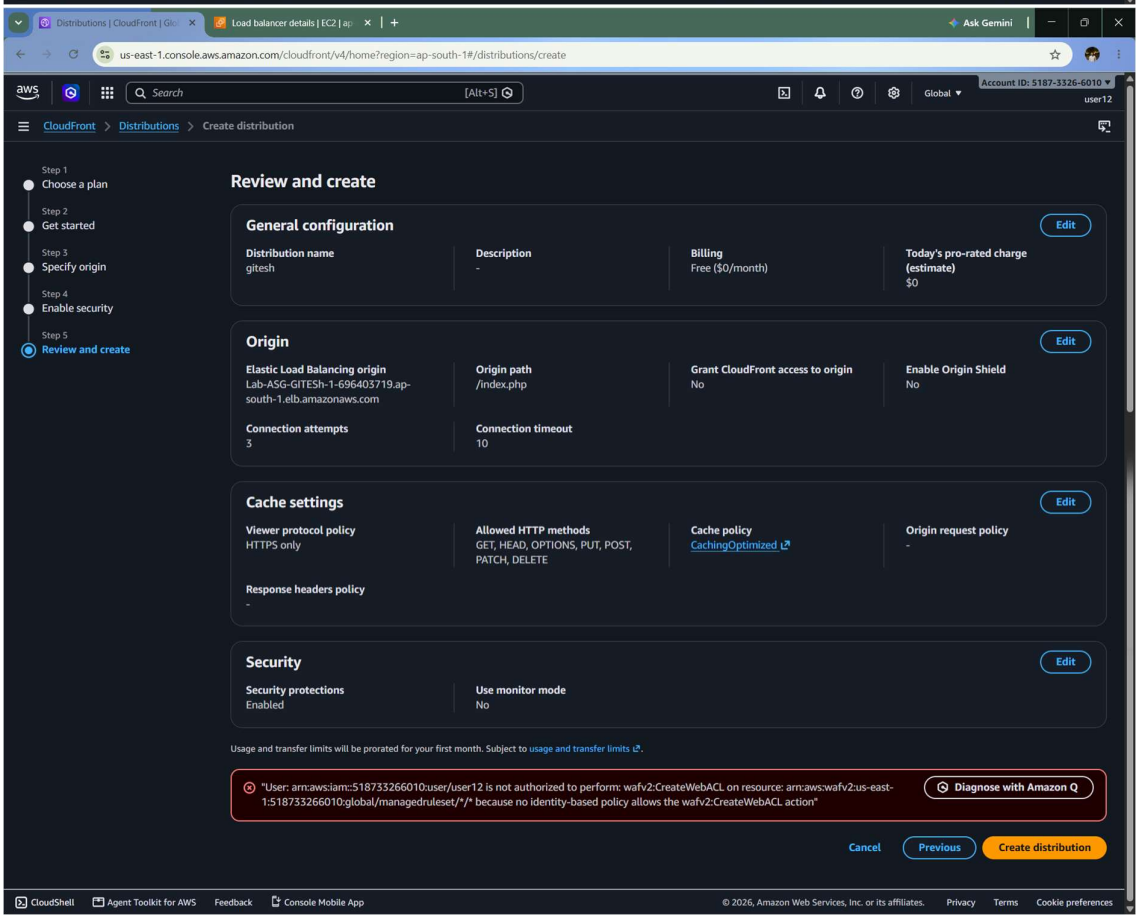
Distributions | CloudFront | Glo
Load balancer details | EC2 | ap
Ask Gemini
us-east-1.console.aws.amazon.com/cloudfront/v4/home?region=ap-south-1#/distributions/create
Search
[Alt+S]
Global
Account ID: 5187-3326-6010
user12
CloudFront > Distributions > Create distribution
Step 1
Choose a plan
Step 2
Get started
Step 3
Specify origin
Step 4
Enable security
Step 5
Review and create
Review and create
General configuration
Edit
Distribution name
gitesh
Description
-
Billing
Free ($0/month)
Today's pro-rated charge (estimate)
$0
Origin
Edit
Elastic Load Balancing origin
Lab-ASG-GITESh-1-696403719.ap-south-1.elb.amazonaws.com
Origin path
/index.php
Grant CloudFront access to origin
No
Enable Origin Shield
No
Connection attempts
3
Connection timeout
10
Cache settings
Edit
Viewer protocol policy
HTTPS only
Allowed HTTP methods
GET, HEAD, OPTIONS, PUT, POST, PATCH, DELETE
Cache policy
CachingOptimized
Origin request policy
-
Response headers policy
-
Security
Edit
Security protections
Enabled
Use monitor mode
No
Usage and transfer limits will be prorated for your first month. Subject to usage and transfer limits.
"User: arn:aws:iam::518733266010:user/user12 is not authorized to perform: wafv2:CreateWebACL on resource: arn:aws:wafv2:us-east-1:518733266010:global/managedruleset/*/* because no identity-based policy allows the wafv2:CreateWebACL action"
Diagnose with Amazon Q
Cancel
Previous
Create distribution
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences