Lab 05: Host a Static Website on S3

In this lab, we will be hosting a static website using Amazon S3 bucket configured for static website hosting.

IAM Policy:


```
{
 "Version": "2012-10-17",
 "Statement": [
  {
   "Effect": "Allow",
   "Action": [
    "s3:CreateBucket",
    "s3:PutBucketPolicy",
    "s3:PutPublicAccessBlock",
    "s3:PutBucketWebsite",
    "s3:DeleteBucketWebsite",
    "s3:PutObject",
    "s3:DeleteObject",
    "s3:GetBucketAcl",
    "s3:GetBucketPolicy",
    "s3:GetObject",
    "s3:ListBucket",
    "s3:DeleteBucket"
   ],
   "Resource": [
    "arn:aws:s3:::YOUR_BUCKET_NAME",
    "arn:aws:s3:::YOUR_BUCKET_NAME/*"
   ]
  }
 ]
}
```

Steps:

1. Open a web browser and enter console.aws.amazon.com in the address bar and log in to your account.

2. From AWS Services, select S3 under Storage


3. From the Amazon S3 dashboard, select Buckets, then click Create Bucket

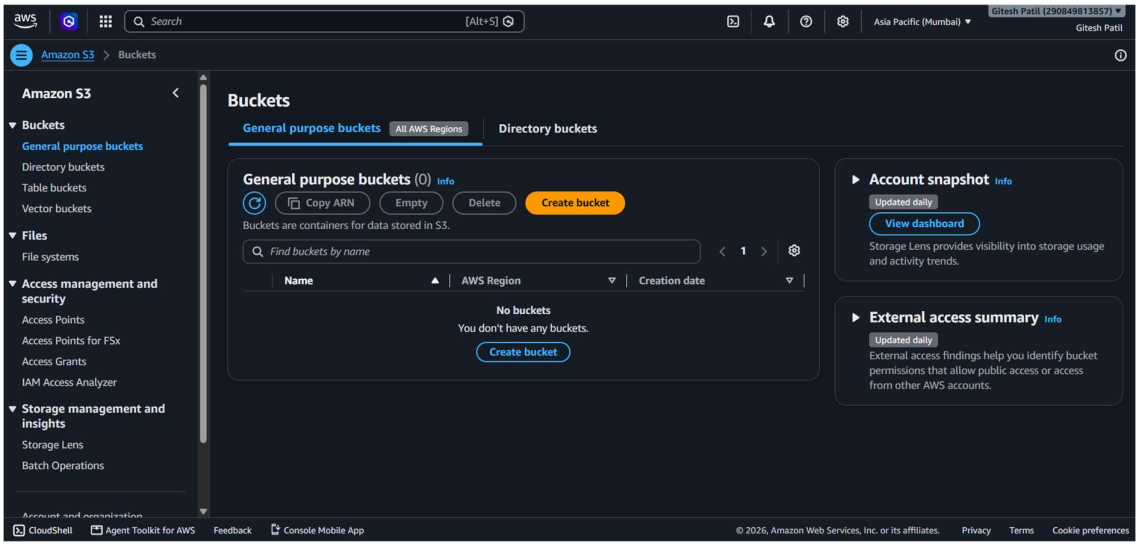

4. Enter the unique name for Bucket Name.

5. Uncheck Block all public access and select the checkbox to acknowledge the same inside the Block Public Access settings for this bucket section


6. Scroll down to the bottom of the page and click on Create Button

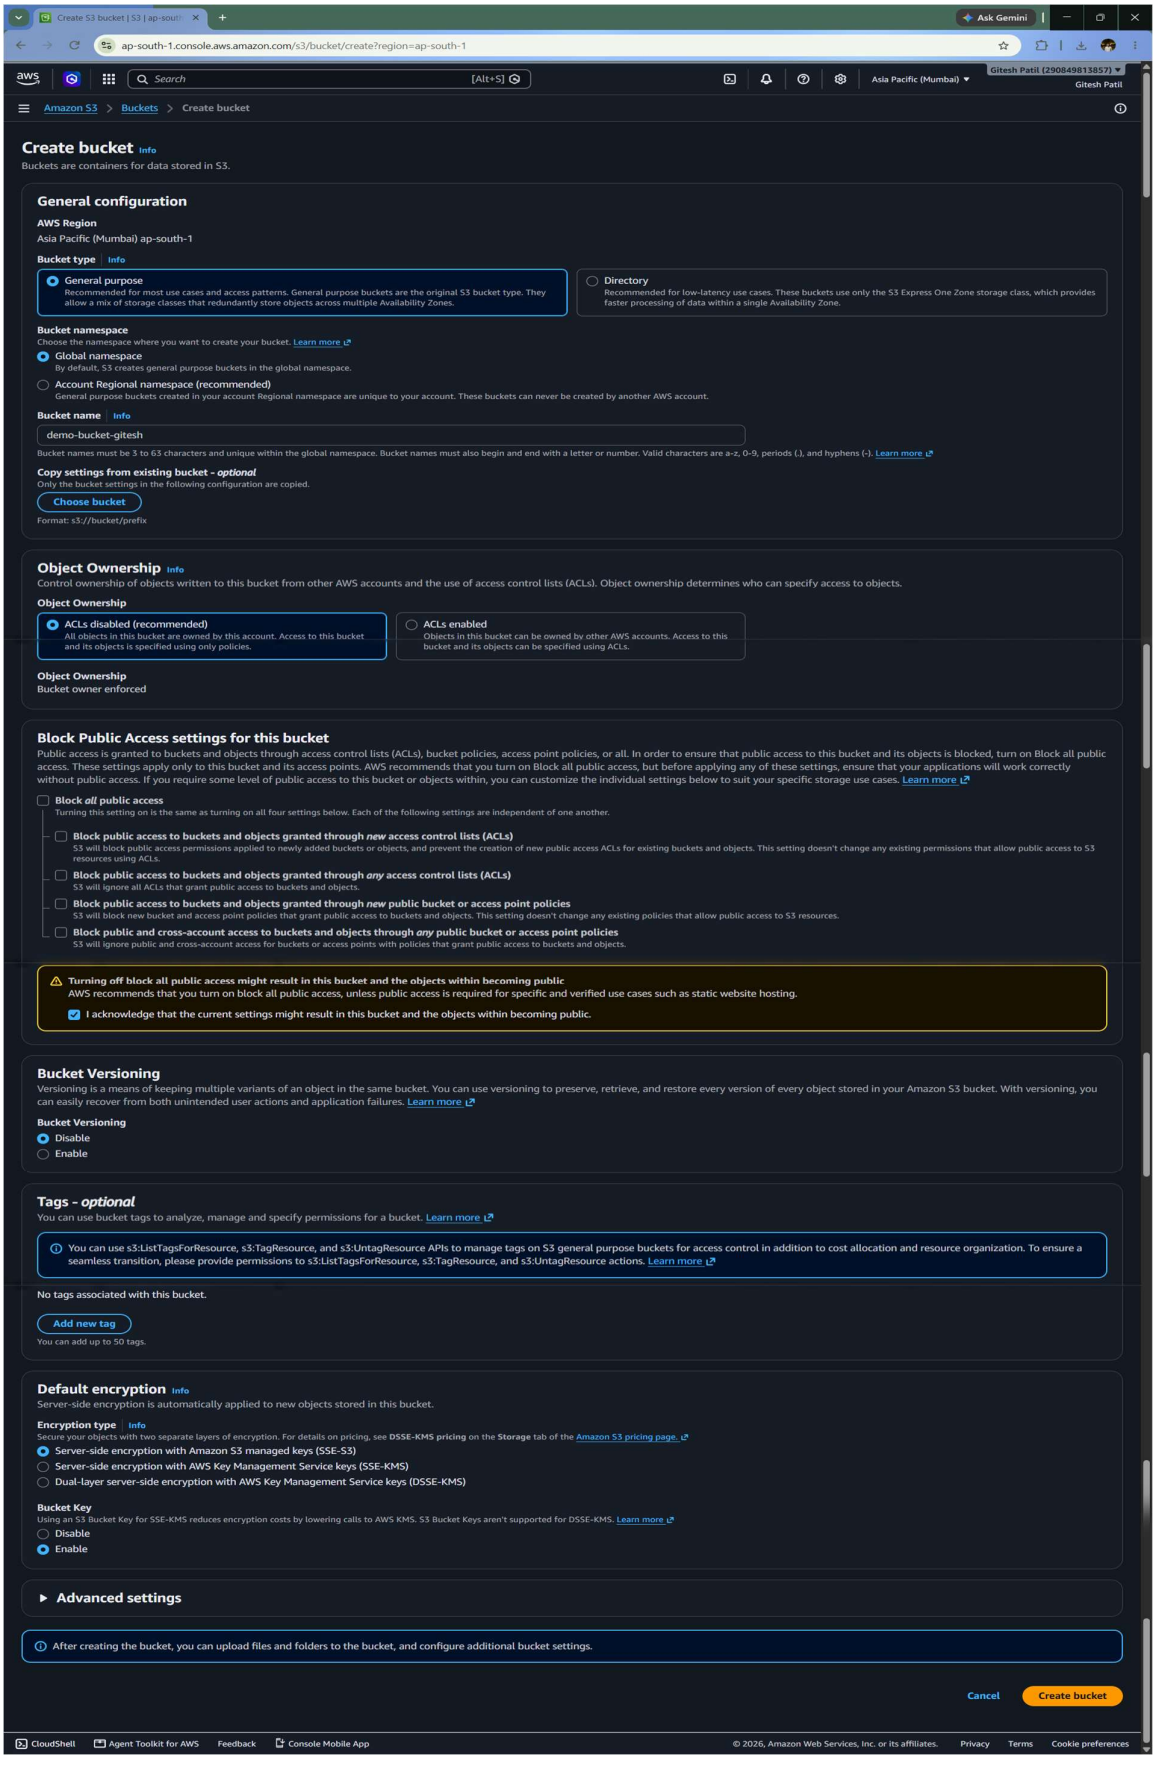
Create S3 bucket | S3 | ap-south
Ask Gemini
ap-south-1.console.aws.amazon.com/s3/bucket/create?region=ap-south-1
Search
[Alt+S]
Asia Pacific (Mumbai)
Gitesh Patil (290849813857)
Gitesh Patil
Amazon S3 > Buckets > Create bucket
Create bucket Info
Buckets are containers for data stored in S3.
General configuration
AWS Region
Asia Pacific (Mumbai) ap-south-1
Bucket type Info
General purpose
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.
Directory
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.
Bucket namespace
Choose the namespace where you want to create your bucket. Learn more
Global namespace
By default, S3 creates general purpose buckets in the global namespace.
Account Regional namespace (recommended)
General purpose buckets created in your account Regional namespace are unique to your account. These buckets can never be created by another AWS account.
Bucket name Info
demo-bucket-gitesh
Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). Learn more
Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.
Choose bucket
Format: s3://bucket/prefix
Object Ownership Info
Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.
Object Ownership
ACLs disabled (recommended)
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.
ACLs enabled
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.
Object Ownership
Bucket owner enforced
Block Public Access settings for this bucket
Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. Learn more
Block all public access
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.
Block public access to buckets and objects granted through new access control lists (ACLs)
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
Block public access to buckets and objects granted through any access control lists (ACLs)
S3 will ignore all ACLs that grant public access to buckets and objects.
Block public access to buckets and objects granted through new public bucket or access point policies
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
Block public and cross-account access to buckets and objects through any public bucket or access point policies
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.
Turning off block all public access might result in this bucket and the objects within becoming public
AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.
I acknowledge that the current settings might result in this bucket and the objects within becoming public.
Bucket Versioning
Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. Learn more
Bucket Versioning
Disable
Enable
Tags - optional
You can use bucket tags to analyze, manage and specify permissions for a bucket. Learn more
You can use s3:ListTagsForResource, s3:TagResource, and s3:UntagResource APIs to manage tags on S3 general purpose buckets for access control in addition to cost allocation and resource organization. To ensure a seamless transition, please provide permissions to s3:ListTagsForResource, s3:TagResource, and s3:UntagResource actions. Learn more
No tags associated with this bucket.
Add new tag
You can add up to 50 tags.
Default encryption Info
Server-side encryption is automatically applied to new objects stored in this bucket.
Encryption type Info
Secure your objects with two separate layers of encryption. For details on pricing, see DSSE-KMS pricing on the Storage tab of the Amazon S3 pricing page.
Server-side encryption with Amazon S3 managed keys (SSE-S3)
Server-side encryption with AWS Key Management Service keys (SSE-KMS)
Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)
Bucket Key
Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. Learn more
Disable
Enable
Advanced settings
After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.
Cancel
Create bucket
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

7. Now from the bucket lists, click on the bucket name you just created


8. On the bucket details page, click on the Properties tab.

9. Scroll to the bottom of the page and click on the Edit button in the Static website hosting section.

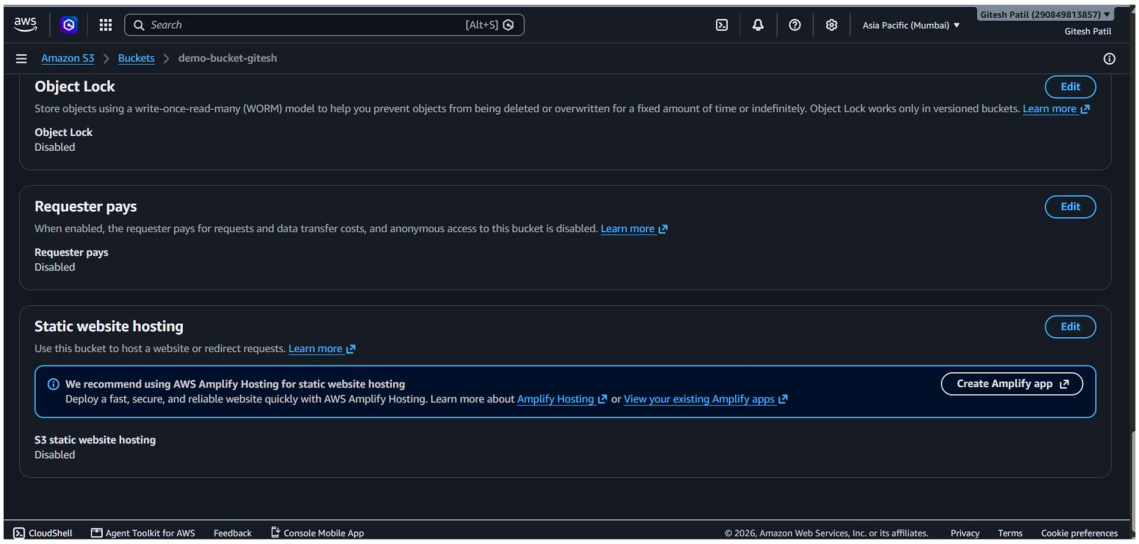


10. Click on the Enable radio button.

11. Now enter index.html in the Index document field and error.html in the Error document field and then click on the Save changes button.

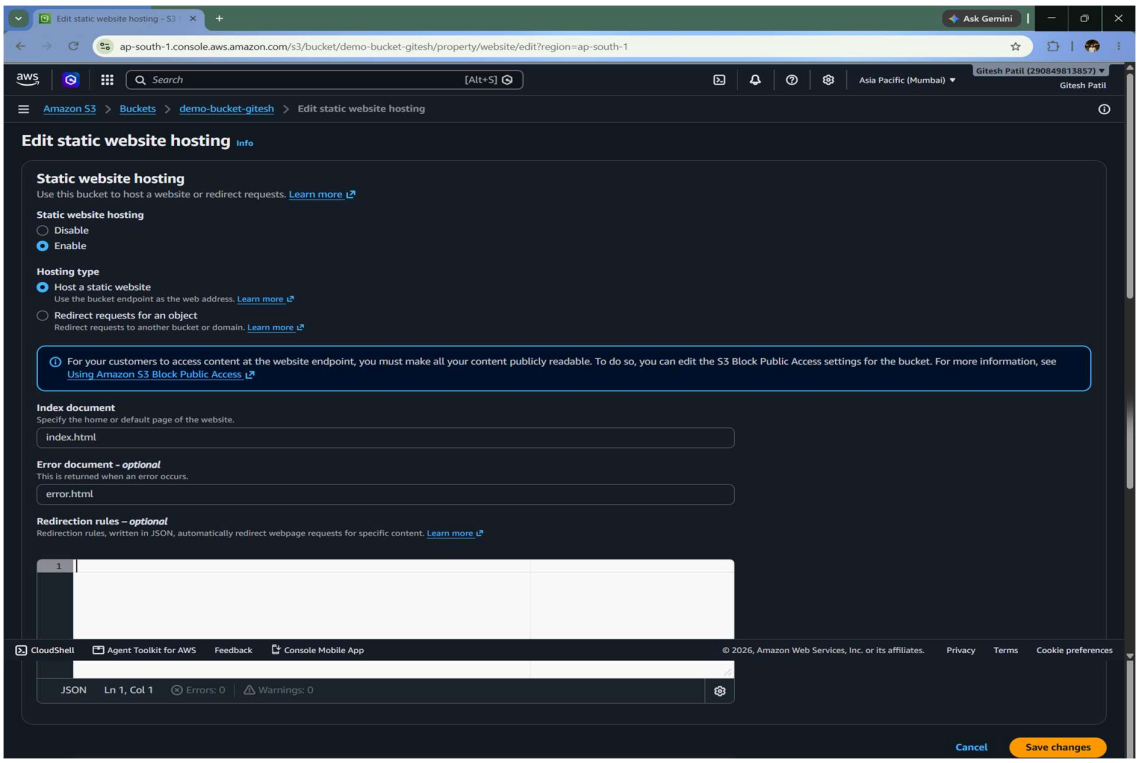

13. Click on the Edit button in the Bucket Policy section and add the following policy with your bucket name and click on Save changes button.

```
{
"Version": "2012-10-17",
"Statement": [
  {
  "Sid": "PublicReadGetobject",
  "Effect": "Allow",
  "Principal": "*",
  "Action": "s3:Getobject",
  "Resource": "arn:aws:s3:::demo-bucket-gitesh/*"
  }
  ]
}
```

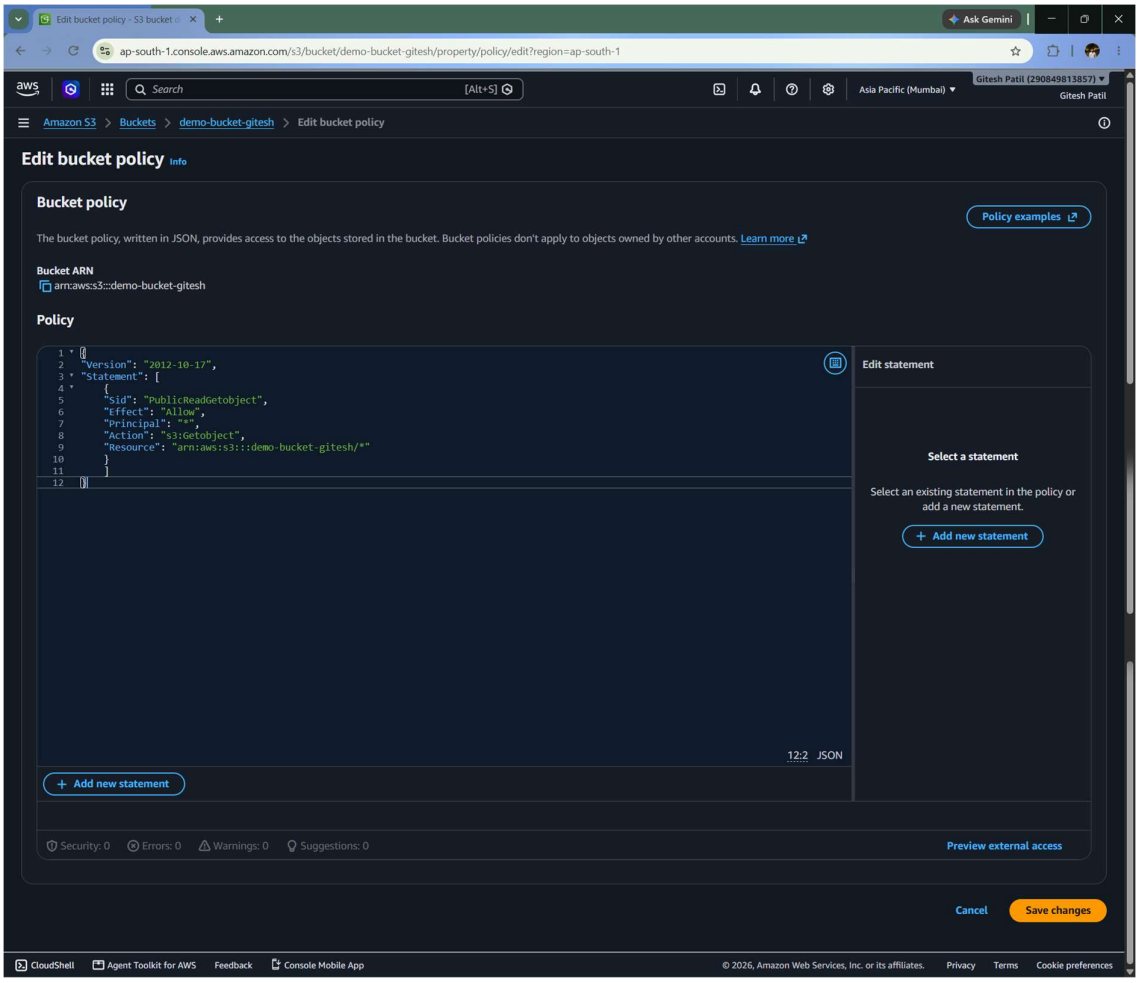

14. Now, open Notepad on your computer and create an html file with the

name index.html with the following content:

<! DOCTYPE html>

<body>

<h1>Welcome to My Website</h1>


<p>This is a simple static page hosted on Amazon S3 .< /p>

</body>


</html>


15. Go back to the bucket details page and click on the Objects tab and then click on the Upload button.

16. Click on the Add Files button and browse the index.html file on your system and then click on the Upload button to upload the file.

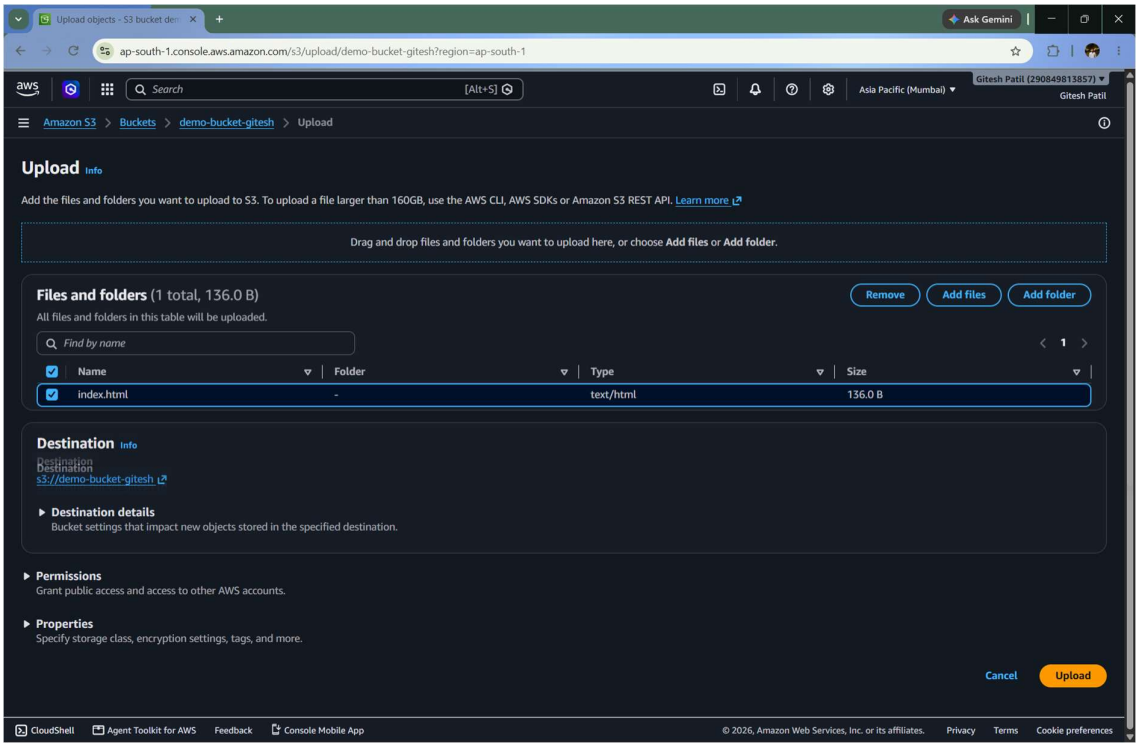

17. Get back to the Properties tab and scroll to the end of the page and copy the Bucket website endpoint.

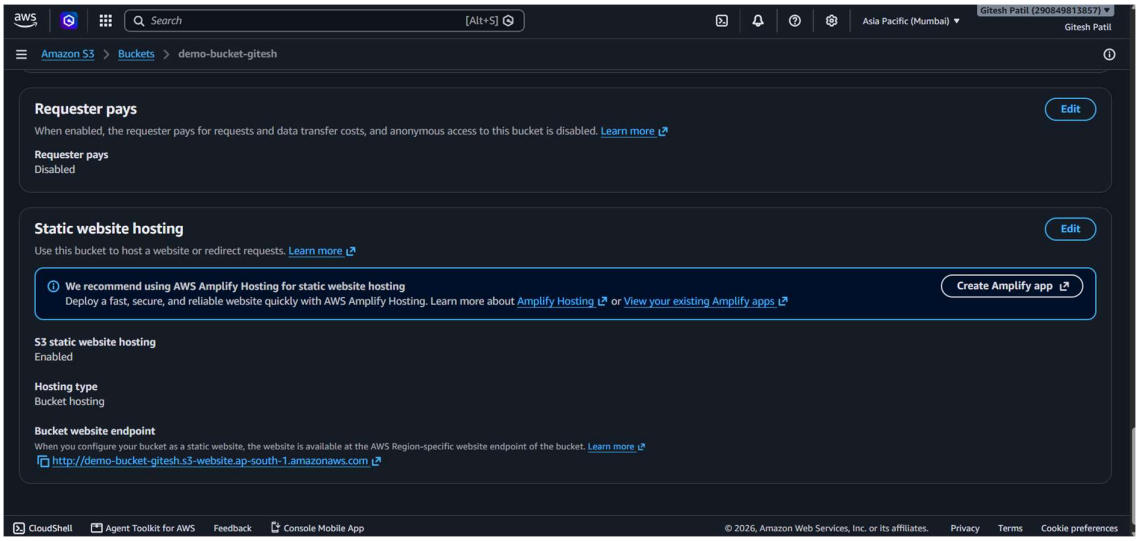

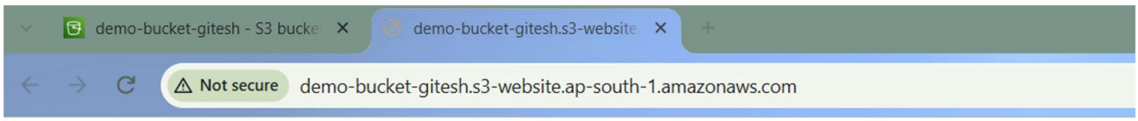

Welcome to My Website

This is a simple static page hosted on Amazon S3 .< /p>