

Práctica 5 - Desacoplamiento con Colas y Eventos en AWS

Asignatura: Computación en la Nube

Fecha: 20-12-2024

Autor: Francisco Javier López-Dufour Morales



Índice

- Práctica 5 - Desacoplamiento con Colas y Eventos en AWS
 - Índice
 - 1. Introducción
 - 2. Objetivos
 - 3. Descripción de Actividades
 - 3.1. Implementación de la aplicación monolítica
 - 3.2. Desacoplamiento en tres microservicios y uso de colas
 - 3.2.1. Creación de las colas SQS
 - 3.2.2. Creación de los tres microservicios
 - 3.2.3. Despliegue de los microservicios en EC2 mediante CloudFormation
 - 3.3. Configuración de Amazon SNS y suscripción de fA
 - 4. Conclusiones
 - 5. Referencias
 - 6. Anexos
 - Anexo A: Código de las funciones monolíticas
 - Anexo B: Código de las funciones desacopladas
 - Anexo C: Plantilla de CloudFormation
 - Anexo D: Plantilla de CloudFormation con SNS
-

1. Introducción

En esta práctica se trabajará con **colas y eventos de AWS** para desacoplar una aplicación inicial (monolítica) en un **conjunto de microservicios escalable**. Se experimentará con servicios de AWS como **Amazon SQS** y **Amazon SNS**, creando flujos asíncronos entre las distintas funciones y facilitando la comunicación desacoplada.

2. Objetivos

1. Desplegar en AWS una aplicación sencilla compuesta por **tres funciones**: fA, fB y fC.
2. Dividir la aplicación monolítica en tres aplicaciones independientes que se comuniquen mediante **colas** (p.ej., **SQS** o **Redis**).
3. Configurar un **topic** de Amazon SNS para suministrar datos a fA.

3. Descripción de Actividades

3.1. Implementación de la aplicación monolítica

Objetivo: Crear una aplicación simple con **tres funciones** (**fA**, **fB**, **fC**) que se invoquen secuencialmente:

- **fA** → **fB** → **fC**
- Cada función hace un *wait* (o *sleep*) de unos segundos antes de devolver su resultado.

Pasos para la implementación:

1. **Lenguaje elegido** **Python**.
2. **Implementación de las funciones** **fA**, **fB** y **fC** con las esperas indicadas:
 - Anexo con el código de las funciones: [Anexo A](#).
3. **Comprobar** el correcto funcionamiento en local.

```
$ python monolithic_app.py
Comienzo de la ejecución monolítica con w = Inicio:
[fA] Recibiendo: Inicio:
[fB] Recibiendo: Inicio:A
[fC] Recibiendo: Inicio:AB
Resultado final del flujo: Inicio:ABC
```

3.2. Desacoplamiento en tres microservicios y uso de colas


Objetivo: Crear **tres aplicaciones independientes** (**fA**, **fB**, **fC**) y conectarlas mediante **colas SQS** para que la salida de una sea la entrada de la siguiente.

Pasos a seguir:

3.2.1. Creación de las colas SQS


1. **Creación de la cola A->B** (**QueueAtoB**):
 - **Nombre:** **QueueAtoB**
 - **Configuración:**
 - **Tiempo de retención:** 1 minuto
 - **Visibilidad:** 30 segundos
 - **Cifrado:**
 - **Cifrado del servidor:** Habilitado
 - **Encryption key type:** Clave de Amazon SQS (SSE-SQS)
 - **Política de acceso:**
 - **Método:** básico
 - **Quién puede enviar mensajes:** solo el propietario de la cola
 - **Quién puede recibir mensajes:** solo el propietario de la cola

- Resto de opciones por defecto.
- URL de la cola: <https://sqs.us-east-1.amazonaws.com/491250998585/QueueAtoB>

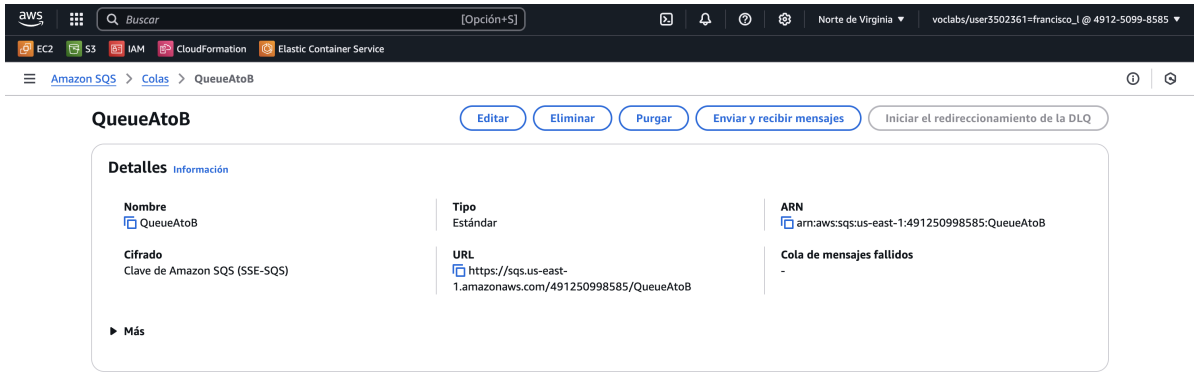

2. Creación de la cola B->C (QueueBtoC):

- **Nombre:** QueueBtoC
- **Configuración:**
 - **Tiempo de retención:** 1 minuto
 - **Visibilidad:** 30 segundos
- **Cifrado:**
 - **Cifrado del servidor:** Habilitado
 - **Encryption key type:** Clave de Amazon SQS (SSE-SQS)
- **Política de acceso:**
 - **Método:** básico
 - **Quién puede enviar mensajes:** solo el propietario de la cola
 - **Quién puede recibir mensajes:** solo el propietario de la cola
- Resto de opciones por defecto.
- URL de la cola: <https://sqs.us-east-1.amazonaws.com/491250998585/QueueBtoC>

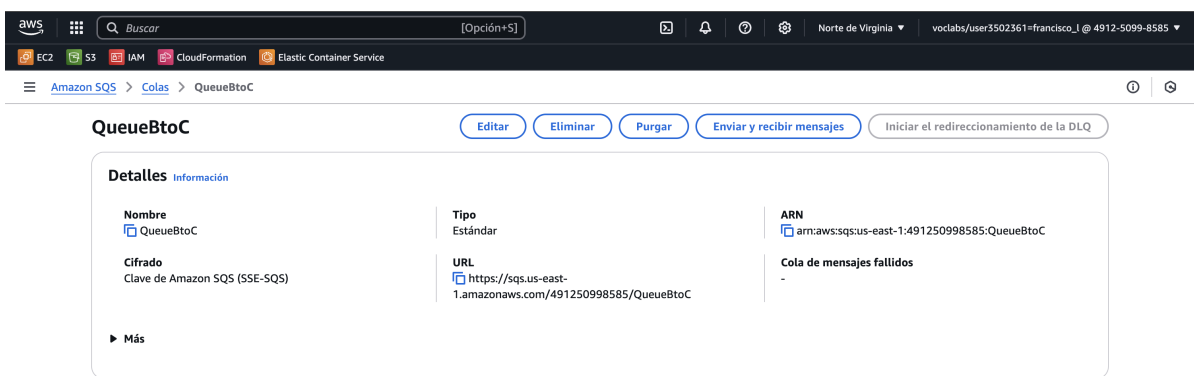

NOTA: este paso lo vamos a realizar de nuevo pero integrado en la plantilla de CloudFormation.

3.2.2. Creación de los tres microservicios

Creamos tres microservicios independientes (fA, fB, fC) que se comunican mediante colas SQS:

- **fA:** Expone un endpoint `/start`. Al recibir una petición POST, procesa el dato, añade "A" y envía el resultado a QueueAtoB.
- **fB:** Hace "polling" de QueueAtoB. Cada mensaje lo procesa añadiendo "B" y lo reenvía a QueueBtoC.

- **fC**: Hace "polling" de **QueueBtoC**. Cada mensaje lo procesa añadiendo "**C**" y muestra el resultado final.

Este desacoplamiento permite mayor flexibilidad, tolerancia a fallos y escalabilidad en la arquitectura.

El código de cada microservicio se encuentra en los anexos: [Anexo B](#).

3.2.3. Despliegue de los microservicios en EC2 mediante CloudFormation

Se utilizó una plantilla de CloudFormation para:

1. Crear la infraestructura (VPC, Subnet, Security Group) necesaria para las instancias EC2.
2. Desplegar tres instancias EC2 con scripts de inicio (**UserData**) que instalan las dependencias, definen variables de entorno y ejecutan cada microservicio.
3. Crear las colas SQS (**QueueAtoB** y **QueueBtoC**).

El código de la plantilla CloudFormation se encuentra en el [Anexo C](#).

CloudFormation console showing the stack **P5** in the **Norte de Virginia** region. The stack is in the **CREATE_COMPLETE** state. The diagram shows the following components and their connections:

- VPC** (Standard Component) is connected to **MicroservicesSecurityGroup** (Standard Component).
- MicroservicesSecurityGroup** is connected to **QueueAtoB** (SQS Queue).
- QueueAtoB** is connected to **QueueBtoC** (SQS Queue).
- QueueBtoC** is connected to **EC2fA** (Standard Component), **EC2fB** (Standard Component), and **EC2fC** (Standard Component).

The stack **P5** is listed in the **Pilas** section with the state **CREATE_COMPLETE**. The **Eventos** section shows a list of events, including the **CREATE_COMPLETE** event for the stack.


Marca temporal	ID lógico	Estado	Estado detallado
2024-12-18 02:55:08 UTC+0000	P5	CREATE_COMPLETE	-
2024-12-18 02:55:07 UTC+0000	VPCGatewayAttachment	CREATE_COMPLETE	-
2024-12-18 02:54:59 UTC+0000	EC2fC	CREATE_COMPLETE	-
2024-12-18 02:54:59 UTC+0000	EC2fA	CREATE_COMPLETE	-
2024-12-18 02:54:59 UTC+0000	EC2fB	CREATE_COMPLETE	-

Tras el despliegue:

- Al enviar una petición a **fA**, la respuesta muestra **"Inicio:A"**.
- **fB** lee **Inicio:A** de **QueueAtoB**, genera **Inicio:AB** y lo envía a **QueueBtoC**.
- **fC** recibe **Inicio:AB**, genera **Inicio:ABC** y muestra el resultado final.

Los logs en las instancias confirman el correcto flujo:

- **fA** recibe **"Inicio:"** y envía **"Inicio:A"**.
- **fB** procesa **"Inicio:A"** y envía **"Inicio:AB"**.
- **fC** procesa **"Inicio:AB"** y muestra **"Inicio:ABC"**.

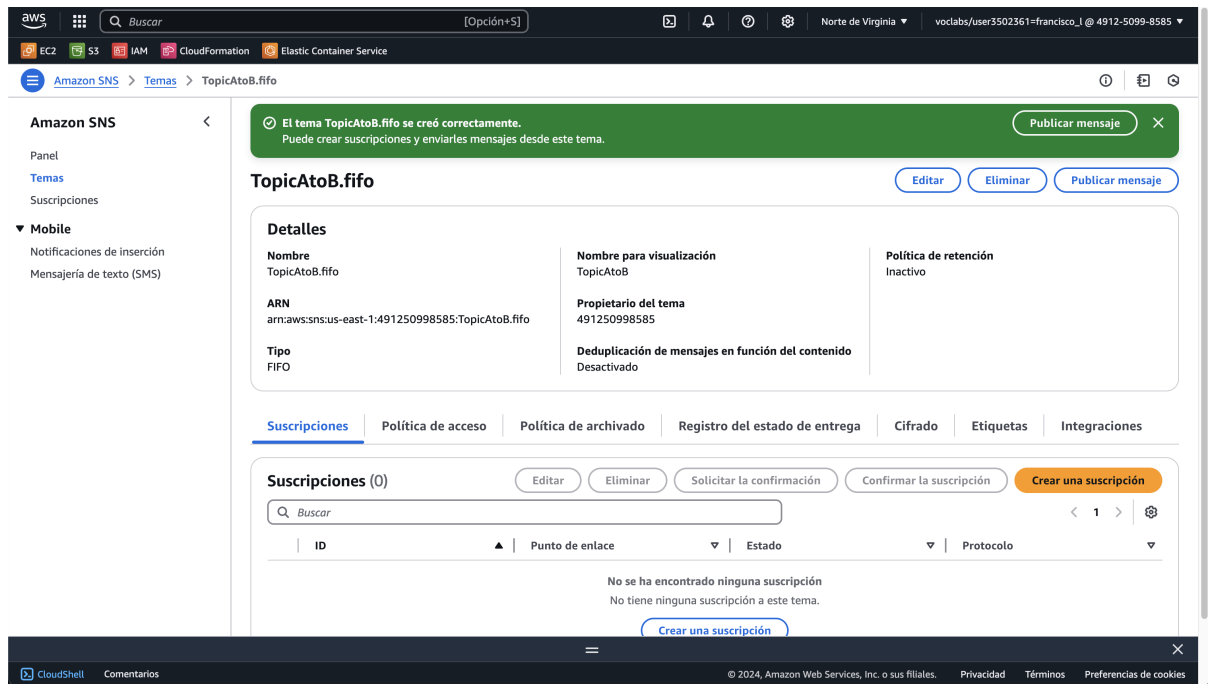


2. Obtener el Endpoint Público de fA

- Desde la consola EC2, ubicamos la instancia que corre **fA**.
- Copiamos su **Public DNS** o **Public IP**.
- En nuestro caso, **fA** escucha en el puerto **5001**, por lo que el endpoint será algo como:
http://<PublicDNS>:5001/start

3. Crear una suscripción HTTP al Topic SNS

- En Amazon SNS: **Temas**, seleccionamos el **Tema** recién creado.
- Click en **Crear una suscripción**.
- **Protocolo**: **HTTP**
- **Punto de enlace**: **http://ec2-18-232-98-219.compute-1.amazonaws.com:5001/start**

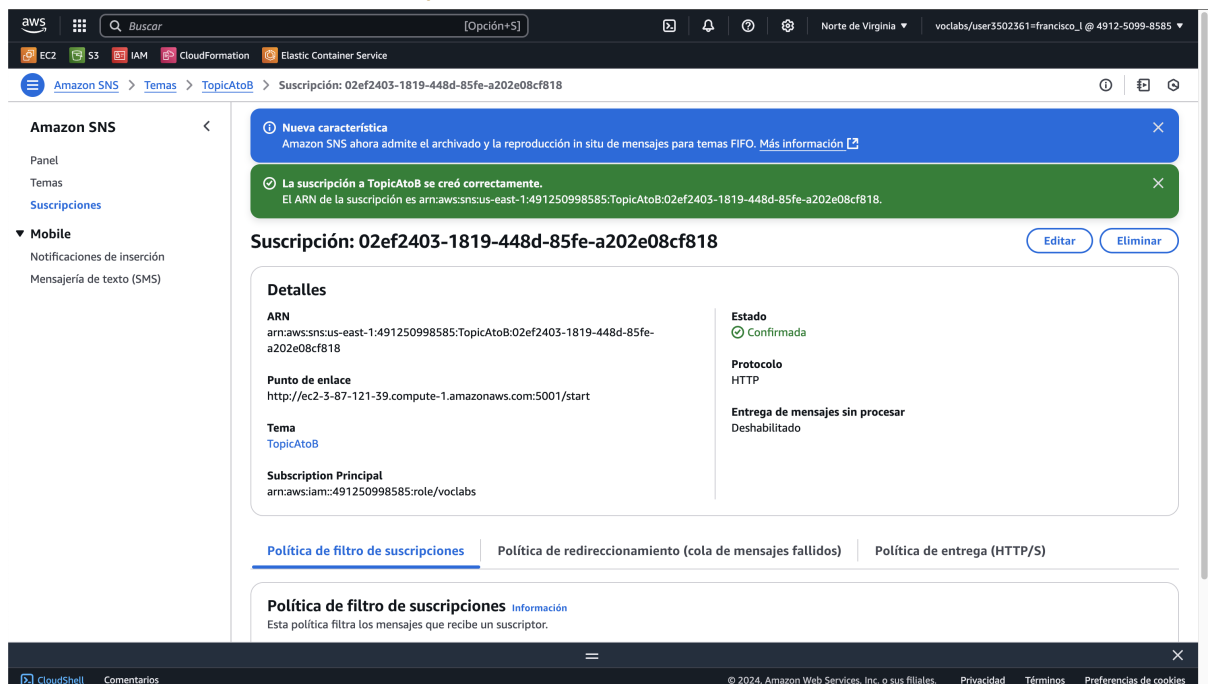

4. Confirmar la Suscripción en fA

- SNS enviará una petición **POST** al endpoint **/start** para confirmar la suscripción.
- En los logs de **fA** (**/var/log/fa_service.log**) se podrá ver un mensaje indicando la recepción de la confirmación de suscripción. **fA** deberá responder con un código **200** para validar la suscripción.

The image shows two terminal windows. The left window is a macOS terminal where a user named franciscoj is running a curl command to send a POST request to an AWS endpoint. The command is: `curl -X POST -H "Content-Type: application/json" -d '{"data": {"Inicio": "A"}}' http://ec2-3-87-121-39.compute-1.amazonaws.com:5001/start`. The output shows a connection failure. The right window is a terminal on an EC2 instance (ip-10-0-1-27) where the user is running `tail -f /var/log/fa_service.log`. The log output shows the application starting, receiving a POST request at `/start`, and responding with a `200` status code. The log also shows the application receiving a confirmation message from SNS.

```
(base) franciscoj MacBook-Pro-de-Francisco ~ % curl -X POST -H "Content-Type: application/json" -d '{"data": {"Inicio": "A"}}' http://ec2-3-87-121-39.compute-1.amazonaws.com:5001/start
curl: (7) Failed to connect to ec2-3-87-121-39.compute-1.amazonaws.com port 5001 after 149 ms: Couldn't connect to server
(base) franciscoj MacBook-Pro-de-Francisco ~ % curl -X POST -H "Content-Type: application/json" -d '{"data": {"Inicio": "A"}}' http://ec2-3-87-121-39.compute-1.amazonaws.com:5001/start
{"fa_output": {"Inicio": "A", "status": "ok"}}
(base) franciscoj MacBook-Pro-de-Francisco ~ %
```

```
ec2-user@ip-10-0-1-27:~$ tail -f /var/log/fa_service.log
[ec2-user@ip-10-0-1-27 ~]$ tail -f /var/log/fa_service.log
* Serving Flask app 'fa'
* Debug mode: off
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
* Running on all addresses (0.0.0.0)
* Running on http://127.0.0.1:5001
* Running on http://10.0.1.27:5001
Press CTRL+C to quit
[fa] Recibiendo: Inicio:
[fa] Enviando a SQS: Inicio:A
62.117.159.64 - - [18/Dec/2024 05:06:17] "POST /start HTTP/1.1" 200 -
[fa] Recibida petición de confirmación de suscripción. URL: https://sns.us-east-1.amazonaws.com/?Action=ConfirmSubscription&TopicArn=arn:aws:sns:us-east-1:491250998585:TopicAtob&Token=2336412f37fb687f5d51e6e2425ba1f30845f212d5e59f49f24ebb4d7f3813e5887570ccc68d6e2760685eb753e4ef412b91315f3193a8a5b4cca5fb53be5a59e45b081653c419a4d3fda51e01747a087ec039c5b4e5e8d8c8a99800b8d944da70e067c01f37b4ef0907ff4ef350728
[fa] Suscripción a SNS confirmada con éxito.
15.221.161.74 - - [18/Dec/2024 05:07:05] "POST /start HTTP/1.1" 200 -
```

5. Probar la Integración

- Publicar un mensaje en el Topic SNS (ej. "Un mensaje para gobernarlos a todos desde SNS").
- **fA** recibirá el mensaje vía HTTP, lo procesará y lo enviará a **QueueAtob**. A partir de ahí, el flujo continuará como en el paso anterior.

The screenshot displays the AWS SNS console interface for a topic named 'TopicAtoB'. A green notification banner at the top states: 'El mensaje se publicó correctamente en el tema TopicAtoB. "ID" del mensaje: 74d39b77-de57-533b-8dd6-c4ab82e989c5 Solicitar "ID": d5d497bd-ecdc-5540-9ea4-c861b0626fbc'. The console shows the topic details, including its ARN and type. Below, the 'Suscripciones' (Subscriptions) section lists three subscriptions, with one confirmed and two pending.

Below the console, four CloudShell terminal windows are shown. The top-left terminal shows the command to send a message to the SNS topic using curl. The top-right terminal shows the output of the Flask application, which is receiving the message and logging it. The bottom-left terminal shows the output of the 'tail' command, displaying the message content. The bottom-right terminal shows the output of the 'tail' command, displaying the message content.

Esta integración añade mayor flexibilidad: ahora **fA** no sólo responde a peticiones manuales, sino también a eventos externos publicados en un Topic SNS, manteniendo el diseño desacoplado y escalable.

El código de la plantilla CloudFormation con SNS se encuentra en el [Anexo D](#).

4. Conclusiones

(Breve apartado donde se recogerán las reflexiones finales. Por ejemplo: dificultad de implementación, ventajas de la arquitectura desacoplada, potenciales problemas de latencia, costes estimados, escalabilidad, etc.)

5. Referencias

1. [AWS Docs - Ejemplos en GitHub](#)
2. [AWS SQS Documentation](#)
3. [AWS SNS Documentation](#)
4. [Microservices Best Practices](#)
5. [CloudFormation o Terraform \(si aplica\)](#)

6. Anexos

(Opcional: añadir todo el material extra, plantillas de CloudFormation, YAML/JSON, scripts de despliegue, capturas adicionales, etc.)

Anexo A: Código de las funciones monolíticas

```
# monolithic_app.py
import time

def fA(dataA):
    print("[fA] Recibiendo:", dataA)
    time.sleep(5) # Simula un proceso pesado
    return dataA + "A"

def fB(dataB):
    print("[fB] Recibiendo:", dataB)
    time.sleep(3) # Simula un proceso pesado
    return dataB + "B"

def fC(dataC):
    print("[fC] Recibiendo:", dataC)
    time.sleep(4) # Simula un proceso pesado
    return dataC + "C"

def monolithic_app():
    w = "Inicio:"
    print("Comienzo de la ejecución con w =", w)

    x = fA(w)
    y = fB(x)
    z = fC(y)

    print("Resultado final del flujo:", z)

if __name__ == "__main__":
    monolithic_app()
```

Anexo B: Código de las funciones desacopladas

```
# fA.py
import os
import time
import boto3
from flask import Flask, request

app = Flask(__name__)
sqs_client = boto3.client('sqs', region_name=os.environ.get("AWS_REGION",
"us-east-1"))
```

```

QUEUE_A_TO_B_URL = os.environ.get("QUEUE_A_TO_B_URL")

@app.route("/start", methods=["POST"])
def start_flow():
    """ Recibe un input (por ejemplo en JSON) y lo envía a la cola A->B
    """
    input_data = request.json.get("data", "Inicio:")
    print("[fA] Recibiendo:", input_data)

    # Simula un proceso costoso
    time.sleep(5)

    # Genera la salida
    output_data = input_data + "A"
    print("[fA] Enviando a SQS (QueueAtoB):", output_data)

    # Envía el resultado a la cola A->B
    sqs_client.send_message(
        QueueUrl=QUEUE_A_TO_B_URL,
        MessageBody=output_data
    )
    return {"status": "ok", "fA_output": output_data}, 200

if __name__ == "__main__":
    # Ejemplo: flask run -h 0.0.0.0 -p 5001
    app.run(host="0.0.0.0", port=5001)

```

```

# fB.py
import os
import time
import boto3

sqs_client = boto3.client('sqs', region_name=os.environ.get("AWS_REGION",
"us-east-1"))

QUEUE_A_TO_B_URL = os.environ.get("QUEUE_A_TO_B_URL")
QUEUE_B_TO_C_URL = os.environ.get("QUEUE_B_TO_C_URL")

def process_message_b(dataB):
    print("[fB] Procesando:", dataB)
    time.sleep(3)
    return dataB + "B"

def main_loop():
    """ Bucle infinito que hace polling de la cola A->B """
    while True:
        messages = sqs_client.receive_message(
            QueueUrl=QUEUE_A_TO_B_URL,
            MaxNumberOfMessages=1,
            WaitTimeSeconds=10 # Long Polling

```



```

    )
    if "Messages" in messages:
        for msg in messages["Messages"]:
            body = msg["Body"]
            output_data = process_message_b(body)

            # Enviar el resultado a la cola B->C
            print("[fB] Enviando a SQS (QueueBtoC):", output_data)
            sqs_client.send_message(
                QueueUrl=QUEUE_B_TO_C_URL,
                MessageBody=output_data
            )

            # Borrar el mensaje de la cola A->B
            sqs_client.delete_message(
                QueueUrl=QUEUE_A_TO_B_URL,
                ReceiptHandle=msg["ReceiptHandle"]
            )
        time.sleep(2) # Espera antes de seguir el polling

if __name__ == "__main__":
    main_loop()

```

```

# fC.py
import os
import time
import boto3

sqs_client = boto3.client('sqs', region_name=os.environ.get("AWS_REGION",
"us-east-1"))

QUEUE_B_TO_C_URL = os.environ.get("QUEUE_B_TO_C_URL")

def process_message_c(dataC):
    print("[fC] Procesando:", dataC)
    time.sleep(4)
    return dataC + "C"

def main_loop():
    """ Bucle infinito que hace polling de la cola B->C """
    while True:
        messages = sqs_client.receive_message(
            QueueUrl=QUEUE_B_TO_C_URL,
            MaxNumberOfMessages=1,
            WaitTimeSeconds=10 # Long Polling
        )
        if "Messages" in messages:
            for msg in messages["Messages"]:
                body = msg["Body"]
                output_data = process_message_c(body)

```

```

# Aquí podríamos almacenar el resultado en una base de
datos

print("[fC] Resultado final:", output_data)

# Borrar el mensaje de la cola B->C
sqs_client.delete_message(
    QueueUrl=QUEUE_B_TO_C_URL,
    ReceiptHandle=msg["ReceiptHandle"]
)
time.sleep(2)

if __name__ == "__main__":
    main_loop()

```

Anexo C: Plantilla de CloudFormation

```

# cloudformation.yml
AWSTemplateFormatVersion: "2010-09-09"
Description: "Desacoplamiento en tres microservicios con SQS y EC2"

Parameters:
  InstanceType:
    Type: String
    Default: t2.micro
    Description: Tipo de instancia EC2
    AllowedValues:
      - t2.micro
      - t2.small
      - t3.micro
      - t3.small

Resources:
  #####
  # 1. Colas SQS
  #####
  QueueAtoB:
    Type: AWS::SQS::Queue
    Properties:
      QueueName: "QueueAtoB"

  QueueBtoC:
    Type: AWS::SQS::Queue
    Properties:
      QueueName: "QueueBtoC"
  #####

  #####
  # 2. Rol IAM para EC2 con permisos SQS
  # Usaremos el rol por defecto "LabRole" que ya tiene permisos para SQS
  #####

```

```
#####  
# 2. VPC y Recursos de Red  
#####
```

VPC:

```
Type: AWS::EC2::VPC  
Properties:  
  CidrBlock: 10.0.0.0/16  
  EnableDnsSupport: true  
  EnableDnsHostnames: true  
  Tags:  
    - Key: Name  
      Value: MyVPC
```

InternetGateway:

```
Type: AWS::EC2::InternetGateway
```

VPCGatewayAttachment:

```
Type: AWS::EC2::VPCGatewayAttachment  
Properties:  
  VpcId: !Ref VPC  
  InternetGatewayId: !Ref InternetGateway
```

RouteTable:

```
Type: AWS::EC2::RouteTable  
Properties:  
  VpcId: !Ref VPC
```

Route:

```
Type: AWS::EC2::Route  
Properties:  
  RouteTableId: !Ref RouteTable  
  DestinationCidrBlock: 0.0.0.0/0  
  GatewayId: !Ref InternetGateway
```

Subnet1:

```
Type: AWS::EC2::Subnet  
Properties:  
  VpcId: !Ref VPC  
  CidrBlock: 10.0.1.0/24  
  MapPublicIpOnLaunch: true  
  AvailabilityZone: !Select [0, !GetAZs ""]
```

SubnetRouteTableAssociation:

```
Type: AWS::EC2::SubnetRouteTableAssociation  
Properties:  
  SubnetId: !Ref Subnet1  
  RouteTableId: !Ref RouteTable
```

```
#####  
# 3. Security Group  
#####
```

MicroservicesSecurityGroup:

```
Type: AWS::EC2::SecurityGroup
```

Properties:

GroupDescription: "Permite acceso HTTP a Flask"

VpcId: !Ref VPC

SecurityGroupIngress:

- IpProtocol: tcp
FromPort: 22
ToPort: 22
CidrIp: 0.0.0.0/0
- IpProtocol: tcp
FromPort: 5001
ToPort: 5001
CidrIp: 0.0.0.0/0 # fA
- IpProtocol: tcp
FromPort: 5002
ToPort: 5002
CidrIp: 0.0.0.0/0 # fB
- IpProtocol: tcp
FromPort: 5003
ToPort: 5003
CidrIp: 0.0.0.0/0 # fC

#####

4. Instancias EC2 (fA, fB, fC)

#####

EC2fA:

Type: AWS::EC2::Instance

Properties:

InstanceType: !Ref InstanceType

KeyName: vockey

SubnetId: !Ref Subnet1

IamInstanceProfile: LabInstanceProfile

SecurityGroupIds:

- !GetAtt MicroservicesSecurityGroup.GroupId

ImageId: ami-06b21ccaef8cd686

UserData:

Fn::Base64: !Sub |

#!/bin/bash

Update and install dependencies

yum update -y

yum install -y python3 git python3-pip

pip3 install flask boto3

Export environment variables in the current shell

export QUEUE_A_TO_B_URL=\${QueueAtoB}

export AWS_REGION=us-east-1

Add them to /etc/profile for future sessions

echo 'export QUEUE_A_TO_B_URL=\${QueueAtoB}' >> /etc/profile

echo 'export AWS_REGION=us-east-1' >> /etc/profile

Create the Python application

cat << EOF > /home/ec2-user/fA.py

import os

import time

```

import boto3
from flask import Flask, request

app = Flask(__name__)
sqs_client = boto3.client('sqs',
region_name=os.environ.get("AWS_REGION", "us-east-1"))

QUEUE_A_TO_B_URL = os.environ.get("QUEUE_A_TO_B_URL")

@app.route("/start", methods=["POST"])
def start_flow():
    input_data = request.json.get("data", "Inicio:")
    print("[fA] Recibiendo:", input_data, flush=True)
    time.sleep(5)
    output_data = input_data + "A"
    print("[fA] Enviando a SQS:", output_data, flush=True)
    sqs_client.send_message(QueueUrl=QUEUE_A_TO_B_URL,
MessageBody=output_data)
    return {"status": "ok", "fA_output": output_data}, 200

if __name__ == "__main__":
    app.run(host="0.0.0.0", port=5001)
EOF

# Ensure log file location exists and set permissions
sudo touch /var/log/fa_service.log
sudo chmod 644 /var/log/fa_service.log

# Run Python in unbuffered mode
nohup python3 -u /home/ec2-user/fA.py > /var/log/fa_service.log

```

2>&1 &

Metadata:

Comment: "Instancia EC2 que ejecuta microservicio fA"

EC2fB:

Type: AWS::EC2::Instance

Properties:

InstanceType: !Ref InstanceType

KeyName: vockey

SubnetId: !Ref Subnet1

IamInstanceProfile: LabInstanceProfile

SecurityGroupIds:

- !GetAtt MicroservicesSecurityGroup.GroupId

ImageId: ami-06b21ccaef8cd686

UserData:

Fn::Base64: !Sub |

#!/bin/bash

Update and install dependencies

yum update -y

yum install -y python3 git python3-pip

pip3 install boto3

Export environment variables in the current shell

export QUEUE_A_TO_B_URL=\${QueueAtoB}

```

export QUEUE_B_TO_C_URL=${QueueBtoC}
export AWS_REGION=us-east-1

# Add them to /etc/profile for future sessions
echo 'export QUEUE_A_TO_B_URL=${QueueAtoB}' >> /etc/profile
echo 'export QUEUE_B_TO_C_URL=${QueueBtoC}' >> /etc/profile
echo 'export AWS_REGION=us-east-1' >> /etc/profile

# Create the Python application
cat << EOF > /home/ec2-user/fB.py
import os
import time
import boto3

sqs_client = boto3.client('sqs',
region_name=os.environ.get("AWS_REGION", "us-east-1"))
QUEUE_A_TO_B_URL = os.environ.get("QUEUE_A_TO_B_URL")
QUEUE_B_TO_C_URL = os.environ.get("QUEUE_B_TO_C_URL")

def process_message_b(dataB):
    print("[fB] Procesando:", dataB, flush=True)
    time.sleep(3)
    return dataB + "B"

def main_loop():
    while True:
        messages = sqs_client.receive_message(
            QueueUrl=QUEUE_A_TO_B_URL,
            MaxNumberOfMessages=1,
            WaitTimeSeconds=10
        )
        if "Messages" in messages:
            for msg in messages["Messages"]:
                body = msg["Body"]
                output_data = process_message_b(body)
                print("[fB] Enviando a SQS:", output_data,
flush=True)

                sqs_client.send_message(
                    QueueUrl=QUEUE_B_TO_C_URL,
                    MessageBody=output_data
                )
                sqs_client.delete_message(
                    QueueUrl=QUEUE_A_TO_B_URL,
                    ReceiptHandle=msg["ReceiptHandle"]
                )
            time.sleep(2)

if __name__ == "__main__":
    main_loop()
EOF

# Ensure log file location exists and set permissions
sudo touch /var/log/fb_service.log
sudo chmod 644 /var/log/fb_service.log

```

```

    # Run Python in unbuffered mode
    nohup python3 -u /home/ec2-user/fB.py > /var/log/fb_service.log
2>&1 &
Metadata:
  Comment: "Instancia EC2 que ejecuta microservicio fB"

EC2fC:
  Type: AWS::EC2::Instance
  Properties:
    InstanceType: !Ref InstanceType
    KeyName: vockey
    SubnetId: !Ref Subnet1
    IamInstanceProfile: LabInstanceProfile
    SecurityGroupIds:
      - !GetAtt MicroservicesSecurityGroup.GroupId
    ImageId: ami-06b21ccaef8cd686
    UserData:
      Fn::Base64: !Sub |
        #!/bin/bash
        # Update and install dependencies
        yum update -y
        yum install -y python3 git python3-pip
        pip3 install boto3

        # Export environment variables in the current shell
        export QUEUE_B_TO_C_URL=${QueueBtoC}
        export AWS_REGION=us-east-1

        # Add them to /etc/profile for future sessions
        echo 'export QUEUE_B_TO_C_URL=${QueueBtoC}' >> /etc/profile
        echo 'export AWS_REGION=us-east-1' >> /etc/profile

        # Create the Python application
        cat << EOF > /home/ec2-user/fC.py
        import os
        import time
        import boto3

        sqs_client = boto3.client('sqs',
region_name=os.environ.get("AWS_REGION", "us-east-1"))
        QUEUE_B_TO_C_URL = os.environ.get("QUEUE_B_TO_C_URL")

        def process_message_c(dataC):
            print("[fC] Procesando:", dataC, flush=True)
            time.sleep(4)
            return dataC + "C"

        def main_loop():
            while True:
                messages = sqs_client.receive_message(
                    QueueUrl=QUEUE_B_TO_C_URL,
                    MaxNumberOfMessages=1,
                    WaitTimeSeconds=10

```

```

    )
    if "Messages" in messages:
        for msg in messages["Messages"]:
            body = msg["Body"]
            output_data = process_message_c(body)
            print("[fC] Resultado final:", output_data,
flush=True)

            sqs_client.delete_message(
                QueueUrl=QUEUE_B_TO_C_URL,
                ReceiptHandle=msg["ReceiptHandle"]
            )
        time.sleep(2)

if __name__ == "__main__":
    main_loop()
EOF

# Ensure log file location exists and set permissions
sudo touch /var/log/fc_service.log
sudo chmod 644 /var/log/fc_service.log

# Run Python in unbuffered mode
nohup python3 -u /home/ec2-user/fC.py > /var/log/fc_service.log

```

2>&1 &

Metadata:

Comment: "Instancia EC2 que ejecuta microservicio fC"

Outputs:

QueueAtoBUrl:

Description: URL de la cola A->B

Value: !Ref QueueAtoB

QueueBtoCUrl:

Description: URL de la cola B->C

Value: !Ref QueueBtoC

fAInstanceID:

Description: Instancia que corre microservicio fA

Value: !Ref EC2fA

fBInstanceID:

Description: Instancia que corre microservicio fB

Value: !Ref EC2fB

fCInstanceID:

Description: Instancia que corre microservicio fC

Value: !Ref EC2fC

Anexo D: Plantilla de CloudFormation con SNS


```

# cloudformation_sns.yml
AWSTemplateFormatVersion: "2010-09-09"
Description: "Desacoplamiento en tres microservicios con SQS y EC2"

Parameters:
  InstanceType:
    Type: String
    Default: t2.micro
    Description: Tipo de instancia EC2
    AllowedValues:
      - t2.micro
      - t2.small
      - t3.micro
      - t3.small

Resources:
  #####
  # 1. Colas SQS
  #####
  QueueAtoB:
    Type: AWS::SQS::Queue
    Properties:
      QueueName: "QueueAtoB"

  QueueBtoC:
    Type: AWS::SQS::Queue
    Properties:
      QueueName: "QueueBtoC"
  #####

  #####
  # 2. Rol IAM para EC2 con permisos SQS
  # Usaremos el rol por defecto "LabRole" que ya tiene permisos para SQS
  #####

  #####
  # 2. VPC y Recursos de Red
  #####

  VPC:
    Type: AWS::EC2::VPC
    Properties:
      CidrBlock: 10.0.0.0/16
      EnableDnsSupport: true
      EnableDnsHostnames: true
      Tags:
        - Key: Name
          Value: MyVPC

  InternetGateway:
    Type: AWS::EC2::InternetGateway

  VPCGatewayAttachment:

```

```

Type: AWS::EC2::VPCGatewayAttachment
Properties:
  VpcId: !Ref VPC
  InternetGatewayId: !Ref InternetGateway

RouteTable:
  Type: AWS::EC2::RouteTable
  Properties:
    VpcId: !Ref VPC

Route:
  Type: AWS::EC2::Route
  Properties:
    RouteTableId: !Ref RouteTable
    DestinationCidrBlock: 0.0.0.0/0
    GatewayId: !Ref InternetGateway

Subnet1:
  Type: AWS::EC2::Subnet
  Properties:
    VpcId: !Ref VPC
    CidrBlock: 10.0.1.0/24
    MapPublicIpOnLaunch: true
    AvailabilityZone: !Select [0, !GetAZs ""]

SubnetRouteTableAssociation:
  Type: AWS::EC2::SubnetRouteTableAssociation
  Properties:
    SubnetId: !Ref Subnet1
    RouteTableId: !Ref RouteTable

#####
# 3. Security Group
#####
MicroservicesSecurityGroup:
  Type: AWS::EC2::SecurityGroup
  Properties:
    GroupDescription: "Permite acceso HTTP a Flask"
    VpcId: !Ref VPC
    SecurityGroupIngress:
      - IpProtocol: tcp
        FromPort: 22
        ToPort: 22
        CidrIp: 0.0.0.0/0
      - IpProtocol: tcp
        FromPort: 5001
        ToPort: 5001
        CidrIp: 0.0.0.0/0 # fA
      - IpProtocol: tcp
        FromPort: 5002
        ToPort: 5002
        CidrIp: 0.0.0.0/0 # fB
      - IpProtocol: tcp
        FromPort: 5003

```

```
ToPort: 5003
CidrIp: 0.0.0.0/0 # fC
```

```
#####
# 4. Instancias EC2 (fA, fB, fC)
#####
```

```
EC2fA:
```

```
Type: AWS::EC2::Instance
```

```
Properties:
```

```
InstanceType: !Ref InstanceType
```

```
KeyName: vockey
```

```
SubnetId: !Ref Subnet1
```

```
IamInstanceProfile: LabInstanceProfile
```

```
SecurityGroupIds:
```

```
  - !GetAtt MicroservicesSecurityGroup.GroupId
```

```
ImageId: ami-06b21ccaef8cd686
```

```
UserData:
```

```
Fn::Base64: !Sub |
```

```
#!/bin/bash
```

```
# Update and install dependencies
```

```
yum update -y
```

```
yum install -y python3 git python3-pip
```

```
pip3 install flask boto3
```

```
# Export environment variables in the current shell
```

```
export QUEUE_A_TO_B_URL=${QueueAtoB}
```

```
export AWS_REGION=us-east-1
```

```
# Add them to /etc/profile for future sessions
```

```
echo 'export QUEUE_A_TO_B_URL=${QueueAtoB}' >> /etc/profile
```

```
echo 'export AWS_REGION=us-east-1' >> /etc/profile
```

```
# Create the Python application
```

```
cat << EOF > /home/ec2-user/fA.py
```

```
from flask import Flask, request
```

```
import requests
```

```
import json
```

```
import os
```

```
import time
```

```
import boto3
```

```
app = Flask(__name__)
```

```
sqs_client = boto3.client('sqs',
```

```
region_name=os.environ.get("AWS_REGION", "us-east-1"))
```

```
QUEUE_A_TO_B_URL = os.environ.get("QUEUE_A_TO_B_URL")
```

```
@app.route("/start", methods=["POST"])
```

```
def start_flow():
```

```
    try:
```

```
        # Intentar obtener el JSON del cuerpo
```

```
        message = request.get_json(force=True) # 'force=True'
```

```
evita problemas de Content-Type
```

```
    except Exception as e:
```

```

        return {"status": "error", "message": "Invalid JSON
format"}, 415

    # Comprobar si es una suscripción de SNS
    if message and message.get("Type") ==
"SubscriptionConfirmation":
        subscribe_url = message.get("SubscribeURL")
        print("[fA] Recibida petición de confirmación de
suscripción. URL:", subscribe_url)

        # Realizar GET a la SubscribeURL para confirmar la
suscripción
        r = requests.get(subscribe_url)
        if r.status_code == 200:
            print("[fA] Suscripción a SNS confirmada con
éxito.")
            return {"status": "SNS subscription confirmed"}, 200
        else:
            print("[fA] Error al confirmar la suscripción SNS.
Código:", r.status_code)
            return {"status": "SNS subscription confirmation
failed"}, 500

    # Flujo normal de fA
    input_data = message.get("data", "Inicio:")
    print("[fA] Recibiendo:", input_data, flush=True)
    time.sleep(5)
    output_data = input_data + "A"
    print("[fA] Enviando a SQS:", output_data, flush=True)
    sqs_client.send_message(QueueUrl=QUEUE_A_TO_B_URL,
MessageBody=output_data)
    return {"status": "ok", "fA_output": output_data}, 200

if __name__ == "__main__":
    app.run(host="0.0.0.0", port=5001)
EOF

sudo touch /var/log/fa_service.log
sudo chmod 644 /var/log/fa_service.log

# Run Python in unbuffered mode
nohup python3 -u /home/ec2-user/fA.py > /var/log/fa_service.log
2>&1 &

Metadata:
    Comment: "Instancia EC2 que ejecuta microservicio fA"

EC2fB:
    Type: AWS::EC2::Instance
    Properties:
        InstanceType: !Ref InstanceType
        KeyName: vockey
        SubnetId: !Ref Subnet1
        IamInstanceProfile: LabInstanceProfile
        SecurityGroupIds:

```

```

- !GetAtt MicroservicesSecurityGroup.GroupId
ImageId: ami-06b21ccaef8cd686
UserData:
  Fn::Base64: !Sub |
    #!/bin/bash
    # Update and install dependencies
    yum update -y
    yum install -y python3 git python3-pip
    pip3 install boto3

    # Export environment variables in the current shell
    export QUEUE_A_TO_B_URL=${QueueAtoB}
    export QUEUE_B_TO_C_URL=${QueueBtoC}
    export AWS_REGION=us-east-1

    # Add them to /etc/profile for future sessions
    echo 'export QUEUE_A_TO_B_URL=${QueueAtoB}' >> /etc/profile
    echo 'export QUEUE_B_TO_C_URL=${QueueBtoC}' >> /etc/profile
    echo 'export AWS_REGION=us-east-1' >> /etc/profile

    # Create the Python application
    cat << EOF > /home/ec2-user/fb.py
    import os
    import time
    import boto3

    sqs_client = boto3.client('sqs',
region_name=os.environ.get("AWS_REGION", "us-east-1"))
    QUEUE_A_TO_B_URL = os.environ.get("QUEUE_A_TO_B_URL")
    QUEUE_B_TO_C_URL = os.environ.get("QUEUE_B_TO_C_URL")

    def process_message_b(dataB):
        print("[fb] Procesando:", dataB, flush=True)
        time.sleep(3)
        return dataB + "B"

    def main_loop():
        while True:
            messages = sqs_client.receive_message(
                QueueUrl=QUEUE_A_TO_B_URL,
                MaxNumberOfMessages=1,
                WaitTimeSeconds=10
            )
            if "Messages" in messages:
                for msg in messages["Messages"]:
                    body = msg["Body"]
                    output_data = process_message_b(body)
                    print("[fb] Enviando a SQS:", output_data,
flush=True)

                    sqs_client.send_message(
                        QueueUrl=QUEUE_B_TO_C_URL,
                        MessageBody=output_data
                    )
                    sqs_client.delete_message(

```

```

        QueueUrl=QUEUE_A_TO_B_URL,
        ReceiptHandle=msg["ReceiptHandle"]
    )
    time.sleep(2)

if __name__ == "__main__":
    main_loop()
EOF

sudo touch /var/log/fb_service.log
sudo chmod 644 /var/log/fb_service.log

# Run Python in unbuffered mode
nohup python3 -u /home/ec2-user/fB.py > /var/log/fb_service.log
2>&1 &

Metadata:
  Comment: "Instancia EC2 que ejecuta microservicio fB"

EC2fC:
  Type: AWS::EC2::Instance
  Properties:
    InstanceType: !Ref InstanceType
    KeyName: vockey
    SubnetId: !Ref Subnet1
    IamInstanceProfile: LabInstanceProfile
    SecurityGroupIds:
      - !GetAtt MicroservicesSecurityGroup.GroupId
    ImageId: ami-06b21ccaef8cd686
    UserData:
      Fn::Base64: !Sub |
        #!/bin/bash
        # Update and install dependencies
        yum update -y
        yum install -y python3 git python3-pip
        pip3 install boto3

        # Export environment variables in the current shell
        export QUEUE_B_TO_C_URL=${QueueBtoC}
        export AWS_REGION=us-east-1

        # Add them to /etc/profile for future sessions
        echo 'export QUEUE_B_TO_C_URL=${QueueBtoC}' >> /etc/profile
        echo 'export AWS_REGION=us-east-1' >> /etc/profile

        # Create the Python application
        cat << EOF > /home/ec2-user/fC.py
        import os
        import time
        import boto3

        sqs_client = boto3.client('sqs',
region_name=os.environ.get("AWS_REGION", "us-east-1"))
        QUEUE_B_TO_C_URL = os.environ.get("QUEUE_B_TO_C_URL")

```

```

def process_message_c(dataC):
    print("[fC] Procesando:", dataC, flush=True)
    time.sleep(4)
    return dataC + "C"

def main_loop():
    while True:
        messages = sqs_client.receive_message(
            QueueUrl=QUEUE_B_TO_C_URL,
            MaxNumberOfMessages=1,
            WaitTimeSeconds=10
        )
        if "Messages" in messages:
            for msg in messages["Messages"]:
                body = msg["Body"]
                output_data = process_message_c(body)
                print("[fC] Resultado final:", output_data,
flush=True)

                sqs_client.delete_message(
                    QueueUrl=QUEUE_B_TO_C_URL,
                    ReceiptHandle=msg["ReceiptHandle"]
                )
            time.sleep(2)

if __name__ == "__main__":
    main_loop()
EOF

sudo touch /var/log/fc_service.log
sudo chmod 644 /var/log/fc_service.log

# Run Python in unbuffered mode
nohup python3 -u /home/ec2-user/fC.py > /var/log/fc_service.log

```

2>&1 &

Metadata:

Comment: "Instancia EC2 que ejecuta microservicio fC"

Outputs:

QueueAtoBUrl:

Description: URL de la cola A->B

Value: [!Ref QueueAtoB](#)

QueueBtoCUrl:

Description: URL de la cola B->C

Value: [!Ref QueueBtoC](#)

fAInstanceID:

Description: Instancia que corre microservicio fA

Value: [!Ref EC2fA](#)

fBInstanceID:

Description: Instancia que corre microservicio fB

Value: [!Ref EC2fB](#)

fCInstanceID:

Description: Instancia que corre microservicio fC

Value: !Ref EC2fC