



Objective

- Learning the Recursion Trace.

Q. # 1. Create a recursion trace (Recursion Tree) for the following algorithms using the provided starting value(s); also show the return value at each level of recursion.

A.

```
int f(int k, int n)
{
    if (n == k)
        return k;
    else if (n > k)
        return f(k, n-k);
    else
        return f(k-n, n);
}
```

Starting Values : k=6, n=8

B. Give recursive trace but also tell that what argument values, if any, could you pass to F that would cause the program to run forever?

```
int F(int N)
{
    cout<<"F entered with N = "<<N<<"\n";
    if (N >= 0 && N <= 2)
    {
        return N+1;
    }
    else
    {
        return F(N-2) * F(N-4);
    }
}
```

C.

```
int mystery(int x, int y)
{
    if (x < 0)
    {
        return -mystery(-x, y);
    }
    else if (y < 0)
    {
        return -mystery(x, -y);
    }
    else if (x == 0 && y == 0)
    {
        return 0;
    }
    else
    {
        return 100 * mystery(x / 10, y / 10) + 10 * (x % 10) + y % 10;
    }
}
```

Draw its recursive trace for following calls

- mystery(7, -2);
- mystery(29, 45);
- mystery(135, 246);

D.

```
int enigma ( int m, int n)
{
    if ( m==0 )
        return n+1;
    else if ( n==0 )
        return enigma(m-1,1);
    else
        return enigma( m-1, enigma( m, n-1) );
}
```

Starting values: m = 1 and n = 3.

E.

```
int mystery( int n )
{
    if ( n<=1 )
        return n;
    else if ( n%2 == 0 )
        return n + mystery(n/2);
    else return mystery( ( n+1)/2 ) + mystery( (n-1)/2 );
}
```

Starting value: n=13

Question below are related to permutation and combination story: you may read the following to review these concepts:

<http://www.mathsisfun.com/combinatorics/combinations-permutations.html>

Q. # 2. Consider the following function i.e. 'permutation', which display all the possible permutation of the given string. Your task is to show the recursive trace for string = "ABC"

```
void swap(char *fir, char *sec)
{
    char temp = *fir;
    *fir = *sec;
    *sec = temp;
}


/* arr is the string, curr is the current index to start permutation from and
size is sizeof the arr */
void permutation(char * arr, int curr, int size)
{
    if(curr == size-1)
    {
        for(int a=0; a<size; a++)
            cout << arr[a] << "\t";
        cout << endl;
    }

    else
    {
        for(int i=curr; i<size; i++)
        {
            swap(&arr[curr], &arr[i]);
            permutation(arr, curr+1, size);
            swap(&arr[curr], &arr[i]);
        }
    }
}
```

}

```
int main()
{
    char str[] = "ABC";

    permutation(str, 0, sizeof(str)-1);
    return 0;
}
```

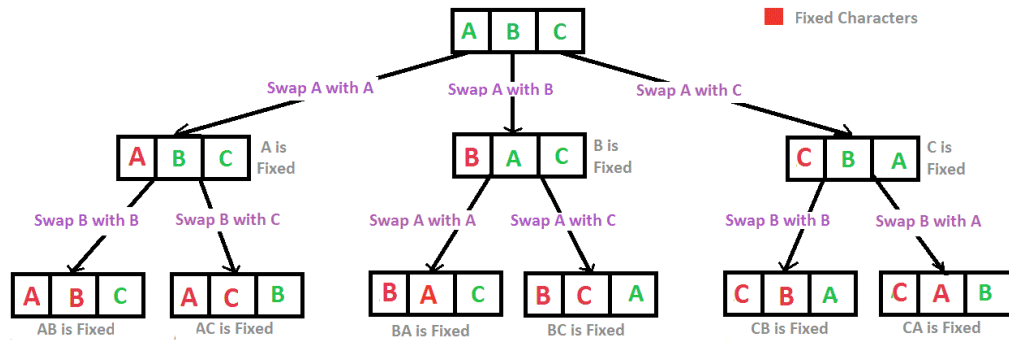

Recursion Tree for Permutations of String "ABC"