

# **FUJITSU Software Enterprise Service Catalog Manager V17.9**

A horizontal band featuring a red abstract graphic with flowing, curved lines and a bright light source, creating a sense of motion and energy.

## **Shell Integration**

January 2019

## Trademarks

LINUX is a registered trademark of Linus Torvalds.

Open Service Catalog Manager is a registered trademark of FUJITSU LIMITED.

The OpenStack Word Mark and OpenStack logo are registered trademarks/service marks or trademarks/service marks of the OpenStack Foundation in the United States and other countries.

Apache Tomcat, Tomcat, and Apache are trademarks of The Apache Software Foundation.

Java is a registered trademark of Oracle and/or its affiliates.

UNIX is a registered trademark of the Open Group in the United States and in other countries.

Other company names and product names are trademarks or registered trademarks of their respective owners.

Copyright FUJITSU  
ENABLING SOFTWARE  
TECHNOLOGY GMBH  
2019

All rights reserved, including those of translation into other languages. No part of this manual may be reproduced in any form whatsoever without the written permission of FUJITSU ENABLING SOFTWARE TECHNOLOGY GMBH.

## High Risk Activity

The Customer acknowledges and agrees that the Product is designed, developed and manufactured as contemplated for general use, including without limitation, general office use, personal use, household use, and ordinary industrial use, but is not designed, developed and manufactured as contemplated for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could lead directly to death, personal injury, severe physical damage or other loss (hereinafter "High Safety Required Use"), including without limitation, nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system. The Customer shall not use the Product without securing the sufficient safety required for the High Safety Required Use. In addition, FUJITSU (or other affiliate's name) shall not be liable against the Customer and/or any third party for any claims or damages arising in connection with the High Safety Required Use of the Product.

## Export Restrictions

Exportation/release of this document may require necessary procedures in accordance with the regulations of your resident country and/or US export control laws.

---

# Contents

	<b>About this Manual.....</b>	<b>4</b>
<b>1</b>	<b>Introduction.....</b>	<b>7</b>
1.1	Components Involved in the Shell Integration.....	7
1.2	Usage Scenarios.....	8
<b>2</b>	<b>Creating and Publishing Services.....</b>	<b>9</b>
2.1	Prerequisites and Preparation.....	9
2.2	Creating Technical Services.....	10
2.3	Creating and Publishing Marketable Services.....	11
2.4	Configuring the Status Information Page.....	11
<b>3</b>	<b>Administering the Shell Integration.....</b>	<b>13</b>
3.1	Handling Problems in the Provisioning Process.....	13
3.2	Updating Service Controller Settings in the Database.....	14
3.3	Changing the Responsible Organization.....	15
3.4	Logging.....	15
	<b>Appendix A Controller Configuration Settings.....</b>	<b>16</b>
	<b>Appendix B Service Parameters and Operations.....</b>	<b>17</b>
	<b>Glossary .....</b>	<b>20</b>

---

## About this Manual

This manual describes the integration of the Shell service with ) FUJITSU Software Enterprise Service Catalog Manager, hereafter referred to as ESCM.

This manual is structured as follows:

Chapter	Description
<i>Introduction on page 7</i>	Provides an overview of the ESCM Shell integration, the components involved, and the supported usage scenarios.
<i>Creating and Publishing Services on page 9</i>	Describes how to prepare and provided Shell scripts, how to create and publish services for the Shell integration in ESCM, as well as how to configure a status information page for viewing details regarding script execution.
<i>Adminstrating the Shell Integration on page 13</i>	Describes administration tasks related to the ESCM Shell integration.
<i>Controller Configuration Settings on page 16</i>	Describes the configuration settings for the Shell integration software.
<i>Service Parameters and Operations on page 17</i>	Describes the technical service parameters and operations which are supported by the Shell service controller.

## Readers of this Manual

This manual is intended for operators who want to use Shell scripts for offering services on a marketplace provided by ESCM. It assumes that you have access to an existing ESCM installation that supports Shell execution. In addition, you should have basic knowledge of Shell scripts and you should be familiar with the concepts and administration of ESCM.

## Notational Conventions

This manual uses the following notational conventions:

<b>Add</b>	Names of graphical user interface elements.
<code>init</code>	System names, for example command names and text that is entered from the keyboard.
<code>&lt;variable&gt;</code>	Variables for which values must be entered.
<code>[option]</code>	Optional items, for example optional command parameters.
<code>one   two</code>	Alternative entries.
<code>{one   two}</code>	Mandatory entries with alternatives.

## Abbreviations

This manual uses the following abbreviations:

<b>APP</b>	Asynchronous Provisioning Platform
<b>ESCM</b>	Enterprise Service Catalog Manager
<b>DBMS</b>	Database Management System
<b>IaaS</b>	Infrastructure as a Service
<b>IdP</b>	SAML Identity Provider
<b>SAML</b>	Security Assertion Markup Language
<b>STS</b>	Security Token Service
<b>WSDL</b>	Web Services Description Language
<b>WSIT</b>	Web Services Interoperability Technologies

## Available Documentation

The following documentation on ESCM is available:

- *Overview*: A PDF manual introducing ESCM. It is written for everybody interested in ESCM and does not require any special knowledge.
- *Operator's Guide*: A PDF manual for operators describing how to administrate and maintain ESCM.
- *Technology Provider's Guide*: A PDF manual for technology providers describing how to prepare applications for usage in a SaaS model and how to integrate them with ESCM.
- *Supplier's Guide*: A PDF manual for suppliers describing how to define and manage service offerings for applications that have been integrated with ESCM.
- *Reseller's Guide*: A PDF manual for resellers describing how to prepare, offer, and sell services defined by suppliers.
- *Broker's Guide*: A PDF manual for brokers describing how to support suppliers in establishing relationships to customers by offering their services on a marketplace.
- *Marketplace Owner's Guide*: A PDF manual for marketplace owners describing how to administrate and customize marketplaces in ESCM.
- *Microsoft Azure Integration*: A PDF manual for operators describing how to offer and use virtual systems controlled by Microsoft Azure through services in ESCM.
- *Amazon Web Services Integration*: A PDF manual for operators describing how to offer and use virtual servers controlled by the Amazon Elastic Compute Cloud Web service through services in ESCM.
- *OpenStack Integration*: A PDF manual for operators describing how to offer and use virtual systems controlled by OpenStack through services in ESCM.
- *VMware vSphere Integration*: A PDF manual for operators describing how to offer and use virtual machines provisioned on a VMware vSphere server through services in ESCM.
- *Shell Integration*: A PDF manual for operators describing how to use Shell scripts through services in ESCM.

- *Online Help*: Online help pages describing how to work with the administration portal of ESCM. The online help is intended for and available to everybody working with the administration portal.

# 1 Introduction

Enterprise Service Catalog Manager (ESCM) is a set of services which provide all business-related functions and features required for turning on-premise applications and tools into 'as a Service' (aaS) offerings and using them in the Cloud. This includes ready-to-use account and subscription management, online service provisioning, billing and payment services, and reporting facilities.

The Shell integration software allows users to install any software or execute any task in a UNIX environment by running Shell scripts.

When integrating applications with ESCM, the instance provisioning can be done in two provisioning modes: synchronous or asynchronous mode.


Asynchronous provisioning is required if provisioning operations take a long time because long-running processes or manual steps are involved. This is the case, for example, when provisioning virtual machines on a virtual machine server. ESCM supports the integration of such applications with its asynchronous provisioning platform (APP). This is a framework which provides a provisioning service as well as functions, data persistence, and notification features which are always required for integrating applications in asynchronous mode.

When deploying the `oscm-app` container provided with ESCM, a Shell service controller is preconfigured and registered with the asynchronous provisioning platform (APP).

This manual describes how to create and use services for Shell scripts on an ESCM marketplace.

## 1.1 Components Involved in the Shell Integration

The following picture provides an overview of the main components involved in the integration of ESCM and Shell scripts:

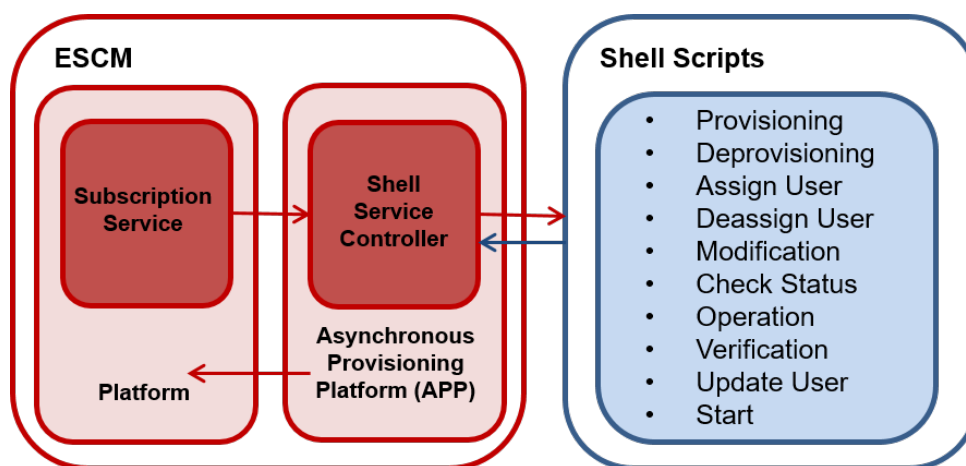

In ESCM, customer subscriptions are managed by means of the **Subscription service**. When a customer creates or terminates a subscription, the Subscription service asynchronously triggers the corresponding actions in a Shell through the **Asynchronous Provisioning Platform (APP)** and the **Shell service controller**: Scripts are executed in a Shell.

APP is a framework which provides a provisioning service, an operation service, as well as functions, data persistence, and notification features which are required for integrating applications with ESCM in asynchronous mode. The actual communication with the applications is carried out

by service controllers. For each application, a specific and dedicated service controller is required. Refer to the *Technology Provider's Guide* for details on APP.

When APP is deployed, a Shell service controller is also deployed, registered, and initialized.

## 1.2 Usage Scenarios

The ESCM Shell integration supports the following usage scenarios:

- **Provisioning script:** When a customer subscribes to a corresponding service on an ESCM marketplace, the Shell service controller triggers the execution of a provisioning script.
- **Deprovisioning script:** When a customer terminates a subscription, the Shell service controller triggers the execution of a deprovisioning script. The subscription is terminated in ESCM independent of whether the Script execution is successful.
- **Assign user script:** When a customer assigns users to a subscription, the Shell service controller triggers the execution of an assign user script.
- **Deassign user script:** When a customer removes users from a subscription, the Shell service controller triggers the execution of a deassign users script.
- **Modification script:** When a customer reconfigures an existing subscription to a corresponding service, the Shell service controller triggers the execution of a modification script.
- **Status script:** When a customer opens the **Details** view of a subscription and then clicks the **Custom** tab (e.g. **Status** tab) that has been defined for the subscribed marketable service, the Shell service controller triggers the execution of a status script.

Additional scripts can be used optionally:

- **Operation script:** When a customer selects an operation for his subscription, the Shell service controller triggers the execution of an operation script.
- **Update user script:** When a customer updates the data of a user, the Shell service controller triggers the execution of an update user script.
- **Verification script:** When a customer subscribes to a corresponding service, the Shell service controller triggers the execution of a verification script, if defined and not empty. In case the verification script returns an error, the subscription process is aborted and the user is informed by a corresponding message. Note that the execution of a verification script is executed in synchronous mode; all other scripts are executed asynchronously.
- **Start script:** When starting the `oscm-app` container, the operator can execute a script (`start.sh`), for example, for installing additional software such as Python or PowerShell for executing remote commands.



## 2 Creating and Publishing Services

The following sections describe how to create and publish services in ESCM by means of which customers can execute Shell scripts.

### 2.1 Prerequisites and Preparation

The following prerequisites must be fulfilled before you can create and publish services in ESCM.

- To create technical services for the Shell integration in ESCM, you must have access to ESCM as a technology manager. You must be a member of the technology provider organization responsible for the Shell service controller as specified in the configuration settings for the installation.
- To create marketable services for the Shell integration in ESCM, you must have access to ESCM as a service manager of an organization with the supplier role. This may be the same organization as the technology provider organization or a different one.
- To publish your marketable services, you must have access to an appropriate marketplace in in your service manager role.

#### Preparing and Providing Shell Scripts

- Shell scripts must exist. They form the basis for the technical services in ESCM.
- Sample scripts are available [here](#).
- The technology provider organization responsible for the Shell service controller prepares the scripts to be called by the Shell service controller. These scripts can be defined in marketable service parameters and then be referenced as scripts located either inside or outside (external URL) the Docker host.


To reference a script located inside the Docker host, you need to provide it in the following directory on your Docker host:

```
/opt/scripts
```

As soon as you provide new scripts or change existing ones, you must restart the `oscm-app` container.

- After deployment, the `oscm-app` container has the above shared file system mounted.

- The Shell service controller will run scripts stored on the shared file system as the same UNIX user who runs the `oscm-app` container:

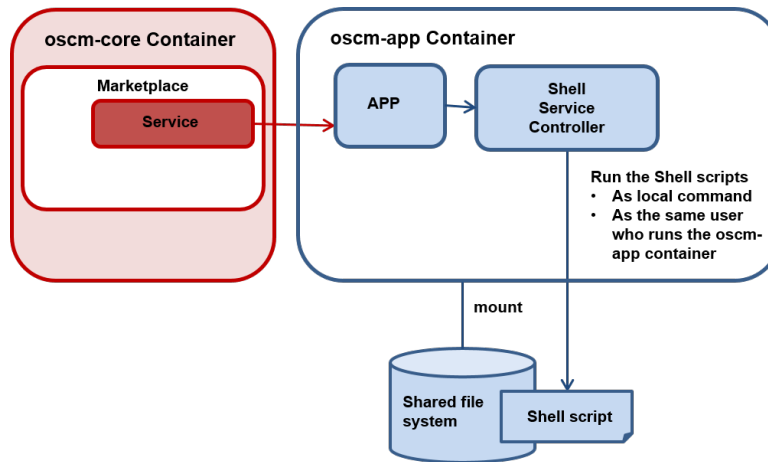

## Shell Script Syntax and Rules

Shell scripts to be executed properly are subject to the following rules:

- Each script must return a valid JSON object followed by an "END\_OF\_SCRIPT" string value. In this way, the Shell service controller can determine that a script has finished successfully. Otherwise the script execution will run into a timeout.
- Each script must return exactly one JSON object.
- The JSON result may contain the following JSON keywords:
  - `status` (mandatory) - allowed values: "ok" or "error"
  - `message` (mandatory) - may contain information related to the script execution addressed to the user.
  - `data` (optional) - may contain any data which can be output in the **Status** tab after the script has been executed. You can include the following JSON keywords in the `data` field:
    - `output` (optional) - may contain any data to be presented, for example, HTML data for the status script.
    - `accessInfo` (optional) - may contain access information to be passed to the subscription details for display.
    - `name` (optional) - may contain any temporary data.
    - `id` (optional) - may contain any ID.
- Special characters used in scripts must be properly escaped.
- You find valid and invalid script samples [here](#).

## 2.2 Creating Technical Services

The first step in providing ESCM services for Shell script execution is to create one or more technical services.

Proceed as follows:

1. Define one or more technical services in an XML file.

As a basis, you can use the technical service sample provided on <https://github.com/servicecatalog/oscm-app-shell/tree/master/src/main/resources>.

A technical service specifies Shell scripts as parameter options. Sample scripts are available [here](#).

In the technical service definition, be sure to specify:

- The asynchronous provisioning type
  - The USER access type
  - Service parameters which correspond to the parameters specified in the Shell scripts. For details on the supported service parameters, refer to *Service Parameters and Operations* on page 17.
2. Log in to the ESCM administration portal with your technology manager account.
  3. Import the technical services you created and appoint one or more supplier organizations for them.

For details on these steps, refer to the *Technology Provider's Guide* and to the online help of ESCM.

## 2.3 Creating and Publishing Marketable Services

As soon as the technical services for the Shell integration exist in ESCM, you can define and publish marketable services based on them. Your cost calculation for the services should include any external costs for operating any provisioned system, etc..

Proceed as follows:

1. Log in to the ESCM administration portal with your service manager account.
2. Define one or more marketable services based on the technical services you created for the Shell.
3. Define price models for your marketable services.
4. Publish the services to a marketplace.

For details on these steps, refer to the *Supplier's Guide* and to the online help of ESCM.

## 2.4 Configuring the Status Information Page

For checking the status of the results of a script execution, you can define a custom tab for the subscription details when defining a marketable service. In this way, you add a tab to the **Details** view for subscriptions on the marketplace:

1. Make sure that a script for checking the status of provisioned instances is available. Refer to this [sample script, status.sh](#) for details.
2. When creating or editing a marketable service definition for Shell script execution, specify a **URL of a custom tab**. This URL may point to a Web page or Web application the content of which will be retrieved and shown on the custom tab. Using a custom tab, you can provide the information needed for accessing, for example, provisioned instances, such as IP addresses, network information, or user credentials.

A predefined custom tab, `serverInformation.xhtml`, is available for viewing the output of a status script, e.g. `status.sh`.

You can set the URL for accessing the custom tab in the following format:

```
https://<app-host-name>:8881/<service controller name>/  
serverInformation.xhtml
```

For example:

```
https://oscm-app-host:8881/oscm-app-shell/serverInformation.xhtml
```

3. Enter a **Name of the custom tab**, for example, `Status`. Do not enter `Details` because the first tab is named that way.
4. Enter the name of the status script in the **Retrieve status of provisioned instance. Absolute filesystem path or URL to script file** field of the service parameters. It is assumed that the script is located in the `/opt/scripts/` folder of your Docker host where the `oscm-app` container has been deployed.
5. Save the marketable service definition.
6. Activate the marketable service, login to the marketplace, and create a subscription to the service.
7. Under **My Subscriptions**, you now see, aside the **Details** tab, the **Status** tab.

For details on defining marketable services, refer to the *Supplier's Guide* and to the online help of ESCM.

## 3 Administrating the Shell Integration

The following sections describe administration tasks you may need to perform in your role as an operator of the Shell integration software.

### 3.1 Handling Problems in the Provisioning Process

If there are problems in the communication between the participating systems, the corresponding subscription in ESCM remains pending. The Shell service controller informs the technology managers of its responsible technology provider organization by email of any incomplete operation in the Shell script execution.

You can then take the appropriate actions to solve the problem. For example, you could remove an incomplete virtual machine, or you could restore a missing connection.

After solving the problem, the Shell integration components and ESCM need to be synchronized accordingly. You do this by triggering a corresponding action in the APP component. Proceed as follows:

1. Work as a technology manager of the technology provider organization responsible for the Shell service controller.
2. Invoke the instance status interface of APP for the service controller of the application by opening its URL in a Web browser.

The access URL has the following format:

```
https://<hostname.fqdn>:<port>/oscm-app/controller/?controllerid=ess.shell
<hostname.fqdn> is the name and the fully qualified domain name of the machine where the
oscm-app container has been deployed, <port> is the port to address the machine (default:
8881), oscm-app/controller/?controllerid=ess.shell is the default context root of the
service controller and cannot be changed.
```

The Web page shows all subscriptions for the application, including detailed information such as the customer organization, the ID of the related application instance, and the provisioning status.

3. Find the subscription for which you solved the problem in the most recent operation.
4. In the **Action** column, select the action for the Shell integration components to execute next. Possible actions are the following:
  - **RESUME** - to resume the processing of a provisioning operation in APP which was suspended.
  - **SUSPEND** - to suspend the processing of a provisioning operation in APP, for example, when a Shell script does not respond.
  - **UNLOCK** - to remove the lock for an instance instance in APP.
  - **DELETE** - to terminate the subscription in ESCM and remove the instance in APP, but keep a virtual system for later use. The service manager role is required for this action.
  - **DEPROVISION** - to terminate the subscription in ESCM, remove the instance in APP, and delete any virtual system. The service manager role is required for this action.
  - **ABORT\_PENDING** - to abort a pending operation in ESCM. ESCM is notified to roll back the changes made for the subscription and return it to its previous state.
  - **COMPLETE\_PENDING** - to complete a pending operation in ESCM. ESCM is notified to complete the changes for the subscription and set the subscription status to **ready** (or

**suspended** if it was suspended before). This is possible only if the operations of the service controller are already completed.

5. Click **Execute** to invoke the selected action.

The instance status interface provides the following additional functionality that is useful for problem-solving purposes:

- You can display service instance details for each subscription by clicking the corresponding entry in the table. This displays all subscription-related information that is stored in the `bssapp` database.

## 3.2 Updating Service Controller Settings in the Database

During deployment, several configuration settings are written to the `bssapp` database. This configuration is used for the initial setup of the Shell service controller and its registration with APP. It is up to the platform operator for taking care that the initial settings are correct. Refer to the *Operator's Guide* for details on the initial configuration using a `var.env` file.

A technology provider can define service parameters in the technical service definition. If such a parameter has the same ID as a controller configuration setting stored in the APP database, it overrules the configuration setting in the database when the marketable service based on such a technical service is subscribed to. By default the values in the controller configuration settings are used. Refer to the *Technology Provider's Guide* for details on defining technical services.

In addition, a supplier can define custom attributes for subscriptions and for customers. If such an attribute has the same ID as a controller configuration setting stored in the APP database as well as a corresponding technical service parameter, it overrules the technical service parameter as well as the configuration setting in the database when the marketable service based on such a technical service is subscribed to.

The controller configuration settings are evaluated as follows:

1. Configuration setting as stored in the APP database.
2. Technical service parameter. If defined, it overrules 1.
3. Custom attribute for customer. If defined, it overrules 1. and 2.
4. Custom attribute for subscription. If defined, it overrules 1. and 2. and 3.

### To update the controller settings in the APP database:

1. Invoke the instance status interface of APP for the Shell service controller of the application by opening it's URL in a Web browser.

The access URL has the following format:

```
https://<hostname.fqdn>:<port>/oscm-app-shell
```

`<hostname.fqdn>` is the name and the fully qualified domain name of the machine where the `oscm-app` container has been deployed, `<port>` is the port to address the machine (default: 8881), `oscm-app-shell` is the default context root of the service controller and cannot be changed.

2. Log in with the ID and password of the user specified in the configuration settings for the Shell service controller by the platform operator in the `BSS_USER_ID` and `BSS_USER_PWD` configuration settings, or as another technology manager registered for the same organization.
3. The following settings can be changed:
  - **User ID:** The identifier of the user responsible for the Shell service controller.

- **User Key:** The user key for accessing ESCM. You receive this key with the confirmation email for your user account. The user must have the technology manager role in ESCM and belong to the technology provider organization responsible for the service controller.  
It is recommended that the user account is used only for carrying out actions on behalf of the service controller in ESCM.
- **Password:** The password of the user for accessing ESCM.

4. Save the settings.

### 3.3 Changing the Responsible Organization

You can change the technology provider organization responsible for the OpenStack service controller using the Web interface of APP:

1. In a Web browser, access the Web interface (base URL) of APP.

The access URL has the following format:

```
https://<hostname.fqdn>:<port>/oscm-app
```

<hostname.fqdn> is the name and the fully qualified domain name of the machine where the `oscm-app` container has been deployed, <port> is the port to address the machine (default: 8881), `oscm-app` is the default context root of APP and cannot be changed.

2. Log in with the ID and password of the user specified for `BSS_USER_KEY` in the configuration settings for APP or as another administrator of the same organization.

3. Specify the technology provider organization for the Shell service controller, `ess.shell`.

4. Save the settings.

5. Make sure that the configuration settings for the Shell service controller are updated.

Any technology manager registered for the technology provider organization you specified can log in to the graphical user interface for updating the controller configuration settings (see above). At least the ID and password of the user to be used for accessing ESCM must be changed in the controller configuration settings.

### 3.4 Logging

The Shell integration software records detailed information regarding script execution in the following log file inside the `oscm-app` container in the following folder:

```
/opt/apache-tomee/logs/app-shell.log
```

The logging is based on `log4j`.

**Note:** Be ware that this log file is available only if you set the `TOMEE_DEBUG` configuration setting in the `var.env` configuration file to `true`.

To view the log file, log into the `oscm-app` container as follows:

```
docker exec -it oscm-app /bin/bash
```

The default log level is `INFO`.

## Appendix A: Controller Configuration Settings

This appendix describes the controller configuration settings as stored in the `bssapp` database. For details on how to update them, refer to *Updating Service Controller Settings in the Database* on page 14 and *Changing the Responsible Organization* on page 15.

### CONTROLLER\_ID

`CONTROLLER_ID=ess.shell`

The identifier of the service controller. This setting cannot be changed.

### BSS\_ORGANIZATION\_ID

`BSS_ORGANIZATION_ID=<organizationID>`

The ID of the organization in ESCM which is responsible for the service controller. The organization must have the technology provider role. It is created and initially assigned to the Shell service controller by the platform operator.

### BSS\_USER\_ID

`BSS_USER_ID=<userId>`

The identifier of the user specified in `BSS_USER_KEY` for accessing ESCM.

### BSS\_USER\_KEY

`BSS_USER_KEY=<userKey>`

The user key for accessing ESCM.

The user key for accessing ESCM. You receive this key with the confirmation email for your user account. The user must have the technology manager role in ESCM and belong to the technology provider organization responsible for the service controller.

It is recommended that the user account is used only for carrying out actions on behalf of the service controller in ESCM.

### BSS\_USER\_PWD

`BSS_USER_PWD=_crypt:<password>`

The password of the user for accessing ESCM.



---

## Appendix B: Service Parameters and Operations

The following sections describe the technical service parameters and service operations which are supported by the Shell service controller.

### Service Parameters

The Shell service controller supports the parameters below.

You find a sample service on GitHub:

<https://github.com/servicecatalog/oscm-app-shell/tree/master/src/main/resources>.

The Shell service controller supports the parameters below.

**Note:** All parameters defined in the technical service definition must be one-time parameters, since the modification of parameters is not supported. Be sure to set their `modificationType` to `ONE_TIME`.

---

#### APP\_CONTROLLER\_ID

Mandatory. The ID of the service controller as defined in its implementation. The ID is set during the installation of the Shell integration software.

Default (must not be changed): `ess.shell`

---

#### PROVISIONING\_SCRIPT

Mandatory. The absolute file system path or URL to a Shell script file. The base folder is `/opt/scripts`. This script will be executed when a user subscribes to a service on the marketplace.

Example: `/provisioning.sh`

---

#### DEPROVISIONING\_SCRIPT

Mandatory. The absolute file system path or URL to a Shell script file. The base folder is `/opt/scripts`. This script will be executed when a user terminates the subscription.

Example: `/deprovisioning.sh`

---

#### UPDATE\_SCRIPT

Mandatory. The absolute file system path or URL to a Shell script file. The base folder is `/opt/scripts`. This script will be executed when a the configuration of an existing subscription is changed.

Example: `/update.sh`

---

#### ASSIGN\_USER\_SCRIPT

Mandatory. The absolute file system path or URL to a Shell script file. The base folder is `/opt/scripts`. This script will be executed when a user is assigned to a subscription.

Example: `/assign_user.sh`

---

#### DEASSIGN\_USER\_SCRIPT

Mandatory. The absolute file system path or URL to a Shell script file. The base folder is `/opt/scripts`. This script will be executed when a user is removed from a subscription.

Example: `/deassign_user.sh`

---

**CHECK\_STATUS\_SCRIPT**

Mandatory. The absolute file system path or URL to a Shell script file. The base folder is `/opt/scripts`. This script will be executed when a user opens the **Details** view under **My Subscriptions** and selects the **Status** tab. It retrieves the status of a provisioned instance.

Example: `/status.sh`

---

**SCRIPT\_TIMEOUT\_SECONDS**

Mandatory. The number of seconds until the execution of a running script will be canceled.

Default: 600

---

**<freely definable service parameter**

Optional. Any number of parameters that are mapped from the parameters defined in the Shell script files. For each parameter in the script file, a corresponding parameter must be specified in the technical service definition.

All service parameters are patched into the script file at the top of the file. For example, a service parameter called `MY_PARAM` can be used as `$MY_PARAM` in the script file.

Parameters are used for passing data for script execution, for example, number of allowed transactions, number of bookable CPUs, etc.

---

**OPERATIONS\_SCRIPT**

Optional. The absolute file system path or URL to a Shell script file defining operations that can be executed for a subscription, for example, starting or stopping a provisioned VM. The base folder is `/opt/scripts`. This script will be executed when a user selects an operation for his subscription.

Example: `/operation.sh`

---

**UPDATE\_USER\_SCRIPT**

Optional. The absolute file system path or URL to a Shell script file. The base folder is `/opt/scripts`. This script will be executed when the data of a user is changed.

Example: `/update.sh`

---

**VERIFICATION\_SCRIPT**

Optional. The absolute file system path or URL to a Shell script file. The base folder is `/opt/scripts`. If specified, this script will be executed BEFORE any other script. This is useful, for example, for checking whether a specific instance already exists, whether parameters are passed correctly, etc.

Example: `/verification.sh`

---

**Service Operations for Instances Provisioned by a Shell Script**

The Shell service controller supports the definition and execution of service operations for instances provisioned using a Shell script.

The `actionURL` for each operation is:

```
http://oscm-app:8880/oscm-app/webservices/oscm-app/oscm-app
/org.oscm.app.v2_0.service.AsynchronousOperationProxy?wsdl
```

<oscm-app> and <8880> are the server and port of the container where the OpenStack service controller is deployed.

**Examples: ???**

# Glossary

**Administrator**

A privileged user role within an organization with the permission to manage the organization's account and subscriptions as well as its users and their roles. Each organization has at least one administrator.

**Application**

A software, including procedures and documentation, which performs productive tasks for users.

**Billing System**

A system responsible for calculating the charges for using a service.

**Broker**

An organization which supports suppliers in establishing relationships to customers by offering the suppliers' services on a marketplace, as well as a privileged user role within such an organization.

**Cloud**

A metaphor for the Internet and an abstraction of the underlying infrastructure it conceals.

**Cloud Computing**

The provisioning of dynamically scalable and often virtualized resources as a service over the Internet on a utility basis.

**Customer**

An organization which subscribes to one or more marketable services in ESCM in order to use the underlying applications in the Cloud.

**Infrastructure as a Service (IaaS)**

The delivery of computer infrastructure (typically a platform virtualization environment) as a service.

**Marketable Service**

A service offering to customers in ESCM, based on a technical service. A marketable service defines prices, conditions, and restrictions for using the underlying application.

**Marketplace**

A virtual platform for suppliers, brokers, and resellers in ESCM to provide their services to customers.

**Marketplace Owner**

An organization which holds a marketplace in ESCM, where one or more suppliers, brokers, or resellers can offer their marketable services.

**Marketplace Manager**

A privileged user role within a marketplace owner organization.

**Operator**

An organization or person responsible for maintaining and operating ESCM.

**Organization**

An organization typically represents a company, but it may also stand for a department of a company or a single person. An organization has a unique account and ID, and is assigned one or more of the following roles: technology provider, supplier, customer, broker, reseller, marketplace owner, operator.

**Organizational Unit**

A set of one or more users within an organization representing, for example, a department in a company, an individual project, a cost center, or a single person. A user may be assigned to one or more organizational units.

**OU Administrator**

A privileged user role within an organization allowing a user to manage the organizational units for which he has been appointed as an administrator, and to create, modify, and terminate subscriptions for these units.

**Payment Type**

A specification of how a customer may pay for the usage of his subscriptions. The operator defines the payment types available in ESCM; the supplier or reseller determines which payment types are offered to his customers, for example payment on receipt of invoice, direct debit, or credit card.

**Platform as a Service (PaaS)**

The delivery of a computing platform and solution stack as a service.

**Price Model**

A specification for a marketable service defining whether and how much customers subscribing to the service will be charged for the subscription as such, each user assigned to the subscription, specific events, or parameters and their options.

**Reseller**

An organization which offers services defined by suppliers to customers applying its own terms and conditions, as well as a privileged user role within such an organization.

**Role**

A collection of authorities that control which actions can be carried out by an organization or user to whom the role is assigned.

**Seller**

Collective term for supplier, broker, and reseller organizations.

**Service**

Generally, a discretely defined set of contiguous or autonomous business or technical functionality, for example an infrastructure or Web service. ESCM distinguishes between technical services and marketable services, and uses the term "service" as a synonym for "marketable service".

**Service Manager**

A privileged user role within a supplier organization.

**Standard User**

A non-privileged user role within an organization.

**Software as a Service (SaaS)**

A model of software deployment where a provider licenses an application to customers for use as a service on demand.

**Subscription**

An agreement registered by a customer for a marketable service in ESCM. By subscribing to a service, the customer is given access to the underlying application under the conditions defined in the marketable service.

**Subscription Manager**

A privileged user role within an organization with the permission to create and manage his own subscriptions.

**Supplier**

An organization which defines marketable services in ESCM for offering applications provisioned by technology providers to customers.

**Technical Service**

The representation of an application in ESCM. A technical service describes parameters and interfaces of the underlying application and is the basis for one or more marketable services.

**Technology Manager**

A privileged user role within a technology provider organization.

**Technology Provider**

An organization which provisions applications as technical services in ESCM.