1. Integer
2. array
3. pusecode
4. java
5. Sql → command
6. Iaas, PaaS, SaaS
7. Cloud → Private, Public
8. Network → HTTP, SMTP
9. Situational and hypothetical question
16. html
11. C++

bitwise operator

operating system

network layers

OSI model

if- else calculations

Cyber Security (Firewall)

Application layer related

Bitwise operations

Unordered related (Colon split)

Class_by



input 1 = n input 2 [ ] [ ] = n x n

Bean giver have to give waiver

least amount positive

unique

it'll move to next higher one

Q1 "xyzxyc"


Out: x-yy-zzz-x-yy-cccccc

On basis of position of characters return output based on the initial position of specific ch observed.

"aaaa"

Out: a-a-a-a

Q2.

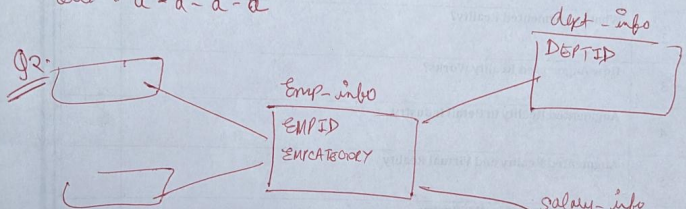

Return 4 cols (EMPNAME, DEPT RELATED (2), BASIC) where DEPT = HR

First Round

1) Gaming Questions 6 8

① Key Find — ② 5 min

③ Maze Puzzles direction — ③ 3 mins


④ Bubbling (Increasing to decreasing (Calculation) — ⑮ — 30 sec

→ 30 min.

→ Key Finds



→ Maze Puzzle




(1) 1. 0.5×2 ; 1×2 ; $14 \div 2$ } (decimal sort from ascending to descending)

2. 14 ; 12 ; 10


3. 0.05×6 ; 12×6 ; 15

(2) MAZE DIAGRAM [3 QUESTIONS]




① rotate based on arrow.
② swap the arrow direction
③ A is starting & B is destination

(3) ROCKET [3 QUESTIONS]



① find the correct based on left & right
② choose the valid path rotate

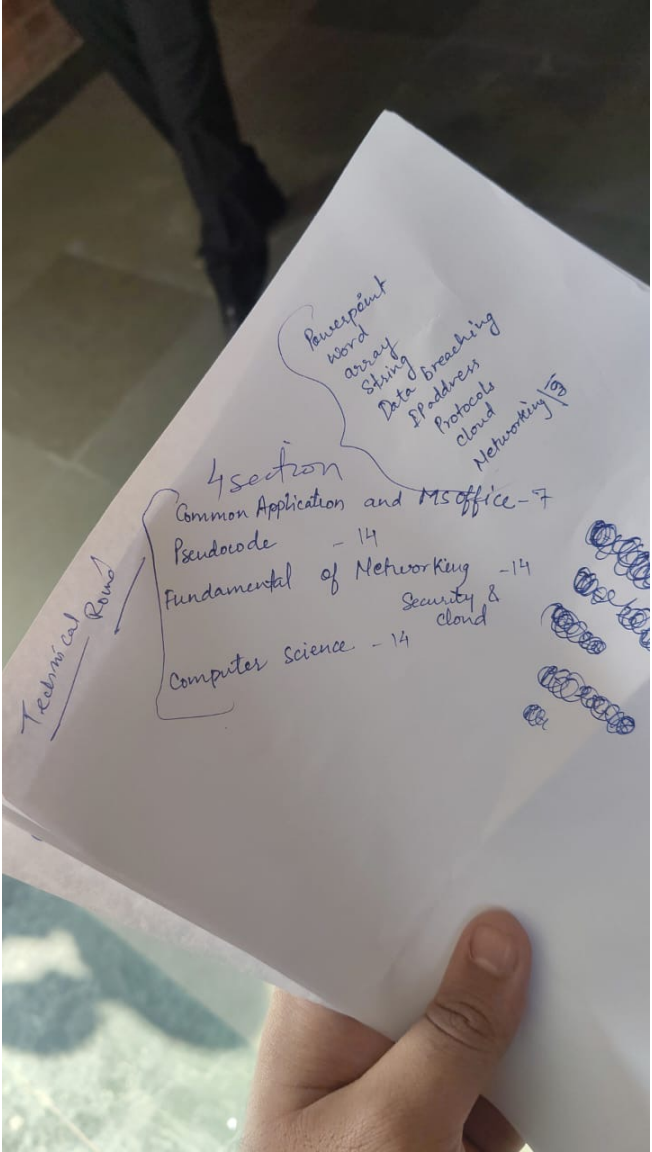
Powerpoint
word
array
String
Data breaching
IPaddress
Protocols
cloud
Networking/vpn
4section
Common Application and MS office - 7
Pseudocode - 14
Fundamental of Networking - 14
Security & cloud
Computer Science - 14
Technical Round

Loading sound

Database → SQL query create a table and display on given condition

Backend → Eg: abcad

→ output → a bbccc addddd

a-bb-ccc-a



(1)


1. 0.5×2 ; 1×2 ; $14 \div 2$

2. 14 ; 12 ; 10

3. 0.05×6 ; 12×6 ; 15


(decimal sort from ascending to descending)

(2) MAZE DIAGRAM [3 QUESTIONS]




① rotate based on arrows.
② Swap the arrow direction
③ A is starting & B is destination

(3) ROCKET [3 QUESTIONS]



① find the correct based on left & right
② choose the valid path rotate

Key



→ Pattern First
Walls → Start from beginning
1. go to the key first encounter Wall then go to the beginning
2. Take key & then go to

(1) S = abcabc

S = abb-ccc-a-bb-ccc

(2) SQL — 10 tables

— If more than 5 followers, print name of that person

(3) Search bar implementation

(1) -> customer loan amount stored in NxN matrix

-> return minimum positive loan amount which is not repeated

DHCP –
OLAP –
SQL →

Coding

Backend - Average Unique number

Frontend - HTML, CSS, Java Script

Database - MY SQL employee info from HR using group by clause