

Github URL

W05-P1: Use .env to connect Supabase, and show blogs via route /api/blog_xx



The screenshot shows a development environment with three main panels:

- Left Panel (database.js):** Contains code for connecting to a database. It uses a Pool to connect to either a local database or a Supabase database based on the environment variable `process.env.DATABASE`. The Supabase connection uses `process.env.SUPABASE_HOST`, `process.env.SUPABASE_PORT`, `process.env.SUPABASE_USER`, and `process.env.SUPABASE_PASSWORD`.
- Middle Panel (package.json):** Shows the project dependencies, including `pg` and `pg-pool`. It also shows the `scripts` section with `start` and `dev` scripts.
- Right Panel (API Response):** Shows the response from the `localhost:3000/api/blog_45` endpoint. It is a JSON array of two blog objects, each with `id`, `title`, `description`, `category`, `img`, and `remote_img` fields.

At the bottom, there is a terminal window showing the output of the `nodemon` command, indicating that the server is running on port 3000 and connecting to the Supabase database.


0da28be Liucchien Wed Oct 9 21:50:33 2024 +0800 W05-P1: Use .env to connect Supabase, and show blogs via route /api/blog_xx

W05-P2: Use blog theme to create blog_xx.ejs and show your info from pinfo variable

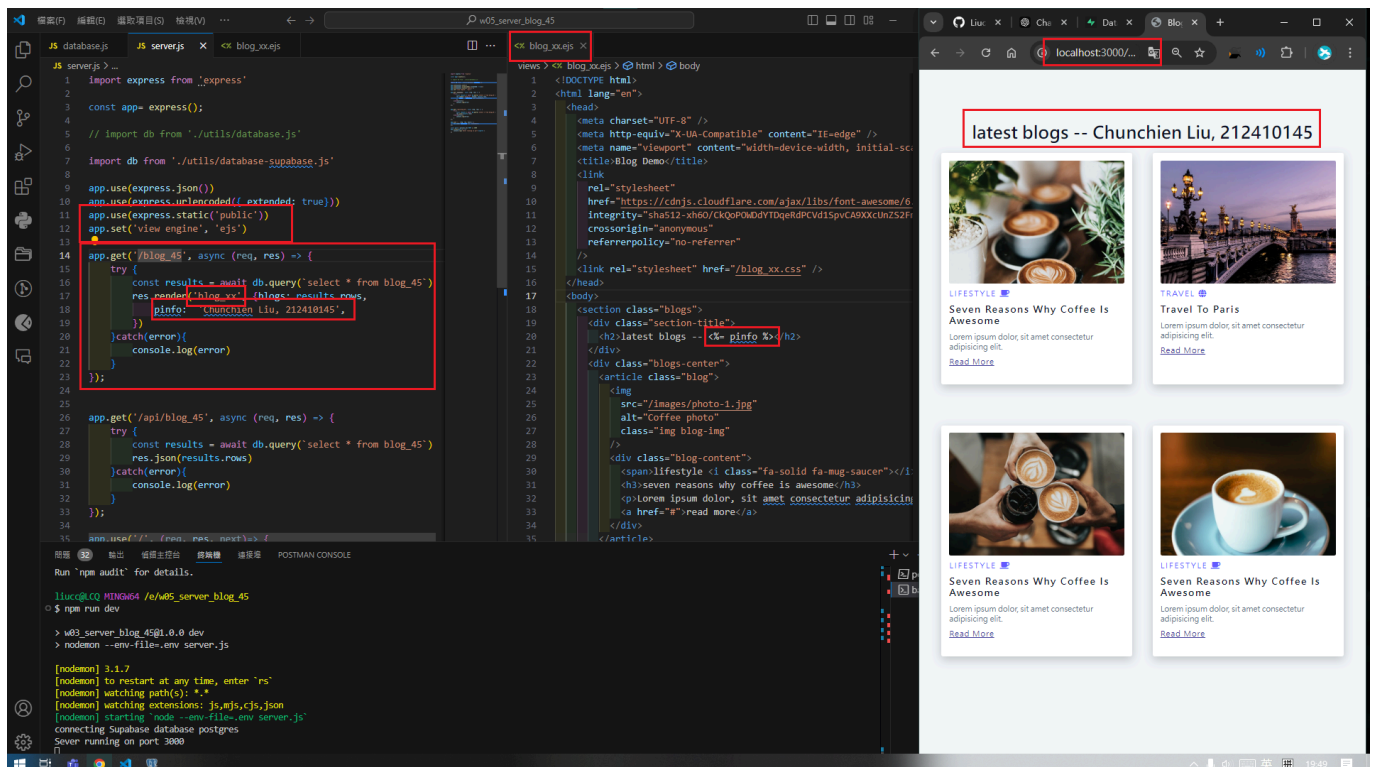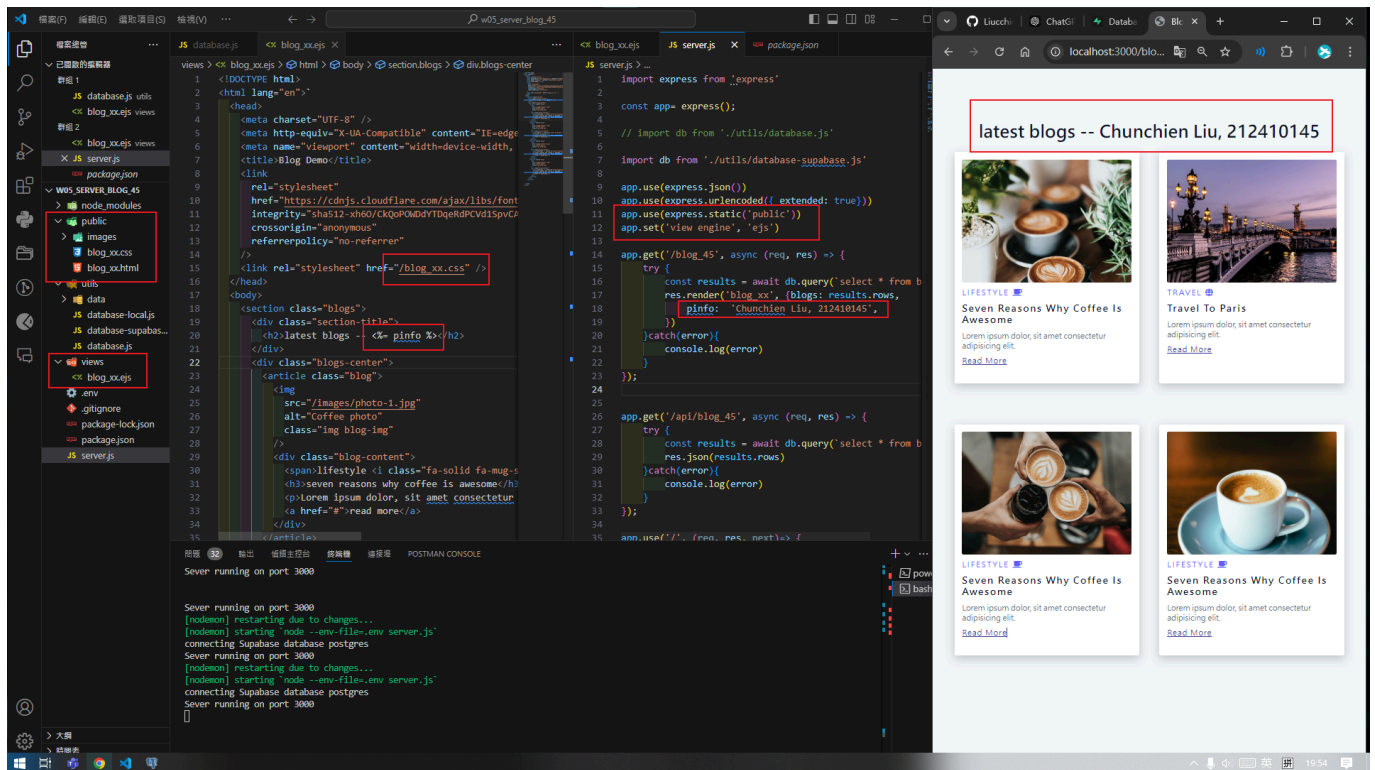


a619cdc Liucchien Wed Oct 9 21:51:18 2024 +0800 W05-P2: Use blog theme to create blog_xx.ejs and show your info from pinfo variable


W05-P3: Add js code into blog_xx.ejs and show blogs obtained from Supabase blog_xx table

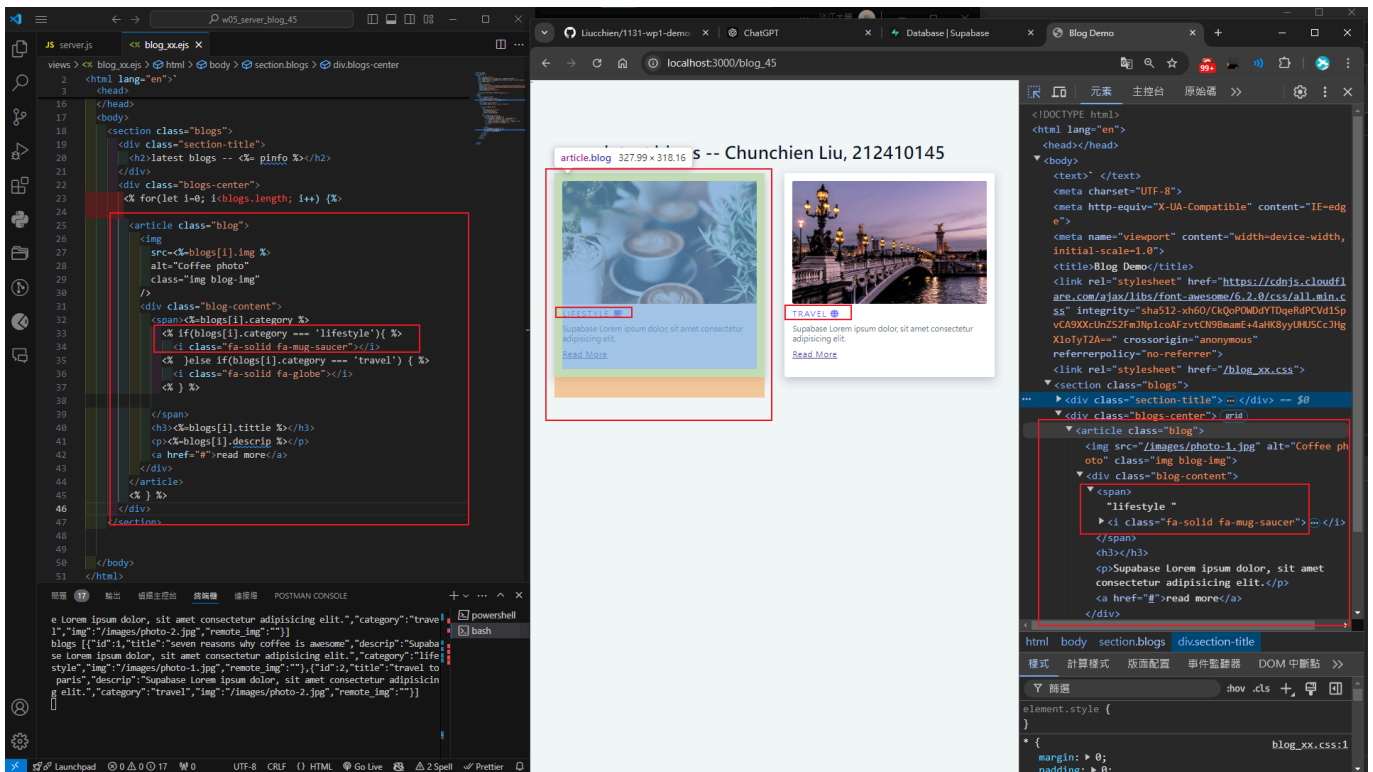

bde58e3 Liucchien Wed Oct 9 21:51:54 2024 +0800 W05-P3: Add js code into blog_xx.ejs and show blogs obtained from Supabase blog_xx table

W05-P4: Refactor P3 code using router concept in MVC architecture

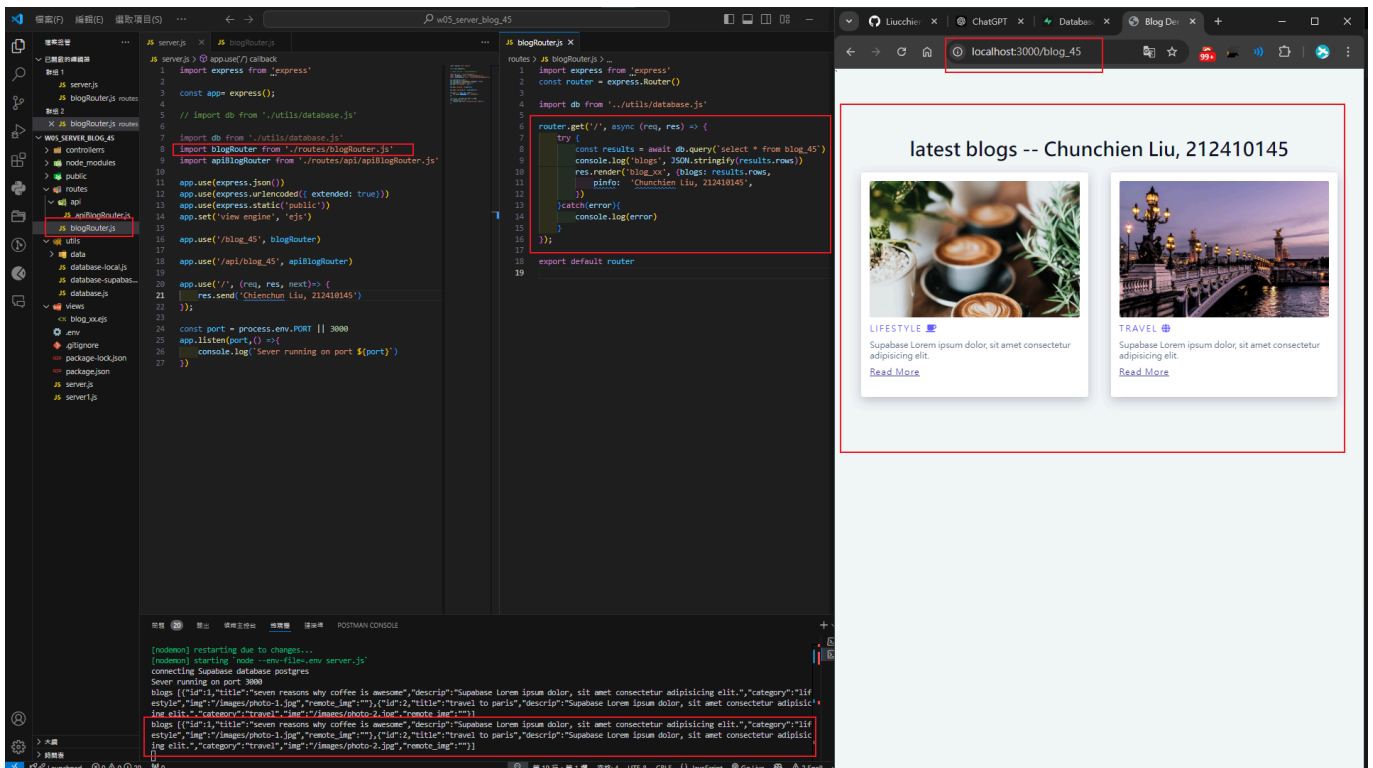

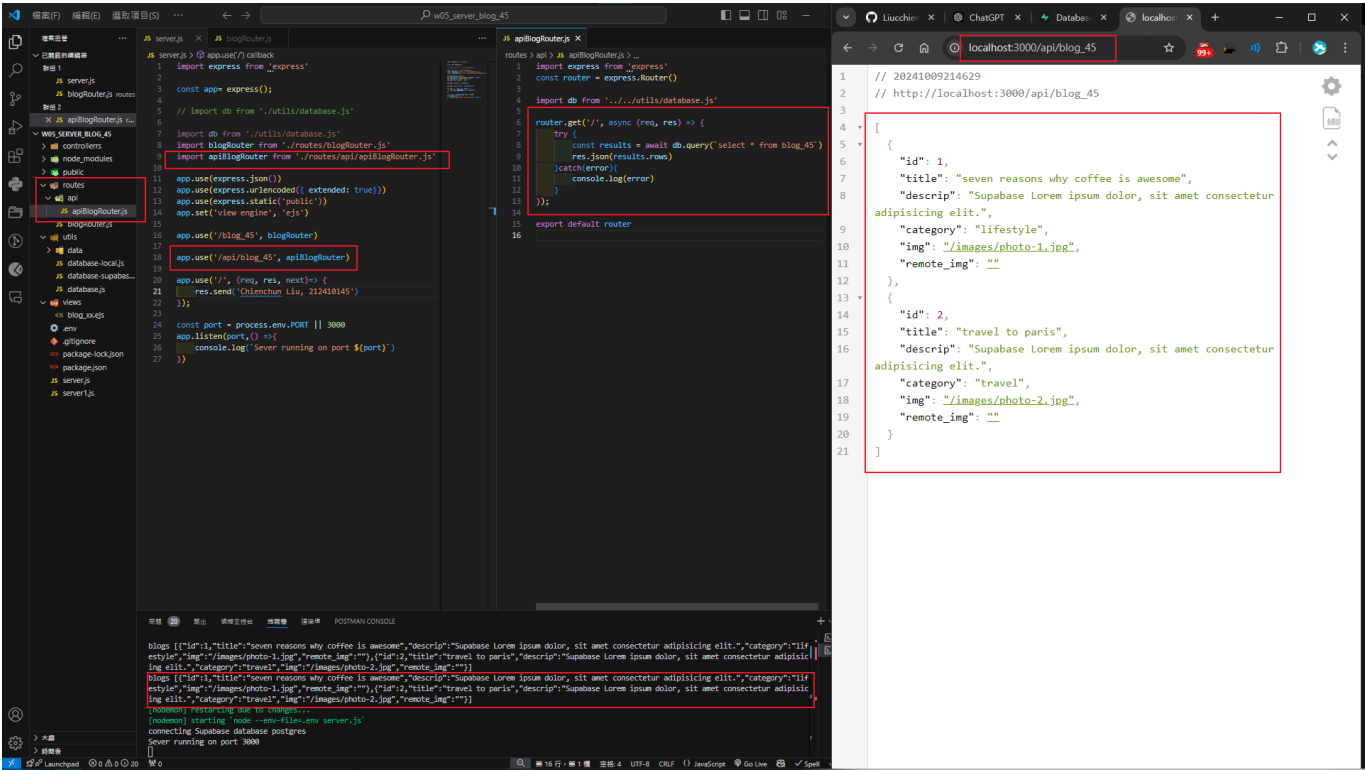

310c666 Liucchien Wed Oct 9 21:52:32 2024 +0800 W05-P4: Refactor P3 code using router concept in MVC architecture

W05-P6: all git logs of W3

310c666 Liucchien Wed Oct 9 21:52:32 2024 +0800 W05-P4: Refactor P3 code using router concept in MVC architecture

bde58e3 Liucchien Wed Oct 9 21:51:54 2024 +0800 W05-P3: Add js code into blog_xx.ejs and show blogs obtained from Supabase blog_xx table

a619cdc Liucchien Wed Oct 9 21:51:18 2024 +0800 W05-P2: Use blog theme to create blog_xx.ejs and show your info from pinfo variable

0da28be Liucchien Wed Oct 9 21:50:33 2024 +0800 W05-P1: Use .env to connect Supabase, and show blogs via route /api/blog_xx

git log --pretty=format:"%h%x09%an%x09%ad%x09%s" --after="2024-10-08"