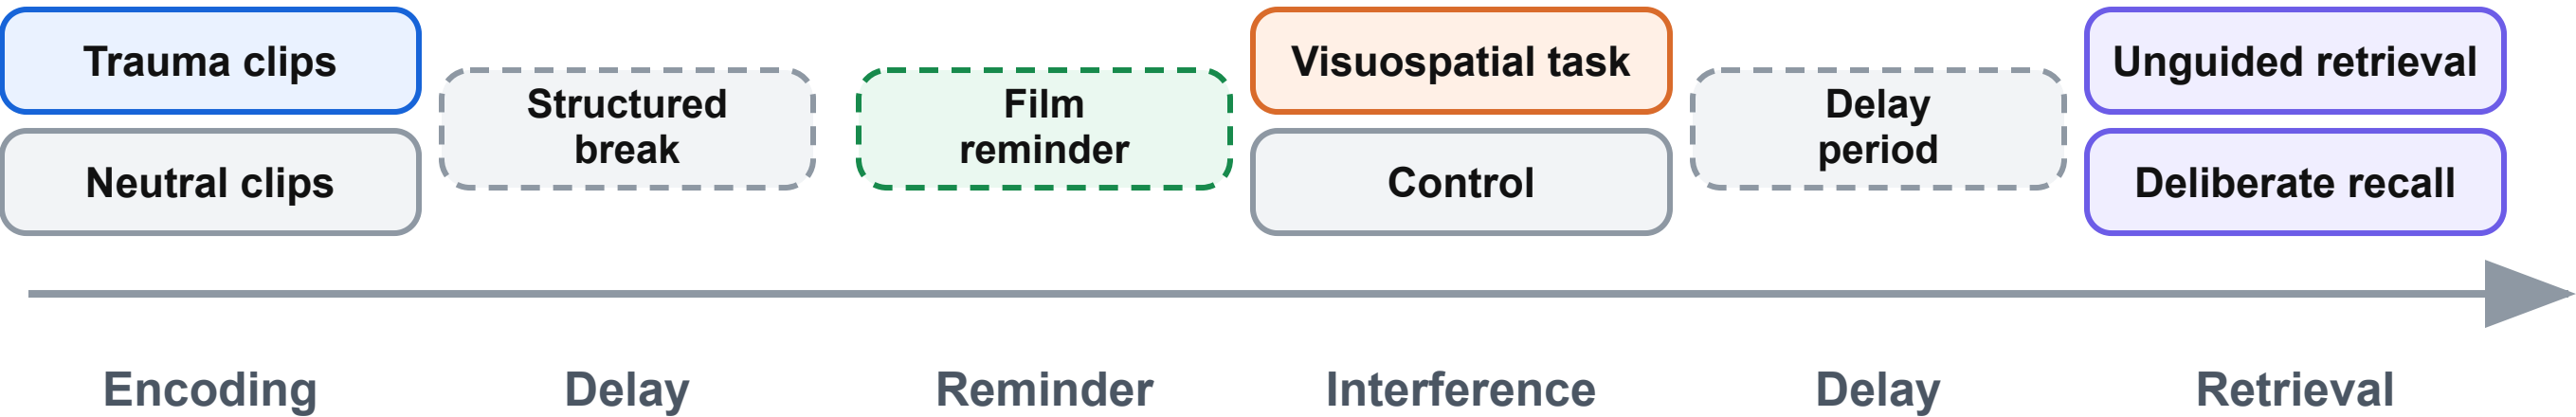
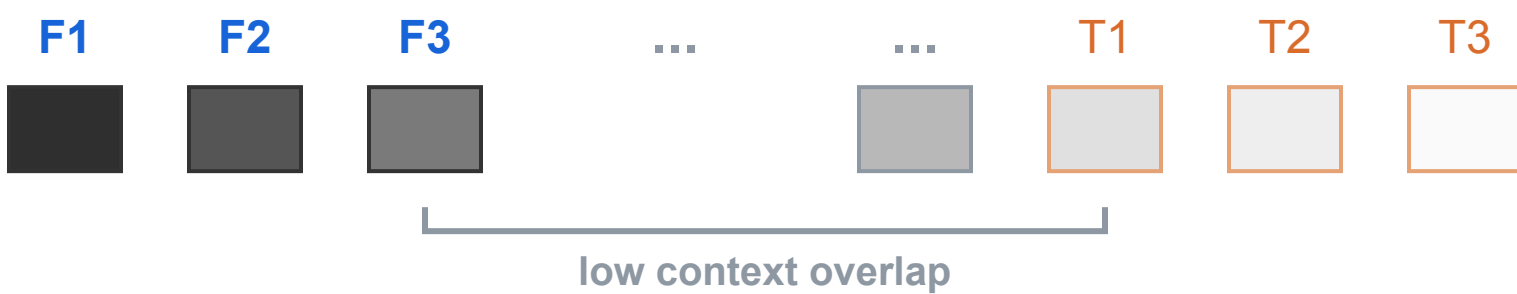


A**B****Baseline drift**

low overlap, weak task encoding

**Reminder reinstatement**

high overlap, weak task encoding

**Stronger task encoding**

high overlap, strong task encoding

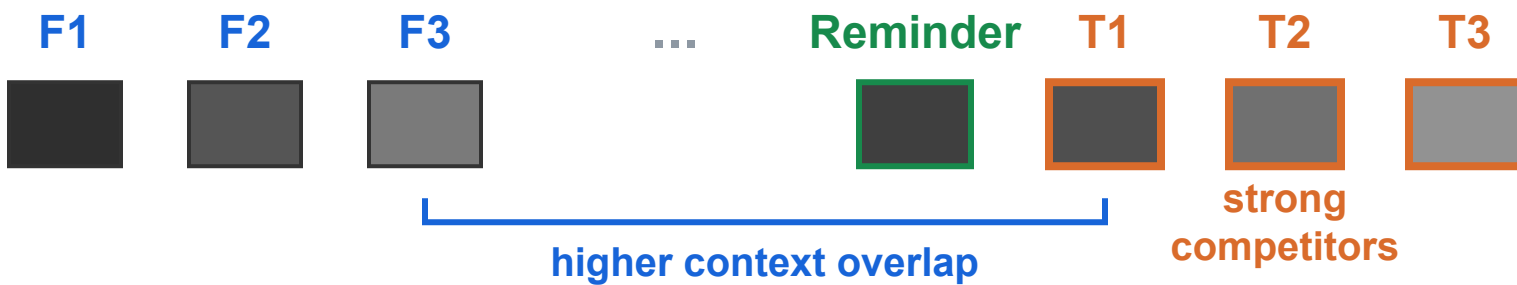
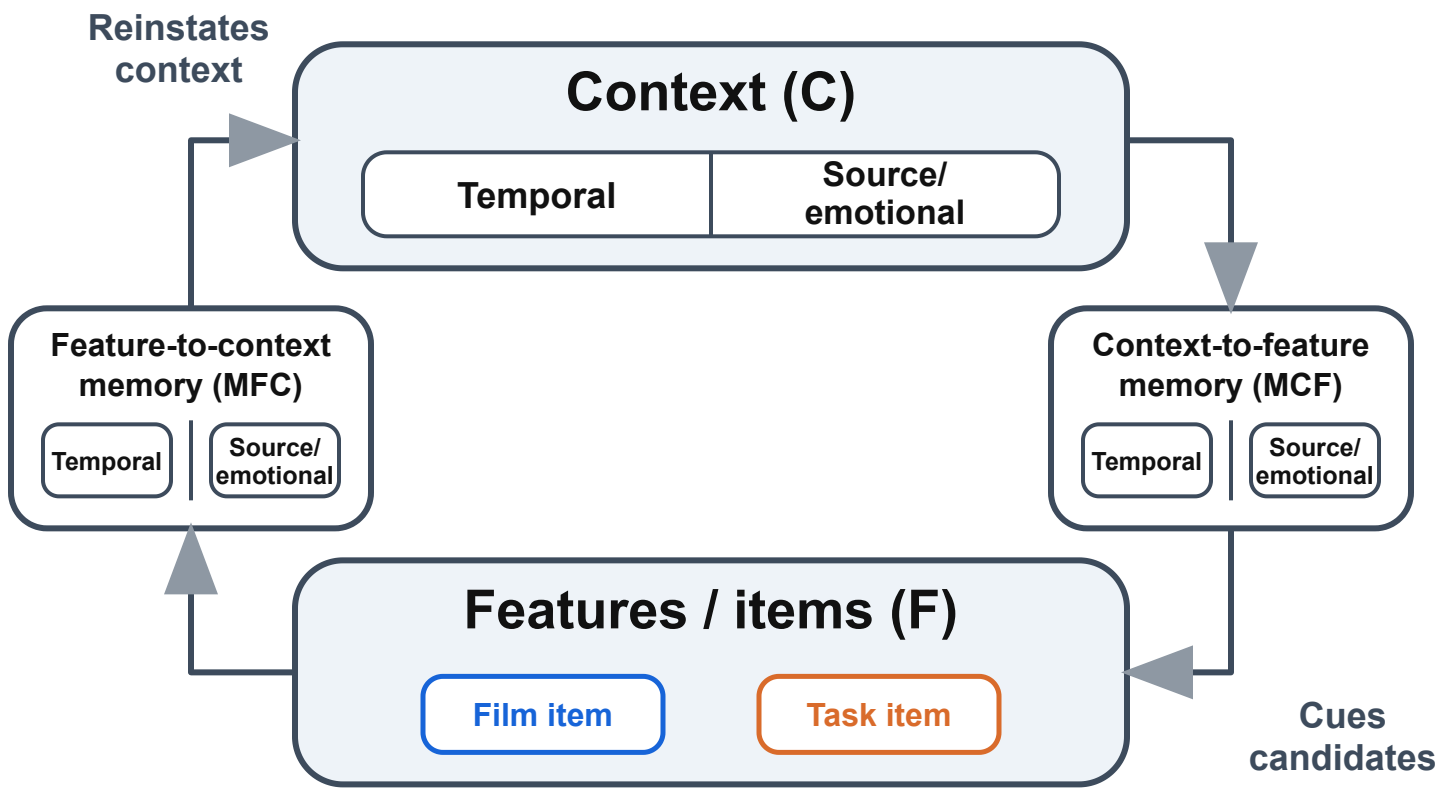
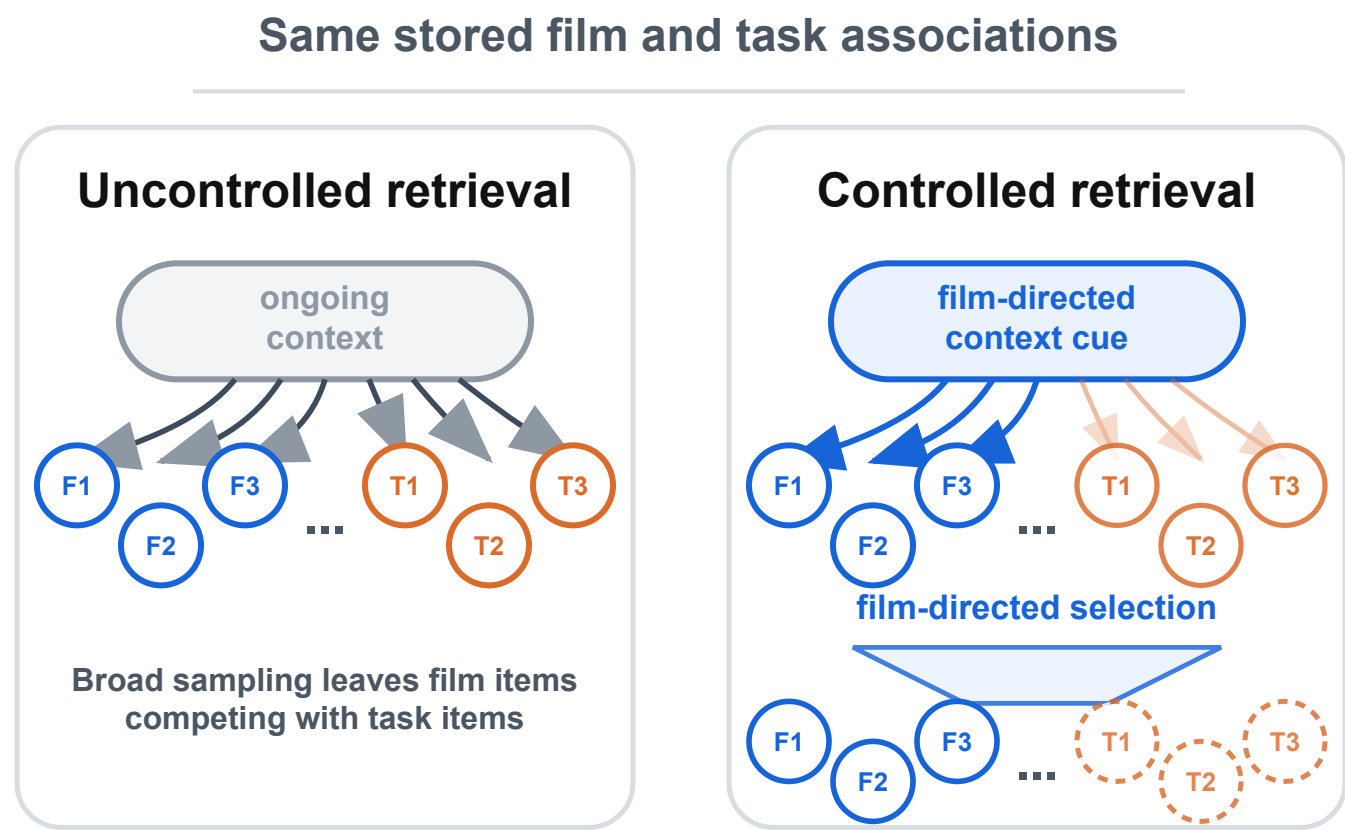
**C****D**

Figure 1. Retrieved-context account of selective interference. The model applies context drift, reminder-driven reinstatement, and retrieval control to explain how post-film tasks can reduce unguided access to film items while leaving deliberate recall relatively protected. (A) The simulated paradigm varies encoding material, post-film task, delay/reminder structure, and retrieval mode within a common trauma-film phase structure; dashed blocks mark phases that vary across immediate and delayed post-reminder designs. (B) Context states are shown as blocks associated with film, reminder, and task positions; task items become strong competitors when preserved or reminder-reinstated context overlaps with film-associated context and task associations are strong. (C) Feature-to-context memory (MFC) and context-to-feature memory (MCF) define reciprocal context-item pathways: recalled, reminded, or supplied items reinstate context, and current context cues competing candidates. (D) The same stored associations can support unguided retrieval or controlled retrieval, with film-directed cue construction and film-directed selection biasing access toward film items.