

To get started you will need to run these commands in your terminal.
New to Git? [Learn the basic Git commands](#)

Configure Git for the first time

```
git config --global user.name "Kyung-Tak LEE"
git config --global user.email "kyung.lee@amadeus.com"
```

Working with your local repository

I just want to clone this repository

If you want to simply clone this empty repository then run this command in your terminal.

```
git clone https://kyung.lee@rndwww.nce.amadeus.net/git/scm/mqh/mqhcv-v2.git
```

My code is ready to be pushed

If you already have code ready to be pushed to this repository then run this in your terminal.

```
cd existing-project
git init
git add --all
git commit -m "Initial Commit"
git remote add origin https://kyung.lee@rndwww.nce.amadeus.net/git/scm/mqh/mqhcv-v2.git
git push -u origin master
```


My code is already tracked by Git

If your code is already tracked by Git then set this repository as your "origin" to push to.

```
cd existing-project
git remote set-url origin https://kyung.lee@rndwww.nce.amadeus.net/git/scm/mqh/mqhcv-v2.git
git push -u origin master
```

All done with the commands?

Bitbucket

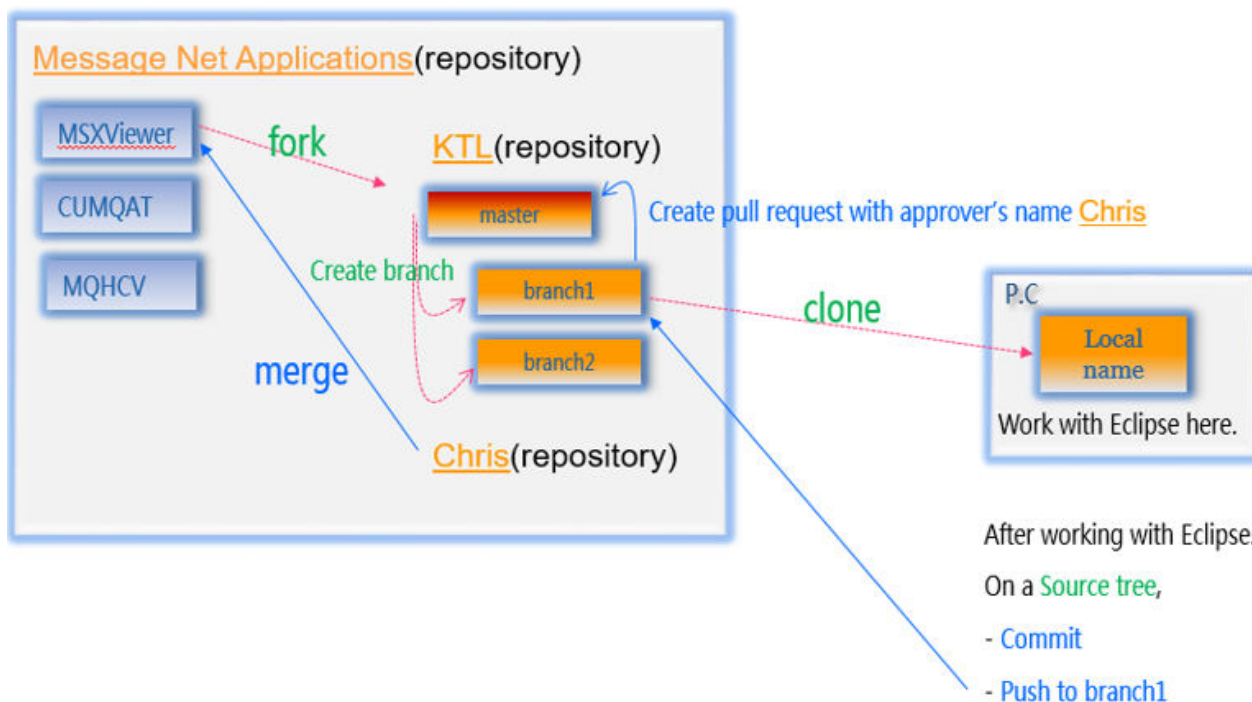

```
$ git add -all
error: did you mean '--all' (with two dashes ?)
```

```
$ git add [ list of files, --all, *.txt, docs/*.txt, docs/, "*.txt", * ]
```

```
kyung.lee@LOND6628 MINGW64 /d/eclipse_kellper/worksp_mqhcvc/git_repository/mqhcvc (master)
```

```
$ git add *
```

```
warning: LF will be replaced by CRLF in mqhcvc/trunk/IRhistory/.gitignore.
The file will have its original line endings in your working directory.
warning: LF will be replaced by CRLF in mqhcvc/trunk/aircode/.gitignore.
The file will have its original line endings in your working directory.
warning: LF will be replaced by CRLF in mqhcvc/trunk/mqhcvc/classes/.gitignore.
The file will have its original line endings in your working directory.
warning: LF will be replaced by CRLF in mqhcvc/trunk/mqhcvc/exploded-archives/mqhcvc.war/home.xhtml.
The file will have its original line endings in your working directory.
warning: LF will be replaced by CRLF in mqhcvc/trunk/mqhcvc/exploded-archives/mqhcvc.war/layout/menu.xhtml.
The file will have its original line endings in your working directory.
warning: LF will be replaced by CRLF in mqhcvc/trunk/mqhcvc/exploded-archives/mqhcvc.war/layout/template.xhtml.
The file will have its original line endings in your working directory.
warning: LF will be replaced by CRLF in mqhcvc/trunk/mqhcvc/exploded-archives/mqhcvc.war/stylesheets/theme.css.
The file will have its original line endings in your working directory.
```

```
kyung.lee@LOND6628 MINGW64 /d/eclipse_kellper/worksp_mqhcvc/git_repository/mqhcvc (master)
```

```
$ git commit -m "mqhcvc.eqr rebuilt for new boxes"
```

```
[master warning: LF will be replaced by CRLF in mqhcvc/trunk/IRhistory/.gitignore.
The file will have its original line endings in your working directory.
warning: LF will be replaced by CRLF in mqhcvc/trunk/aircode/.gitignore.
The file will have its original line endings in your working directory.
warning: LF will be replaced by CRLF in mqhcvc/trunk/mqhcvc/classes/.gitignore.
The file will have its original line endings in your working directory.
35dae63] mqhcvc.eqr rebuilt for new boxes
warning: LF will be replaced by CRLF in mqhcvc/trunk/IRhistory/.gitignore.
The file will have its original line endings in your working directory.
warning: LF will be replaced by CRLF in mqhcvc/trunk/aircode/.gitignore.
The file will have its original line endings in your working directory.
warning: LF will be replaced by CRLF in mqhcvc/trunk/mqhcvc/classes/.gitignore.
The file will have its original line endings in your working directory.
12 files changed, 19 insertions(+), 3 deletions(-)
rewrite mqhcvc/trunk/mqhcvc/exploded-archives/mqhcvc.jar/com/amadeus/etc/mqhcvc/SearchIcpItem.class
(67%)
rewrite mqhcvc/trunk/mqhcvc/exploded-archives/mqhcvc.jar/com/amadeus/etc/mqhcvc/SystemEnum.class (79%)
rewrite mqhcvc/trunk/mqhcvc/exploded-archives/mqhcvc.jar/com/amadeus/etc/mqhcvc/TxQueryParserEnum.class (96%)
```

```
kyung.lee@LOND6628 MINGW64 /d/eclipse_kellper/worksp_mqhcvc/git_repository/mqhcvc (master)
```

```
$ git push origin master
```

```
Counting objects: 37, done.
Delta compression using up to 8 threads.
Compressing objects: 100% (25/25), done.
Writing objects: 100% (37/37), 1006.49 KiB | 467.00 KiB/s, done.
Total 37 (delta 13), reused 0 (delta 0)
To https://rndwww.nce.amadeus.net/git/scm/mqh/mqhcvc.git
9d8fa33..35dae63 master -> master
```

```
kyung.lee@LOND6628 MINGW64 /d/eclipse_kellper/worksp_mqhcvc/git_repository/mqhcvc (master)
```

```
$ git log
```

```
commit 35dae63b1e75eb6047d2a0f809cef385267d71e8
Author: ktlee88 <ktlee88@yahoo.com>
Date: Mon Nov 13 09:57:33 2017 +0000
```

```
mqhcvc.eqr rebuilt for new boxes
```

```
commit 9d8fa33c3e8ecaec9b99f4c1336795e81887231d
Author: ktlee88 <ktlee88@yahoo.com>
Date: Tue Jul 18 16:07:55 2017 +0100
```

```
Initial commit
```

```
commit 32c503f58a77e04ac432a7cbf51ef8652720687a
Author: Peter Cardoe <pcardoe@amadeus.com>
Date: Fri Apr 8 15:12:05 2016 +0100
```

```
Initial Commit
```

git 시작하기

새로운 저장소 만들기, 폴더를 하나 만들고, 그 안에서 아래 명령을 실행하세요.
git init, 새로운 **git** 저장소가 만들어집니다.

저장소 받아오기,

로컬 저장소를 복제(clone)하려면 아래 명령을 실행하세요.

```
git clone /로컬/저장소/경로
```

원격 서버의 저장소를 복제 하려면 아래 명령을 실행하세요.

```
git clone (<사용자명@호스트>)/원격/저장소/경로
```

<https://rndwww.nce.amadeus.net/git/scm/mqh/mqhcv.git>

작업의 흐름

여러분의 로컬 저장소는 git 이 관리하는 세 그루의 나무로 구성되어있어요.

첫번째 나무인 **Working directory** (작업 디렉토리)는 실제 파일들로 이루어져있고,

두번째 나무인 **Index** (인덱스)는 준비 영역(staging area)의 역할을 하며,

마지막 나무인 **HEAD**는 최종 확정본(commit)을 나타내요.

