


# ERD DATABASE FOR EMPLOYEE

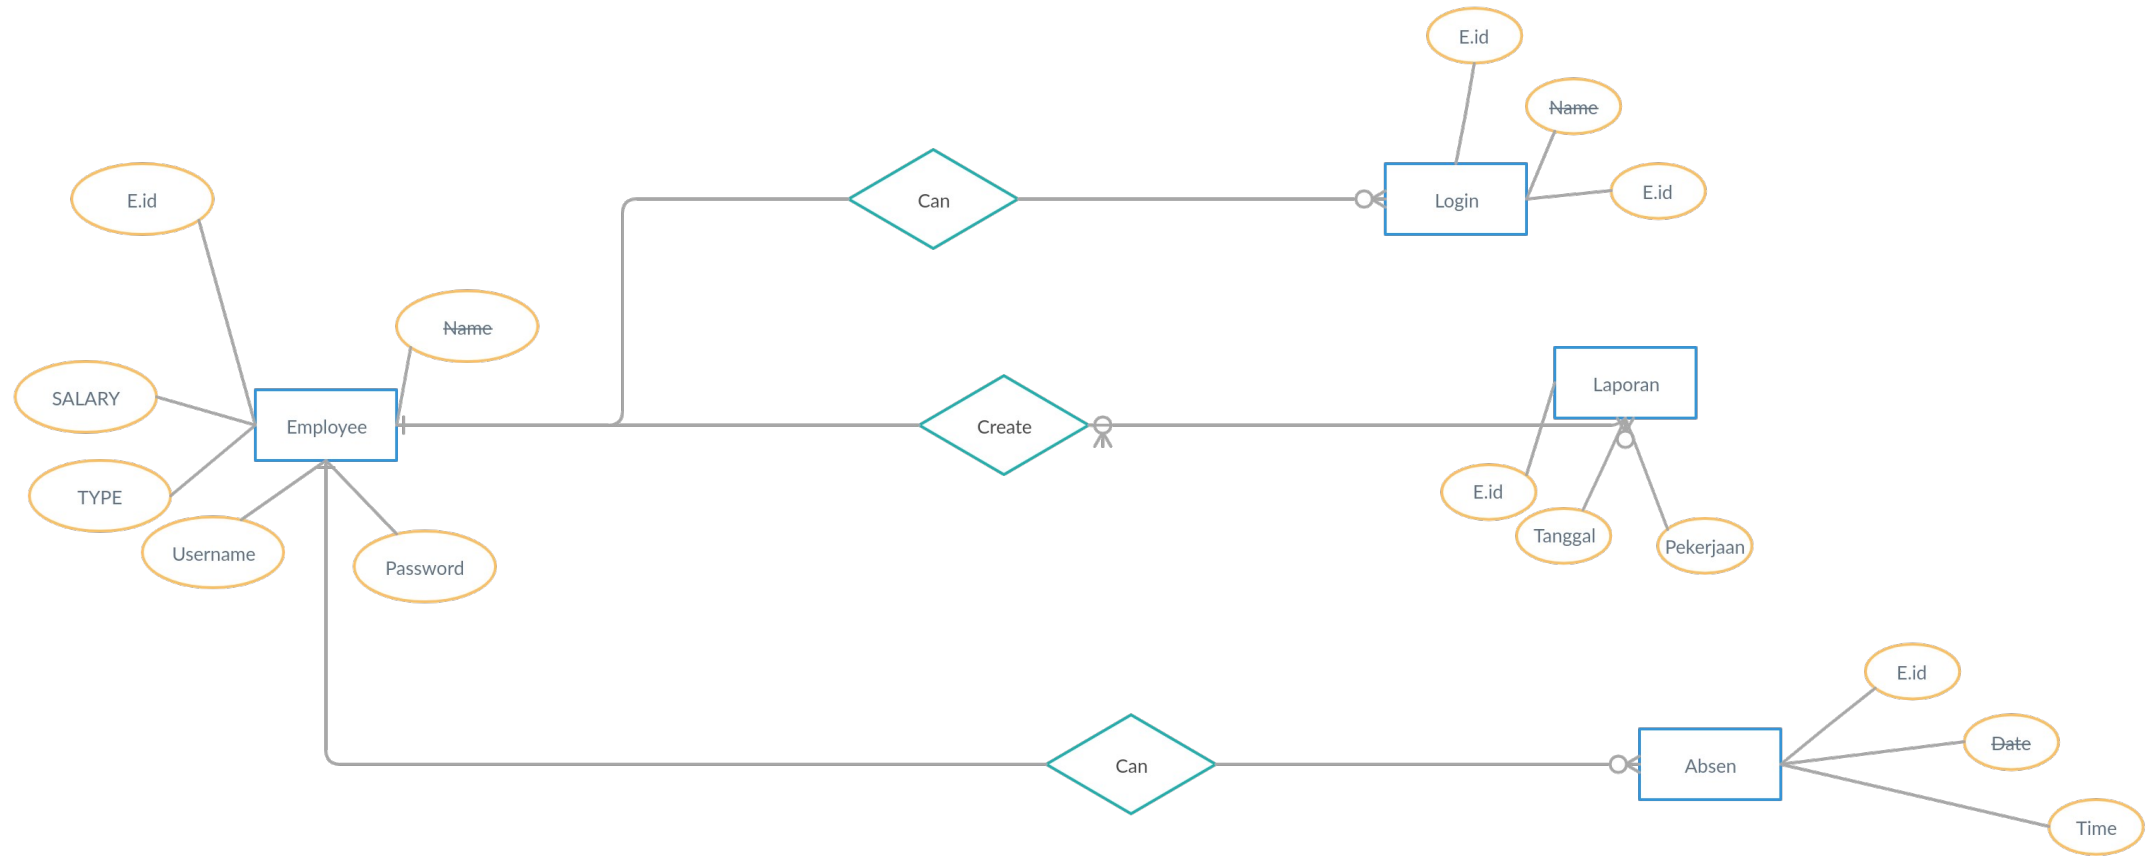

## SQL QUERY

```
CREATE TABLE transactions(customer_id int NOT NULL,item_name char(50),price int(50));
```

```
CREATE TABLE pelanggan (customer_id int NOT NULL,customer_name char(50),age int(3));
```

```
end_at TIMEbirth DATECREATE TABLE pet (name VARCHAR(20), owner VARCHAR(20), species VARCHAR(20), sex CHAR(1), birth DATE, death DATE);
```

```
CREATE TABLE employee(e_id int NOT NULL,e_name char(50),e_username char(50),e_password char(50),type char(50),salary int(20));CREATE TABLE absen(e_id int NOT NULL,tanggal DATE,jam TIME);CREATE TABLE laporan(e_id int NOT NULL,tanggal DATE,pekerjaan char(1000));CREATE TABLE sistemlog(e_id int NOT NULL,tanggal DATE,jam TIME);
```

```
INSERT INTO employee VALUES (1,'Ahmad','ahmad@yazid.id','Qwerty!1234','SPV',10000000);
```

```
INSERT INTO employee VALUES (2,'Yazid','yazid@emp.id','Qwerty!1234','EMP',5000000);
```

```
INSERT INTO employee VALUES (3,'Harhar','harharah@hr.id','Qwerty!1234','HR',6000000);
```

```
INSERT INTO employee VALUES (4,'Dizay','dizay@emp.id','Qwerty!1234','EMP',5000000);
```

```
INSERT INTO employee VALUES (5,'Damha','damha@emp.id','Qwerty!1234','EMP',5000000);
```

```
INSERT INTO employee VALUES (6,'Zid','zid@emp.id','Qwerty!1234','EMP',5000000);
```