

Red Hat Lightspeed 1-latest

Monitoring your OpenShift cluster health with Red Hat Lightspeed Advisor

Use the Red Hat Lightspeed advisor service to monitor the health of your Red Hat OpenShift cluster infrastructure

Last Updated: 2026-09-10

Red Hat Lightspeed 1-latest Monitoring your OpenShift cluster health with Red Hat Lightspeed Advisor

Use the Red Hat Lightspeed advisor service to monitor the health of your Red Hat OpenShift cluster infrastructure

Legal Notice

Copyright © Red Hat.

Except as otherwise noted below, the text of and illustrations in this documentation are licensed by Red Hat under the Creative Commons Attribution–Share Alike 3.0 Unported license . If you distribute this document or an adaptation of it, you must provide the URL for the original version.

Red Hat, as the licensor of this document, waives the right to enforce, and agrees not to assert, Section 4d of CC-BY-SA to the fullest extent permitted by applicable law.

Red Hat, the Red Hat logo, JBoss, Hibernate, and RHCE are trademarks or registered trademarks of Red Hat, LLC. or its subsidiaries in the United States and other countries.

Linux ® is the registered trademark of Linus Torvalds in the United States and other countries.

XFS is a trademark or registered trademark of Hewlett Packard Enterprise Development LP or its subsidiaries in the United States and other countries.

The OpenStack ® Word Mark and OpenStack logo are trademarks or registered trademarks of the Linux Foundation, used under license.

All other trademarks are the property of their respective owners.

Abstract

Table of Contents

CHAPTER 1. RED HAT LIGHTSPEED ADVISOR SERVICE OVERVIEW 3
1.1. ADVISOR SERVICE RECOMMENDATIONS 3
1.2. ADDITIONAL RESOURCES 3

CHAPTER 2. USE THE RED HAT LIGHTSPEED ADVISOR SERVICE 5
2.1. DISPLAY POTENTIAL ISSUES WITH YOUR CLUSTER 5
2.2. DISPLAY ALL RED HAT LIGHTSPEED ADVISOR SERVICE RECOMMENDATIONS 5
2.3. ADVISOR RECOMMENDATION FILTERS 6
2.3.1. Filter critical advisor recommendations 7
2.3.2. Remove filters from advisor service recommendations 8
2.4. DISABLE ADVISOR RECOMMENDATIONS 8
2.5. ENABLE A PREVIOUSLY DISABLED ADVISOR RECOMMENDATION 9
2.6. CHECK THE HEALTH STATUS OF YOUR CLUSTERS IN THE OPENSHIFT CONTAINER PLATFORM WEB CONSOLE 10
2.7. IDENTIFY AND MITIGATE CLUSTER-UPDATE RISKS 10
2.8. WORKLOAD RECOMMENDATIONS FOR NAMESPACES IN YOUR CLUSTERS 11
2.8.1. View workload recommendations for namespaces in your cluster 12
2.8.2. Exclude objects from workload recommendations in your clusters 13

CHAPTER 3. DEPLOYMENT VALIDATION OPERATOR WORKFLOW 15
3.1. DEPLOYMENT VALIDATION OPERATOR ON MANAGED OPENSHIFT CONTAINER PLATFORM CLUSTERS 15
3.2. DEPLOYMENT VALIDATION OPERATOR ON ON-PREMISE OPENSHIFT CONTAINER PLATFORM CLUSTERS 15
3.3. INSTALL THE DEPLOYMENT VALIDATION OPERATOR ON ON-PREMISE CLUSTERS 16
3.4. DEPLOYMENT VALIDATION OPERATOR CHECKS ON ON-PREMISE CLUSTERS 16
3.5. VIEW DEPLOYMENT VALIDATION OPERATOR RESULTS IN ADVISOR 16
3.6. DEFAULT LIST OF DEPLOYMENT VALIDATION OPERATOR CHECKS 17
3.7. ADDITIONAL RESOURCES 17

CHAPTER 1. RED HAT LIGHTSPEED ADVISOR SERVICE OVERVIEW

Use the Red Hat Lightspeed advisor service to assess and monitor Red Hat OpenShift Container Platform cluster health, identifying issues that affect availability, fault tolerance, performance, or security.

Red Hat Lightspeed repeatedly analyzes data collected by Insights Operator against a database of *recommendations*, which are sets of conditions that can leave your clusters at risk. You can then perform the following actions in the Red Hat Hybrid Cloud Console:

- See clusters impacted by a specific recommendation.
- Use robust filtering capabilities to refine your results.
- Learn more about individual recommendations, details about the risks they present, and get resolutions tailored to your individual clusters.
- Share results with other stakeholders.

To use the advisor service, your cluster must be registered to Red Hat OpenShift Cluster Manager.

Red Hat Lightspeed does not collect identifying information, such as user names, passwords, or certificates.

1.1. ADVISOR SERVICE RECOMMENDATIONS

The Red Hat Lightspeed advisor service bundles information about various cluster states and component configurations that can negatively affect the service availability, fault tolerance, performance, or security of your clusters.

The information set generated by the Red Hat Lightspeed advisor service is called a recommendation and includes the following details:

- **Name:** A concise description of the recommendation
- **Added:** When the recommendation was published to the Red Hat Lightspeed archive
- **Category:** Whether the issue has the potential to negatively affect service availability, fault tolerance, performance, or security
- **Total risk:** A value derived from the *likelihood* that the condition will negatively affect your infrastructure, and the *impact* on operations if that were to happen
- **Clusters:** A list of clusters on which a recommendation is detected
- **Hyperlink to associated topics:**More information from Red Hat about the issue

1.2. ADDITIONAL RESOURCES

- Red Hat Lightspeed data and application security
- Registering your disconnected cluster
- About remote health monitoring

- Showing data collected by remote health monitoring
- Disabling remote health reporting

CHAPTER 2. USE THE RED HAT LIGHTSPEED ADVISOR SERVICE

The Red Hat Lightspeed advisor service repeatedly analyzes the data collected by the Insights Operator. You can view and manage reports showing advisor results for your OpenShift Container Platform cluster in the advisor service GUI on the Red Hat Hybrid Cloud Console.

2.1. DISPLAY POTENTIAL ISSUES WITH YOUR CLUSTER

View advisor results in the Red Hat Lightspeed GUI to identify availability, stability, performance, and security issues affecting your Red Hat OpenShift Container Platform clusters.

Note that the Insights Operator repeatedly analyzes your cluster and shows the latest results in the Red Hat Lightspeed advisor service. These results can change if you fix an issue or a new issue has been detected, for example.

Prerequisites

- Your OpenShift Container Platform cluster is registered with Red Hat OpenShift Cluster Manager.

  TIP

  To register your cluster, go to the Register disconnected cluster.

- Remote health reporting is enabled, which is the default state.
- You have access to the cluster as a user with the **cluster-admin** role or the **cluster-monitoring-view** role.

Procedure

1. Navigate to OpenShift > Advisor > Recommendations.
   Depending on the result, you might see one of the following messages:
   - **No matching recommendations found**, if Red Hat Lightspeed did not identify any issues.
   - A list of issues Red Hat Lightspeed has detected, grouped by risk (low, moderate, important, and critical).
   - **No clusters yet**, if Red Hat Lightspeed has not yet analyzed the cluster. The analysis starts shortly after the cluster has been installed, registered, and connected to the internet.
2. If any issues are displayed, click the > icon in front of the entry for more details.
   Depending on the issue, the details can also contain a link to more information from Red Hat about the issue.

2.2. DISPLAY ALL RED HAT LIGHTSPEED ADVISOR SERVICE RECOMMENDATIONS

The Recommendations view, by default, only displays the recommendations that are detected on your Red Hat OpenShift Container Platform clusters. However, you can view all of the recommendations in the advisor service's archive.

Prerequisites

- Your OpenShift Container Platform cluster is registered with Red Hat OpenShift Cluster Manager.

  TIP

  To register your cluster, go to the Register disconnected cluster.

- Remote health reporting is enabled, which is the default state.
- You have access to the cluster as a user with the **cluster-admin** role or the **cluster-monitoring-view** role.

Procedure

1. Navigate to OpenShift > Advisor > Recommendations.
2. Click the **X** icons next to the **Clusters impacted** and **Status** filters.
   You can now browse through all of the recommendations against which your cluster is scanned.

2.3. ADVISOR RECOMMENDATION FILTERS

The Red Hat Lightspeed advisor service can return a large number of recommendations. To focus on your most critical recommendations, you can apply filters to the **Advisor recommendations** list to remove low-priority recommendations.

By default, filters are set to only show enabled recommendations that are impacting one or more clusters. To view all or disabled recommendations in the Red Hat Lightspeed library, you can customize the filters.

To apply a filter, select a filter type and then set its value based on the options that are available in the drop-down list. You can apply multiple filters to the list of recommendations.

The following filter types are available:

Name

Search for a recommendation by name.

Total risk

Select one or more values from **Critical**, **Important**, **Moderate**, and **Low** indicating the likelihood and the severity of a negative impact on a cluster.

Impact

Select one or more values from **Critical**, **High**, **Medium**, and **Low** indicating the potential impact to the continuity of cluster operations.

Likelihood

Select one or more values from **Critical**, **High**, **Medium**, and **Low** indicating the potential for a negative impact to a cluster if the recommendation comes to fruition.

Category

Select one or more categories from **Service Availability**, **Performance**, **Fault Tolerance**, **Security**, and **Best Practice** to focus your attention on.

Status

Click a radio button to show enabled recommendations (default), disabled recommendations, or all recommendations.

Clusters impacted

Set the filter to show recommendations currently impacting one or more clusters, non-impacting recommendations, or all recommendations.

Risk of change

Select one or more values from **High**, **Moderate**, **Low**, and **Very low** indicating the risk that the implementation of the resolution could have on cluster operations.

Additional resources

- Advisor recommendations

2.3.1. Filter critical advisor recommendations

As an OpenShift Container Platform cluster administrator, you can filter the advisor recommendations that are displayed on the recommendations list. By applying filters, you can reduce the number of reported recommendations and concentrate on your highest priority recommendations.

The following procedure demonstrates how to set and remove **Category** filters; however, the procedure is applicable to any of the filter types and values.

Prerequisites

- Your OpenShift Container Platform cluster is registered with Red Hat OpenShift Cluster Manager.

  TIP

  To register your cluster, go to the Register disconnected cluster.

- Remote health reporting is enabled, which is the default state.
- You have access to the cluster as a user with the **cluster-admin** role or the **cluster-monitoring-view** role.

Procedure


1. Navigate to OpenShift > Advisor > Recommendations.
2. In the **Filter by category** drop-down list, select the checkbox next to each category of recommendation you want to view. Leave the checkboxes for unnecessary categories clear.

   NOTE

   For a description of the available categories you can filter by, see Advisor recommendation filters.

3. **Optional:** Apply additional filters to further refine the list.



NOTE

Only recommendations from the selected categories are shown in the list.

Verification

After applying filters, you can view the updated recommendations list. The applied filters are added next to the default filters.

Additional resources

- Advisor recommendations

2.3.2. Remove filters from advisor service recommendations


You can apply multiple filters to the list of recommendations. When ready, you can remove them individually or completely reset them.

Procedure

- Removing filters individually
  - Click the **X** icon next to each filter, including the default filters, to remove them individually.
- Removing all non-default filters
  - Click **Reset filters** to remove only the filters that you applied, leaving the default filters in place.

2.4. DISABLE ADVISOR RECOMMENDATIONS

Disable specific recommendations that affect your clusters to remove them from your reports. It is possible to disable a recommendation for a single cluster or all of your clusters.



NOTE

Disabling a recommendation for all of your current clusters also disables that recommendation on all future clusters.

Prerequisites

- Your OpenShift Container Platform cluster is registered with Red Hat OpenShift Cluster Manager.

  TIP

  To register your cluster, go to the Register disconnected cluster.

- Remote health reporting is enabled, which is the default state.
- You have access to the cluster as a user with the **cluster-admin** role or the **cluster-monitoring-view** role.

Procedure

1. Navigate to OpenShift > Advisor > Recommendations.
2. To disable the recommendation for a **single** cluster:
   a. Click the name of the recommendation to disable.
   b. Click the options icon (⋮) for that cluster, and then click **Disable recommendation for cluster**.
   c. Enter a justification note and click **Save**.
3. To disable the recommendation for **all** of your clusters:
   a. Click the name of the recommendation to disable.
   b. Click **Actions → Disable recommendation**.
   c. Enter a Justification note and click **Save**.

Verification

1. If you disabled the recommendation for all clusters, go to OpenShift > Advisor > Recommendations and search for the recommendation. If the procedure was successful, you will not see the recommendation in the search result.
2. If you disabled the recommendation for an individual cluster, go to the Recommendations page and search for the recommendation.
3. Click the recommendation and search for the cluster ID for the cluster on which it was disabled. If the procedure was successful, you will not see your cluster in the list of clusters affected by the recommendation.

2.5. ENABLE A PREVIOUSLY DISABLED ADVISOR RECOMMENDATION

When a Red Hat Lightspeed advisor recommendation is disabled for all Red Hat OpenShift Container Platform clusters, you will no longer see it on the list of recommendations. You can re-enable the recommendation so that your clusters are scanned for it.

Prerequisites

- Your OpenShift Container Platform cluster is registered with Red Hat OpenShift Cluster Manager.

  TIP

  To register your cluster, go to the Register disconnected cluster.

- Remote health reporting is enabled, which is the default state.
- You have access to the cluster as a user with the **cluster-admin** role or the **cluster-monitoring-view** role.

Procedure

1. Navigate to OpenShift > Advisor > Recommendations.

2. Filter the recommendations by **Status** > **Disabled**.
3. Locate the recommendation to enable.
4. Click the options icon (⋮), and then click **Enable recommendation**.

2.6. CHECK THE HEALTH STATUS OF YOUR CLUSTERS IN THE OPENSHIFT CONTAINER PLATFORM WEB CONSOLE

View cluster health status and potential issues identified by the Red Hat Lightspeed advisor service in the OpenShift Container Platform web console. Issues are grouped by risk category with links to detailed reports in the Red Hat Hybrid Cloud Console.

Prerequisites

- Your cluster is registered with Red Hat OpenShift Cluster Manager.

  TIP

  To register your cluster, go to the Register disconnected cluster.

- Remote health reporting is enabled, which is the default.
- You are logged in to the OpenShift Container Platform web console.

Procedure

1. Navigate to **Home → Overview** in the OpenShift Container Platform web console.
2. Click **Insights** on the **Status** card.
   A list of potential issues grouped by risk is displayed.
3. Click **View all recommendations in Red Hat Lightspeed Advisor** or click a specific category to view detailed reports in the Red Hat Hybrid Cloud Console.

2.7. IDENTIFY AND MITIGATE CLUSTER-UPDATE RISKS

Use the update-risk assessment to compare the recent state of the cluster with conditions that could cause updates to fail, such as failing operator conditions, alerts, and other metrics. The advisor service uses machine learning developed in collaboration with IBM Research to compare the recent state of the cluster with conditions known to cause updates to fail. You can use the update-risk feature to generate a checklist of issues to fix before beginning a cluster update.

Prerequisites


- Cluster is connected to the Red Hat Hybrid Cloud Console by using the instructions in the Enabling remote health reporting chapter of the Red Hat OpenShift Container Platform documentation.
- Cluster has sent data to the Red Hat Lightspeed service within the last two hours.
- You are logged in to the Red Hat Hybrid Cloud Console.

Procedure

1. Navigate to the Advisor clusters page in the Hybrid Cloud Console.
2. Select a cluster with the **Update risk** label. The label is visible with the cluster name or ID.

Name	Version	Recommendations	Critical	Important	Moderate	Low	Last seen
openshift	4.15.0	0	0	0	0	0	2 minutes ago
openshift Update risk	4.15.0	0	0	0	0	0	15 minutes ago

3. Click the cluster name to open the cluster details page.
   - If no risks exist for the cluster, a banner displays the message, "No known update risks identified for this cluster."
   - If the cluster has not checked in for more than two hours, the banner message says "Warning alert: Update risks are not currently available. This cluster has gone more than two hours without sending metrics. Check the cluster's web console if you think that this is incorrect."
4. Click the **Update risks** tab.

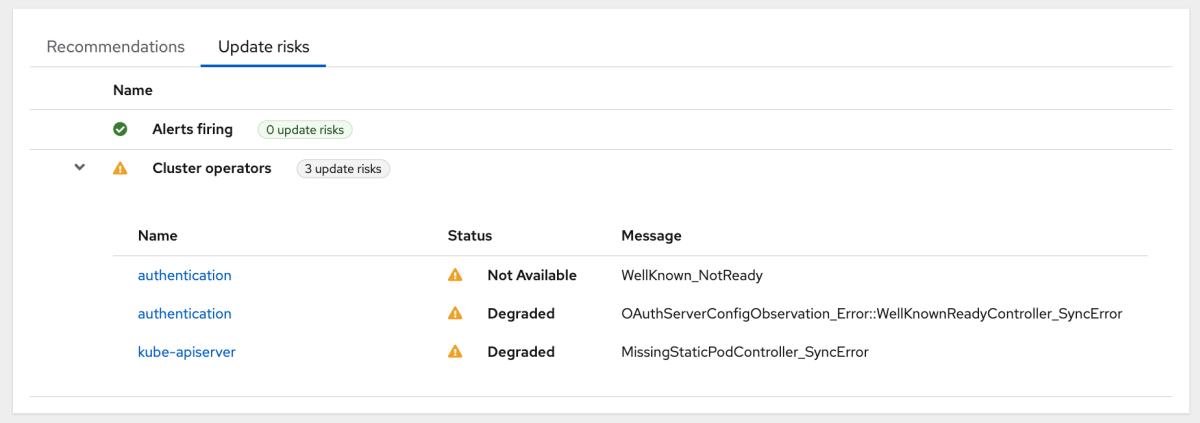

5. View alerts or cluster operator risks for the cluster.
6. Click an alert to open the Alert details page in the OpenShift Container Platform web console.
7. Click a cluster operator to open the in-cluster, ClusterOperator details page in the OpenShift Container Platform web console.

Additional resources

- Red Hat Lightspeed Upgrade Risks for Red Hat OpenShift
- About remote health monitoring
- Managing clusters
- Getting information about alerts, silences, and alerting rules as a developer
- Getting information about alerts, silences, and alerting rules

2.8. WORKLOAD RECOMMENDATIONS FOR NAMESPACES IN YOUR CLUSTERS

The Red Hat Lightspeed advisor service compiles workload recommendations for namespace objects to identify best practices violations and misconfigurations in your cluster workloads.

Workload recommendations are based on data provided by the Deployment Validation Operator (DVO), which executes KubeLinter checks.

If you are a cluster administrator, you can view workload recommendation details, including cluster, namespace, and affected object IDs, and also steps to resolve the issue on the Workloads page. As a cluster administrator, you can also either fix the issue or inform developers who manage the namespaces so that they can apply a resolution.

Additional resources

- Workloads
- Deployment Validation Operator workflow

2.8.1. View workload recommendations for namespaces in your cluster

View workload recommendations for specific namespace objects to identify and resolve configuration issues, security vulnerabilities, and best practice violations detected by Deployment Validation Operator checks.

You can search for namespaces by **cluster name** and **namespace name** for on-premise clusters, or by **cluster name** and **namespace UUID** for managed clusters.

Prerequisites

- You have access as a cluster administrator to at least one cluster in your infrastructure.
- You have logged in to the Red Hat Hybrid Cloud Console.

Procedure

1. Go to OpenShift > Advisor > Workloads.
2. Click a namespace (identified by cluster and namespace) to display the namespace details page, which includes recommendations based on the Deployment Validation Operator (DVO) checks for this namespace.
   You can use the filtering function to search by cluster name or namespace name.
3. Click the arrow next to a recommendation to see the following information about the issue:
   - A description of the detected issue
   - Steps to resolve the issue on affected objects in the namespace
   - Identifiers for affected objects in the namespace
   - Additional resources and information
4. Click **View all objects** to view a list of all of the objects affected by the recommendation in this namespace.
   You can use this information to work with your developers to resolve issues, as needed. In some cases, you might find that your organization's policies are different from a recommendation and the proposed solution to resolve it. In these cases, you can exclude objects from workload

recommendations.

2.8.2. Exclude objects from workload recommendations in your clusters

Exclude specific objects from Deployment Validation Operator checks to prevent workload recommendations that conflict with your organization's policies from appearing in the advisor service.

Prerequisites

- You have Red Hat OpenShift Container Platform Advisor administrator permissions to a cluster.
- You have permission to edit the namespace.
- You have logged in to the Red Hat Hybrid Cloud Console.
- You have identified a cluster with a recommendation and have at least one object in Workloads that you want to exclude.

Procedure

1. Navigate to OpenShift > Advisor > Workloads.
2. Click a namespace that relates to the recommendation that includes the object you want to exclude. A namespace is identified by cluster and namespace.



NOTE

You can use the filtering function to search by the following:

- For on-premise clusters: **cluster name** and **namespace name**
- For managed clusters: **cluster name** and **namespace UUID**

3. Expand **Description** on the details page to see all issues or click the arrow next to a recommendation to see the following information about the issue:
   - A description of the detected issue
   - Steps to resolve the issue on affected objects in the namespace
   - Identifiers for affected objects in the namespace
   - Additional resources and information
4. Note the name of the KubeLinter check, for example **run-as-non-root** or **non-isolated-pod**.
5. In the **Steps to resolve** section, click **View all objects** to display a list of all of the objects affected by the recommendation in this namespace.
6. Note the **Name** and **Kind** values for the workload object you want to exclude from the Deployment Validation Operator (DVO) KubeLinter checks. You will need this information to change the annotation for the object.
7. Annotate the object based on your organization's workflow by using the Ignore specific resources GitHub resource for the Deployment Validation Operator:

- The following example shows the YAML line to add to the **nginx** deployment object in the **test-dvo** project. This annotation excludes the object from the KubeLinter **run-as-root** check:

```
ignore-check.kube-linter.io/run-as-non-root: "This image must be run as a privileged user for it to work."
```

- The following example shows the complete YAML file for the **nginx** deployment object in the **test-dvo** project. The annotation excludes the object from the KubeLinter **run-as-root** check:

```
kind: Deployment
apiVersion: apps/v1
metadata:
  annotations:
    deployment.kubernetes.io/revision: '1'
    kubectl.kubernetes.io/last-applied-configuration: |
      {"apiVersion":"apps/v1","kind":"Deployment","metadata":{"annotations":{},"labels":
{"app":"nginx"},"name":"nginx","namespace":"test-dvo"},"spec":{"replicas":3,"selector":
{"matchLabels":{"app":"nginx"}},"template":{"metadata":{"labels":{"app":"nginx"}},"spec":
{"containers":[{"image":"nginxinc/nginx-unprivileged:1.18","name":"nginx","ports":
[{"containerPort":8080}]}]}}}}
    ignore-check.kube-linter.io/run-as-non-root: "This image must be run as a privileged
user for it to work."
  resourceVersion: '114842'
  name: nginx
  uid: bf934080-0e21-4ae3-a6d1-d6d077b8d6f3
```

Verification

- Wait approximately two hours or until the Insights Operator has updated the recommendations. Then log on as a cluster administrator and verify that the object is excluded from the workload recommendation.

Additional resources

- Deployment Validation Operator workflow
- Using the Insights Operator


CHAPTER 3. DEPLOYMENT VALIDATION OPERATOR WORKFLOW

The Deployment Validation Operator validates on-premise and managed clusters against a curated collection of KubeLinter checks. These checks implement best practices for Kubernetes-native workloads, helping to ensure that applications are optimized for the operational stability of the cluster.

The Insights Operator gathers Deployment Validation Operator checks every two hours by default and presents data in the Red Hat Lightspeed advisor service. If the Deployment Validation Operator detects issues, cluster administrators can view resolutions in the advisor service. If the Deployment Validation Operator detects no issues, no results are visible in the advisor service.

Curated KubeLinter checks: The Deployment Validation Operator checks a curated, limited collection of all of the available KubeLinter checks. The Deployment Validation Operator does not run the whole list of available KubeLinter checks. Red Hat Lightspeed advisor service recommendations do not exist for all available KubeLinter checks.

Supported Red Hat OpenShift Container Platform versions: All Red Hat-supported versions of Red Hat OpenShift Container Platform, Red Hat OpenShift Dedicated, and Red Hat OpenShift Service on AWS support the Deployment Validation Operator.



IMPORTANT

With a managed OpenShift Container Platform cluster, the Deployment Validation Operator is installed and operational by default. For an on-premise OpenShift Container Platform cluster, a cluster administrator must download and install the Deployment Validation Operator from OperatorHub and can change the default list of checks.

3.1. DEPLOYMENT VALIDATION OPERATOR ON MANAGED OPENSHIFT CONTAINER PLATFORM CLUSTERS


The Deployment Validation Operator is already installed and operational on managed OpenShift Container Platform clusters. This includes clusters on Red Hat OpenShift Dedicated and Red Hat OpenShift Service on AWS.

Deployment Validation Operator configuration: The Deployment Validation Operator for managed clusters comes preconfigured, by default. The Deployment Validation Operator configuration file contains the default, curated set of KubeLinter checks and is not editable.

Deployment Validation Operator updates: On managed clusters, the Deployment Validation Operator updates automatically.

3.2. DEPLOYMENT VALIDATION OPERATOR ON ON-PREMISE OPENSHIFT CONTAINER PLATFORM CLUSTERS

Administrators of on-premise clusters must install the Deployment Validation Operator from OperatorHub in the OpenShift Container Platform web console. On-premise cluster administrators can also configure the default set of KubeLinter checks.



NOTE

The advisor does not have recommendations for all of the checks that KubeLinter has available.

3.3. INSTALL THE DEPLOYMENT VALIDATION OPERATOR ON ON-PREMISE CLUSTERS

Install the Deployment Validation Operator from OperatorHub to validate on-premise and managed clusters.

Prerequisites

- You are logged into the Red Hat OpenShift Container Platform web console as a cluster-admin.

Procedure

1. Navigate to Red Hat OpenShift Container Platform web console > Operators > OperatorHub.
2. In the **Search** box, start typing "deployment-validation-operator".
3. Click the Deployment Validation Operator card when you see it.
4. The Deployment Validation Operator card displays information about capabilities, configuration, version, and GitHub source files. When you are ready to install the Operator, click **Install**.
5. Choose the namespace or use the default.
6. Click **Install** and the Operator installs.

Verification

- You can confirm the installation in the **InstalledOperators** view.
- The Deployment Validation Operator is also visible in the **Pods and Deployments** views for the cluster in the corresponding namespace.



NOTE

You can set the Deployment Validation Operator to automatically update during the installation from OperatorHub.

3.4. DEPLOYMENT VALIDATION OPERATOR CHECKS ON ON-PREMISE CLUSTERS

If you are an administrator of an on-premise OpenShift Container Platform cluster, you can change the default list of Deployment Validation Operator checks to focus on specific best practices of interest.

Additional resources

- Configuring Checks

3.5. VIEW DEPLOYMENT VALIDATION OPERATOR RESULTS IN ADVISOR

View Deployment Validation Operator issues and resolution guidance in the **Status** block on the OpenShift Container Platform console **Overview** page.



NOTE

If the latest Deployment Validation Operator returns no issues, you will not see any issues in Red Hat Lightspeed.

Prerequisites


- You are logged into the Red Hat Hybrid Cloud Console.

Procedure

1. Go to the **Overview** page for the cluster in the OpenShift Container Platform web console.
2. Look for the **Status** block, a Red Hat Lightspeed link, and the number of detected issues.
3. If one or more issues exist, click the Red Hat Lightspeed link to open the advisor service in the Hybrid Cloud Console.
   The cluster information page displays. On the **Recommendations** tab, you can see the issues detected for the cluster.
4. Click the arrow to view complete information about the issue, including the necessary actions to resolve it.

3.6. DEFAULT LIST OF DEPLOYMENT VALIDATION OPERATOR CHECKS

The Deployment Validation Operator checks your cluster against a default list of KubeLinter checks to implement best practices.



IMPORTANT

Administrators of managed clusters cannot modify the list of default checks, but can view them.

Additional resources

- Configuring Checks

3.7. ADDITIONAL RESOURCES

- Deployment Validation Operator