

Red Hat Lightspeed 1-latest

Assessing and remediating system issues by using Red Hat Lightspeed tasks

Use predefined playbooks provided by the Red Hat Lightspeed tasks service to resolve issues on your systems

Last Updated: 2026-09-02

Red Hat Lightspeed 1-latest Assessing and remediating system issues by using Red Hat Lightspeed tasks

Use predefined playbooks provided by the Red Hat Lightspeed tasks service to resolve issues on your systems

Legal Notice

Copyright © Red Hat.

Except as otherwise noted below, the text of and illustrations in this documentation are licensed by Red Hat under the Creative Commons Attribution–Share Alike 3.0 Unported license . If you distribute this document or an adaptation of it, you must provide the URL for the original version.

Red Hat, as the licensor of this document, waives the right to enforce, and agrees not to assert, Section 4d of CC-BY-SA to the fullest extent permitted by applicable law.

Red Hat, the Red Hat logo, JBoss, Hibernate, and RHCE are trademarks or registered trademarks of Red Hat, LLC. or its subsidiaries in the United States and other countries.

Linux ® is the registered trademark of Linus Torvalds in the United States and other countries.

XFS is a trademark or registered trademark of Hewlett Packard Enterprise Development LP or its subsidiaries in the United States and other countries.

The OpenStack ® Word Mark and OpenStack logo are trademarks or registered trademarks of the Linux Foundation, used under license.

All other trademarks are the property of their respective owners.

Abstract

Assess and remediate system issues by using predefined playbooks provided by the Red Hat Lightspeed tasks service.

Table of Contents

CHAPTER 1. OVERVIEW OF RED HAT LIGHTSPEED TASKS 3
1.1. MANAGE USER PERMISSIONS FOR RED HAT LIGHTSPEED SERVICES 3
1.1.1. User Access overview 3
1.1.2. Predefined groups in User Access 4
1.1.3. Predefined roles assigned to groups 4
1.1.4. Check your permissions 6
1.1.5. Configure user permissions 7
1.1.6. User Access roles for permissions to tasks features 7

CHAPTER 2. NOTIFICATIONS AND INTEGRATIONS FOR RED HAT LIGHTSPEED TASKS EVENTS 10

CHAPTER 3. REGISTRATION AND CONNECTION TO RED HAT LIGHTSPEED FOR TASKS 12

CHAPTER 4. RUN TASKS IN RED HAT LIGHTSPEED 13
4.1. RUN A TASK 13

CHAPTER 5. WHAT TO EXPECT WHEN YOU CONVERT FROM CENTOS LINUX 7 TO RHEL 7 15

CHAPTER 6. ASSESS SYSTEM-UPGRADE READINESS WITH THE PRE-UPGRADE ANALYSIS TASK 16
6.1. PREREQUISITES 16
6.2. RUN THE PRE-UPGRADE ANALYSIS TASK 16
6.3. REVIEW THE PRE-UPGRADE ANALYSIS TASK REPORT 18
6.4. VIEW UPGRADE-INHIBITING RECOMMENDATIONS 19
6.5. UPGRADE-INHIBITING RECOMMENDATIONS FILTERING 20
6.6. REMEDIATE RHEL UPGRADE-INHIBITING RECOMMENDATIONS WITH A REMEDIATION PLAN 20
6.7. REMEDIATE RHEL UPGRADE-INHIBITING RECOMMENDATIONS MANUALLY 21

CHAPTER 7. USE RED HAT LIGHTSPEED TASKS TO UPDATE IMAGE MODE RHEL SYSTEMS 23
7.1. RUN RED HAT LIGHTSPEED TASKS TO UPDATE IMAGE MODE FOR RHEL SYSTEMS 23

CHAPTER 1. OVERVIEW OF RED HAT LIGHTSPEED TASKS

In Red Hat Lightspeed, the Tasks feature offers predefined playbooks that help you maintain the health of your infrastructure. Red Hat Lightspeed tasks are typically run one time on your systems to accomplish goals such as detecting a high-profile vulnerability on your systems, or preparing systems for a major upgrade.

Red Hat Lightspeed anticipates your need to solve problems in your infrastructure and continuously adds specific tasks to the Automation Toolkit. You can find tasks in Red Hat Hybrid Cloud Console > Red Hat Lightspeed > RHEL > Automation Toolkit > Tasks in the Red Hat Lightspeed UI.

Each task is a predefined playbook that executes a task from start to finish. The pre-built tasks that you can run in Red Hat Lightspeed include:

- **Run the `insights-client`**
- **Run the Ansible ping module**
- **Pre-conversion analysis for converting to RHEL**
- **Convert to RHEL from CentOS Linux 7**
- **Pre-upgrade analysis for in-place upgrade from RHEL 8**
- **Initiate update of image mode for RHEL host**
- **Initiate update of RHEL AI host**

The system requirements to run different tasks can vary.

Additional resources

- User Access roles for permissions to tasks features
- Registering and connecting systems to Red Hat Lightspeed to run tasks
- Running tasks by using Red Hat Lightspeed

1.1. MANAGE USER PERMISSIONS FOR RED HAT LIGHTSPEED SERVICES

Manage user permissions to control access to Red Hat Lightspeed applications. Use the User Access feature to apply role-based access control (RBAC). Red Hat provides predefined groups and roles to help Organization Administrators manage user permissions.

1.1.1. User Access overview

You can simplify access management in the Red Hat Hybrid Cloud Console by using role-based access control (RBAC). The User Access feature assigns specific permissions to roles instead of individual users, which are then inherited when roles are assigned to user groups.

You can also create custom groups and roles to provide more fine-tuned control over specific features of Red Hat Lightspeed to suit the needs of your organization.

If you are an Organization Administrator, you can use the User Access feature under **Identity & Access Management → User Access** in the Hybrid Cloud Console to:

- Control user permissions and organize roles.
- Create groups that include roles and their corresponding permissions.
- Assign users to these groups, allowing them to inherit the permissions associated with their group's roles.

Additional resources


- User Access in the Hybrid Cloud Console
- User Access Configuration Guide for Role-based Access Control (RBAC)

1.1.2. Predefined groups in User Access

The two predefined groups available in User Access, **Default access** and **Default admin access** provide different baseline privilege levels for users in your organization. You can also create custom groups to align permissions with specific personas, job functions, or teams in your organization.

The Default access group

By default, the **Default access** group is assigned many granular predefined roles, so that group members have basic visibility. Because all users in your organization are members of the **Default access** group, they inherit all permissions assigned to that group. The **Default access** group is automatically updated by Red Hat.



IMPORTANT

If your Organization Administrator modifies the **Default access** group, for example, by removing roles to restrict access to specific applications or to use the consolidated roles, the group is automatically renamed to **Custom default access** Once converted, this group is no longer automatically updated by Red Hat.

The Default admin access group

The **Default admin access** group contains only users who have Organization Administrator permissions. This group is automatically maintained, and users and roles in this group cannot be changed.

The **Default admin access** group includes many (but not all) predefined roles that provide update and delete permissions. The roles in this group usually include **administrator** in their names.

TIP

To view the roles included in the **Default access** or **Default admin access** group, log in to the Hybrid Cloud Console, navigate to **Groups** in User Access, and select the group.

Additional resources

- User Access groups

1.1.3. Predefined roles assigned to groups

Understand how predefined roles in Red Hat Hybrid Cloud Console bundle permissions across multiple Red Hat Lightspeed applications to align with common user personas. Use predefined roles to reduce administrative effort, or create custom roles for more fine-tuned control over specific features.

The predefined roles are a starting point to help you control and manage user permissions. You can then use these roles to create custom roles that are tailored to your specific use cases and organization. For example, you can use the predefined granular roles to create custom roles that provide more fine-tuned control over specific features of Red Hat Lightspeed.

By default, Red Hat provides a set of *consolidated roles* and a set of *granular* roles in the Red Hat Hybrid Cloud Console User Access UI. The consolidated roles significantly reduce the administrative effort required to manage user permissions, while the granular roles provide more fine-tuned control over specific features of Red Hat Lightspeed.

You can use the predefined consolidated and granular roles in User Access simultaneously, but using consolidated roles can significantly reduce the administrative effort.

Select from the predefined consolidated roles library

The Red Hat Hybrid Cloud Console provides three predefined, consolidated User Access roles to help you manage user permissions to Red Hat Lightspeed applications and services that run on registered Red Hat Enterprise Linux systems. These roles help simplify how the Organization Administrator creates groups and permissions for various levels of access to the Red Hat Lightspeed services. If you want to reduce the administrative effort required to manage user permissions and your use case aligns with the permissions included in these roles, select from the consolidated roles library.
The consolidated roles are as follows:

RHEL viewer: The *RHEL viewer* role provides users visibility without the ability to make changes. It allows read-only access to Red Hat Lightspeed. You can view system configurations, compliance reports, inventory data, patch information, vulnerabilities, and overall resource states and activities. The only action permitted with this role is to generate activation keys.

RHEL operator: The *RHEL operator* role allows active management of your Red Hat Lightspeed environment. With this role, you can edit system configurations, inventory details, policies, and notification/integration settings. The RHEL operator role allows many of the RHEL administrator role functions, but it is restricted from editing compliance policies, content source templates, policies, or tasks. In addition, the RHEL operator role cannot execute remediation plans.

RHEL administrator: The *RHEL administrator* role provides comprehensive administrative privileges across your RHEL systems and Red Hat Lightspeed. With this role, you can manage system configurations, inventory, compliance policies, notifications, patch management, remediations, malware detection, and advisor recommendations. The role can also view and modify all vulnerability settings.



IMPORTANT

To use the consolidated roles effectively, you might need to remove the granular RHEL roles from the **Default access** group to prevent permission conflicts. This action automatically changes the name of the predefined **Default access** group to **Custom default access** group, after which, it is no longer automatically updated by Red Hat.

See *Predefined User Access roles* for a list of the roles included in the **Default admin access** group and a reference table that lists most of the predefined groups and roles that are available in the Red Hat Hybrid Cloud Console and the permissions included in each role.

Granular roles

The granular roles are specific roles for individual services that allow for fine-tuned control over specific features of Red Hat Lightspeed, for example, *Inventory Hosts administrator* or *Compliance viewer*. If you want to have more control over specific features of Red Hat Lightspeed and your use case does not align with the permissions included in the consolidated roles, use the granular predefined roles.

TIP

Across the Red Hat Lightspeed product documentation, the **Prerequisites** section for each procedure lists which predefined roles provide the permissions needed to use the features in that procedure. For example, if a procedure requires permissions to create and view remediations, the **Prerequisites** section for that procedure lists the *Remediations user* or other valid role as a recommended predefined role to use for that procedure.

Additional resources

- Preparing the Default access group for consolidated role permissions
- Predefined User Access roles

1.1.4. Check your permissions

Verify your current permissions and the roles or groups assigned to you in the Red Hat Hybrid Cloud Console. Check your permissions to troubleshoot access issues or understand your level of access to Red Hat Lightspeed applications.



NOTE

Only users with the Organization Administrator role can view the permissions of other users in the User Access settings and manage user permissions to Red Hat Lightspeed services. For more information, see the *Configure user permissions* section.

Prerequisites

- You are logged in to the Red Hat Hybrid Cloud Console.

Procedure

1. Click the **Settings** icon (⚙), then navigate to **Settings → Identity & Access Management→ My User Access**.
2. Optional: If you require additional permissions, use the Red Hat Hybrid Cloud Console Virtual Assistant to ask **"Contact my Organization Administrator"**. The assistant sends an email to the Organization Administrator on your behalf.

Verification

All of the applications that you have permissions to access are listed on this page and are grouped by product, for example, RHEL, OpenShift Container Platform, and Ansible Automation Platform.

You can also filter your permissions by application, for example, by advisor, cost management, inventory, and remediations.

Additional resources

- User Access Configuration Guide for Role-based Access Control (RBAC)
- Procedures for configuring User Access

1.1.5. Configure user permissions

If you are an Organization Administrator, you can view and manage user permissions for all users in your organization. Control access to Red Hat Lightspeed and other Red Hat Hybrid Cloud Console services through the User Access interface.



IMPORTANT

If you are not an Organization Administrator, you are unable to complete this task. However, you can check your own permissions for different applications by navigating to **Settings → Identity & Access Management→ My User Access**. Contact your Organization Administrator to request more permissions.

Prerequisites

- You have logged in to the Red Hat Hybrid Cloud Console as an Organization Administrator, or you have the required administrator User Access role permissions.

Procedure

1. Click the **Settings** icon (⚙), then navigate to **Settings → Identity & Access Management→ User Access**.

Verification

From here, you can create and manage:

- **Settings → Identity & Access Management→ User Access → Roles** to determine permissions to Red Hat Lightspeed services and features
- **Settings → Identity & Access Management→ User Access → Groups** to include one or more roles to align with a specific persona, job function, or team in your organization
- **Settings → Identity & Access Management→ User Access → Users** and their assignment to groups to inherit permissions from the roles assigned to those groups

Additional resources


- User Access Configuration Guide for Role-based Access Control (RBAC)
- Procedures for configuring User Access
- Simplifying access management on Hybrid Cloud Console for Red Hat Lightspeed with predefined roles (Red Hat Knowledgebase)


1.1.6. User Access roles for permissions to tasks features

Understand the predefined roles that control access to tasks in Red Hat Lightspeed. Use these role definitions to assign appropriate permissions to users based on their responsibilities.

The following roles enable enhanced access tasks in Red Hat Lightspeed:

Table 1.1. Permissions provided by the User Access roles

User Access role	Grants permissions to ...	Included in the Default access group
Tasks administrator	• Run tasks on Red Hat Lightspeed-connected systems remotely or from within Red Hat Lightspeed.	X
RHEL administrator	• Do everything that a **RHEL operator** can do. • Administer RHEL system configs, inventory, compliance, notifications, patch management, execute remediation plans, malware detection, and advisor. • View and modify vulnerability settings.	
RHEL operator	• Do everything that a **RHEL viewer** can do. • Edit system configs, inventory, policies, notifications, and integrations. • View compliance reports, patch info, malware detections, and recommendations. • Create remediation plans, manage stale data, and change vulnerability settings.  **NOTE** The RHEL operator role is restricted from editing compliance policies, content source templates, policies, or tasks. Also, the RHEL operator role cannot execute remediation plans.	
RHEL viewer	• Read all available data across Red Hat Lightspeed services and features. ◦ View system configs, compliance reports, inventory data, patch info, vulnerabilities, and more to observe the state of resources or activities.  **NOTE** Cannot perform actions other than generating activation keys.	



NOTE

- All members of the **Default Admin Access** group can also run tasks.
- A tasks viewer role does not exist in Red Hat Lightspeed.

CHAPTER 2. NOTIFICATIONS AND INTEGRATIONS FOR RED HAT LIGHTSPEED TASKS EVENTS

You can configure Red Hat Hybrid Cloud Console to send notifications when the Red Hat Lightspeed tasks service detects certain events that occur during the start and execution of a task. Use the notifications service as an alternative to continually checking the **Activity** tab. The notifications service settings are available in **Settings → Notifications** in the Red Hat Hybrid Cloud Console.

When you configure events for Red Hat Lightspeed tasks and want notifications, it is essential to understand the distinctions between a task, a task execution, and a task job and how they work together to perform a specific task:

- **Red Hat Lightspeed tasks:** a predefined script or playbook that helps you perform a specific task.
- **Red Hat Lightspeed tasks execution:** an instance of running that script or playbook on one or more systems.
- **Red Hat Lightspeed tasks job:** the execution of a specific task on a specific system.

For example, you can configure the notifications service to automatically send an email message when a Red Hat Lightspeed task starts, completes, or fails. As another example, you can configure the notifications service to automatically send an email message when a Red Hat Lightspeed task job starts or completes.

In addition to sending email messages, you can configure the notifications service to send event data in other ways:

- Using an authenticated client to query Red Hat Lightspeed APIs for event data
- Using webhooks to send events to third-party applications that accept inbound requests
- Integrating notifications with applications such as Splunk to route tasks events to the application dashboard, or to your preferred messaging application such as Slack or Microsoft Teams.

Configuring the notifications service to inform members of your Red Hat account of tasks events requires three main steps:

1. An Organization Administrator creates a User Access group that includes at least the **Notifications administrator** or the **RHEL administrator** role, and then adds account members to the group.
2. A user with the correct notifications administrator role permissions sets up behavior groups for events in the notifications service. Behavior groups specify the delivery method for each notification. That same user then selects the event types to make available for the specified group of users. For example, a behavior group can specify whether to send email notifications to all users, or just to Organization Administrators.
3. Members on the account who want to receive email notifications about events must set their user preferences to receive individual emails for each event.



NOTE

To view configurable task events, your user account must be a member of a group that includes at least the **Notifications administrator** or the **RHEL administrator** role.

For more information about events and notifications, see the additional resources.

Additional resources

- Configuring notifications on the Red Hat Hybrid Cloud Console
- Understanding Red Hat Lightspeed Events and Notifications in the Hybrid Cloud Console

CHAPTER 3. REGISTRATION AND CONNECTION TO RED HAT LIGHTSPEED FOR TASKS

Before you can run tasks on your RHEL systems, you must register and connect them to Red Hat Lightspeed. You also must enable and install dependencies on Satellite version 6.11 or higher, remote host configuration (rhc), **rhc-worker-playbook**, and **ansible**.

Additional resources

- Enabling host communication with Red Hat Lightspeed in the Red Hat Lightspeed Remediations guide
- Red Hat Lightspeed data and application security

CHAPTER 4. RUN TASKS IN RED HAT LIGHTSPEED

Red Hat Lightspeed provides built-in task playbooks that you can run on your remote Red Hat Enterprise Linux systems to automate common administrative actions. You can run tasks directly from the Red Hat Lightspeed UI. The prerequisites that are required to run specific Red Hat Lightspeed tasks vary.

You can run the following pre-built tasks in Red Hat Lightspeed:

- **Run the `insights-client`**
- **Run the Ansible ping module**
- **Pre-conversion analysis for converting to RHEL**
- **Convert to RHEL from CentOS Linux 7**
- **Pre-upgrade analysis for in-place upgrade from RHEL 8**
- **Initiate update of image mode for RHEL host**
- **Initiate update of RHEL AI host**

4.1. RUN A TASK

Red Hat Lightspeed enables you to run pre-built tasks so that you can automate common administrative actions. For example, converting from CentOS Linux 7 to RHEL or updating image mode.

Prerequisites

- You have connected systems and addressed dependencies for remote host configuration (rhc), **rhc-worker-playbook**, and **ansible-core**, as needed.
- You have addressed dependencies for Satellite version 6.11 or higher.
- You are logged in to the Red Hat Hybrid Cloud Console as a user who is a member of a User Access group with at least one of the following roles:
  - Tasks administrator
  - RHEL administrator
- For more information, see Enabling host communication with Red Hat Lightspeed in the Red Hat Lightspeed remediations guide.

Procedure

1. Navigate to **Automation Toolkit > Tasks**.
2. Find a task in the list and click **Select systems**. A table that lists the systems that are eligible to run is displayed.
3. Optional: Edit the default task name so that you can find it on the **Tasks Activity** tab later. After you run the task, you cannot change the task name again.

4. Review the task-specific prerequisites in the description of the task and take the required actions.
5. Select the systems that you want to run the task on. You can use filters to search and filter systems by:
    - **Name**
    - **Operating system**
    - **Tags**
    - **Task eligibility**
6. Optional: For some tasks, you can configure how the task runs and is logged in Red Hat Lightspeed. If applicable, click **Next** and complete the task setup options. If not applicable, proceed to the next step.
7. Click **Run task**. The task runs on the selected systems.

Verification

1. A pop-up message confirms the task's success or failure. Click **View progress** to go to the task activity details page.
    - A status of **Completed** indicates success but does not necessarily mean the task achieved its intended goal.
2. Navigate to **Automation Toolkit > Tasks > Activity** to see the status of all tasks.
3. Tasks are listed in chronological order. Use search, filter, and sort to find your task.
4. Click the task to open the activity details.
5. Review the **Status** column for alerts or messages.
    - To see full details, click the **Show more** caret beside the system name.
6. Resolve any errors if needed and rerun the task from the **Task status details** page.

CHAPTER 5. WHAT TO EXPECT WHEN YOU CONVERT FROM CENTOS LINUX 7 TO RHEL 7

You can use Red Hat Lightspeed to convert systems from CentOS Linux 7 to RHEL 7. The conversion task automates the process by using the Convert2RHEL utility, and you can run it directly from Red Hat Hybrid Cloud Console > Red Hat Lightspeed > RHEL > Automation Toolkit > Tasks in the Red Hat Lightspeed UI.

Additional resources

- How to convert CentOS Linux to RHEL with Red Hat Lightspeed
- *Converting from a Linux distribution to RHEL using the Convert2RHEL utility* documentation
- How to prepare for your conversion from CentOS Linux to RHEL
- Troubleshooting issues with Red Hat Lightspeed conversions

CHAPTER 6. ASSESS SYSTEM-UPGRADE READINESS WITH THE PRE-UPGRADE ANALYSIS TASK

The pre-upgrade analysis task checks the readiness of systems for upgrade from Red Hat Enterprise Linux (RHEL) 8 to RHEL 9. If Red Hat Lightspeed detects upgrade-blocking issues, you can view the steps to resolve them. The task is a component of the in-place upgrade capability for Red Hat Enterprise Linux, also referred to as the *Leapp tool*.

The pre-upgrade analysis task can run on any RHEL 8 system that is connected to Red Hat Lightspeed using the remote host configuration (rhc) solution. You can verify that your system is connected to Red Hat Lightspeed by finding it in **System > Inventory**. If your system is not in the inventory, connect systems to Red Hat Lightspeed.

You can also run the Leapp utility manually on systems. When a Red Hat Lightspeed-connected system has a Leapp report in its archive, you can see results from the report in Red Hat Lightspeed, regardless of whether the utility ran manually or ran from a task in Red Hat Lightspeed.

6.1. PREREQUISITES

- Your systems are eligible for an in-place upgrade. For more information, see the in-place upgrade documentation for system requirements and limitations.
- Your RHEL systems are connected to Red Hat Lightspeed by using the remote host configuration solution.
- You are logged in to the Red Hat Hybrid Cloud Console as a user who is a member of a User Access group with at least one of the following roles:
  - **Tasks administrator**
  - **RHEL administrator**

All members of the **Default admin access** group have **Tasks administrator** access. If you are not a member of a User Access group with this role, you will not be permitted to see tasks on the **Tasks** page.

Additional resources

- Instructions for an in-place upgrade from Red Hat Enterprise Linux 8 to Red Hat Enterprise Linux 9
- Registering RHEL systems and configuring client tools with Red Hat Lightspeed
- Upgrading from RHEL 8 to RHEL 9, Instructions for an in-place upgrade from Red Hat Enterprise Linux 8 to Red Hat Enterprise Linux 9
- User Access Configuration Guide for Role-based Access Control (RBAC)

6.2. RUN THE PRE-UPGRADE ANALYSIS TASK

Red Hat Lightspeed provides built-in task playbooks to help you prepare your Red Hat Enterprise Linux systems for upgrades. Tasks analyze select Red Hat Enterprise Linux systems in your organization and identify the required actions that you must complete before you upgrade those systems.

Use the following procedure to run the pre-upgrade analysis task and check the readiness of your systems for upgrading from RHEL version 8 to 9.

Prerequisites


- You are logged in to the Red Hat Hybrid Cloud Console as a user who is a member of a User Access group with at least one of the following roles:
  - **Tasks administrator**
  - **RHEL administrator**

Procedure

1. Navigate to **Automation Toolkit > Tasks**.
2. In the list of available tasks, click **Pre-upgrade analysis for in-place upgrade from RHEL 8** to open the details.
3. Review the task-specific prerequisites that are in the description of the task and take the required actions.
4. Optional: To view more details of the pre-upgrade analysis utility task, click **Download preview of playbook**.
5. Select the systems that you want to run the task on. Eligible systems are listed on the task details page.
6. Click **Run task**.

Result

The task runs on the selected systems and a pop-up message confirms the success or failure. Click **View progress** to go to the task activity details page to see how the task is progressing on each of your selected systems and alerts.




IMPORTANT

A status of **Completed** indicates that the task ran successfully, but does not necessarily mean that the task achieved its intended goal.

Use the following steps to check the progress of the task and to verify that it ran successfully:

1. If you missed the pop-up message with the **View progress** link, navigate to **Automation Toolkit > Tasks > Activity** to see the status of all of the tasks that you have run, including those in progress. Tasks are in chronological order, ordered by the most recent run date and time.
2. Use the search, filter, and sort features to find the task that you just ran.
3. Click the task to open the activity details.
4. Review the **Status** column to check whether there are any alerts or messages to resolve for your systems.
   - To see the full details of a message or alert, click the **Show more** caret icon beside the system name, as outlined in the following screen capture:

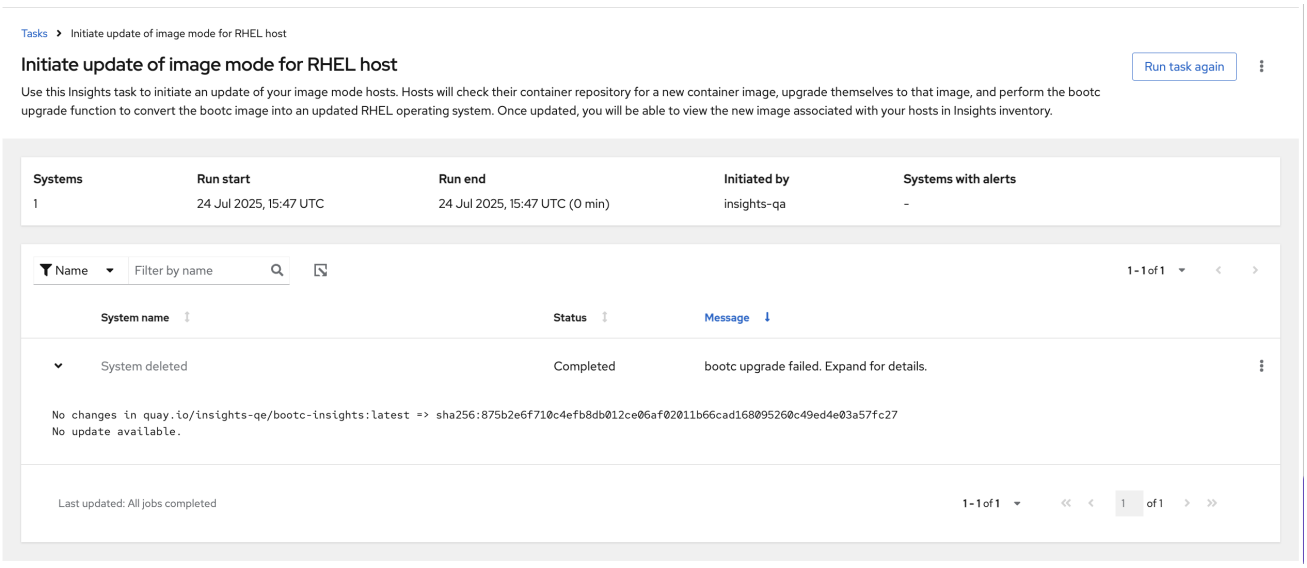

6.3. REVIEW THE PRE-UPGRADE ANALYSIS TASK REPORT


After you run the pre-upgrade analysis task on your systems, review the results and take the actions that Red Hat Lightspeed recommends.

Prerequisites

- You are logged in to the Red Hat Hybrid Cloud Console as a user who is a member of a User Access group with at least one of the following roles:
  - **Tasks administrator**
  - **RHEL administrator**

Procedure

1. Navigate to **Automation Toolkit > Tasks > Activity**to see the status of all of the tasks that you have run previously, including those in progress. Tasks are in chronological order by the most recent run date and time.
2. Use the search, filter, and sort features to find the pre-upgrade analysis task that you ran.
3. Click the task name to open the activity details.
4. Review the **Status** column to check if there are any alerts or messages to resolve for your systems. Some alerts are classified as official inhibitors, and you cannot proceed with the upgrade until these are remediated. Some items in the table are lower in severity and are informative messages that do not require remediation for the upgrade to proceed:
   - Alerts have a red **High risk** tag.
   - Warnings have an orange **Low risk** tag.
   - Informational messages have a blue **Info** tag.

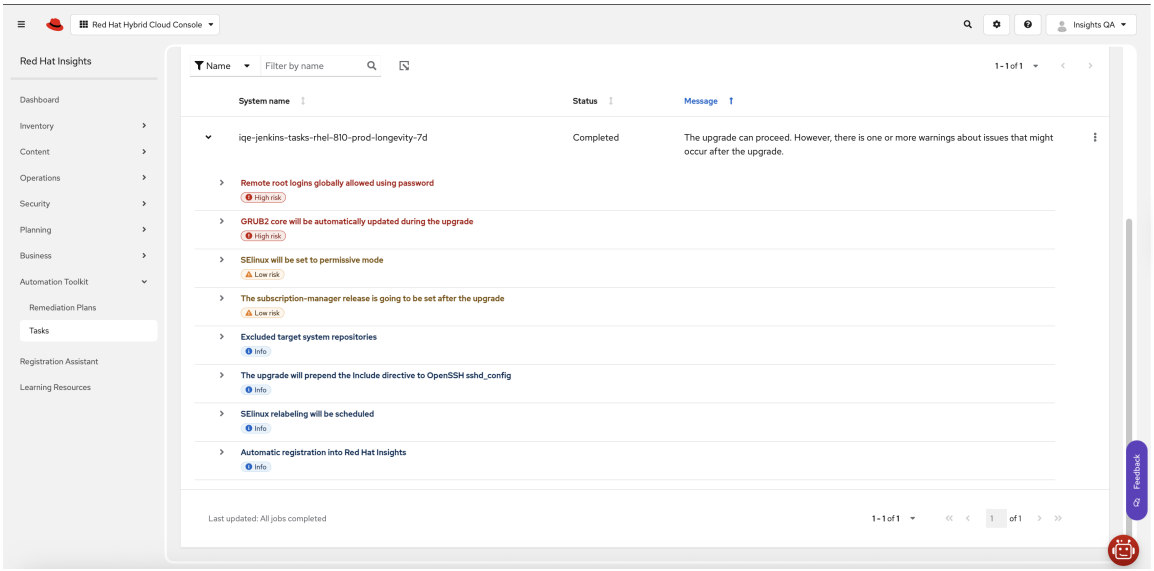

5. If the activity report has high-risk upgrade-inhibiting alerts, take the required actions to resolve them on your systems, and then re-run the pre-upgrade task to assess the impact of your remediation efforts.

6. Review the rest of the report thoroughly and take the required actions.

6.4. VIEW UPGRADE-INHIBITING RECOMMENDATIONS

After you run the pre-upgrade analysis task or manually run the Leapp tool on individual systems, you can view a list of recommendations for upgrade-inhibiting issues in your RHEL infrastructure.

For pre-upgrade recommendations, Red Hat Lightspeed provides the following information:

- Recommendation details
- Affected-system information
- Total risk and impact insights
- Risk to system availability during resolution actions

Prerequisites

You are logged in to the Red Hat Hybrid Cloud Console. By default, all Red Hat Lightspeed users can view the list of in-place upgrade recommendations.

Procedure

1. Go to Red Hat Lightspeed > Operations > Advisor > Topics > In-place upgrade to view recommendations that affect the success of in-place upgrades.



NOTE

The in-place upgrade recommendations list only shows recommendations that Red Hat Lightspeed has identified as upgrade inhibitors. You can see all in-place upgrade recommendations, including non-inhibitors, in the detailed view of each executed task.

6.5. UPGRADE-INHIBITING RECOMMENDATIONS FILTERING

Some recommendations have a playbook available to automate the execution of remediations from the Red Hat Lightspeed UI, while some require manual resolutions that are customized for the system and recommendation pair.

You can determine which recommendations have playbooks available by viewing the **Remediation type** column in the recommendations table. Use the in-place upgrade recommendations list to remediate upgrade-inhibiting issues on systems in your infrastructure.

To find the recommendations that have playbooks available to execute, use the filter and sort options:

- **Filter:** Use the search function or select a specific item from the drop-down menu.
- **Sort:** Click the **Remediation type** column header to sort the recommendations by **Manual** or **Playbook** types.

Additional resources

- Red Hat Lightspeed remediations guide

6.6. REMEDIATE RHEL UPGRADE-INHIBITING RECOMMENDATIONS WITH A REMEDIATION PLAN

Automate the remediation of upgrade-inhibiting recommendations by creating a remediation plan in Red Hat Lightspeed. Red Hat Lightspeed generates an Ansible Playbook to perform the necessary actions on selected systems.

Use the following procedure to locate inhibitor issues and select recommendations and systems for remediation.

Prerequisites

- You are logged in to the Red Hat Hybrid Cloud Console as a user who is a member of a User Access group with at least one of the following roles:
  - **Tasks administrator**
  - **RHEL administrator**

Procedure

1. Navigate to **Operations > Advisor > Topics > In-place upgrade** A table shows the recommended remediations that affect in-place upgrades.
2. Filter and sort the recommendations:
   a. **Filter:** Use the search bar or select an item from the drop-down menu.
   b. **Sort:** Click column headers, for example, **Name**, **Remediation type**, **Systems**, or **Total risk**.
3. Choose a recommendation with a **Remediation type** of **Playbook**.



NOTE

Recommendations with playbooks are identified by the **Remediation type** column.

4. For each recommendation with an available playbook:
   a. Click the recommendation to view details and affected systems.
   b. Check the box next to each system you want to add to the playbook, and then click **Plan remediation**.
   c. In the pop-up, select **Create a new playbook** and enter a name, then click **Next**.
   d. Optional: Alternatively, select the option to add the resolution for the selected systems to an existing playbook in your organization.
   e. Review the included systems and click **Next**.
   f. Review the included recommendation. You can click the caret next to the recommendation name to see included systems.



IMPORTANT

If the issue or risk requires a reboot, all systems in the remediation plan will automatically reboot. To manually reboot after plan execution, toggle the **Auto-reboot** button.

   g. Click **Submit**. The final pop-up view confirms that the playbook was created successfully. You can select to return to the application or open the playbook.
5. Find and open the playbook in Automation Toolkit > Remediation Plans.
6. The playbook includes a list of actions. Select the actions to execute by checking the box next to each one.
7. Click **Execute playbook** to run the playbook on the specified systems.
8. When prompted, click **Execute playbook on systems** The playbook runs on those systems.

6.7. REMEDIATE RHEL UPGRADE-INHIBITING RECOMMENDATIONS MANUALLY

Some issues cannot be addressed by creating and executing a remediation plan in Red Hat Lightspeed, and instead require manual actions or intervention. For example, to remediate upgrade-inhibiting recommendations, manually apply resolution steps on the affected systems.

The following procedure outlines how to determine the resolution steps for a system that Red Hat Lightspeed recommends you manually remediate.

Prerequisites

- You are logged into the Red Hat Hybrid Cloud Console.

Procedure

1. Navigate to **Operations > Advisor > Topics > In-place upgrade** to view recommendations that affect the success of in-place upgrades.
2. Use the search and filtering function in the table to sort the items by **Remediation type**.
3. Choose a recommendation with the word "*Manual*" in the **Remediation type** column, which indicates that the issue requires manual remediation.
4. Click the recommendation name. The full details of the recommendation are displayed, along with a list of impacted systems on the lower part of the page.
5. For each impacted system:
    a. Expand the caret icon to view the steps to resolve the recommendation.
    b. Complete the recommended actions directly on the system.

CHAPTER 7. USE RED HAT LIGHTSPEED TASKS TO UPDATE IMAGE MODE RHEL SYSTEMS

To connect your systems to Red Hat Lightspeed, you can build systems with image mode for RHEL. After you connect, use the Red Hat Lightspeed tasks **Initiate an update of your image mode RHEL host** to update your Red Hat Lightspeed-connected systems to the latest versions of RHEL.

Red Hat Enterprise Linux version 9.4 and later includes image mode for RHEL. Image mode for RHEL uses the terms *update* and *upgrade* interchangeably.

Additional resources

- Using image mode for RHEL to build, deploy, and manage operating systems

7.1. RUN RED HAT LIGHTSPEED TASKS TO UPDATE IMAGE MODE FOR RHEL SYSTEMS

Red Hat Lightspeed provides pre-built tasks to help you keep your *image mode for Red Hat Enterprise Linux* systems updated. In the Red Hat Lightspeed UI, you can run a task to initiate an update to your image mode for RHEL systems, otherwise known as *bootc* images.

If you have a large number of image mode for Red Hat Enterprise Linux systems to update, run the Red Hat Lightspeed task ***"Initiate update of image mode for RHEL host"***to automate the following actions:

- Check the container repository for a new container image
- Download the image and extract content for use on the next boot
- Reboot the host to pull in new image content if updated content is available
- Provide progress results about the image update

You can use this Red Hat Lightspeed task to avoid executing the automatic upgrade option for your image mode for Red Hat Enterprise Linux systems.

Prerequisites

- You are logged in to the Red Hat Hybrid Cloud Console as a user who is a member of a User Access group with at least one of the following roles:
  - **Tasks administrator**
  - **RHEL administrator**
- You have systems that are registered and connected to Red Hat Lightspeed by using one of the following methods:
  - The remote host configuration (rhc) **rhc-worker-playbook** and **ansible-core** tools.
  - Satellite 6.11 or higher.
    - For more information, see Enabling host communication with Red Hat Lightspeed in the *Red Hat Lightspeed remediations guide* .

- The target systems were built with Red Hat Enterprise Linux **bootc** images by using the **bootc** image builder.
  - For more information about how you can use Red Hat Enterprise Linux **bootc** images to build, deploy, and manage an operating system as if it were any other container, see the following documentation:
    - Using *Image mode for RHEL* to build, deploy, and manage operating systems (for RHEL 9.4 or later).

Completing the next steps results in a reboot of the selected systems. If you need to roll back your systems to an earlier state, see the Additional resources section.

Procedure

1. Navigate to **Automation Toolkit > Tasks**. The **Available** tab opens with a list of tasks available for you to run.
2. Find the task **Initiate update of image mode for RHEL host** and click **Select systems**. The systems that you can run the task on are displayed in a table.
3. Select the systems that you want to run the task on. By default, the table is filtered by **bootc** systems that were registered by using remote host configuration (rhc). You can use filters to search and filter systems by:
   - **Name**
   - **Operating system**
   - **Tags**
   - **Task eligibility**
4. Click **Run Task**. A pop-up alerts you that the task is running.
5. Review the information in the **Status** and **Message** fields on the **Activity** page.
6. Expand the caret next to the system name to view more details about the task, for example, the operating system version and the image hash.

Troubleshooting

- Sometimes when you run a task, Red Hat Lightspeed might report that there are zero updates because the system is already up to date.
- To view the detailed progress and history of all tasks in your Red Hat Lightspeed organization, navigate to **Automation Toolkit > Tasks > Activity** to understand why any tasks failed and to get more information.
- If you have trouble completing a task, open the **Activity results** page for the last time the task ran, then try running the same task by clicking **Run task again**.
- To resolve issues with the task, you can find the answers to common issues in the linked documentation for other tasks. Red Hat Lightspeed tasks use a common framework of tools, language, and resources in the service.

Additional resources

- Managing RHEL bootable images Red Hat Enterprise Linux 9
- Troubleshooting issues with Red Hat Lightspeed conversions